

TEST REPORT

Product : Beyond Tablet
Trade mark : Beyond Screen
Model/Type reference : BYM001
Serial Number : N/A
Report Number : EED32J00028403
FCC ID : 2AK5X-BM2897
Date of Issue : Mar. 30, 2017
Test Standards : 47 CFR Part 15Subpart C (2015)
Test result : PASS

Prepared for:

Beyond Screen Limited
Suite 307, Building 6, Fulltech Plaza, No. 33 North Guangshun Street,
Beijing, 100102, China

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

Tom chen

Tom chen (Test Project)

Compiled by:

Ware xin

Ware xin (Project Engineer)

Reviewed by:

Kevin Yang

Kevin yang (Reviewer)

Approved by:

Sheek Luo

Sheek Luo (Lab supervisor)

Date:

Mar. 30, 2017



Check No.: 1022560588

2 Version

Version No.	Date	Description
00	Mar. 30, 2017	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
Radiated Spurious Emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
6 GENERAL INFORMATION	8
6.1 CLIENT INFORMATION	8
6.2 GENERAL DESCRIPTION OF EUT	8
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	8
6.4 DESCRIPTION OF SUPPORT UNITS	9
6.5 TEST LOCATION	9
6.6 TEST FACILITY	9
6.7 DEVIATION FROM STANDARDS	10
6.8 ABNORMALITIES FROM STANDARD CONDITIONS	10
6.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	10
6.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, $k=2$)	11
7 EQUIPMENT LIST	12
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	14
Appendix A): Conducted Peak Output Power	15
Appendix B): 6dB Occupied Bandwidth	20
Appendix C): Band-edge for RF Conducted Emissions	25
Appendix D): RF Conducted Spurious Emissions	28
Appendix E): Power Spectral Density	37
Appendix F): Antenna Requirement	42
Appendix G): AC Power Line Conducted Emission	43
Appendix H): Restricted bands around fundamental frequency (Radiated)	46
Appendix I): Radiated Spurious Emissions	56

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

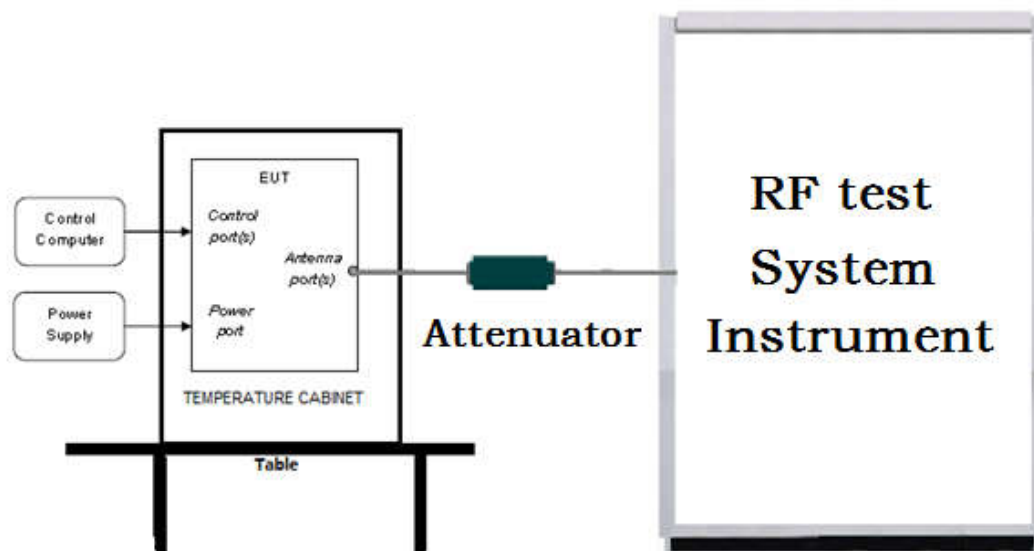

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

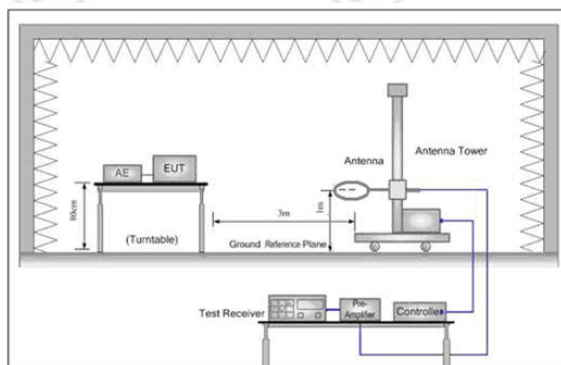


Figure 1. Below 30MHz

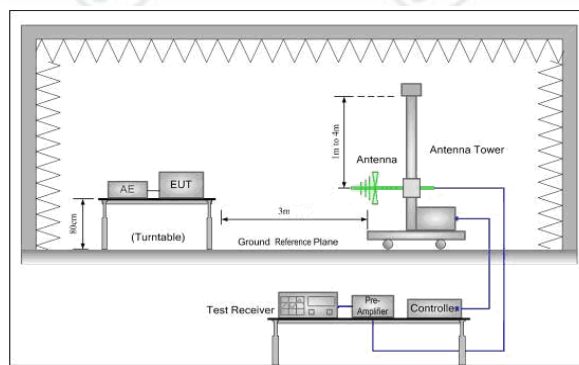


Figure 2. 30MHz to 1GHz


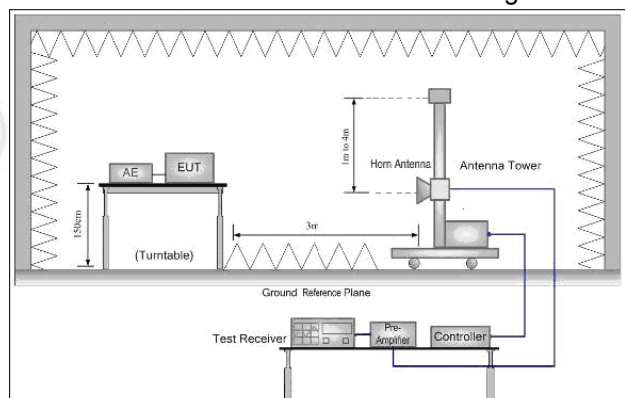


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

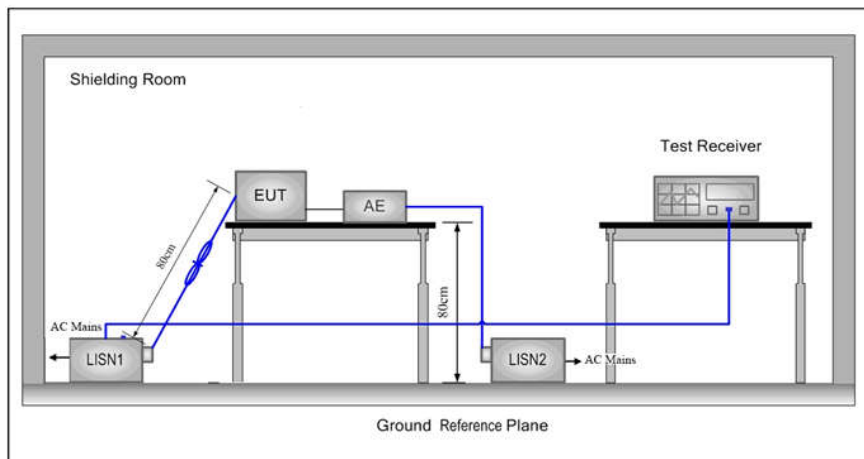

5.2 Test Environment

Operating Environment:	
Temperature:	24°C
Humidity:	54 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test channel:

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11b/g/n(HT20)	2412MHz ~2462 MHz	Channel 1	Channel 6	Channel11
		2412MHz	2437MHz	2462MHz
802.11n(HT40)	2422MHz ~2452 MHz	Channel 1	Channel 4	Channel7
		2422MHz	2437MHz	2452MHz
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.			

Test mode:

Pre-scan under all rate at lowest channel 1

Mode	802.11b							
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps				
Power(dBm)	15.98	16.07	16.14	16.17				
Mode	802.11g							
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
Power(dBm)	15.07	15.03	15.00	14.97	14.92	14.88	14.67	14.58
Mode	802.11n (HT20)							
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps
Power(dBm)	13.48	13.44	13.41	13.37	13.31	13.30	13.22	13.18
Mode	802.11n (HT40)							
Data Rate	13.5Mbps	27Mbps	40.5Mbps	54Mbps	81Mbps	108Mbps	121.5Mbps	135Mbps
Power(dBm)	11.90	11.84	11.80	11.76	11.71	11.70	11.64	11.55

Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).

6 General Information

6.1 Client Information

Applicant:	Beyond Screen Limited
Address of Applicant:	Suite 307, Building 6, Fulltech Plaza, No. 33 North Guangshun Street, Beijing, 100102, China
Manufacturer:	Beyond Screen Limited
Address of Manufacturer:	Suite 307, Building 6, Fulltech Plaza, No. 33 North Guangshun Street, Beijing, 100102, China
Factory:	Shenzhen Han-Shine Electronic Co., Ltd.
Address of Factory:	No. 2, Lane 3, 2nd Industrial Park, Yulv Village, Gongming Town, Guangming New District, Shenzhen City, Guangdong Province, 518132, China

6.2 General Description of EUT

Product Name:	Beyond Tablet
Model No.(EUT):	BYM001
Trade Mark:	Beyond Screen
EUT Supports Radios application:	Wlan 2.4GHz 802.11b/g/n(HT20&HT40), Bluetooth V3.0+EDR, BT 4.0 NFC(13.56MHz)
Power Supply:	Adapter: MODEL: RS-200/120-S336 INPUT: 100-240VAC, 50/60Hz, 1.5A Max OUTPUT: DC 12V=2A
AC Adapter line:	137cm(Unshielded)
Sample Received Date:	Mar. 02, 2017
Sample tested Date:	Mar. 02, 2017 to Mar. 30, 2017

6.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g :OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20and HT40) : OFDM (64QAM, 16QAM, QPSK,BPSK)
Hardware Version:	BY2.MB_V0.3 BY2.TB_V0.3 BY2.LRB V0.35 BY2.KB_V0.3 (manufacturer declare)
Software Version:	V1.0(manufacturer declare)
Test Power Grade:	802.11b: 45; 802.11g: 42; 802.11n(HT20&HT40): 39(manufacturer declare)
Test Software of EUT:	SoFia RFTestTool V1.1 (manufacturer declare)
Antenna Type and Gain:	PIFA antenna, 3.74dBi
Test Voltage:	AC 120V/60Hz

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Operation Frequency each of channel(802.11n HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency		
1	2422MHz	4	2437MHz	7	2452MHz		
2	2427MHz	5	2442MHz				
3	2432MHz	6	2447MHz				

6.4 Description of Support Units

The EUT has been tested independently.

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 3368 3668 Fax: +86 (0) 755 3368 3385

No tests were sub-contracted.

6.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1910

Centre Testing International Group Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories..

A2LA-Lab Cert. No. 3061.01

Centre Testing International Group Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 886427

Centre Testing International Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 886427.

IC-Registration No.: 7408A-2

The 3m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A-2 .

IC-Registration No.: 7408B-1

The 10m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B-1.

NEMKO-Aut. No.: ELA503

Centre Testing International Group Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

VCCI

The Radiation 3 &10 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Main Ports Conducted Interference Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563.

Telecommunication Ports Conducted Disturbance Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

6.7 Deviation from Standards

None.

6.8 Abnormalities from Standard Conditions

None.

6.9 Other Information Requested by the Customer

None.

6.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	04-01-2016	03-31-2017
Spectrum Analyzer	Keysight	N9010A	MY54510339	04-01-2016	03-31-2017
Signal Generator	Keysight	N5182B	MY53051549	04-01-2016	03-31-2017
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	TTF20120439	01-11-2017	01-10-2018
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	003	01-11-2017	01-10-2018
DC Power	Keysight	E3642A	MY54436035	04-01-2016	03-31-2017
BT&WI-FI Automatic control	R&S	OSP120	101374	04-01-2016	03-31-2017
RF control unit	JS Tonscend	JS0806-2	158060006	04-01-2016	03-31-2017

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100009	06-16-2016	06-15-2017
Temperature/ Humidity Indicator	TAYLOR	1451	1905	04-27-2016	04-26-2017
LISN	R&S	ENV216	100098	06-16-2016	06-15-2017
LISN	schwarzbeck	NNLK8121	8121-529	06-16-2016	06-15-2017
Current Probe	R&S	EZ17	100106	06-16-2016	06-15-2017
ISN	TESEQ GmbH	ISN T800	30297	02-23-2017	02-22-2018

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	TTE20130797	06-05-2016	06-05-2019
TRILOG Broadband Antenna	SCHWARZBECK	VULB9163	9163-484	05-23-2016	05-22-2017
Microwave Preamplifier	Agilent	8449B	3008A02425	02-16-2017	02-15-2018
Horn Antenna	ETS-LINDGREN	3117	00057407	07-20-2015	07-18-2018
Loop Antenna	ETS	6502	00071730	07-30-2015	07-28-2017
Microwave Preamplifier	A.H.SYSTEMS	PAP-1840-60	6041.6042	06-30-2015	06-28-2018
Horn Antenna	A.H.SYSTEMS	SAS-574 374	374	06-30-2015	06-28-2018
Spectrum Analyzer	R&S	FSP40	100416	06-16-2016	06-15-2017
Receiver	R&S	ESCI	100435	06-16-2016	06-15-2017
LISN	schwarzbeck	NNBM8125	81251547	06-16-2016	06-15-2017
LISN	schwarzbeck	NNBM8125	81251548	06-16-2016	06-15-2017
Signal Generator	Agilent	E4438C	MY45095744	04-01-2016	03-31-2017
Signal Generator	Keysight	E8257D	MY53401106	04-01-2016	03-31-2017
Temperature/ Humidity Indicator	TAYLOR	1451	1905	04-27-2016	04-26-2017
Cable line	Fulai(7M)	SF106	5219/6A	01-11-2017	01-10-2018
Cable line	Fulai(6M)	SF106	5220/6A	01-11-2017	01-10-2018
Cable line	Fulai(3M)	SF106	5216/6A	01-11-2017	01-10-2018
Cable line	Fulai(3M)	SF106	5217/6A	01-11-2017	01-10-2018
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	TTF20120439	01-11-2017	01-10-2018
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	003	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	TTF20120434	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	TTF20120435	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	TTF20120436	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	TTF20120437	01-11-2017	01-10-2018

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C (2015)	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (b)(3)	ANSI C63.10/ KDB 558074	Conducted Peak Output Power	PASS	Appendix A)
Part15C Section 15.247 (a)(2)	ANSI C63.10/ KDB 558074	6dB Occupied Bandwidth	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10/ KDB 558074	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10/ KDB 558074	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10/ KDB 558074	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix I)

Appendix A): Conducted Peak Output Power



Result Table




Mode	Channel	Conducted Peak Output Power [dBm]	Verdict
11B	LCH	16.17	PASS
11B	MCH	16.6	PASS
11B	HCH	16.93	PASS
11G	LCH	15.07	PASS
11G	MCH	15.54	PASS
11G	HCH	15.96	PASS
11N20SISO	LCH	13.48	PASS
11N20SISO	MCH	13.78	PASS
11N20SISO	HCH	15.16	PASS
11N40SISO	LCH	11.9	PASS
11N40SISO	MCH	12.43	PASS
11N40SISO	HCH	12.59	PASS

Test Graph



11G/LCH	 <p>Keyight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 19.06 dB Ref 20.00 dBm</p> <p>Center 2.412 GHz #Res BW 1 MHz</p> <p>#VBW 3 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <p>Channel Power 15.07 dBm / 20 MHz</p> <p>Power Spectral Density -57.94 dBm / Hz</p> <p>Frequency Center Freq 2.412000000 GHz</p> <p>CF Step 4.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
11G/MCH	 <p>Keyight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 19.02 dB Ref 29.02 dBm</p> <p>Center 2.437 GHz #Res BW 1 MHz</p> <p>#VBW 3 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <p>Channel Power 15.54 dBm / 20 MHz</p> <p>Power Spectral Density -57.47 dBm / Hz</p> <p>Frequency Center Freq 2.437000000 GHz</p> <p>CF Step 4.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
11G/HCH	 <p>Keyight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 19.06 dB Ref 20.00 dBm</p> <p>Center 2.462 GHz #Res BW 1 MHz</p> <p>#VBW 3 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <p>Channel Power 15.96 dBm / 20 MHz</p> <p>Power Spectral Density -57.05 dBm / Hz</p> <p>Frequency Center Freq 2.462000000 GHz</p> <p>CF Step 4.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>

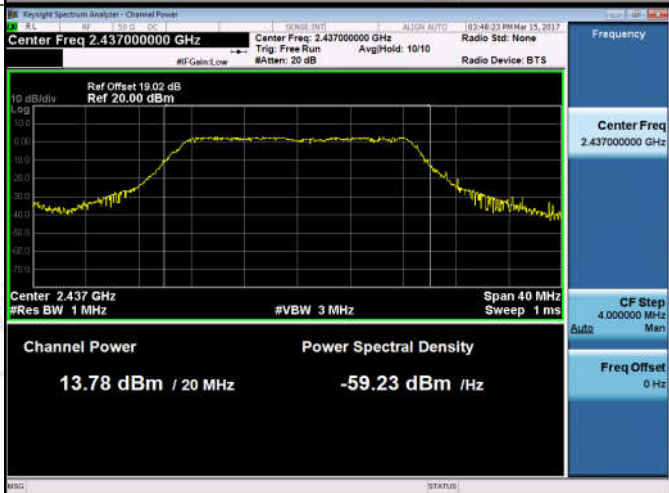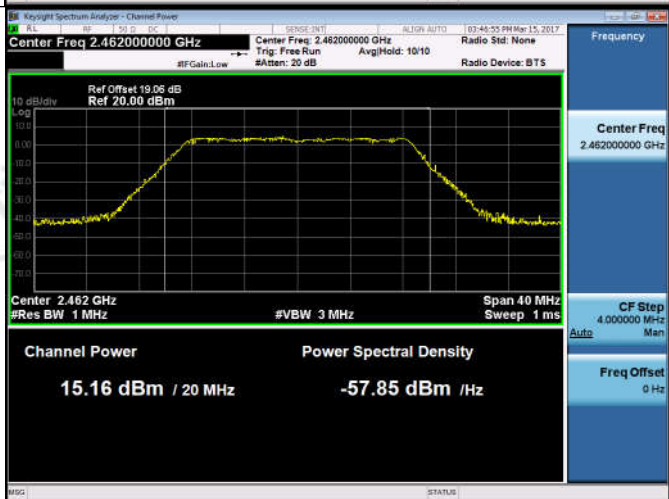11N20SISO/LCH	 <p>Keyight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 19.06 dB Ref 20.00 dBm</p> <p>Center 2.412 GHz #Res BW 1 MHz #VBW 3 MHz Span 40 MHz Sweep 1 ms</p> <p>Channel Power 13.48 dBm / 20 MHz</p> <p>Power Spectral Density -59.53 dBm / Hz</p>
11N20SISO/MCH	 <p>Keyight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 19.02 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 1 MHz #VBW 3 MHz Span 40 MHz Sweep 1 ms</p> <p>Channel Power 13.78 dBm / 20 MHz</p> <p>Power Spectral Density -59.23 dBm / Hz</p>
11N20SISO/HCH	 <p>Keyight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 19.06 dB Ref 20.00 dBm</p> <p>Center 2.462 GHz #Res BW 1 MHz #VBW 3 MHz Span 40 MHz Sweep 1 ms</p> <p>Channel Power 15.16 dBm / 20 MHz</p> <p>Power Spectral Density -57.85 dBm / Hz</p>

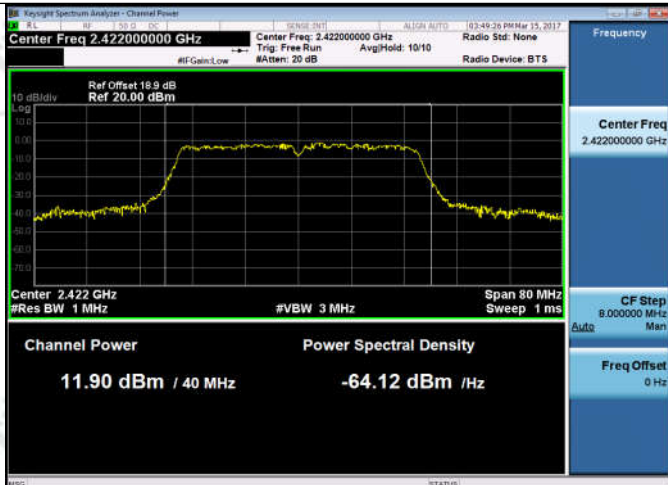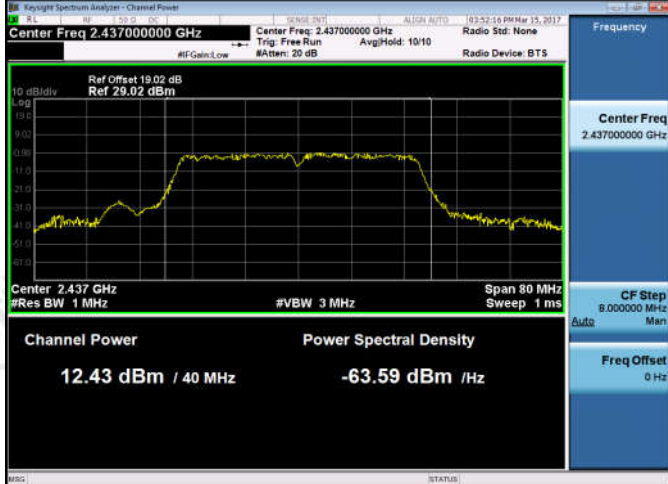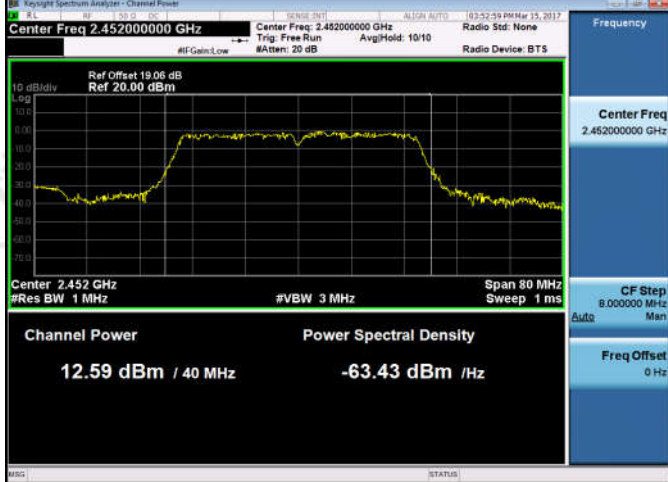11N40SISO/LCH	 <p>Key: Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.422000000 GHz</p> <p>Ref Offset 19.9 dB Ref 20.00 dBm</p> <p>Center 2.422 GHz #Res BW 1 MHz #VBW 3 MHz Span 80 MHz Sweep 1 ms</p> <p>Channel Power 11.90 dBm / 40 MHz</p> <p>Power Spectral Density -64.12 dBm / Hz</p>
11N40SISO/MCH	 <p>Key: Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 19.02 dB Ref 29.02 dBm</p> <p>Center 2.437 GHz #Res BW 1 MHz #VBW 3 MHz Span 80 MHz Sweep 1 ms</p> <p>Channel Power 12.43 dBm / 40 MHz</p> <p>Power Spectral Density -63.59 dBm / Hz</p>
11N40SISO/HCH	 <p>Key: Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.452000000 GHz</p> <p>Ref Offset 19.06 dB Ref 20.00 dBm</p> <p>Center 2.452 GHz #Res BW 1 MHz #VBW 3 MHz Span 80 MHz Sweep 1 ms</p> <p>Channel Power 12.59 dBm / 40 MHz</p> <p>Power Spectral Density -63.43 dBm / Hz</p>



Appendix B): 6dB Occupied Bandwidth




Result Table




Mode	Channel	6dB Bandwidth [MHz]	99% OBW [MHz]	Verdict	Remark
11B	LCH	10.06	15.080	PASS	Peak detector
11B	MCH	10.06	15.091	PASS	
11B	HCH	10.06	15.073	PASS	
11G	LCH	16.34	16.475	PASS	
11G	MCH	16.36	16.478	PASS	
11G	HCH	16.35	16.498	PASS	
11N20SISO	LCH	17.56	17.671	PASS	
11N20SISO	MCH	17.58	17.671	PASS	
11N20SISO	HCH	17.59	17.668	PASS	
11N40SISO	LCH	35.46	35.999	PASS	
11N40SISO	MCH	35.62	36.022	PASS	
11N40SISO	HCH	35.46	36.004	PASS	

Test Graph

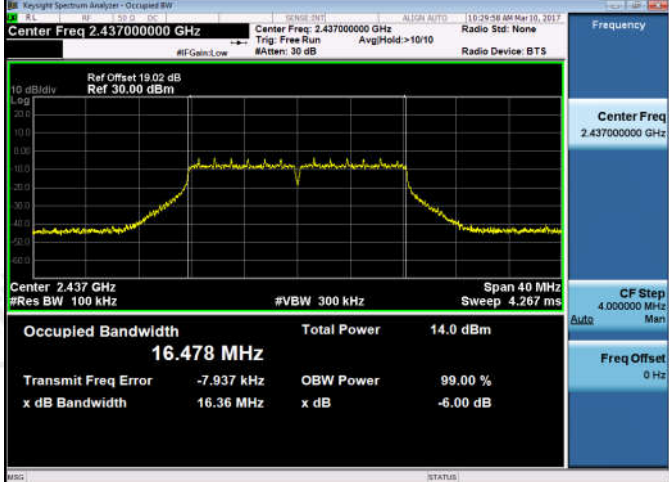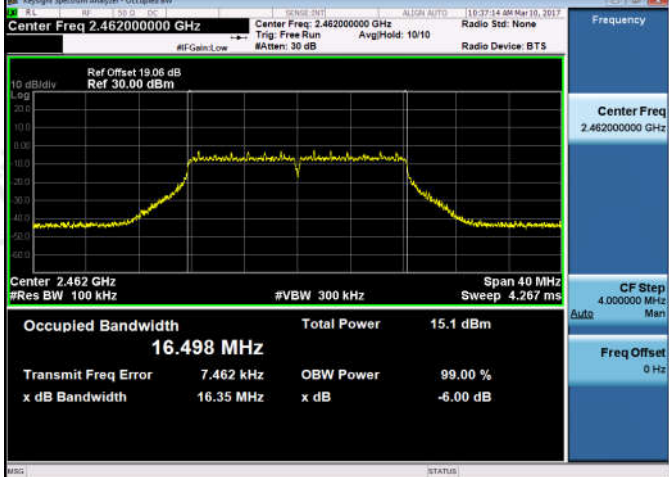

11G/LCH	 <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 19.06 dB Ref 30.00 dBm</p> <p>Center Freq 2.412000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 16.475 MHz</p> <p>Total Power 13.7 dBm</p> <p>Transmit Freq Error -3.028 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 16.34 MHz x dB -6.00 dB</p>
11G/MCH	 <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 19.02 dB Ref 30.00 dBm</p> <p>Center Freq 2.437000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 16.478 MHz</p> <p>Total Power 14.0 dBm</p> <p>Transmit Freq Error -7.937 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 16.36 MHz x dB -6.00 dB</p>
11G/HCH	 <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 19.06 dB Ref 30.00 dBm</p> <p>Center Freq 2.462000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 16.498 MHz</p> <p>Total Power 15.1 dBm</p> <p>Transmit Freq Error 7.462 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 16.35 MHz x dB -6.00 dB</p>

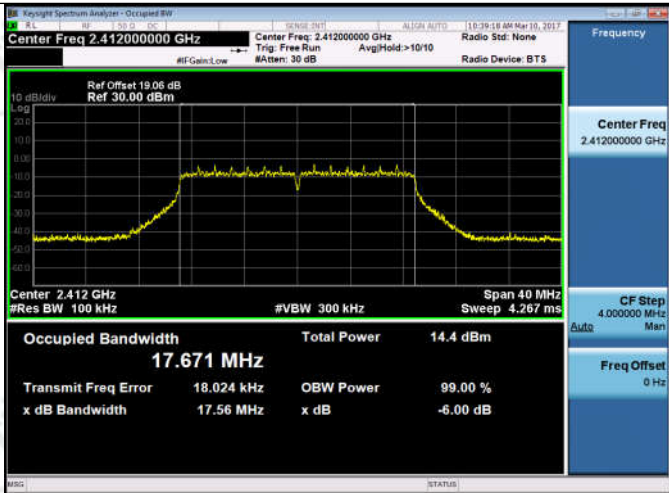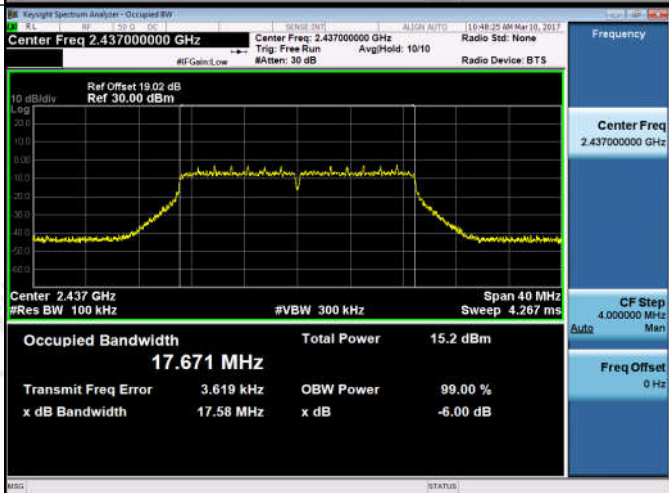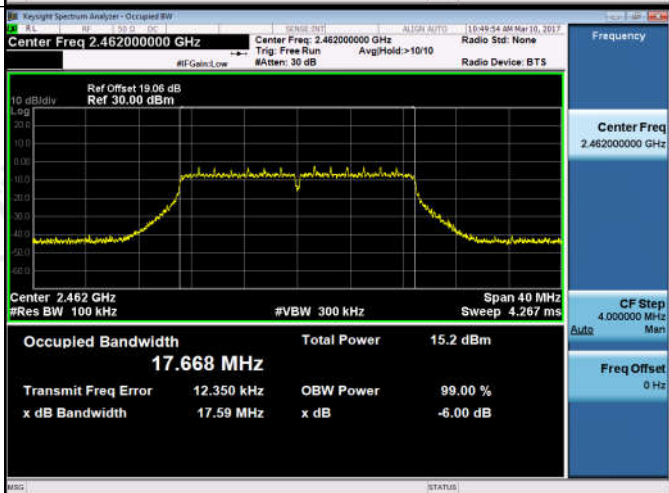11N20SISO/LCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 19.06 dB Ref 30.00 dBm</p> <p>Center Freq 2.412000000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 17.671 MHz Total Power 14.4 dBm</p> <p>Transmit Freq Error 18.024 kHz OBW Power 99.00 % x dB Bandwidth 17.56 MHz x dB -6.00 dB</p>
11N20SISO/MCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 19.02 dB Ref 30.00 dBm</p> <p>Center Freq 2.437000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 17.671 MHz Total Power 15.2 dBm</p> <p>Transmit Freq Error 3.619 kHz OBW Power 99.00 % x dB Bandwidth 17.58 MHz x dB -6.00 dB</p>
11N20SISO/HCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 19.06 dB Ref 30.00 dBm</p> <p>Center Freq 2.462000000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms</p> <p>Occupied Bandwidth 17.668 MHz Total Power 15.2 dBm</p> <p>Transmit Freq Error 12.350 kHz OBW Power 99.00 % x dB Bandwidth 17.59 MHz x dB -6.00 dB</p>

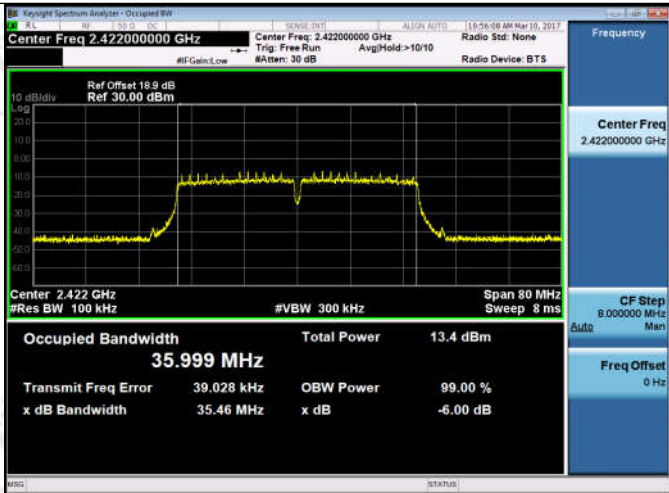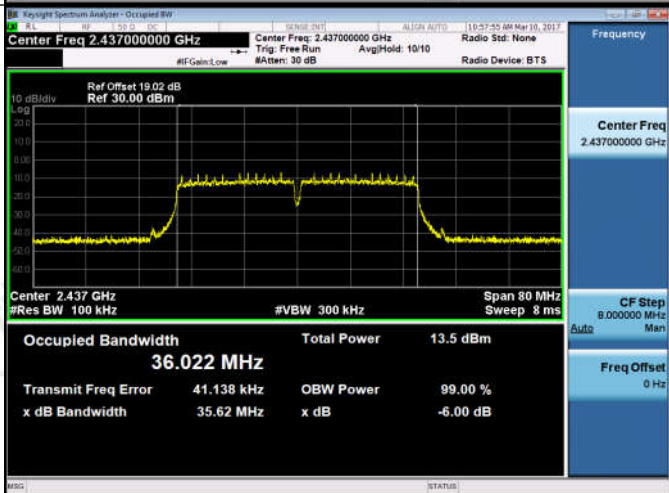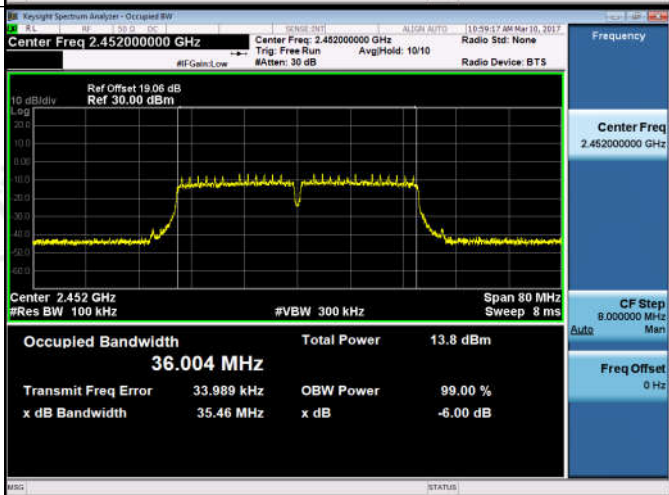
11N40SISO/LCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.422000000 GHz</p> <p>Ref Offset 19.9 dB Ref 30.00 dBm</p> <p>Center 2.422 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 35.999 MHz</p> <p>Total Power 13.4 dBm</p> <p>Transmit Freq Error 39.028 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 35.46 MHz</p> <p>x dB -6.00 dB</p>
11N40SISO/MCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 19.02 dB Ref 30.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 36.022 MHz</p> <p>Total Power 13.5 dBm</p> <p>Transmit Freq Error 41.138 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 35.62 MHz</p> <p>x dB -6.00 dB</p>
11N40SISO/HCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.452000000 GHz</p> <p>Ref Offset 19.06 dB Ref 30.00 dBm</p> <p>Center 2.452 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 36.004 MHz</p> <p>Total Power 13.8 dBm</p> <p>Transmit Freq Error 33.989 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 35.46 MHz</p> <p>x dB -6.00 dB</p>




Appendix C): Band-edge for RF Conducted Emissions

Result Table

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
11B	LCH	2.571	-50.226	-27.43	PASS
11B	HCH	3.330	-49.920	-26.67	PASS
11G	LCH	-4.044	-50.159	-34.04	PASS
11G	HCH	-2.835	-50.235	-32.84	PASS
11N20SISO	LCH	-3.646	-50.494	-33.65	PASS
11N20SISO	HCH	-2.935	-49.557	-32.94	PASS
11N40SISO	LCH	-7.569	-50.081	-37.57	PASS
11N40SISO	HCH	-6.740	-49.302	-36.74	PASS

Test Graph

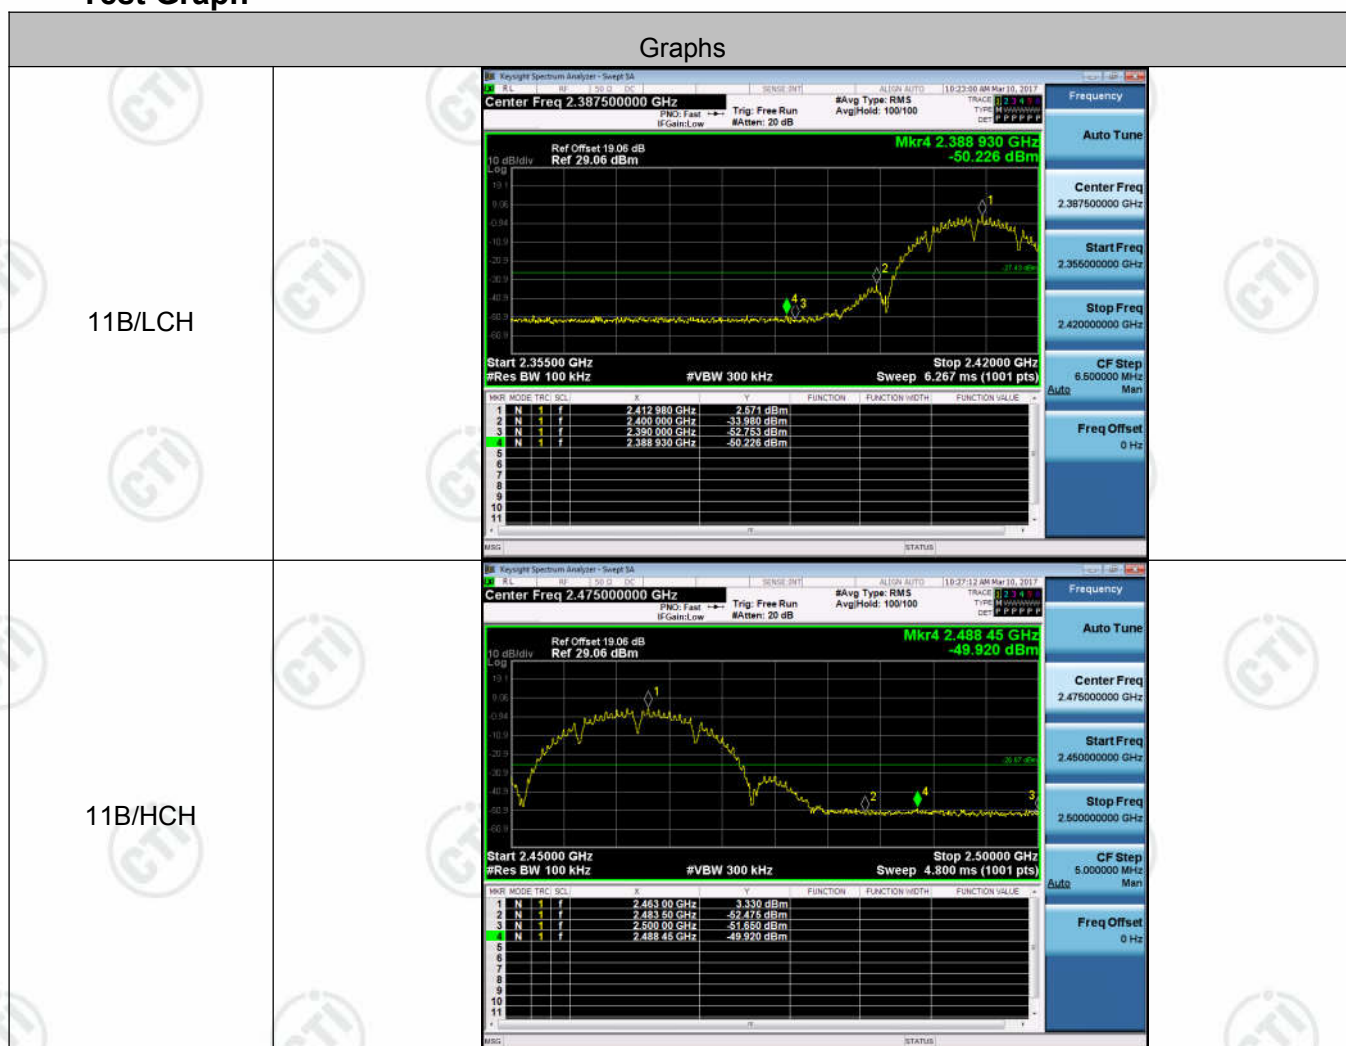

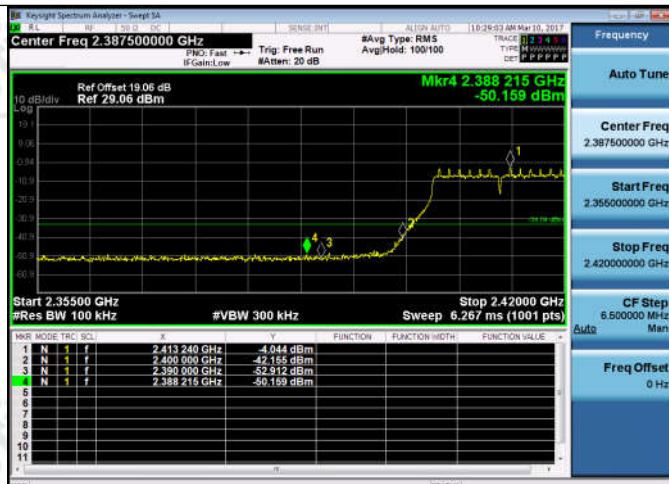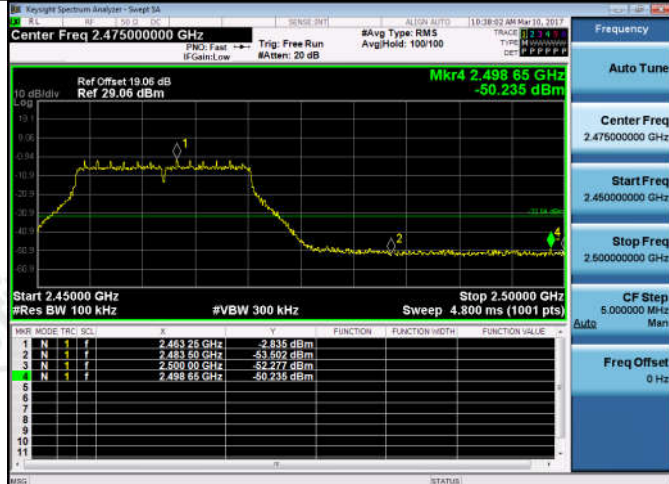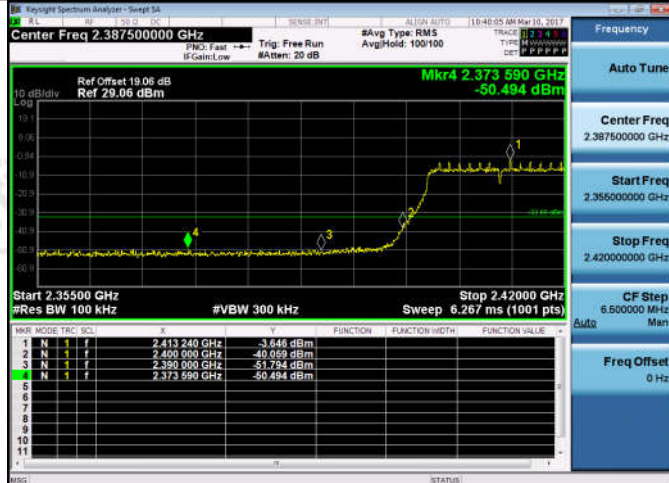11G/LCH	 <p>Key: Knight Spectrum Analyzer - Sweep SA Center Freq 2.387500000 GHz Ref Offset 19.06 dB Ref 29.06 dBm Mkr4 2.388 215 GHz -50.169 dBm Start 2.35500 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 6.267 ms (1001 pts)</p> <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>F</th><th>F</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td>2.413 240 GHz</td><td>-4.044 dBm</td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td>2.400 000 GHz</td><td>-42.155 dBm</td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td>2.390 000 GHz</td><td>-52.912 dBm</td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td>2.388 215 GHz</td><td>-50.169 dBm</td><td></td></tr></table>	MNR	MODE	TRC	SOL	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f				2.413 240 GHz	-4.044 dBm		2	N	1	f				2.400 000 GHz	-42.155 dBm		3	N	1	f				2.390 000 GHz	-52.912 dBm		4	N	1	f				2.388 215 GHz	-50.169 dBm	
MNR	MODE	TRC	SOL	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f				2.413 240 GHz	-4.044 dBm																																											
2	N	1	f				2.400 000 GHz	-42.155 dBm																																											
3	N	1	f				2.390 000 GHz	-52.912 dBm																																											
4	N	1	f				2.388 215 GHz	-50.169 dBm																																											
11G/HCH	 <p>Key: Knight Spectrum Analyzer - Sweep SA Center Freq 2.475000000 GHz Ref Offset 19.06 dB Ref 29.06 dBm Mkr4 2.498 65 GHz -50.235 dBm Start 2.45000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.800 ms (1001 pts)</p> <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>F</th><th>F</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td>2.463 25 GHz</td><td>-2.835 dBm</td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td>2.483 50 GHz</td><td>-51.592 dBm</td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td>2.500 00 GHz</td><td>-52.277 dBm</td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td>2.498 65 GHz</td><td>-50.235 dBm</td><td></td></tr></table>	MNR	MODE	TRC	SOL	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f				2.463 25 GHz	-2.835 dBm		2	N	1	f				2.483 50 GHz	-51.592 dBm		3	N	1	f				2.500 00 GHz	-52.277 dBm		4	N	1	f				2.498 65 GHz	-50.235 dBm	
MNR	MODE	TRC	SOL	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f				2.463 25 GHz	-2.835 dBm																																											
2	N	1	f				2.483 50 GHz	-51.592 dBm																																											
3	N	1	f				2.500 00 GHz	-52.277 dBm																																											
4	N	1	f				2.498 65 GHz	-50.235 dBm																																											
11N20SISO/LCH	 <p>Key: Knight Spectrum Analyzer - Sweep SA Center Freq 2.387500000 GHz Ref Offset 19.06 dB Ref 29.06 dBm Mkr4 2.373 590 GHz -50.494 dBm Start 2.35500 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 6.267 ms (1001 pts)</p> <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>F</th><th>F</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td>2.413 240 GHz</td><td>-3.646 dBm</td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td>2.400 000 GHz</td><td>-40.059 dBm</td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td>2.390 000 GHz</td><td>-51.794 dBm</td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td>2.373 590 GHz</td><td>-50.494 dBm</td><td></td></tr></table>	MNR	MODE	TRC	SOL	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f				2.413 240 GHz	-3.646 dBm		2	N	1	f				2.400 000 GHz	-40.059 dBm		3	N	1	f				2.390 000 GHz	-51.794 dBm		4	N	1	f				2.373 590 GHz	-50.494 dBm	
MNR	MODE	TRC	SOL	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f				2.413 240 GHz	-3.646 dBm																																											
2	N	1	f				2.400 000 GHz	-40.059 dBm																																											
3	N	1	f				2.390 000 GHz	-51.794 dBm																																											
4	N	1	f				2.373 590 GHz	-50.494 dBm																																											



Appendix D): RF Conducted Spurious Emissions

Result Table



Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
11B	LCH	2.586	<Limit	PASS
11B	MCH	2.789	<Limit	PASS
11B	HCH	3.376	<Limit	PASS
11G	LCH	-4.517	<Limit	PASS
11G	MCH	-3.789	<Limit	PASS
11G	HCH	-2.939	<Limit	PASS
11N20SISO	LCH	-3.582	<Limit	PASS
11N20SISO	MCH	-3.047	<Limit	PASS
11N20SISO	HCH	-2.74	<Limit	PASS
11N40SISO	LCH	-7.097	<Limit	PASS
11N40SISO	MCH	-6.997	<Limit	PASS
11N40SISO	HCH	-6.971	<Limit	PASS



Test Graph





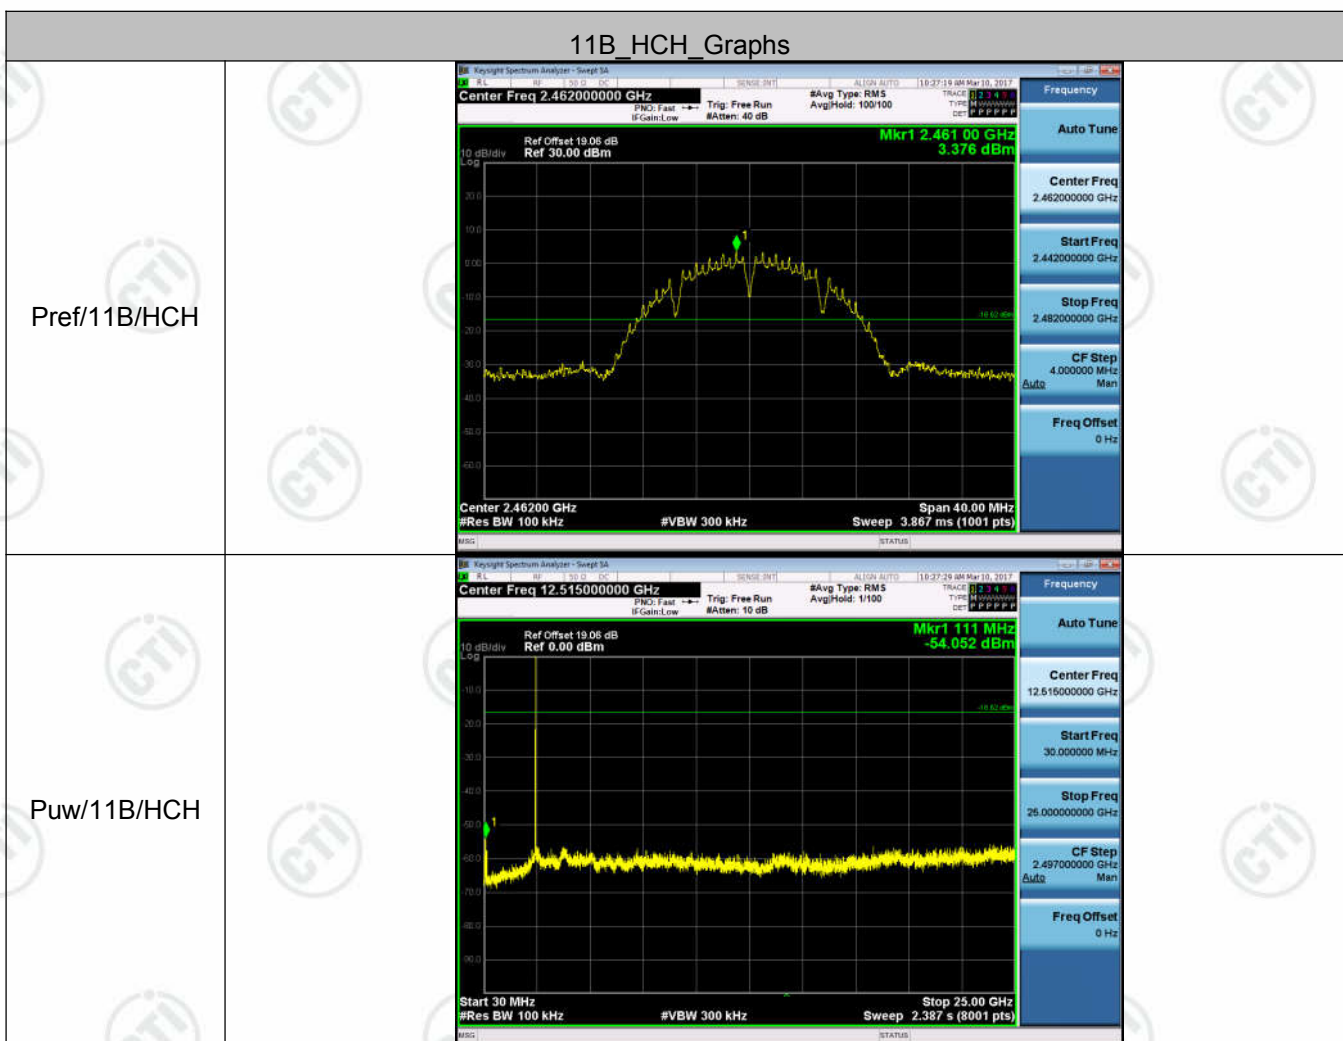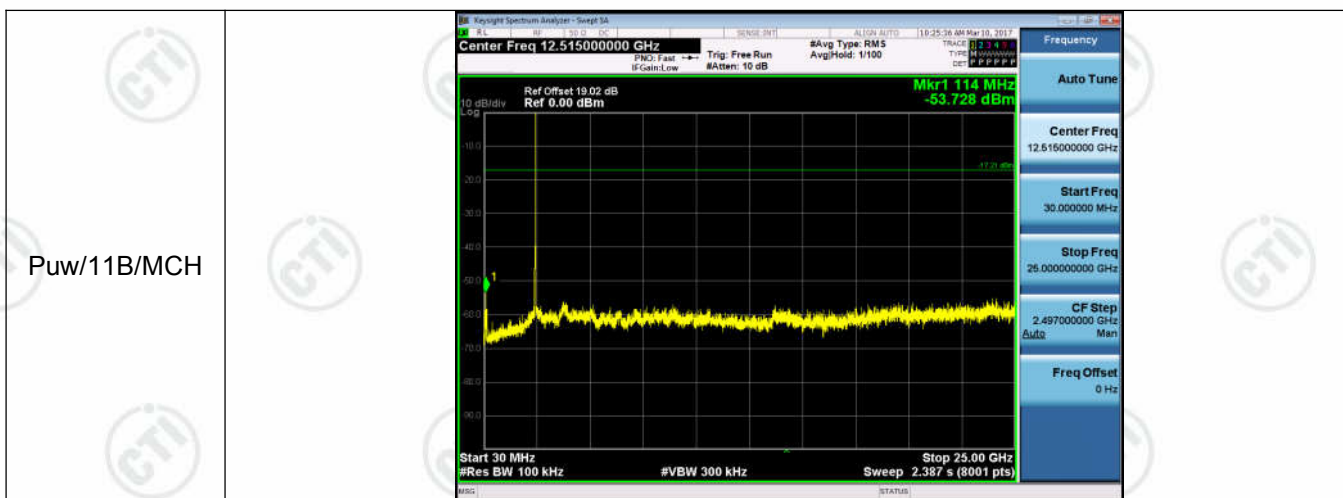



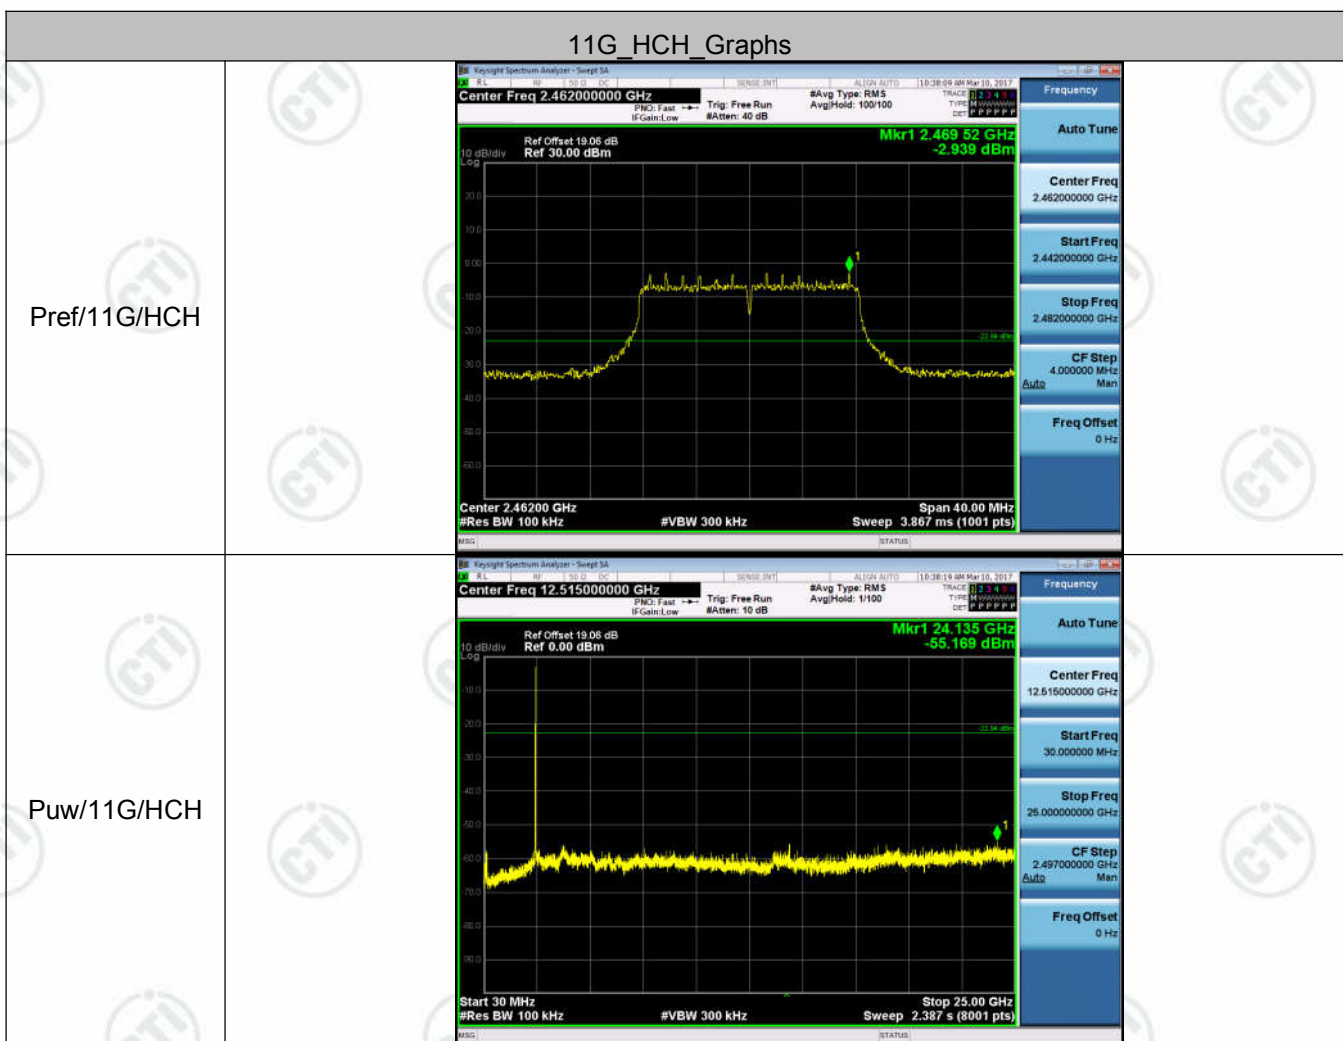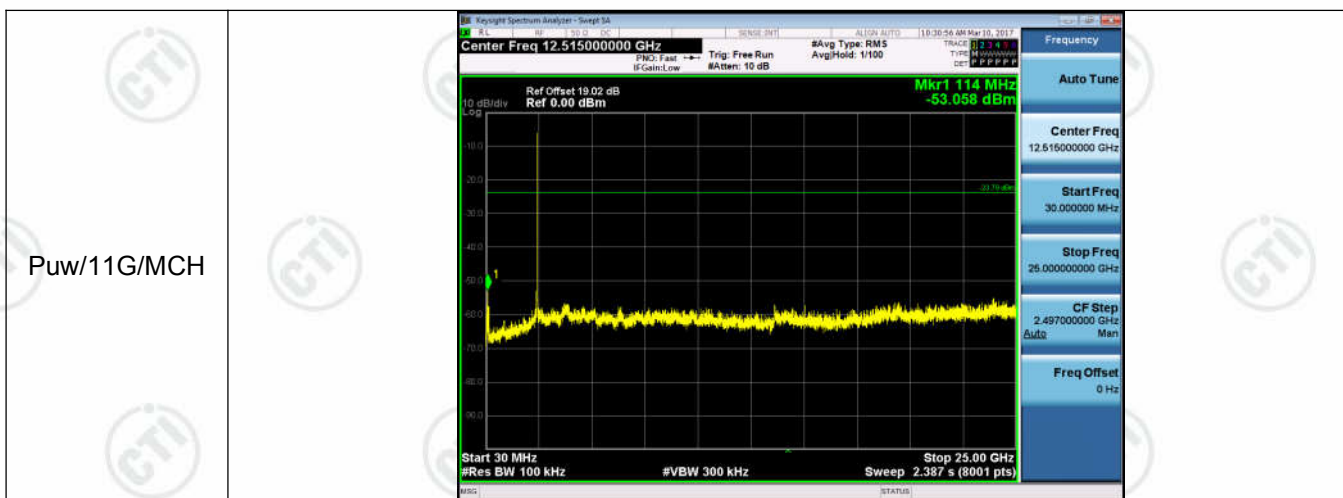


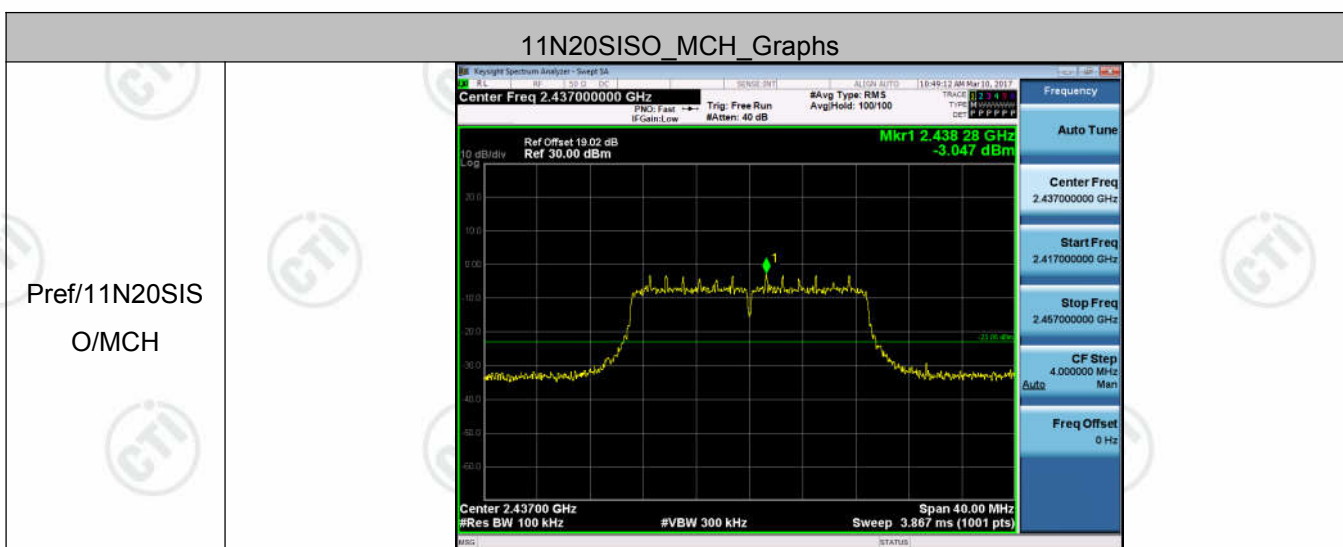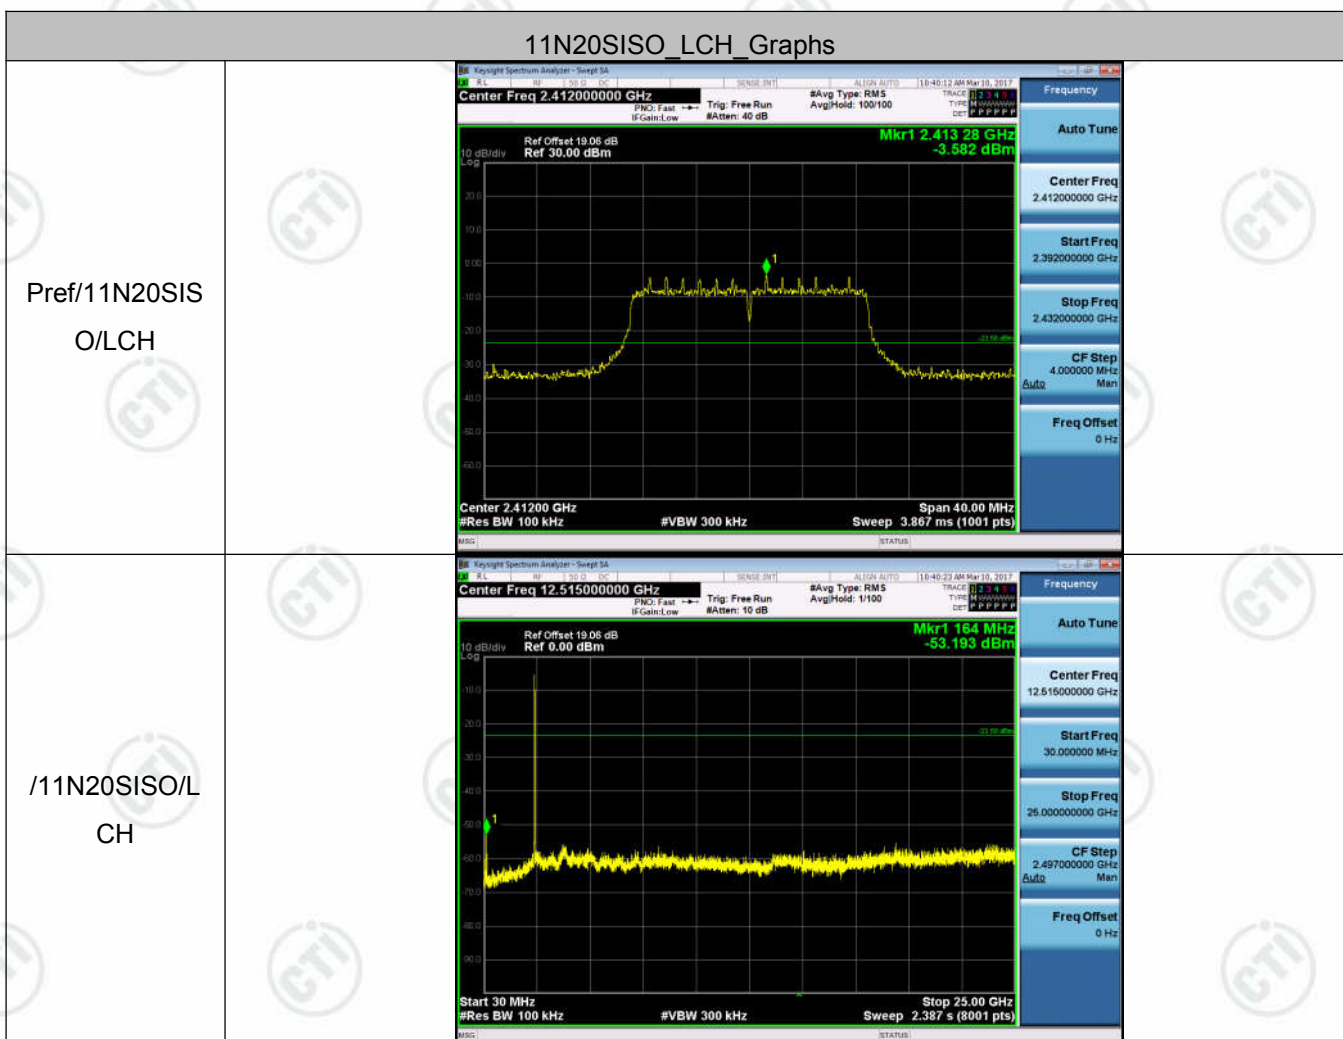

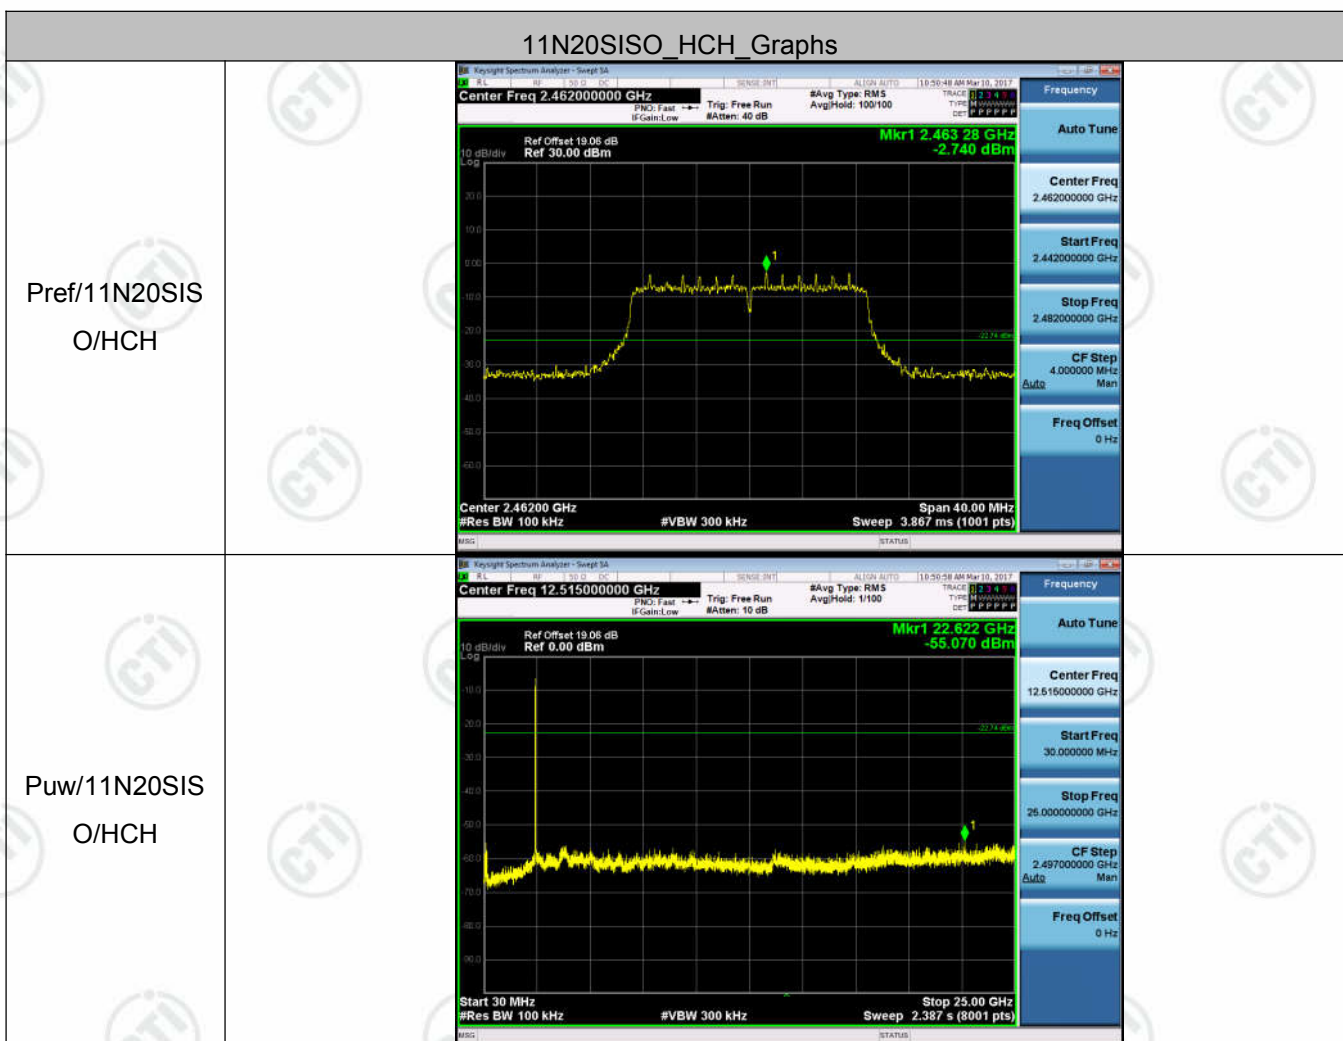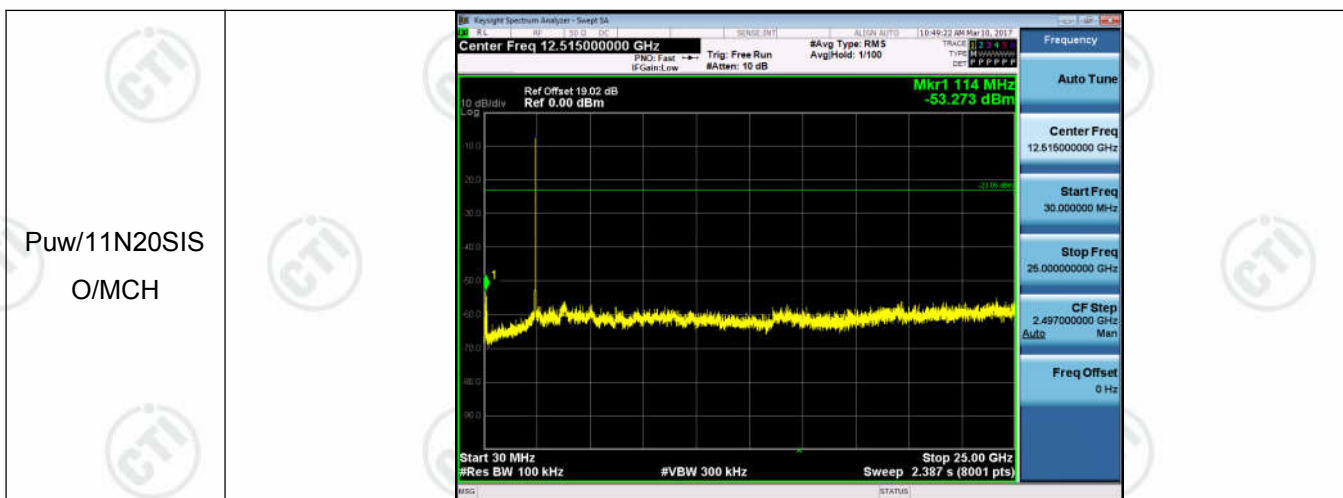


11N40SISO_LCH_Graphs

Pref/11N40SIS
O/LCH

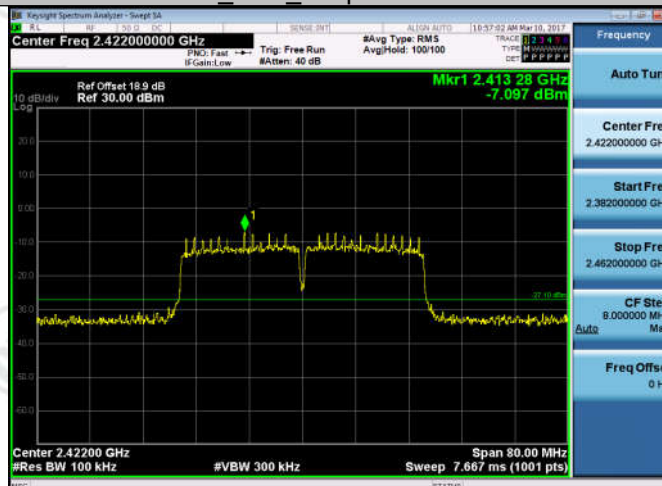




Puw/11N40SIS
O/LCH

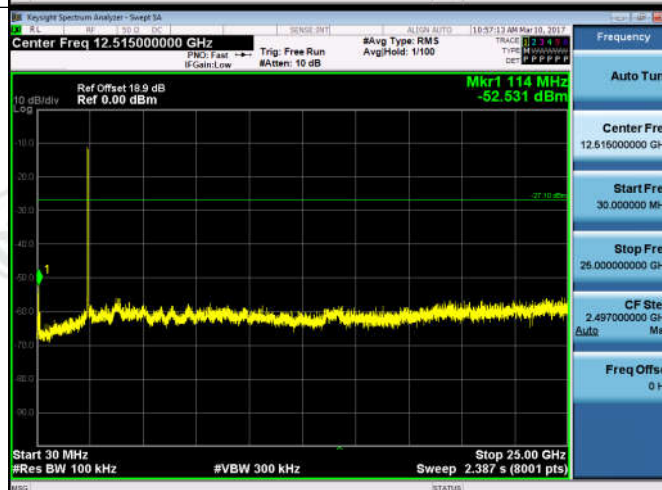

11N40SISO_MCH_Graphs

Pref/11N40SIS
O/MCH

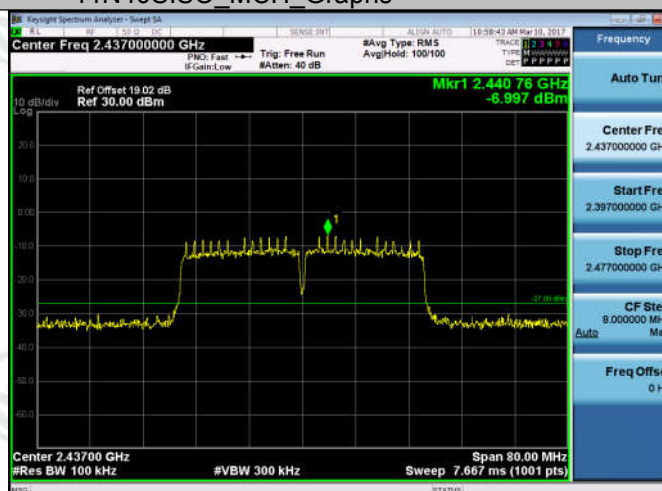

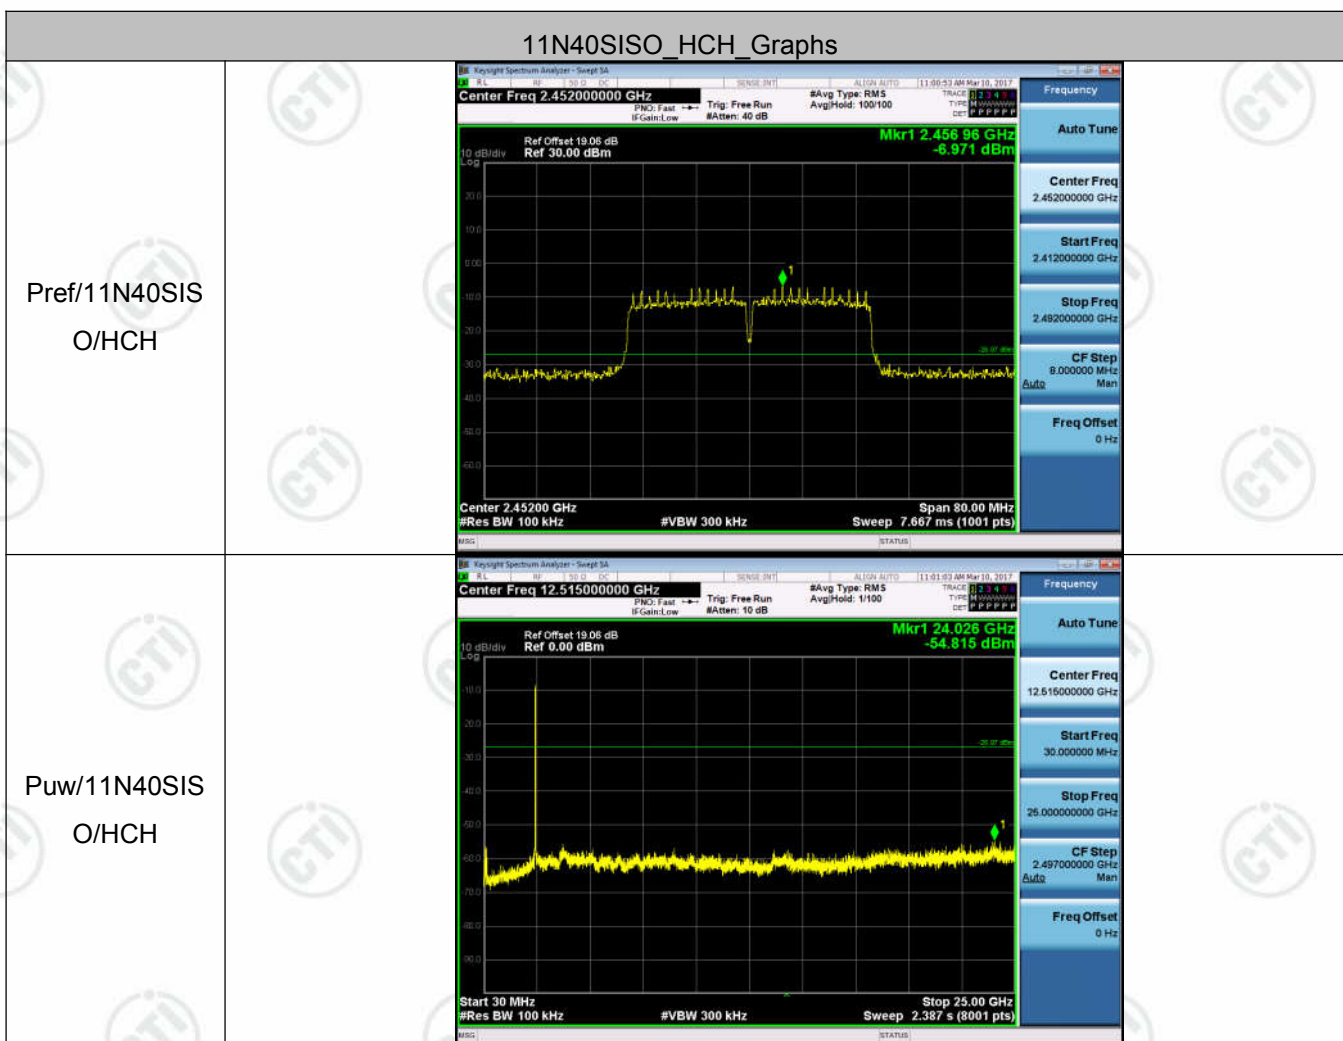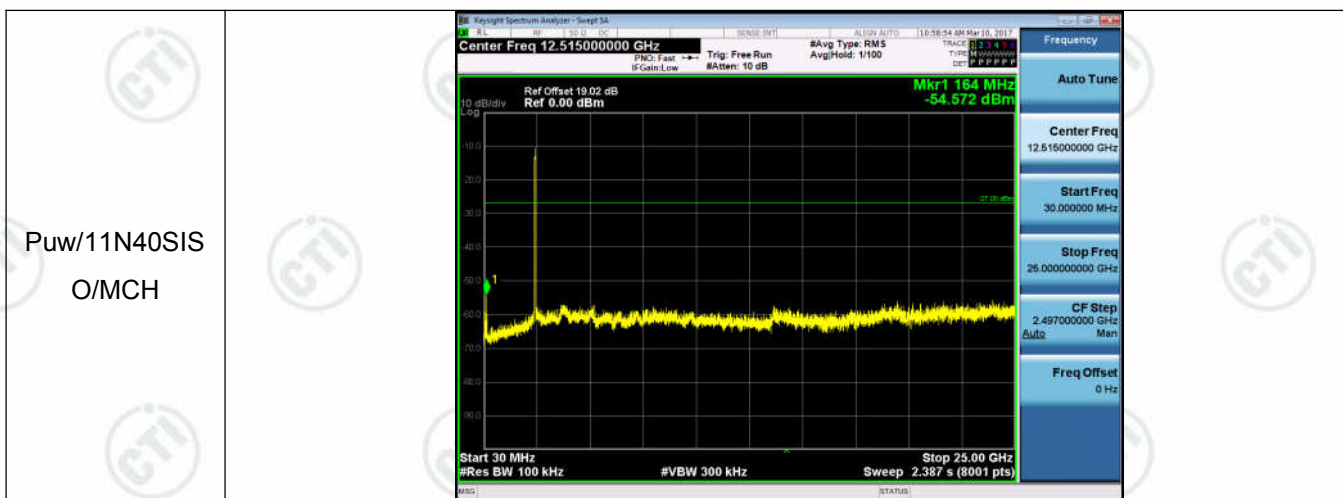

Appendix E): Power Spectral Density

Result Table


Mode	Channel	Power Spectral Density [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	LCH	-15.181	8	PASS
11B	MCH	-13.553	8	PASS
11B	HCH	-13.113	8	PASS
11G	LCH	-19.868	8	PASS
11G	MCH	-19.744	8	PASS
11G	HCH	-16.586	8	PASS
11N20SISO	LCH	-18.082	8	PASS
11N20SISO	MCH	-16.379	8	PASS
11N20SISO	HCH	-16.941	8	PASS
11N40SISO	LCH	-22.845	8	PASS
11N40SISO	MCH	-22.661	8	PASS
11N40SISO	HCH	-22.585	8	PASS

Test Graph





11N20SISO/LCH	
11N20SISO/MCH	
11N20SISO/HCH	

11N40SISO/LCH	
11N40SISO/MCH	
11N40SISO/HCH	

Appendix F): Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PIFA Antenna and no consideration of replacement. The best case gain of the antenna is 3.74dBi.

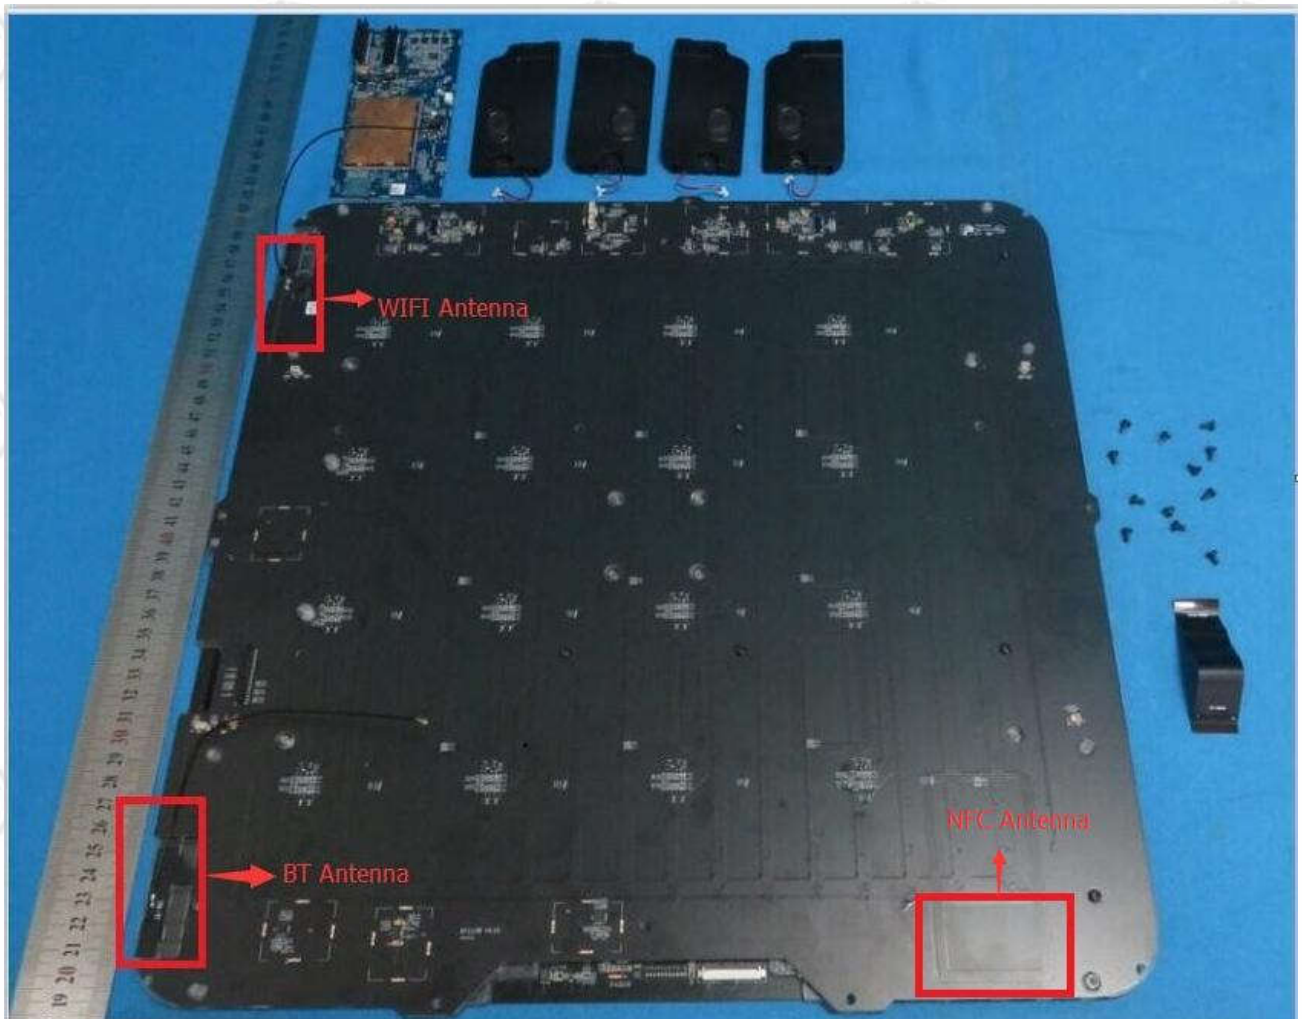

Appendix G): AC Power Line Conducted Emission


Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. 															
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr> <tr> <th>Quasi-peak</th><th>Average</th></tr> </thead> <tbody> <tr> <td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr> <tr> <td>0.5-5</td><td>56</td><td>46</td></tr> <tr> <td>5-30</td><td>60</td><td>50</td></tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency</p>		Frequency range (MHz)	Limit (dB μ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB μ V)															
	Quasi-peak	Average														
0.15-0.5	66 to 56*	56 to 46*														
0.5-5	56	46														
5-30	60	50														

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

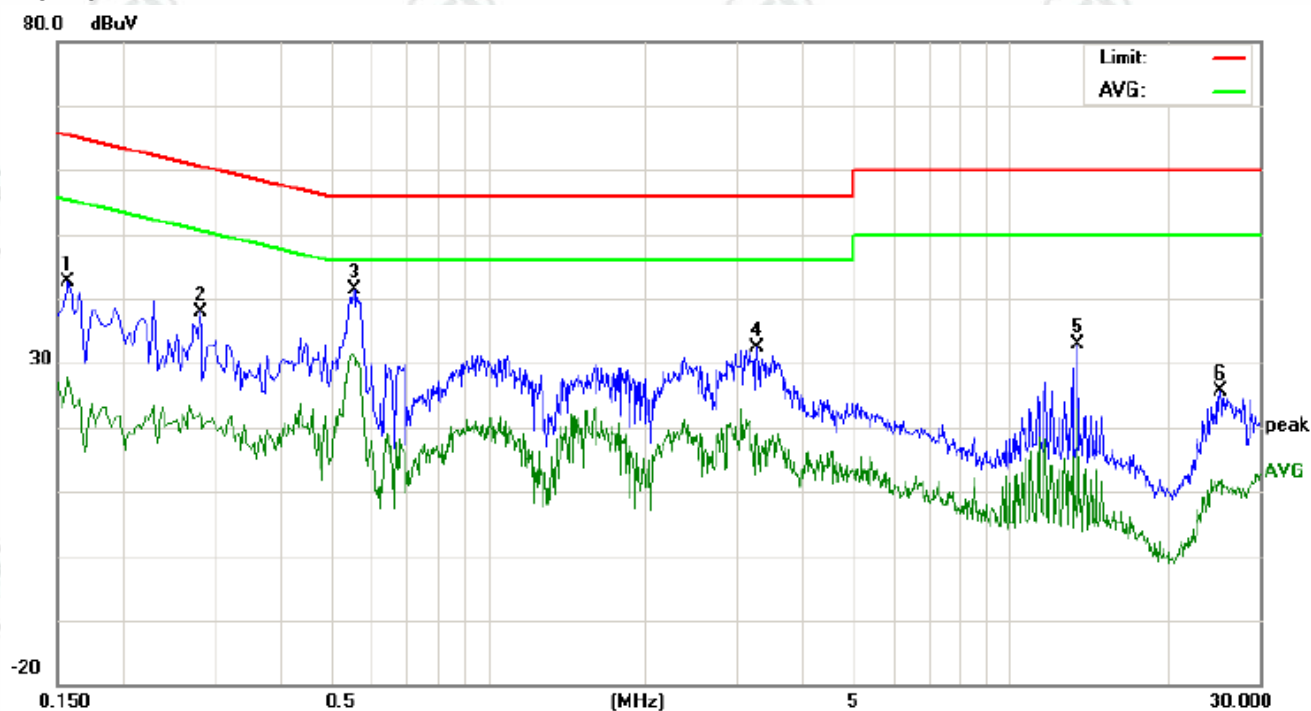

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1580	32.84	32.13	14.82	9.76	42.60	41.89	24.58	65.56	55.56	-23.67	-30.98	P	
2	0.2819	28.16	20.93	10.46	9.77	37.93	30.70	20.23	60.76	50.76	-30.06	-30.53	P	
3	0.5580	31.63	30.25	21.10	9.73	41.36	39.98	30.83	56.00	46.00	-16.02	-15.17	P	
4	3.2860	22.62	18.32	5.99	9.68	32.30	28.00	15.67	56.00	46.00	-28.00	-30.33	P	
5	13.5340	22.94	14.23	1.06	9.97	32.91	24.20	11.03	60.00	50.00	-35.80	-38.97	P	
6	25.3140	15.49	8.50	-2.07	10.18	25.67	18.68	8.11	60.00	50.00	-41.32	-41.89	P	

Neutral line:

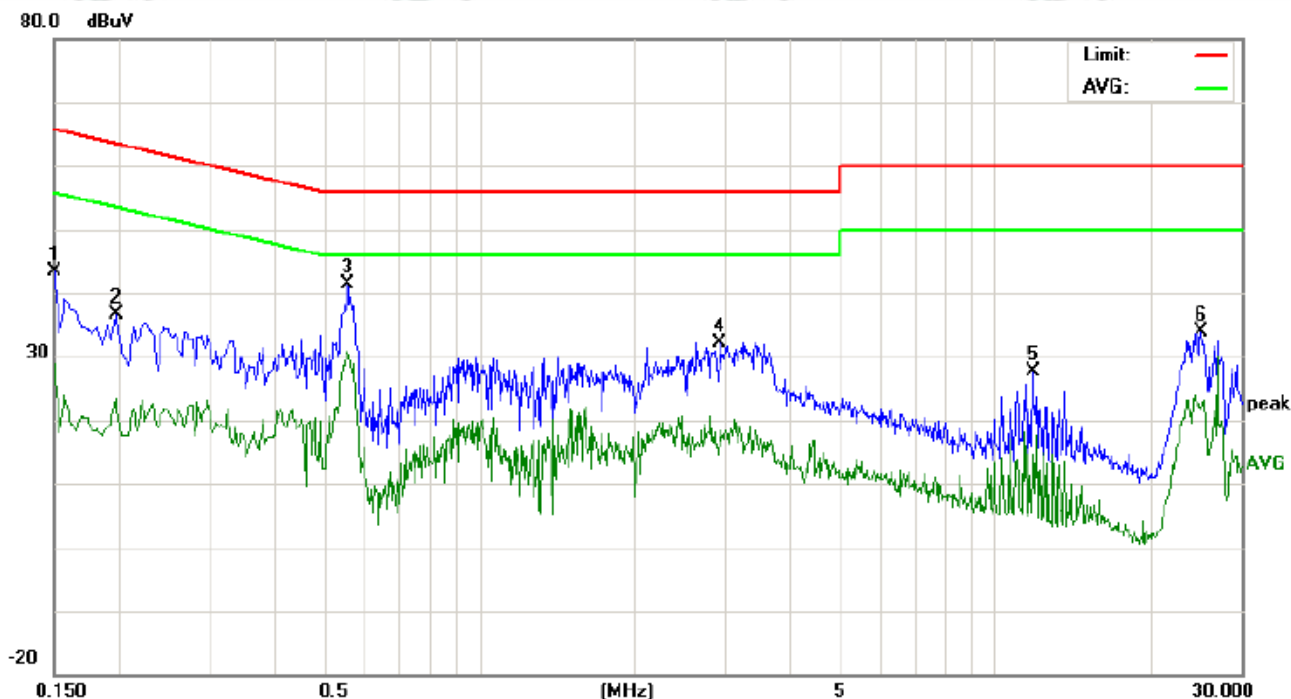

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1500	33.70	33.65	28.20	9.77	43.47	43.42	37.97	65.99	55.99	-22.57	-18.02	P	
2	0.1980	26.93	27.94	11.46	9.71	36.64	37.65	21.17	63.69	53.69	-26.04	-32.52	P	
3	0.5580	31.53	29.66	20.76	9.73	41.26	39.39	30.49	56.00	46.00	-16.61	-15.51	P	
4	2.9380	22.53	17.06	6.52	9.69	32.22	26.75	16.21	56.00	46.00	-29.25	-29.79	P	
5	11.8660	17.71	11.23	-3.30	9.93	27.64	21.16	6.63	60.00	50.00	-38.84	-43.37	P	
6	25.0620	23.63	15.65	8.87	10.18	33.81	25.83	19.05	60.00	50.00	-34.17	-30.95	P	

Notes:


1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

Appendix H): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 				
Limit:	Frequency	Limit (dBμV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	


Test plot as follows:

Worse case mode:	802.11b (11Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

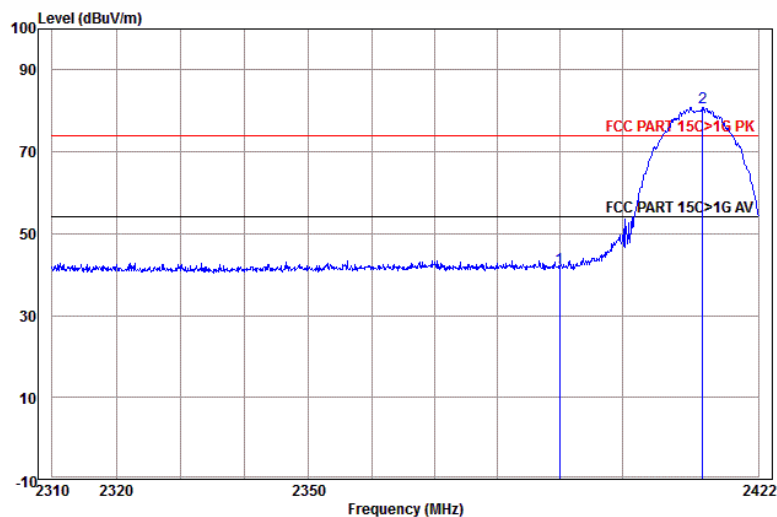


	Ant Freq	Cable Factor	Preamp Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	4.28	44.03	48.77	41.55	74.00	-32.45	Horizontal	
2 pp	2412.958	32.58	4.34	44.06	88.05	80.91	74.00	6.91	Horizontal	

Worse case mode:	802.11b (11Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

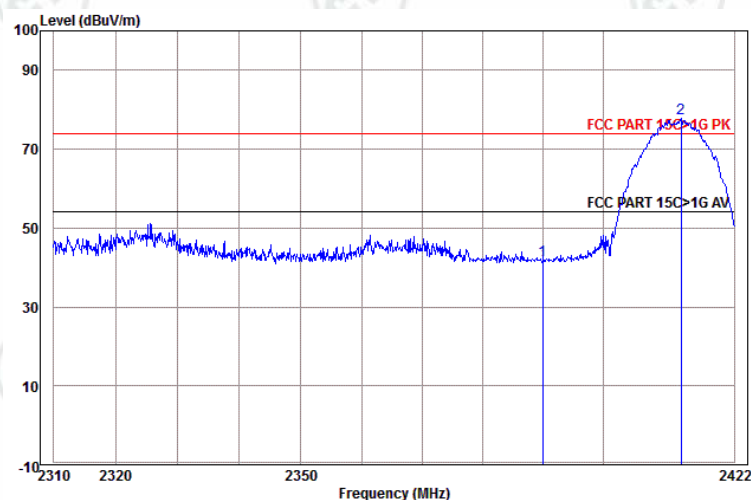


	Ant Freq	Cable Factor	Preamp Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	4.28	44.03	49.16	41.94	74.00	-32.06	Vertical	
2 pp	2413.072	32.58	4.34	44.06	84.82	77.68	74.00	3.68	Vertical	

Worse case mode:	802.11b (11Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

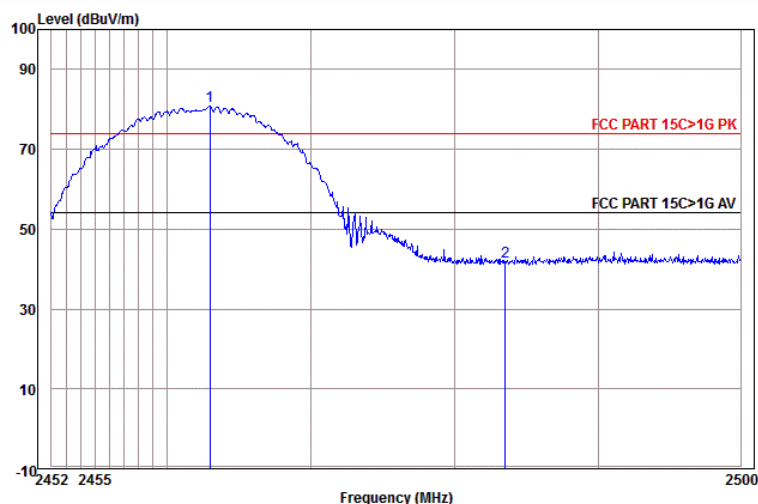


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2462.958	32.68	4.46	44.12	87.83	80.85	74.00	6.85	Horizontal
2	2483.500	32.71	4.51	44.14	48.71	41.79	74.00	-32.21	Horizontal

Worse case mode:	802.11b (11Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

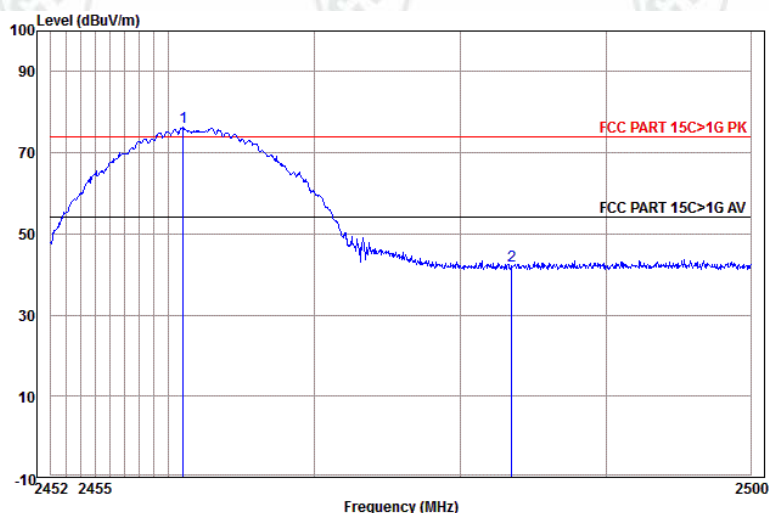


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2461.001	32.67	4.45	44.11	83.19	76.20	74.00	2.20	Vertical
2	2483.500	32.71	4.51	44.14	49.09	42.17	74.00	-31.83	Vertical

Worse case mode:	802.11g (6Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

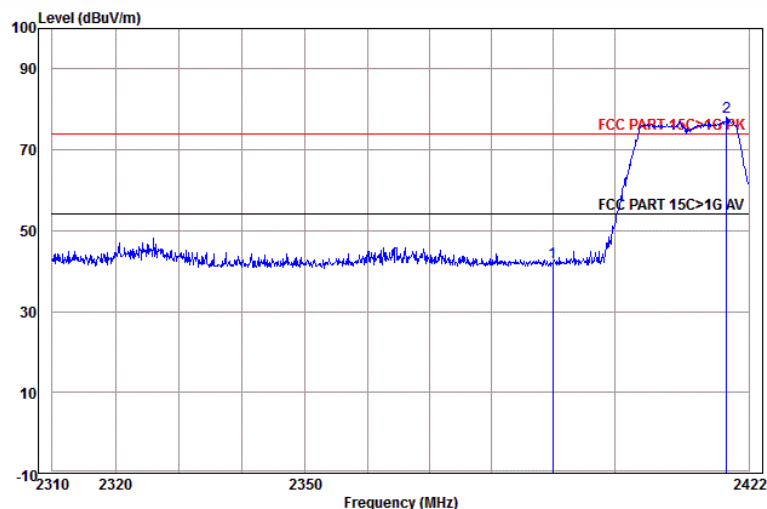


	Ant Freq	Cable Factor	Preamp Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	4.28	44.03	49.36	42.14	74.00	-31.86	Horizontal	
2 pp	2418.333	32.59	4.35	44.06	85.11	77.99	74.00	3.99	Horizontal	

Worse case mode:	802.11g (6Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

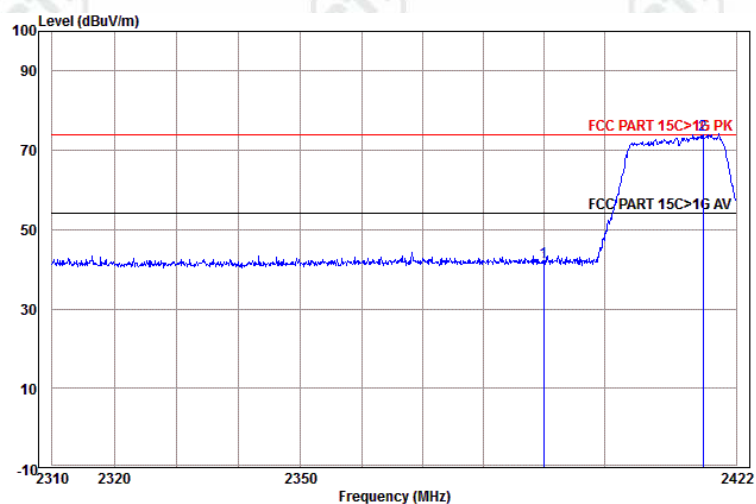


	Ant Freq	Cable Factor	Preamp Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	4.28	44.03	49.20	41.98	74.00	-32.02	Vertical	
2 pp	2416.502	32.59	4.35	44.06	81.12	74.00	74.00	0.00	Vertical	

Worse case mode:	802.11g (6Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

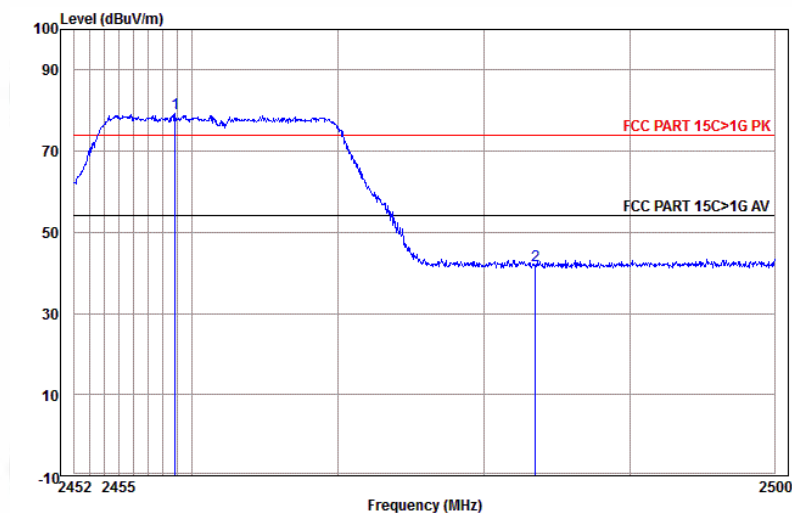


	Ant Freq	Cable Factor	Preamp Loss	Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	pp 2458.855	32.67	4.45	44.11	86.27	79.28	74.00	5.28	Horizontal	
2	2483.500	32.71	4.51	44.14	48.75	41.83	74.00	-32.17	Horizontal	

Worse case mode:	802.11g (6Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

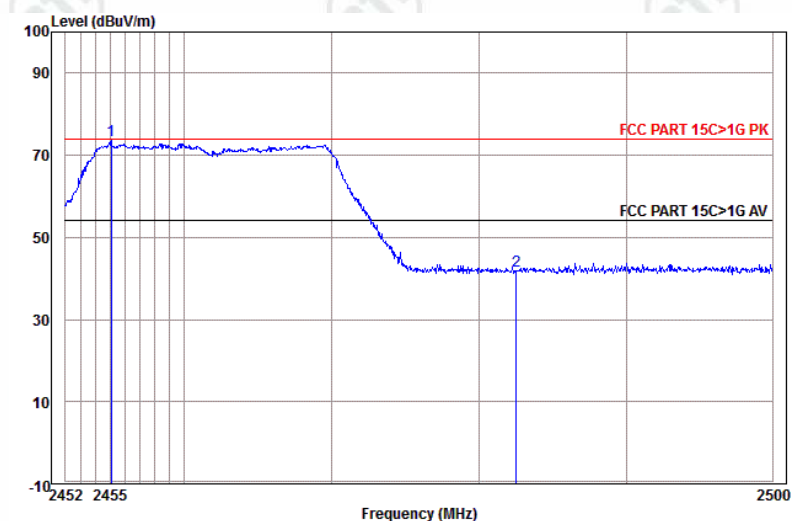


	Ant Freq	Cable Factor	Preamp Loss	Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	pp 2455.092	32.66	4.44	44.11	80.49	73.48	74.00	-0.52	Vertical	
2	2482.500	32.71	4.50	44.14	48.74	41.81	74.00	-32.19	Vertical	

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

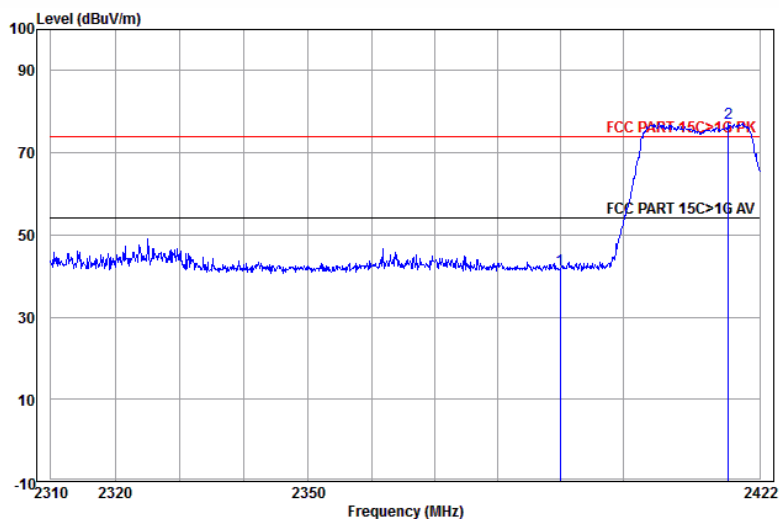


	Ant Freq	Factor	Cable Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	4.28	44.03	48.72	41.50	74.00	-32.50	Horizontal	
2 pp	2416.960	32.59	4.35	44.06	84.48	77.36	74.00	3.36	Horizontal	

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

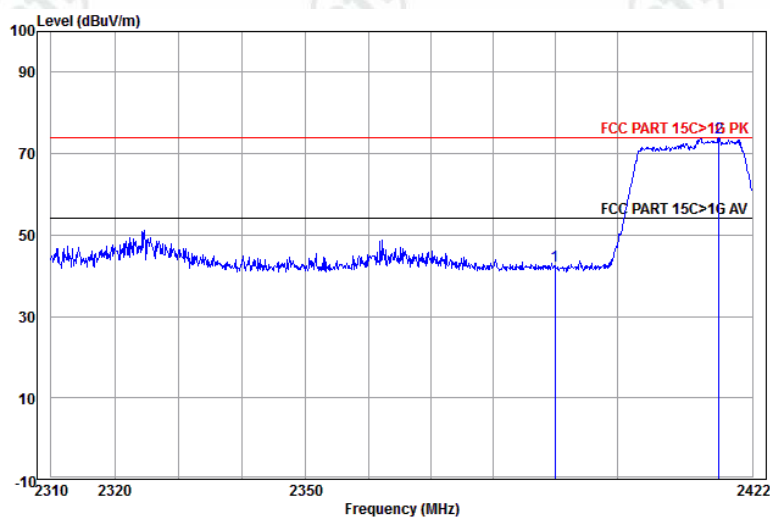


	Ant Freq	Factor	Cable Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	4.28	44.03	49.80	42.58	74.00	-31.42	Vertical	
2 pp	2416.616	32.59	4.35	44.06	81.04	73.92	74.00	-0.08	Vertical	

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

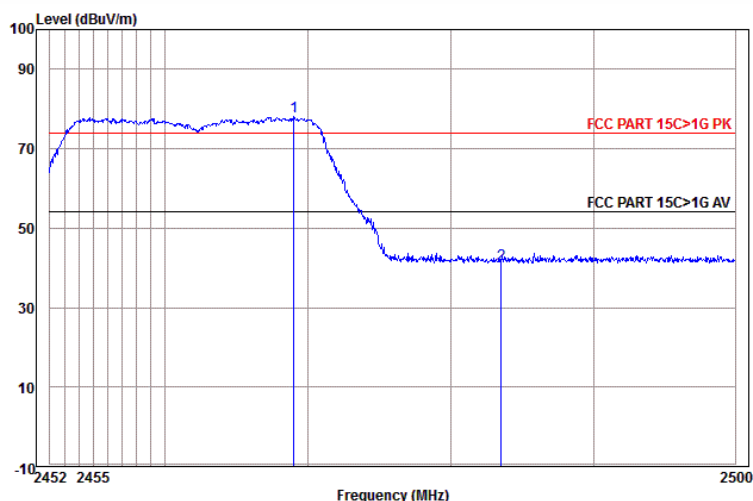


	Ant	Cable	Preamp	Read	Limit	Over		
Freq	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 2468.981	32.69	4.47	44.12	84.94	77.98	74.00	3.98	Horizontal
2 2483.500	32.71	4.51	44.14	47.87	40.95	74.00	-33.05	Horizontal

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

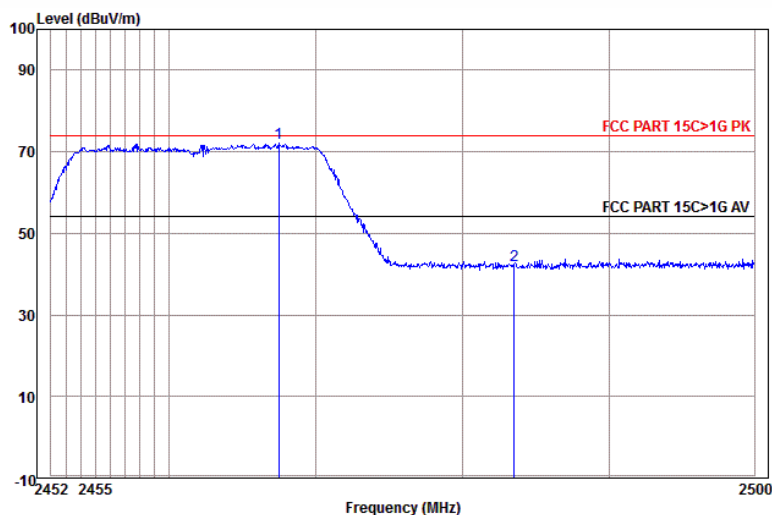


	Ant	Cable	Preamp	Read	Limit	Over		
Freq	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 2467.450	32.68	4.47	44.12	79.01	72.04	74.00	-1.96	Vertical
2 2483.500	32.71	4.51	44.14	48.93	42.01	74.00	-31.99	Vertical

Worse case mode:	802.11n(HT40) (13.5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

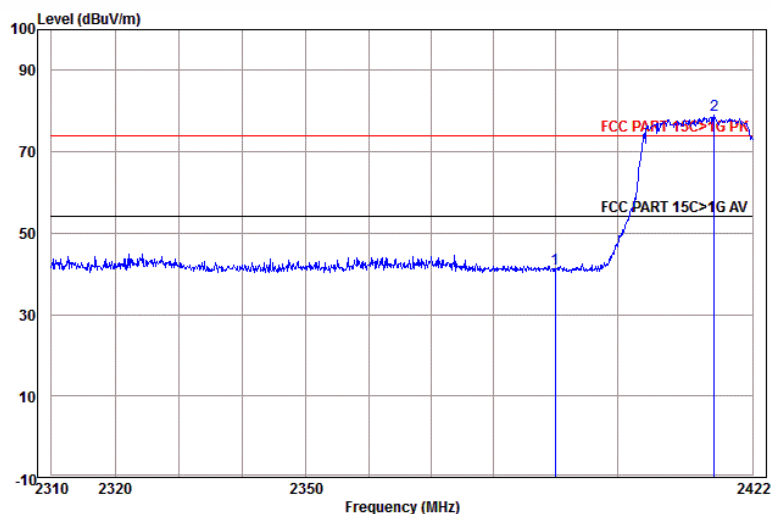


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit	Over	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.15	44.03	49.66	41.31	74.00	-32.69	Horizontal
2 pp	2415.816	32.59	3.17	44.06	87.18	78.88	74.00	4.88	Horizontal

Worse case mode:	802.11n(HT40) (13..5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

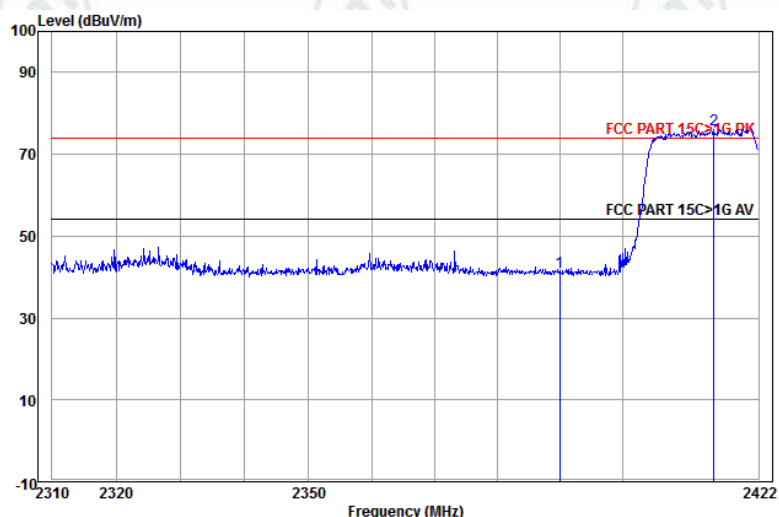


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit	Over	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.15	44.03	49.72	41.37	74.00	-32.63	Vertical
2 pp	2414.786	32.58	3.17	44.06	84.41	76.10	74.00	2.10	Vertical

Worse case mode:	802.11n(HT40) (13.5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

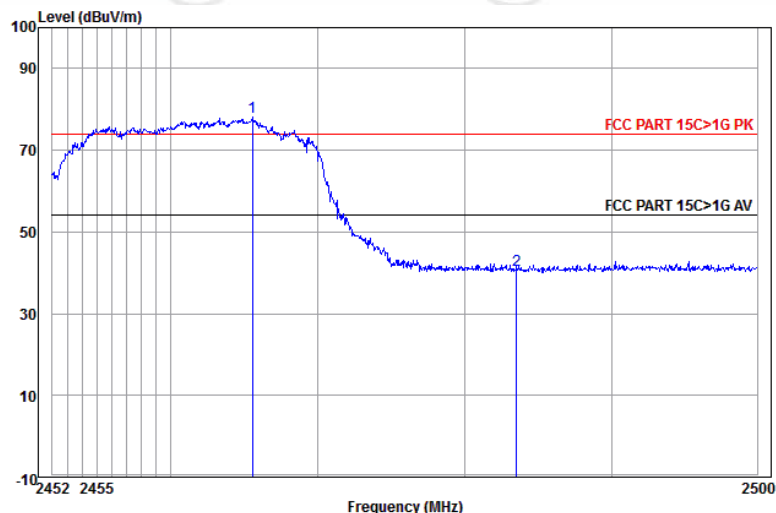

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Over Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2465.538	32.68	3.21	44.12	86.39	78.16	74.00	4.16	Horizontal
2	2483.500	32.71	3.22	44.14	48.74	40.53	74.00	-33.47	Horizontal

Worse case mode:	802.11n(HT40) (13..5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

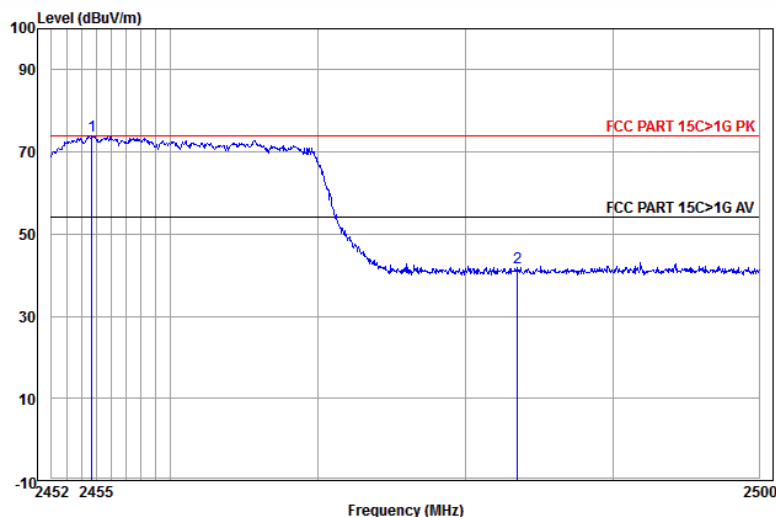

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Over Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2454.711	32.66	3.20	44.11	82.19	73.94	74.00	-0.06	Vertical
2	2483.500	32.71	3.22	44.14	50.01	41.80	74.00	-32.20	Vertical

Note:

- 1) Through Pre-scan transmitting mode with all kind of modulation and data rate, and the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40),and then Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic

equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix I): Radiated Spurious Emissions

Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

Test Procedure:

Below 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter)..

h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.

j. Repeat above procedures until all frequencies measured was complete.

Limit:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3


Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Radiated Spurious Emissions test Data:

Radiated Emission below 1GHz


30MHz~1GHz (QP)

Test mode:	Transmitting	Horizontal
------------	--------------	------------

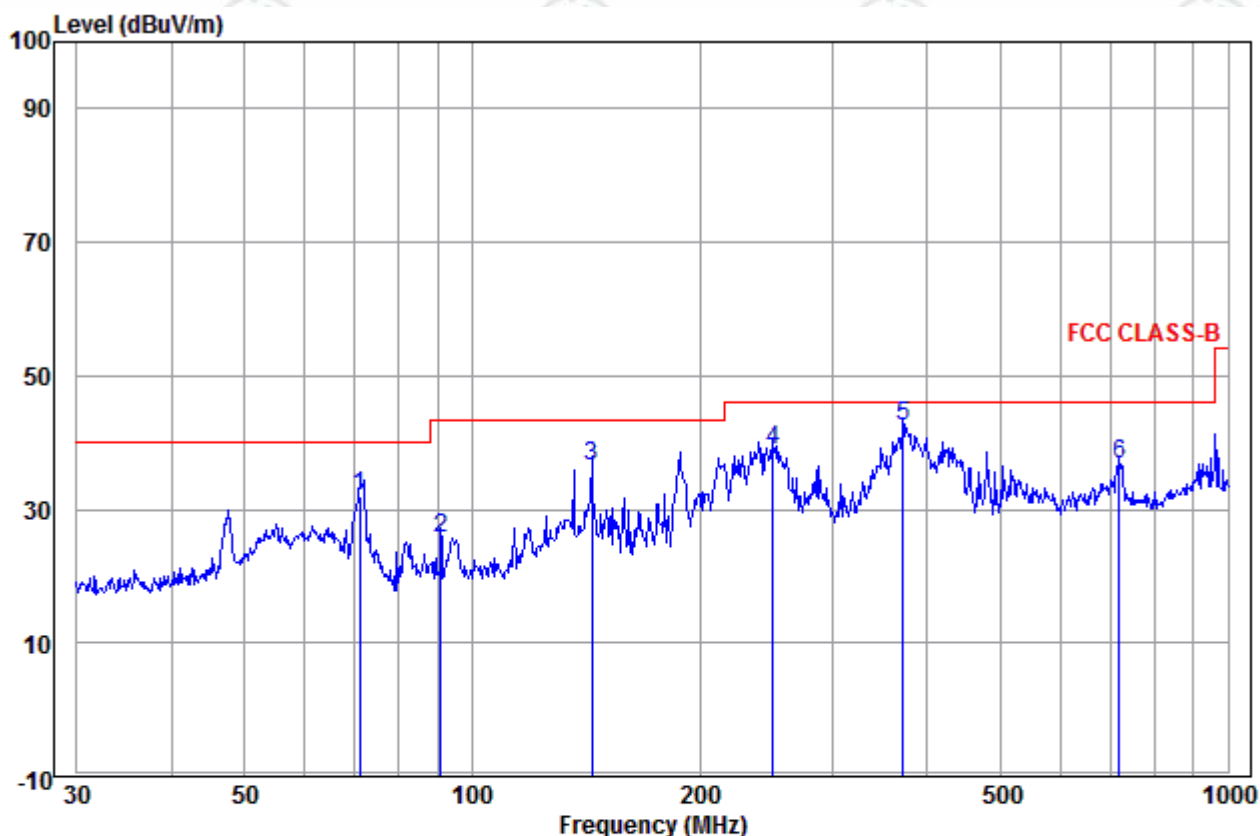

	Ant Freq	Cable Factor	Cable Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	71.080	10.19	1.46	20.17	31.82	40.00	-8.18	Horizontal QP
2	90.855	11.38	1.59	12.76	25.73	43.50	-17.77	Horizontal QP
3	143.830	10.06	1.58	24.72	36.36	43.50	-7.14	Horizontal QP
4	250.301	12.41	2.35	23.98	38.74	46.00	-7.26	Horizontal QP
5 pp	372.005	15.48	2.75	24.23	42.46	46.00	-3.54	Horizontal QP
6	719.200	20.82	3.94	11.91	36.67	46.00	-9.33	Horizontal QP

Test mode:	Transmitting	Vertical
------------	--------------	----------

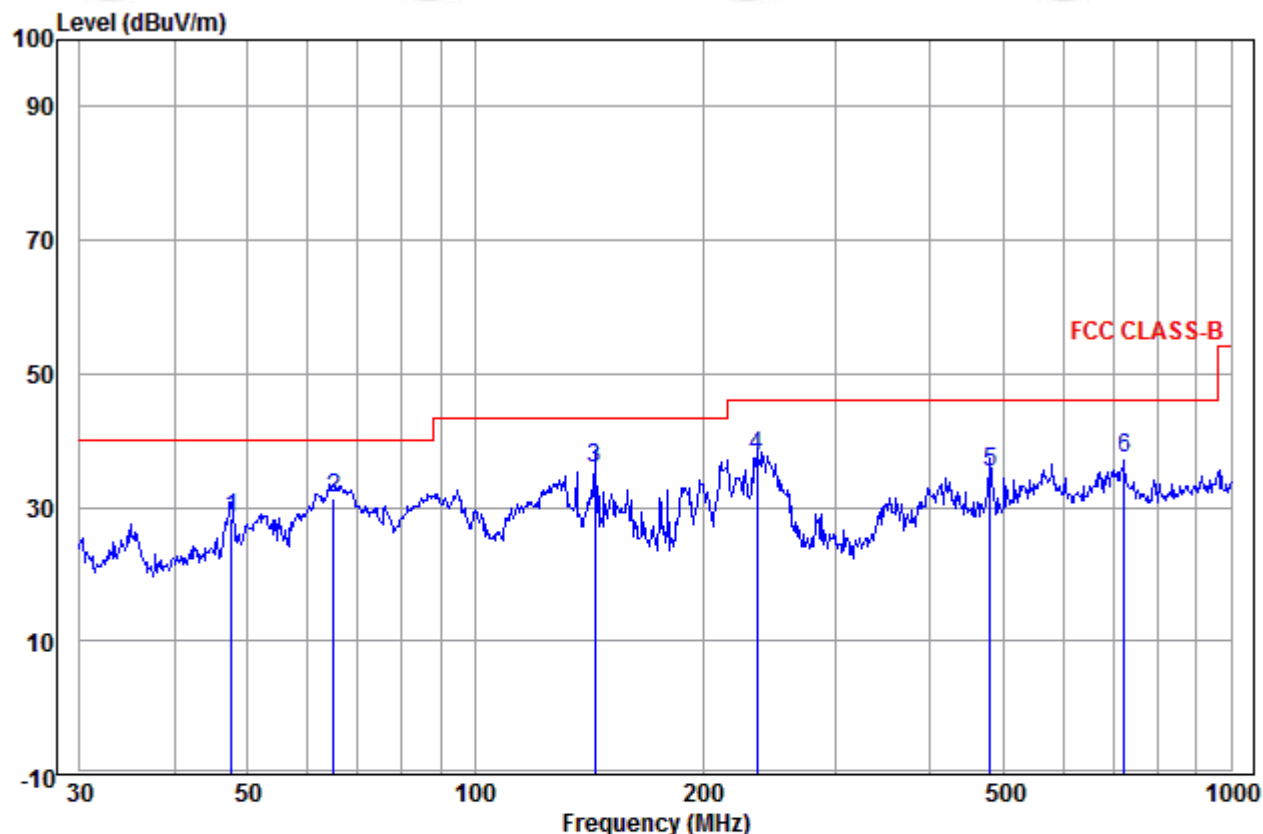

	Freq	Ant Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	47.659	14.91	1.21	12.35	28.47	40.00	-11.53	Vertical	QP
2	64.887	12.07	1.44	17.72	31.23	40.00	-8.77	Vertical	QP
3 pp	143.830	10.06	1.58	24.31	35.95	43.50	-7.55	Vertical	QP
4	235.816	12.19	2.31	23.12	37.62	46.00	-8.38	Vertical	QP
5	480.528	17.91	3.08	14.33	35.32	46.00	-10.68	Vertical	QP
6	721.726	20.83	3.94	12.66	37.43	46.00	-8.57	Vertical	QP

Transmitter Emission above 1GHz

Test mode: 802.11b(11Mbps)			Test Frequency: 2412MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Final test level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1198.095	30.22	2.51	44.39	53.10	41.44	74.00	-32.56	Pass	Horizontal
1759.638	31.33	3.05	43.72	56.24	46.90	74.00	-27.10	Pass	Horizontal
4824.000	34.73	5.10	44.60	48.23	43.46	74.00	-30.54	Pass	Horizontal
5925.863	35.85	7.27	44.51	48.32	46.93	74.00	-27.07	Pass	Horizontal
7236.000	36.42	6.69	44.80	47.75	46.06	74.00	-27.94	Pass	Horizontal
9648.000	37.93	7.70	45.57	47.48	47.54	74.00	-26.46	Pass	Horizontal
1162.051	30.13	2.47	44.44	58.65	46.81	74.00	-27.19	Pass	Vertical
1326.513	30.52	2.66	44.21	57.65	46.62	74.00	-27.38	Pass	Vertical
4824.000	34.73	5.10	44.60	49.40	44.63	74.00	-29.37	Pass	Vertical
5895.771	35.82	7.20	44.51	49.05	47.56	74.00	-26.44	Pass	Vertical
7236.000	36.42	6.69	44.80	47.65	45.96	74.00	-28.04	Pass	Vertical
9648.000	37.93	7.70	45.57	48.44	48.50	74.00	-25.50	Pass	Vertical

Test mode: 802.11b(11Mbps)			Test Frequency: 2437MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Final test level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1195.049	30.21	2.51	44.39	53.64	41.97	74.00	-32.03	Pass	Horizontal
1702.361	31.24	3.00	43.78	55.52	45.98	74.00	-28.02	Pass	Horizontal
4874.000	34.84	5.09	44.60	47.83	43.16	74.00	-30.84	Pass	Horizontal
6017.064	35.91	7.41	44.50	48.53	47.35	74.00	-26.65	Pass	Horizontal
7311.000	36.43	6.76	44.86	47.94	46.27	74.00	-27.73	Pass	Horizontal
9748.000	38.03	7.61	45.55	47.53	47.62	74.00	-26.38	Pass	Horizontal
1162.051	30.13	2.47	44.44	60.66	48.82	74.00	-25.18	Pass	Vertical
1759.638	31.33	3.05	43.72	60.13	50.79	74.00	-23.21	Pass	Vertical
4874.000	34.84	5.09	44.60	49.56	44.89	74.00	-29.11	Pass	Vertical
6315.233	36.07	7.11	44.53	48.97	47.62	74.00	-26.38	Pass	Vertical
7311.000	36.43	6.76	44.86	47.43	45.76	74.00	-28.24	Pass	Vertical
9748.000	38.03	7.61	45.55	48.01	48.10	74.00	-25.90	Pass	Vertical

Test mode: 802.11b(11Mbps)			Test Frequency: 2462MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Final test level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1201.149	30.23	2.52	44.38	53.02	41.39	74.00	-32.61	Pass	Horizontal
1668.044	31.18	2.98	43.81	53.50	43.85	74.00	-30.15	Pass	Horizontal
4924.000	34.94	5.07	44.60	46.76	42.17	74.00	-31.83	Pass	Horizontal
5776.922	35.73	6.93	44.52	49.29	47.43	74.00	-26.57	Pass	Horizontal
7386.000	36.44	6.83	44.92	47.95	46.30	74.00	-27.70	Pass	Horizontal
9848.000	38.14	7.53	45.53	47.79	47.93	74.00	-26.07	Pass	Horizontal
1162.051	30.13	2.47	44.44	57.89	46.05	74.00	-27.95	Pass	Vertical
1329.894	30.52	2.66	44.21	56.37	45.34	74.00	-28.66	Pass	Vertical
3662.775	33.04	5.50	44.63	49.98	43.89	74.00	-30.11	Pass	Vertical
4924.000	34.94	5.07	44.60	48.35	43.76	74.00	-30.24	Pass	Vertical
7386.000	36.44	6.83	44.92	47.47	45.82	74.00	-28.18	Pass	Vertical
9848.000	38.14	7.53	45.53	48.54	48.68	74.00	-25.32	Pass	Vertical

Test mode: 802.11g(6Mbps)			Test Frequency: 2412MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Final test level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1198.095	30.22	2.51	44.39	53.21	41.55	74.00	-32.45	Pass	Horizontal
1759.638	31.33	3.05	43.72	55.15	45.81	74.00	-28.19	Pass	Horizontal
4824.000	34.73	5.10	44.60	47.29	42.52	74.00	-31.48	Pass	Horizontal
6235.364	36.02	7.19	44.52	48.89	47.58	74.00	-26.42	Pass	Horizontal
7236.000	36.42	6.69	44.80	46.64	44.95	74.00	-29.05	Pass	Horizontal
9648.000	37.93	7.70	45.57	47.82	47.88	74.00	-26.12	Pass	Horizontal
1201.149	30.23	2.52	44.38	57.54	45.91	74.00	-28.09	Pass	Vertical
1698.033	31.23	3.00	43.78	59.52	49.97	74.00	-24.03	Pass	Vertical
4824.000	34.73	5.10	44.60	47.05	42.28	74.00	-31.72	Pass	Vertical
5910.798	35.83	7.23	44.51	48.94	47.49	74.00	-26.51	Pass	Vertical
7236.000	36.42	6.69	44.80	47.84	46.15	74.00	-27.85	Pass	Vertical
9648.000	37.93	7.70	45.57	48.05	48.11	74.00	-25.89	Pass	Vertical

Test mode: 802.11g(6Mbps)			Test Frequency: 2437MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Final test level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1198.095	30.22	2.51	44.39	59.01	47.35	74.00	-26.65	Pass	Horizontal
1668.044	31.18	2.98	43.81	53.98	44.33	74.00	-29.67	Pass	Horizontal
3747.656	32.98	5.48	44.62	49.60	43.44	74.00	-30.56	Pass	Horizontal
4874.000	34.84	5.09	44.60	47.05	42.38	74.00	-31.62	Pass	Horizontal
7311.000	36.43	6.76	44.86	47.92	46.25	74.00	-27.75	Pass	Horizontal
9748.000	38.03	7.61	45.55	47.47	47.56	74.00	-26.44	Pass	Horizontal
1162.051	30.13	2.47	44.44	57.57	45.73	74.00	-28.27	Pass	Vertical
1326.513	30.52	2.66	44.21	57.76	46.73	74.00	-27.27	Pass	Vertical
4874.000	34.84	5.09	44.60	46.88	42.21	74.00	-31.79	Pass	Vertical
6001.768	35.90	7.43	44.50	48.86	47.69	74.00	-26.31	Pass	Vertical
7311.000	36.43	6.76	44.86	48.50	46.83	74.00	-27.17	Pass	Vertical
9748.000	38.03	7.61	45.55	47.86	47.95	74.00	-26.05	Pass	Vertical

Test mode: 802.11g(6Mbps)			Test Frequency: 2462MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Final test level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1198.095	30.22	2.51	44.39	58.71	47.05	74.00	-26.95	Pass	Horizontal
1746.251	31.31	3.04	43.73	55.51	46.13	74.00	-27.87	Pass	Horizontal
4924.000	34.94	5.07	44.60	46.73	42.14	74.00	-31.86	Pass	Horizontal
5895.771	35.82	7.20	44.51	49.42	47.93	74.00	-26.07	Pass	Horizontal
7386.000	36.44	6.83	44.92	47.77	46.12	74.00	-27.88	Pass	Horizontal
9848.000	38.14	7.53	45.53	48.41	48.55	74.00	-25.45	Pass	Horizontal
1329.894	30.52	2.66	44.21	57.34	46.31	74.00	-27.69	Pass	Vertical
1746.251	31.31	3.04	43.73	54.36	44.98	74.00	-29.02	Pass	Vertical
4924.000	34.94	5.07	44.60	47.01	42.42	74.00	-31.58	Pass	Vertical
5836.044	35.78	7.07	44.52	49.26	47.59	74.00	-26.41	Pass	Vertical
7386.000	36.44	6.83	44.92	47.80	46.15	74.00	-27.85	Pass	Vertical
9848.000	38.14	7.53	45.53	48.04	48.18	74.00	-25.82	Pass	Vertical

Test mode: 802.11n(HT20)(6.5Mbps)				Test Frequency: 2412MHz			Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Final test level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1198.095	30.22	2.51	44.39	55.24	43.58	74.00	-30.42	Pass	Horizontal
1439.090	30.75	2.77	44.07	53.91	43.36	74.00	-30.64	Pass	Horizontal
3757.208	32.97	5.48	44.62	50.03	43.86	74.00	-30.14	Pass	Horizontal
4824.000	34.73	5.10	44.60	46.69	41.92	74.00	-32.08	Pass	Horizontal
7236.000	36.42	6.69	44.80	48.17	46.48	74.00	-27.52	Pass	Horizontal
9648.000	37.93	7.70	45.57	47.36	47.42	74.00	-26.58	Pass	Horizontal
1076.613	29.91	2.36	44.57	51.95	39.65	74.00	-34.35	Pass	Vertical
1518.111	30.90	2.84	43.98	49.35	39.11	74.00	-34.89	Pass	Vertical
3757.208	32.97	5.48	44.62	50.03	43.86	74.00	-30.14	Pass	Vertical
4824.000	34.73	5.10	44.60	45.69	40.92	74.00	-33.08	Pass	Vertical
7236.000	36.42	6.69	44.80	46.16	44.47	74.00	-29.53	Pass	Vertical
9648.000	37.93	7.70	45.57	47.36	47.42	74.00	-26.58	Pass	Vertical

Test mode: 802.11n(HT20)(6.5Mbps)				Test Frequency: 2437MHz			Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Final test level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1198.095	30.22	2.51	44.39	56.36	44.70	74.00	-29.30	Pass	Horizontal
3325.070	33.31	5.56	44.66	50.19	44.40	74.00	-29.60	Pass	Horizontal
4874.000	34.84	5.09	44.60	47.13	42.46	74.00	-31.54	Pass	Horizontal
5821.207	35.77	7.03	44.52	48.47	46.75	74.00	-27.25	Pass	Horizontal
7311.000	36.43	6.76	44.86	47.19	45.52	74.00	-28.48	Pass	Horizontal
9748.000	38.03	7.61	45.55	48.63	48.72	74.00	-25.28	Pass	Horizontal
1162.051	30.13	2.47	44.44	56.81	44.97	74.00	-29.03	Pass	Vertical
1329.894	30.52	2.66	44.21	57.64	46.61	74.00	-27.39	Pass	Vertical
4874.000	34.84	5.09	44.60	48.13	43.46	74.00	-30.54	Pass	Vertical
6017.064	35.91	7.41	44.50	48.85	47.67	74.00	-26.33	Pass	Vertical
7311.000	36.43	6.76	44.86	46.67	45.00	74.00	-29.00	Pass	Vertical
9748.000	38.03	7.61	45.55	49.02	49.11	74.00	-24.89	Pass	Vertical

Test mode: 802.11n(HT20)(6.5Mbps)				Test Frequency: 2462MHz			Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Final test level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1198.095	30.22	2.51	44.39	55.30	43.64	74.00	-30.36	Pass	Horizontal
1439.090	30.75	2.77	44.07	56.48	45.93	74.00	-28.07	Pass	Horizontal
4924.000	34.94	5.07	44.60	46.61	42.02	74.00	-31.98	Pass	Horizontal
5806.408	35.76	7.00	44.52	49.16	47.40	74.00	-26.60	Pass	Horizontal
7386.000	36.44	6.83	44.92	48.33	46.68	74.00	-27.32	Pass	Horizontal
9848.000	38.14	7.53	45.53	48.41	48.55	74.00	-25.45	Pass	Horizontal
1162.051	30.13	2.47	44.44	59.14	47.30	74.00	-26.70	Pass	Vertical
1326.513	30.52	2.66	44.21	57.25	46.22	74.00	-27.78	Pass	Vertical
4924.000	34.94	5.07	44.60	47.39	42.80	74.00	-31.20	Pass	Vertical
6251.257	36.03	7.17	44.53	48.45	47.12	74.00	-26.88	Pass	Vertical
7386.000	36.44	6.83	44.92	47.12	45.47	74.00	-28.53	Pass	Vertical
9848.000	38.14	7.53	45.53	48.16	48.30	74.00	-25.70	Pass	Vertical

Test mode: 802.11n(HT40)(13.5Mbps)				Test Frequency: 2422MHz			Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Final test level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1364.182	30.60	2.52	44.16	48.78	37.74	74.00	-36.26	Pass	Horizontal
1800.416	31.40	2.77	43.68	48.61	39.10	74.00	-34.90	Pass	Horizontal
4844.000	34.77	6.73	44.60	46.21	43.11	74.00	-30.89	Pass	Horizontal
5762.235	35.72	6.15	44.52	48.17	45.52	74.00	-28.48	Pass	Horizontal
7266.000	36.43	8.40	44.82	46.55	46.56	74.00	-27.44	Pass	Horizontal
9688.000	37.97	7.60	45.56	46.59	46.60	74.00	-27.40	Pass	Horizontal
1270.334	30.39	2.45	44.29	48.44	36.99	74.00	-37.01	Pass	Vertical
1814.218	31.42	2.77	43.67	48.28	38.80	74.00	-35.20	Pass	Vertical
4844.000	34.77	6.73	44.60	45.78	42.68	74.00	-31.32	Pass	Vertical
5895.771	35.82	6.05	44.51	48.72	46.08	74.00	-27.92	Pass	Vertical
7266.000	36.43	8.40	44.82	46.61	46.62	74.00	-27.38	Pass	Vertical
9688.000	37.97	7.60	45.56	47.38	47.39	74.00	-26.61	Pass	Vertical

Test mode: 802.11n(HT40)(13.5Mbps)				Test Frequency: 2437MHz			Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Final test level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1232.117	30.30	2.43	44.34	48.18	36.57	74.00	-37.43	Pass	Horizontal
1715.411	31.26	2.72	43.77	47.05	37.26	74.00	-36.74	Pass	Horizontal
4874.000	34.84	6.73	44.60	44.91	41.88	74.00	-32.12	Pass	Horizontal
6478.053	36.15	7.06	44.55	47.45	46.11	74.00	-27.89	Pass	Horizontal
7311.000	36.43	8.44	44.86	44.59	44.60	74.00	-29.40	Pass	Horizontal
9748.000	38.03	7.55	45.55	45.99	46.02	74.00	-27.98	Pass	Horizontal
1257.465	30.36	2.44	44.30	49.07	37.57	74.00	-36.43	Pass	Vertical
1737.384	31.29	2.73	43.74	48.77	39.05	74.00	-34.95	Pass	Vertical
3776.385	32.96	5.94	44.62	49.91	44.19	74.00	-29.81	Pass	Vertical
4874.000	34.84	6.73	44.60	45.93	42.90	74.00	-31.10	Pass	Vertical
7311.000	36.43	8.44	44.86	46.54	46.55	74.00	-27.45	Pass	Vertical
9748.000	38.03	7.55	45.55	46.05	46.08	74.00	-27.92	Pass	Vertical

Test mode: 802.11n(HT40)(13.5Mbps)				Test Frequency: 2452MHz			Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Final test level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1082.109	29.93	2.31	44.56	48.43	36.11	74.00	-37.89	Pass	Horizontal
1529.749	30.93	2.62	43.96	47.35	36.94	74.00	-37.06	Pass	Horizontal
4904.000	34.90	6.74	44.60	45.28	42.32	74.00	-31.68	Pass	Horizontal
5895.771	35.82	6.05	44.51	48.39	45.75	74.00	-28.25	Pass	Horizontal
7356.000	36.44	8.48	44.90	45.75	45.77	74.00	-28.23	Pass	Horizontal
9808.000	38.10	7.50	45.54	45.83	45.89	74.00	-28.11	Pass	Horizontal
1201.149	30.23	2.40	44.38	48.01	36.26	74.00	-37.74	Pass	Vertical
1672.296	31.18	2.70	43.81	47.44	37.51	74.00	-36.49	Pass	Vertical
2060.463	31.84	2.91	43.59	48.21	39.37	74.00	-34.63	Pass	Vertical
4904.000	34.90	6.74	44.60	45.93	42.97	74.00	-31.03	Pass	Vertical
7356.000	36.44	8.48	44.90	45.53	45.55	74.00	-28.45	Pass	Vertical
9808.000	38.10	7.50	45.54	46.60	46.66	74.00	-27.34	Pass	Vertical

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and data rate, find the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40),and then Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.