



FCC Part 15C Test Report

FCC ID: 2AKKBDC1

Product Name:	Smart Dashcam
Trademark:	N/A
Model Name :	DC1 DC2, DC3, DC4, DC5, DC6, DC7, DC8, DC9.
Prepared For : Address :	Qihan Techonlogy Co.,LTD 20th Floor, Times Technology Building, No.7028 Shennan Road, Futian, Shenzhen, China
Prepared By : Address :	Shenzhen BCTC Technology Co., Ltd. No.101,Yousong Road,Longhua New District, Shenzhen,China
Test Date:	Nov. 18 - Nov. 25, 2016
Date of Report :	Nov. 25, 2016
Report No.:	BCTC-FY160902681E



CERTIFICATION

Applicant's name : Shenzhen ENY Technology Co., Ltd
Address : 20th Floor, Times Technology Building, No.7028 Shennan Road, Futian, Shenzhen, China

Manufacture's Name : Shenzhen ENY Technology Co., Ltd
Address : 20th Floor, Times Technology Building, No.7028 Shennan Road, Futian, Shenzhen, China

Product description

Product name : Smart Dashcam
Trademark : N/A
Model and/or type reference : DC1

Standards : FCC Part15.247
ANSI C63.10:2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Testing Engineer :

Eric Yang

Reviewer
(Supervisor) :

Jade Yang

Approved &
Authorized
Signer(Manager) :



Carson Zhang

**Table of Contents**

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
3 . EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	11
3.1.2 TEST PROCEDURE	11
3.1.3 DEVIATION FROM TEST STANDARD	11
3.1.4 TEST SETUP	12
3.1.5 EUT OPERATING CONDITIONS	12
3.1.6 TEST RESULTS	12
3.2 RADIATED EMISSION MEASUREMENT	15
3.2.1 RADIATED EMISSION LIMITS	15
3.2.2 TEST PROCEDURE	16
3.2.3 DEVIATION FROM TEST STANDARD	16
3.2.4 TEST SETUP	16
3.2.5 EUT OPERATING CONDITIONS	17
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	18
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	19
3.2.8 TEST RESULTS (1GHZ~25GHZ)	21
3.3 RADIATED BAND EMISSION MEASUREMENT	26
3.3.1 TEST REQUIREMENT:	26
3.3.2 TEST PROCEDURE	26
3.3.3 DEVIATION FROM TEST STANDARD	27
3.3.4 TEST SETUP	27
3.3.5 EUT OPERATING CONDITIONS	27
4 . POWER SPECTRAL DENSITY TEST	38

**Table of Contents**

	Page
4.1 APPLIED PROCEDURES / LIMIT	38
4.1.1 TEST PROCEDURE	38
4.1.2 DEVIATION FROM STANDARD	38
4.1.3 TEST SETUP	38
4.1.4 EUT OPERATION CONDITIONS	38
4.1.5 TEST RESULTS	39
5 . BANDWIDTH TEST	49
5.1 APPLIED PROCEDURES / LIMIT	49
5.1.1 TEST PROCEDURE	49
5.1.2 DEVIATION FROM STANDARD	49
5.1.3 TEST SETUP	49
5.1.4 EUT OPERATION CONDITIONS	49
5.1.5 TEST RESULTS	50
6 . PEAK OUTPUT POWER TEST	60
6.1 APPLIED PROCEDURES / LIMIT	60
6.1.1 TEST PROCEDURE	60
6.1.2 DEVIATION FROM STANDARD	60
6.1.3 TEST SETUP	60
6.1.4 EUT OPERATION CONDITIONS	60
6.1.5 TEST RESULTS	61
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	62
7.1 APPLICABLE STANDARD	62
7.2 TEST PROCEDURE	62
7.3 DEVIATION FROM STANDARD	62
7.4 TEST SETUP	62
7.5 EUT OPERATION CONDITIONS	62
7.1 TEST RESULTS	62
8 . ANTENNA REQUIREMENT	68
8.1 STANDARD REQUIREMENT	68
8.2 EUT ANTENNA	68
9 . EUT TEST PHOTO	69
10 . EUT PHOTO	71
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207 RSS-GEN 8.8 RSS-247 3.1	Conducted Emission	PASS	
15.247 (a)(2) RSS-247 5.2 (1)	6dB Bandwidth	PASS	
15.247 (b) RSS-247 5.4 (3)	Peak Output Power	PASS	
15.247 (c) RSS-247 5.5	Radiated Spurious Emission	PASS	
15.247 (d) RSS-247 5.2 (2)	Power Spectral Density	PASS	
15.205 RSS-247 5.5	Band Edge Emission	PASS	
15.203 RSS-247 5.4	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



1.1 TEST FACILITY

Shenzhen BCTC Technology Co., Ltd.

Add. : No.101,Yousong Road,Longhua New District, Shenzhen,China

FCC Registered No.: 187086

IC Registered No.: 12655A

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %** .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Dashcam	
Trade Name	N/A	
Model Name	DC1	
Serial Model	DC2, DC3, DC4, DC5, DC6, DC7, DC8, DC9.	
Model Difference	All the same, Only model name is different.	
Product Description	The EUT is a Smart Dashcam	
	Operation Frequency:	802.11b/g/n20MHz:2412~2462 MHz 802.11n40MHz:2422~2452 MHz BT:2402~2480MHz
	Modulation Type:	WIFI: OFDM/DSSS BT:GFSK
	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 150Mbps BT:2MHz
	Number Of Channel	802.11b/g/n20MHz:11 CH 802.11n40MHz: 7 CH BT:40 CH
	Antenna Designation:	Please see Note 3.
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Power Source	DC 3.7V From Battery	
hardware version	--	
Software version	--	
Serial number	--	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List for 802.11b/g/n(20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		



Channel List for 802.11n(40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	05	2432	07	2442	09	2452
04	2427	06	2437	08	2447		

Channel List for BT					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2402	10	2420	39	2478
02	2404	~	~	40	2480
~	~	20	2440		
9	2418	21	2442		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
1	N/A	N/A	CHIP antenna	1.0dBi	

2.2 DESCRIPTION OF TEST MODES

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	Link Mode
Mode 6	BT CH1/CH20/CH40

Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 6	BT CH1/CH20/CH40


Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.




2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test

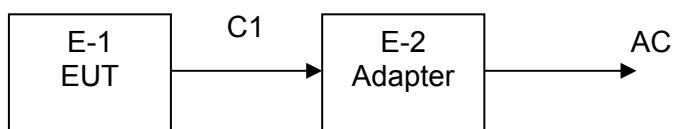

Radiated Spurious Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Smart Dashcam	N/A	DC1	N/A	EUT
E-2	Adapter	N/A	A8A-501000		Lab Provide

Item	Shielded Type	Ferrite Core	Length	Note
C1	No	No	1.0m	USB cable

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer	Agilent	E4407B	MY45109572	2016.08.27	2017.08.26
2	Test Receiver	R&S	ESPI	101396	2016.08.27	2017.08.26
3	Bilog Antenna	SCHWARZBECK	VULB9160	VULB9160-3369	2016.08.27	2017.08.26
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.08.27	2017.08.26
5	Spectrum Analyzer	Agilent	N9020A	MY5051041	2016.08.27	2017.08.26
6	Horn Antenna	SCHWARZBECK	9120D	9120D-1275	2016.08.27	2017.08.26
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2016.08.25	2017.08.24
8	Amplifier	SCHWARZBECK	BBV9718	9718-270	2016.08.25	2017.08.24
9	Amplifier	SCHWARZBECK	BBV9743	9743-119	2016.08.25	2017.08.24
10	Loop Antenna	ARA	PLDC130/B	1029	2016.08.25	2017.08.24
11	Power Meter	R&S	NRVS	100696	2016.08.27	2017.08.26
12	Power Sensor	R&S	URV5-Z4	0395.1619.05	2016.08.27	2017.08.26
13	RF cables	R&S	N/A	N/A	2016.08.27	2017.08.26

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESCI	1166.5950K03-101165-ha	2016.08.27	2017.08.26
2	LISN	R&S	NSLK8126	8126466	2016.08.27	2017.08.26
3	LISN	R&S	NSLK8126	8126487	2016.08.27	2017.08.26
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.08.27	2017.08.26
5	RF cables	R&S	R204	R20X	2016.08.27	2017.08.26



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

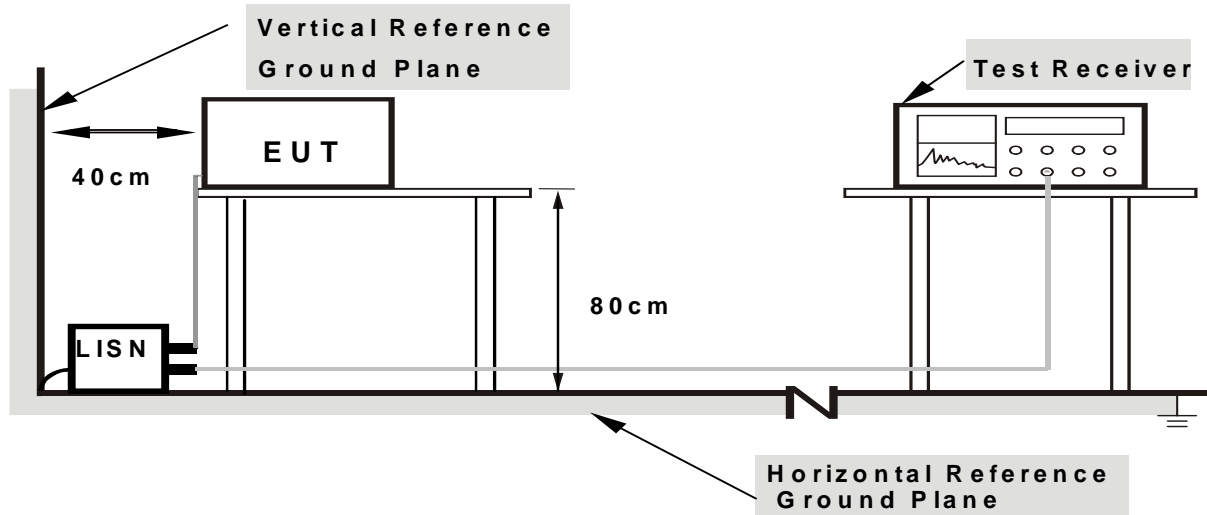

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

3.1.6 TEST RESULTS



Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5

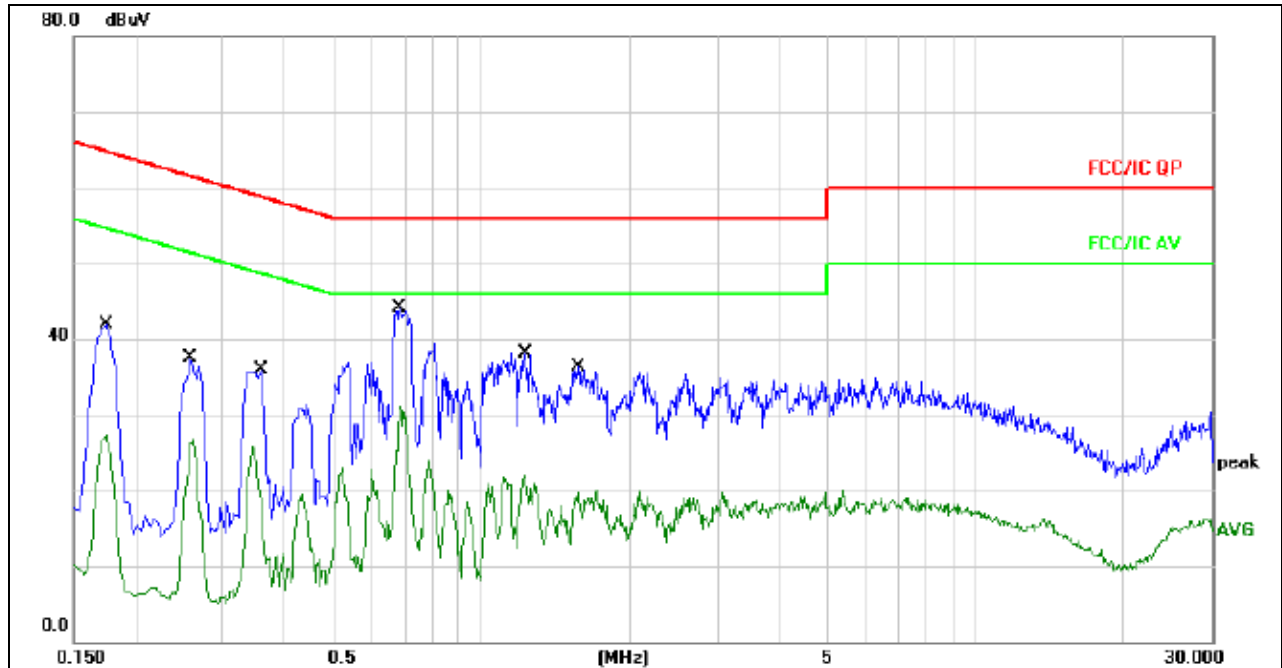


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1740	32.31	9.66	41.97	64.76	-22.79	QP	
2		0.1740	17.64	9.66	27.30	54.76	-27.46	AVG	
3		0.2580	27.80	9.66	37.46	61.49	-24.03	QP	
4		0.2580	17.10	9.66	26.76	51.49	-24.73	AVG	
5		0.3580	26.15	9.67	35.82	58.77	-22.95	QP	
6		0.3580	16.28	9.67	25.95	48.77	-22.82	AVG	
7	*	0.6860	34.49	9.68	44.17	56.00	-11.83	QP	
8		0.6860	21.48	9.68	31.16	46.00	-14.84	AVG	
9		1.2260	28.47	9.69	38.16	56.00	-17.84	QP	
10		1.2260	12.47	9.69	22.16	46.00	-23.84	AVG	
11		1.5740	26.61	9.70	36.31	56.00	-19.69	QP	
12		1.5740	10.35	9.70	20.05	46.00	-25.95	AVG	



Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5

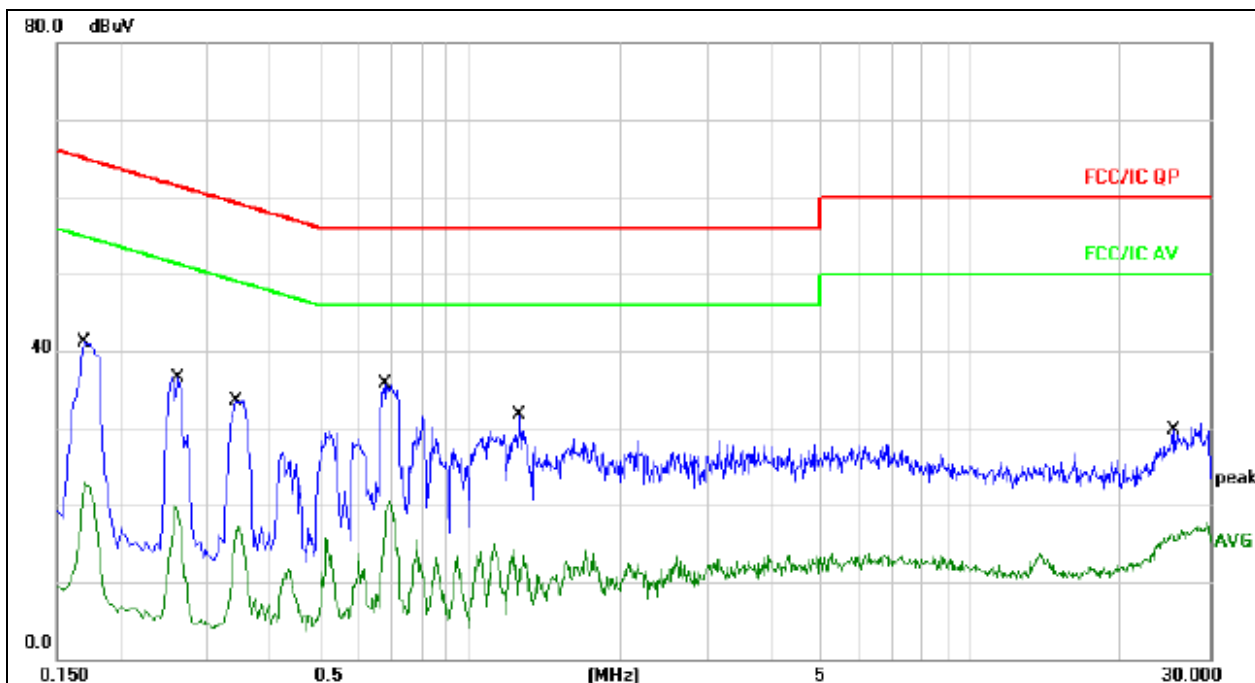

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1700	31.49	9.66	41.15	64.96	-23.81	QP	
2		0.1700	13.33	9.66	22.99	54.96	-31.97	AVG	
3		0.2620	26.92	9.66	36.58	61.36	-24.78	QP	
4		0.2620	10.22	9.66	19.88	51.36	-31.48	AVG	
5		0.3420	23.82	9.66	33.48	59.15	-25.67	QP	
6		0.3420	7.61	9.66	17.27	49.15	-31.88	AVG	
7	*	0.6780	26.00	9.68	35.68	56.00	-20.32	QP	
8		0.6780	10.80	9.68	20.48	46.00	-25.52	AVG	
9		1.2579	22.04	9.70	31.74	56.00	-24.26	QP	
10		1.2579	4.59	9.70	14.29	46.00	-31.71	AVG	
11		25.3819	19.74	9.87	29.61	60.00	-30.39	QP	
12		25.3819	7.30	9.87	17.17	50.00	-32.83	AVG	



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

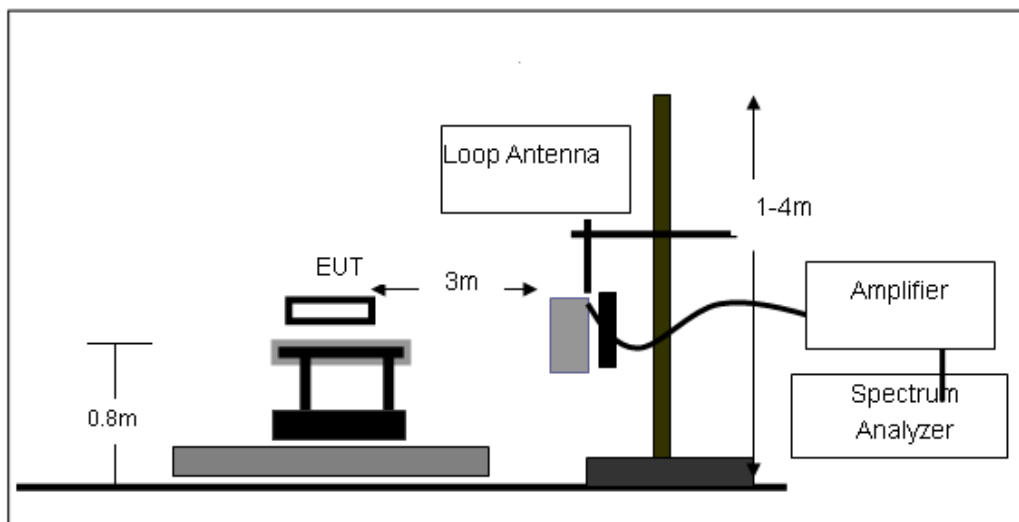

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

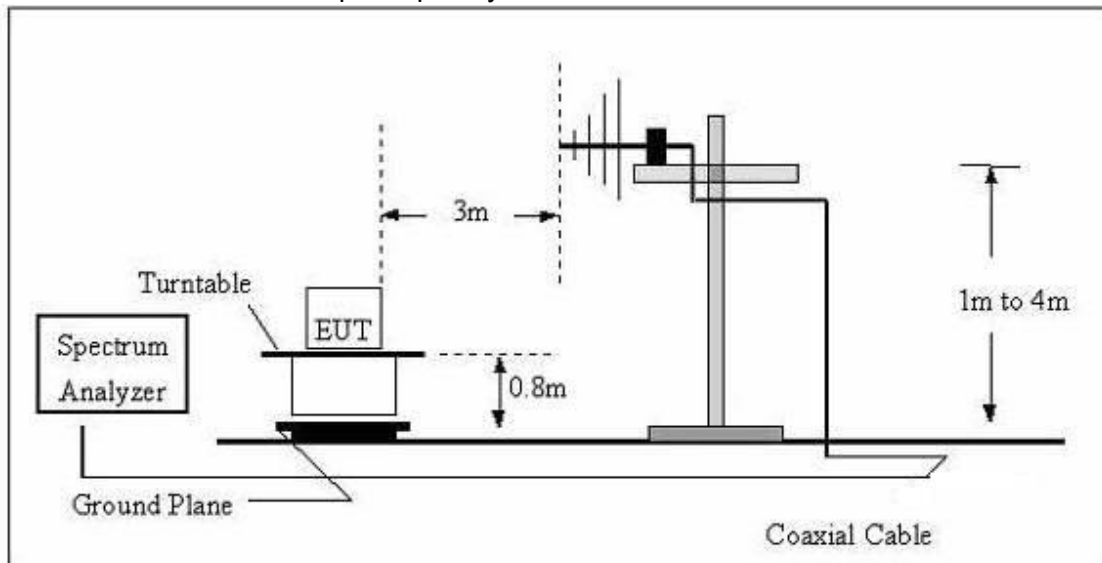

(C) Radiated Emission Test-Up Frequency Above 1GHz

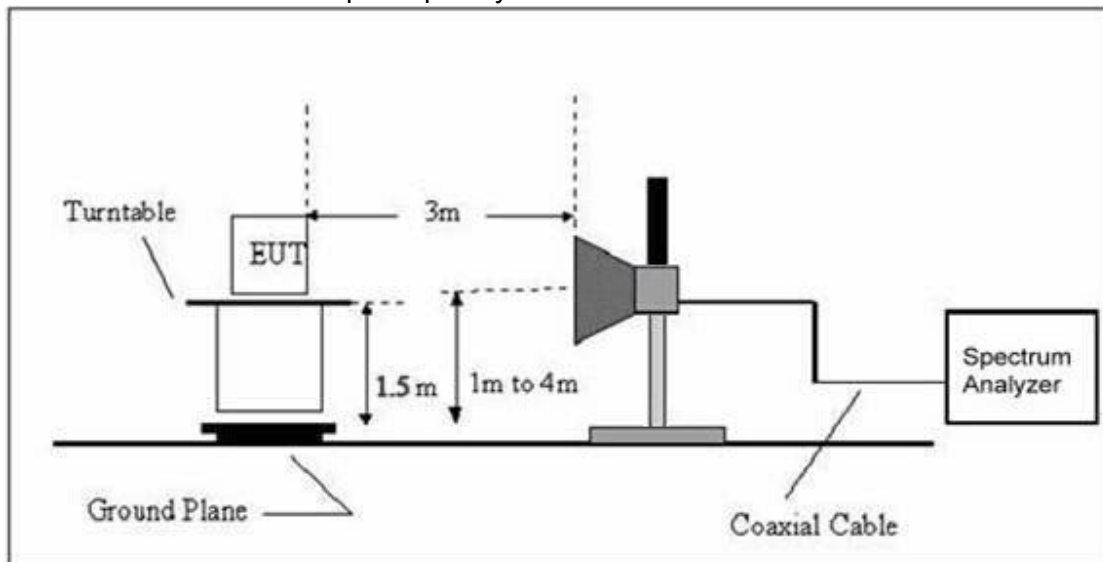

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	Mode 5	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

Temperature :	26℃	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V		
Test Mode :	Mode 5		

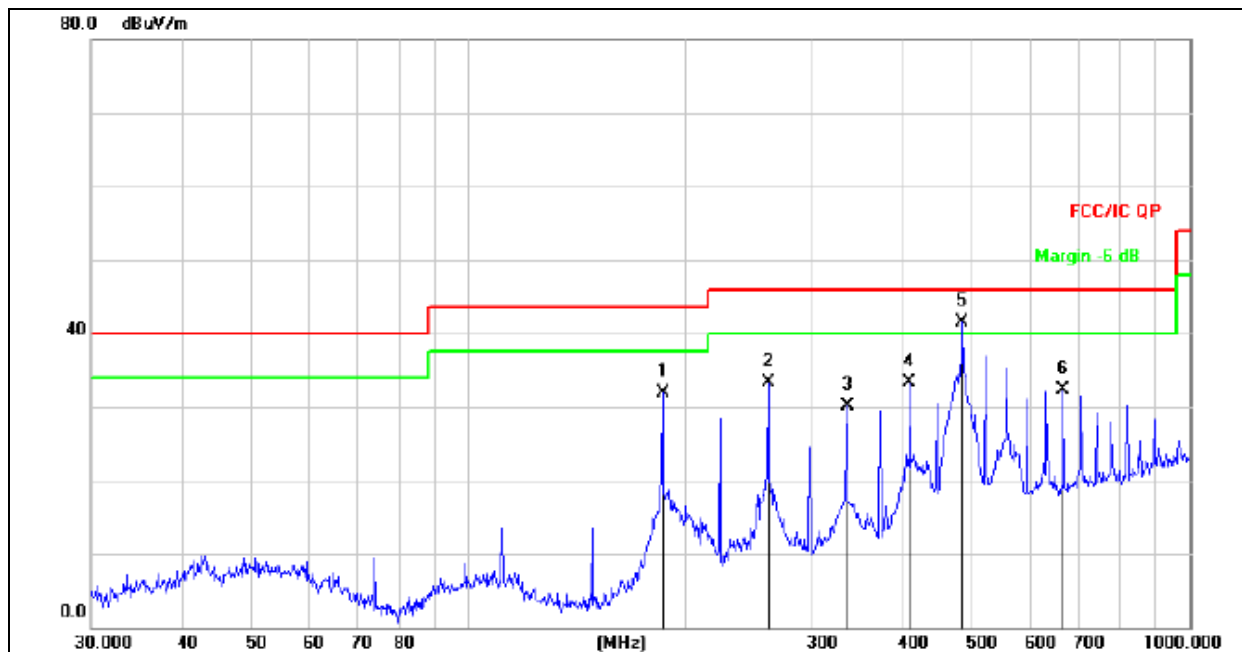


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		185.7882	49.11	-17.18	31.93	43.50	-11.57	QP
2		260.1444	46.67	-13.40	33.27	46.00	-12.73	QP
3		334.8589	41.08	-11.01	30.07	46.00	-15.93	QP
4		408.9460	42.37	-9.13	33.24	46.00	-12.76	QP
5	*	483.9094	49.19	-7.59	41.60	46.00	-4.40	QP
6		668.1423	35.74	-3.50	32.24	46.00	-13.76	QP



Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3.7V		
Test Mode :	Mode 5		

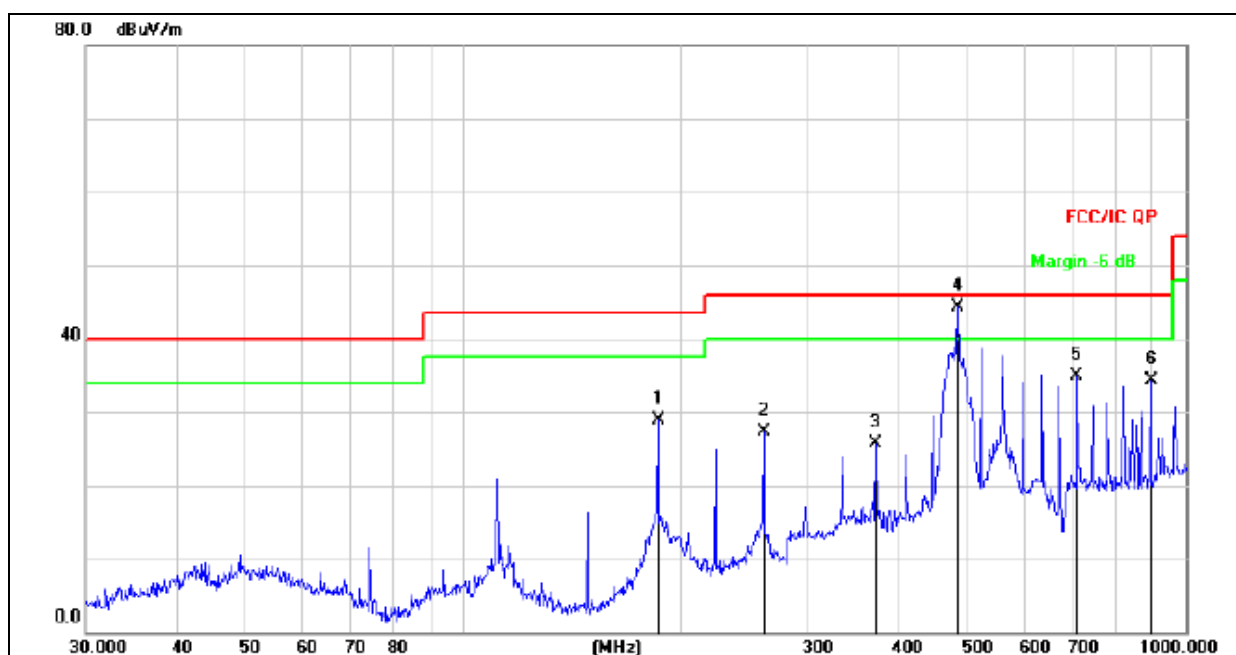

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		185.7881	46.14	-17.18	28.96	43.50	-14.54	QP
2		260.1444	40.71	-13.40	27.31	46.00	-18.69	QP
3		372.0045	35.92	-10.30	25.62	46.00	-20.38	QP
4	*	483.9094	51.92	-7.59	44.33	46.00	-1.67	QP
5		706.6998	37.77	-2.87	34.90	46.00	-11.10	QP
6		893.8567	33.64	0.61	34.25	46.00	-11.75	QP



3.2.8 TEST RESULTS (1GHZ~25GHZ)

802.11b

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low operation frequency:2412									
V	4824.00	68.75	39.55	7.85	25.66	62.71	74	-11.29	PK
V	4824.00	49.67	39.55	7.85	25.66	43.63	54	-10.37	AV
V	7236.00	66.68	38.33	7.52	24.55	60.42	74	-13.58	PK
V	7236.00	48.59	38.33	7.52	24.55	42.33	54	-11.67	AV
V	15450.00	52.35	35.23	6.75	26.59	50.46	74	-23.54	PK
H	4824.00	68.87	39.55	7.85	25.66	62.83	74	-11.17	PK
H	4824.00	49.86	39.55	7.85	25.66	43.82	54	-10.18	AV
H	7236.00	68.23	38.33	7.52	23.55	60.97	74	-13.03	PK
H	7236.00	51.72	38.33	7.52	23.22	44.13	54	-9.87	AV
H	15450.00	48.56	35.45	6.75	27.88	47.74	74	-26.26	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle operation frequency:2437									
V	4874.00	67.68	38.89	7.57	25.45	61.81	74	-12.19	PK
V	4874.00	49.48	38.89	7.57	25.45	43.61	54	-10.39	AV
V	7311.00	68.95	38.78	7.35	24.78	62.30	74	-11.70	PK
V	7311.00	48.72	38.78	7.35	24.78	42.07	54	-11.93	AV
V	15450.00	53.37	35.89	6.42	26.47	50.37	74	-23.63	PK
H	4874.00	66.25	38.89	7.57	25.45	60.38	74	-13.62	PK
H	4874.00	50.49	38.89	7.57	25.45	44.62	54	-9.38	AV
H	7311.00	68.56	38.78	7.35	24.78	61.91	74	-12.09	PK
H	7311.00	49.33	38.78	7.35	24.78	42.68	54	-11.32	AV
H	15450.00	50.44	36.68	6.42	26.65	46.83	74	-27.17	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High operation frequency:2462									
V	4924.00	68.22	38.75	7.46	25.45	62.38	74	-11.62	PK
V	4924.00	48.45	38.75	7.46	25.45	42.61	54	-11.39	AV
V	7386.00	67.98	38.65	7.22	24.78	61.33	74	-12.67	PK
V	7386.00	48.34	38.65	7.22	24.78	41.69	54	-12.31	AV
V	15450.00	53.85	35.58	6.35	26.47	51.09	74	-22.91	PK
H	4924.00	67.69	38.75	7.46	25.45	61.85	74	-12.15	PK
H	4924.00	48.36	38.75	7.46	25.45	42.52	54	-11.48	AV
H	7386.00	69.07	38.65	7.22	24.78	62.42	74	-11.58	PK
H	7386.00	51.78	38.65	7.22	24.78	45.13	54	-8.87	AV
H	15450.00	49.88	36.42	6.32	26.65	46.43	74	-27.57	PK

Remark:

- Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
- If peak below the average limit, the average emission was no test.
- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low operation frequency:2412									
V	4824.00	66.23	39.55	7.85	25.66	60.19	74	-13.81	PK
V	4824.00	49.58	39.55	7.85	25.66	43.54	54	-10.46	AV
V	7236.00	66.39	38.33	7.52	24.55	60.13	74	-13.87	PK
V	7236.00	47.67	38.33	7.52	24.55	41.41	54	-12.59	AV
V	15450.00	50.95	35.23	6.75	26.59	49.06	74	-24.94	PK
H	4824.00	63.25	39.55	7.85	25.66	57.21	74	-16.79	PK
H	4824.00	49.49	39.55	7.85	25.66	43.45	54	-10.55	AV
H	7236.00	69.35	38.33	7.52	23.55	62.09	74	-11.91	PK
H	7236.00	50.47	38.33	7.52	23.22	42.88	54	-11.12	AV
H	15450.00	45.78	35.45	6.75	27.88	44.96	74	-29.04	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle operation frequency:2437									
V	4874.00	65.78	38.89	7.57	25.45	59.91	74	-14.09	PK
V	4874.00	48.96	38.89	7.57	25.45	43.09	54	-10.91	AV
V	7311.00	66.45	38.78	7.35	24.78	59.80	74	-14.20	PK
V	7311.00	48.78	38.78	7.35	24.78	42.13	54	-11.87	AV
V	15450.00	52.59	35.89	6.42	26.47	49.59	74	-24.41	PK
H	4874.00	64.23	38.89	7.57	25.45	58.36	74	-15.64	PK
H	4874.00	49.75	38.89	7.57	25.45	43.88	54	-10.12	AV
H	7311.00	70.89	38.78	7.35	24.78	64.24	74	-9.76	PK
H	7311.00	48.78	38.78	7.35	24.78	42.13	54	-11.87	AV
H	15450.00	48.75	36.68	6.45	26.65	45.17	74	-28.83	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High operation frequency:2462									
V	4924.00	67.89	38.75	7.46	25.45	62.05	74	-11.95	PK
V	4924.00	48.45	38.75	7.46	25.45	42.61	54	-11.39	AV
V	7386.00	68.57	38.65	7.22	24.78	61.92	74	-12.08	PK
V	7386.00	49.78	38.65	7.22	24.78	43.13	54	-10.87	AV
V	15450.00	53.66	35.58	6.35	26.47	50.90	74	-23.10	PK
H	4924.00	66.55	38.75	7.46	25.45	60.71	74	-13.29	PK
H	4924.00	50.44	38.75	7.46	25.45	44.60	54	-9.40	AV
H	7386.00	69.37	38.65	7.22	24.78	62.72	74	-11.28	PK
H	7386.00	48.88	38.65	7.22	24.78	42.23	54	-11.77	AV
H	15450.00	49.74	36.42	6.32	26.65	46.29	74	-27.71	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n(20MHz)

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low operation frequency:2412									
V	4824.00	67.22	39.55	7.85	25.66	61.18	74	-12.82	PK
V	4824.00	48.88	39.55	7.85	25.66	42.84	54	-11.16	AV
V	7236.00	66.95	38.33	7.52	24.55	60.69	74	-13.31	PK
V	7236.00	48.56	38.33	7.52	24.55	42.30	54	-11.70	AV
V	15450.00	51.45	35.23	6.75	26.59	49.56	74	-24.44	PK
H	4824.00	68.25	39.55	7.85	25.66	62.21	74	-11.79	PK
H	4824.00	49.44	39.55	7.85	25.66	43.40	54	-10.60	AV
H	7236.00	69.31	38.33	7.52	23.55	62.05	74	-11.95	PK
H	7236.00	52.41	38.33	7.52	23.22	44.82	54	-9.18	AV
H	15450.00	47.32	35.45	6.75	27.88	46.50	74	-27.50	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle operation frequency:2437									
V	4874.00	66.94	38.89	7.57	25.45	61.07	74	-12.93	PK
V	4874.00	49.56	38.89	7.57	25.45	43.69	54	-10.31	AV
V	7311.00	67.25	38.78	7.35	24.78	60.60	74	-13.40	PK
V	7311.00	47.55	38.78	7.35	24.78	40.90	54	-13.10	AV
V	15450.00	52.11	35.89	6.42	26.47	49.11	74	-24.89	PK
H	4874.00	65.78	38.89	7.57	25.45	59.91	74	-14.09	PK
H	4874.00	49.71	38.89	7.57	25.45	43.84	54	-10.16	AV
H	7311.00	69.56	38.78	7.35	24.78	62.91	74	-11.09	PK
H	7311.00	48.77	38.78	7.35	24.78	42.12	54	-11.88	AV
H	15450.00	49.25	36.68	6.45	26.65	45.67	74	-28.33	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High operation frequency:2462									
V	4924.00	68.25	38.75	7.46	25.45	62.41	74	-11.59	PK
V	4924.00	50.78	38.75	7.46	25.45	44.94	54	-9.06	AV
V	7386.00	67.56	38.65	7.22	24.78	60.91	74	-13.09	PK
V	7386.00	49.25	38.65	7.22	24.78	42.60	54	-11.40	AV
V	15450.00	53.22	35.58	6.35	26.47	50.46	74	-23.54	PK
H	4924.00	66.11	38.75	7.46	25.45	60.27	74	-13.73	PK
H	4924.00	50.35	38.75	7.46	25.45	44.51	54	-9.49	AV
H	7386.00	69.78	38.65	7.22	24.78	63.13	74	-10.87	PK
H	7386.00	48.96	38.65	7.22	24.78	42.31	54	-11.69	AV
H	15450.00	50.47	36.42	6.32	26.65	47.02	74	-26.98	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n(40MHz)

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low operation frequency:2422									
V	4844.000	69.81	39.55	7.77	25.66	63.69	74	-10.31	PK
V	4844.000	50.34	39.55	7.77	25.66	44.22	54	-9.78	AV
V	7266.000	67.88	38.33	7.30	24.55	61.40	74	-12.60	PK
V	7266.000	48.72	38.33	7.30	24.55	42.24	54	-11.76	AV
V	15450.00	51.85	35.23	6.60	26.59	49.81	74	-24.19	PK
H	4844.000	68.69	39.55	7.77	25.66	62.57	74	-11.43	PK
H	4844.000	49.88	39.55	7.77	25.66	43.76	54	-10.24	AV
H	7266.000	69.66	38.33	7.30	23.55	62.18	74	-11.82	PK
H	7266.000	51.21	38.33	7.30	23.22	43.40	54	-10.60	AV
H	15450.00	49.68	35.45	6.60	27.88	48.71	74	-25.29	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle operation frequency:2437									
V	4874.00	66.74	38.89	7.57	25.45	60.87	74	-13.13	PK
V	4874.00	49.35	38.89	7.57	25.45	43.48	54	-10.52	AV
V	7311.00	67.35	38.78	7.35	24.78	60.70	74	-13.30	PK
V	7311.00	47.57	38.78	7.35	24.78	40.92	54	-13.08	AV
V	15450.00	52.48	35.89	6.42	26.47	49.48	74	-24.52	PK
H	4874.00	65.68	38.89	7.57	25.45	59.81	74	-14.19	PK
H	4874.00	49.25	38.89	7.57	25.45	43.38	54	-10.62	AV
H	7311.00	69.23	38.78	7.35	24.78	62.58	74	-11.42	PK
H	7311.00	48.71	38.78	7.35	24.78	42.06	54	-11.94	AV
H	15450.00	49.63	36.68	6.42	26.65	46.02	74	-27.98	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High operation frequency:2452									
V	4904.00	68.68	38.75	7.38	25.45	62.76	74	-11.24	PK
V	4904.00	50.95	38.75	7.38	25.45	45.03	54	-8.97	AV
V	7356.00	67.74	38.65	7.15	24.78	61.02	74	-12.98	PK
V	7356.00	49.55	38.65	7.15	24.78	42.83	54	-11.17	AV
V	15450.00	53.63	35.58	6.25	26.47	50.77	74	-23.23	PK
H	4904.00	66.28	38.75	7.38	25.45	60.36	74	-13.64	PK
H	4904.00	50.35	38.75	7.38	25.45	44.43	54	-9.57	AV
H	7356.00	69.59	38.65	7.15	24.78	62.87	74	-11.13	PK
H	7356.00	48.61	38.65	7.15	24.78	41.89	54	-12.11	AV
H	15450.00	50.72	36.42	6.25	26.65	47.20	74	-26.80	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



BT

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low operation frequency:2402									
V	4804.000	66.68	39.36	7.95	25.86	61.13	74	-12.87	PK
V	4804.000	47.95	39.36	7.95	25.86	42.40	54	-11.60	AV
V	7206.000	65.74	38.33	7.3	24.55	59.26	74	-14.74	PK
V	7206.000	49.36	38.33	7.3	24.55	42.88	54	-11.12	AV
V	15450.00	53.63	35.23	6.6	26.59	51.59	74	-22.41	PK
H	4804.000	66.28	39.36	7.95	25.86	60.73	74	-13.27	PK
H	4804.000	48.69	39.36	7.95	25.86	43.14	54	-10.86	AV
H	7206.000	65.55	38.33	7.3	23.55	58.07	74	-15.93	PK
H	7206.000	48.46	38.33	7.3	23.22	40.65	54	-13.35	AV
H	15450.00	50.36	35.45	6.6	27.88	49.39	74	-24.61	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle operation frequency:2440									
V	4880.00	67.26	39.12	7.57	25.65	61.36	74	-12.64	PK
V	4880.00	48.45	39.12	7.57	25.65	42.55	54	-11.45	AV
V	7320.00	67.98	38.78	7.35	24.78	61.33	74	-12.67	PK
V	7320.00	48.34	38.78	7.35	24.78	41.69	54	-12.31	AV
V	15450.00	53.85	35.89	6.42	26.47	50.85	74	-23.15	PK
H	4880.00	67.69	39.12	7.57	25.65	61.79	74	-12.21	PK
H	4880.00	48.36	39.12	7.57	25.65	42.46	54	-11.54	AV
H	7320.00	66.44	38.78	7.35	24.78	59.79	74	-14.21	PK
H	7320.00	49.75	38.78	7.35	24.78	43.10	54	-10.90	AV
H	15450.00	49.44	36.68	6.42	26.65	45.83	74	-28.17	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High operation frequency:2480									
V	4960.00	68.35	38.75	7.38	25.45	62.74	74	-11.26	PK
V	4960.00	50.24	38.75	7.38	25.45	44.93	54	-9.07	AV
V	7440.00	67.36	38.65	7.15	24.78	60.60	74	-13.40	PK
V	7440.00	49.42	38.65	7.15	24.78	42.75	54	-11.25	AV
V	15450.00	53.64	35.58	6.25	26.47	50.83	74	-23.17	PK
H	4960.00	66.33	38.75	7.38	25.45	60.44	74	-13.56	PK
H	4960.00	50.44	38.75	7.38	25.45	44.55	54	-9.45	AV
H	7440.00	69.69	38.65	7.15	24.78	62.97	74	-11.03	PK
H	7440.00	48.75	38.65	7.15	24.78	42.03	54	-11.97	AV
H	15450.00	50.25	36.42	6.25	26.65	46.73	74	-27.27	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

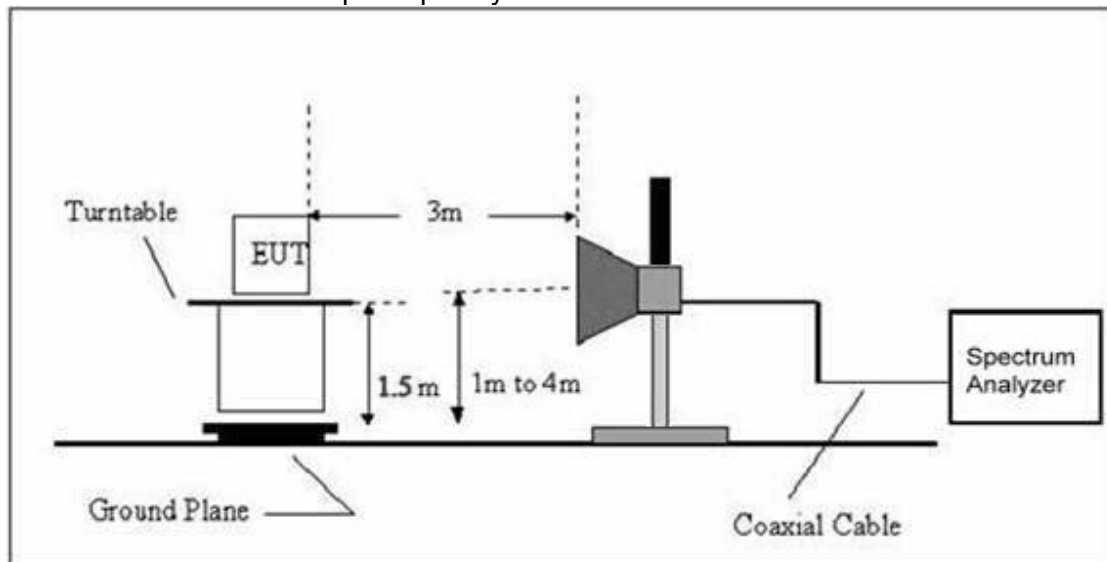


3.3.5 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




3.3.6 TEST RESULT

Band Radiated

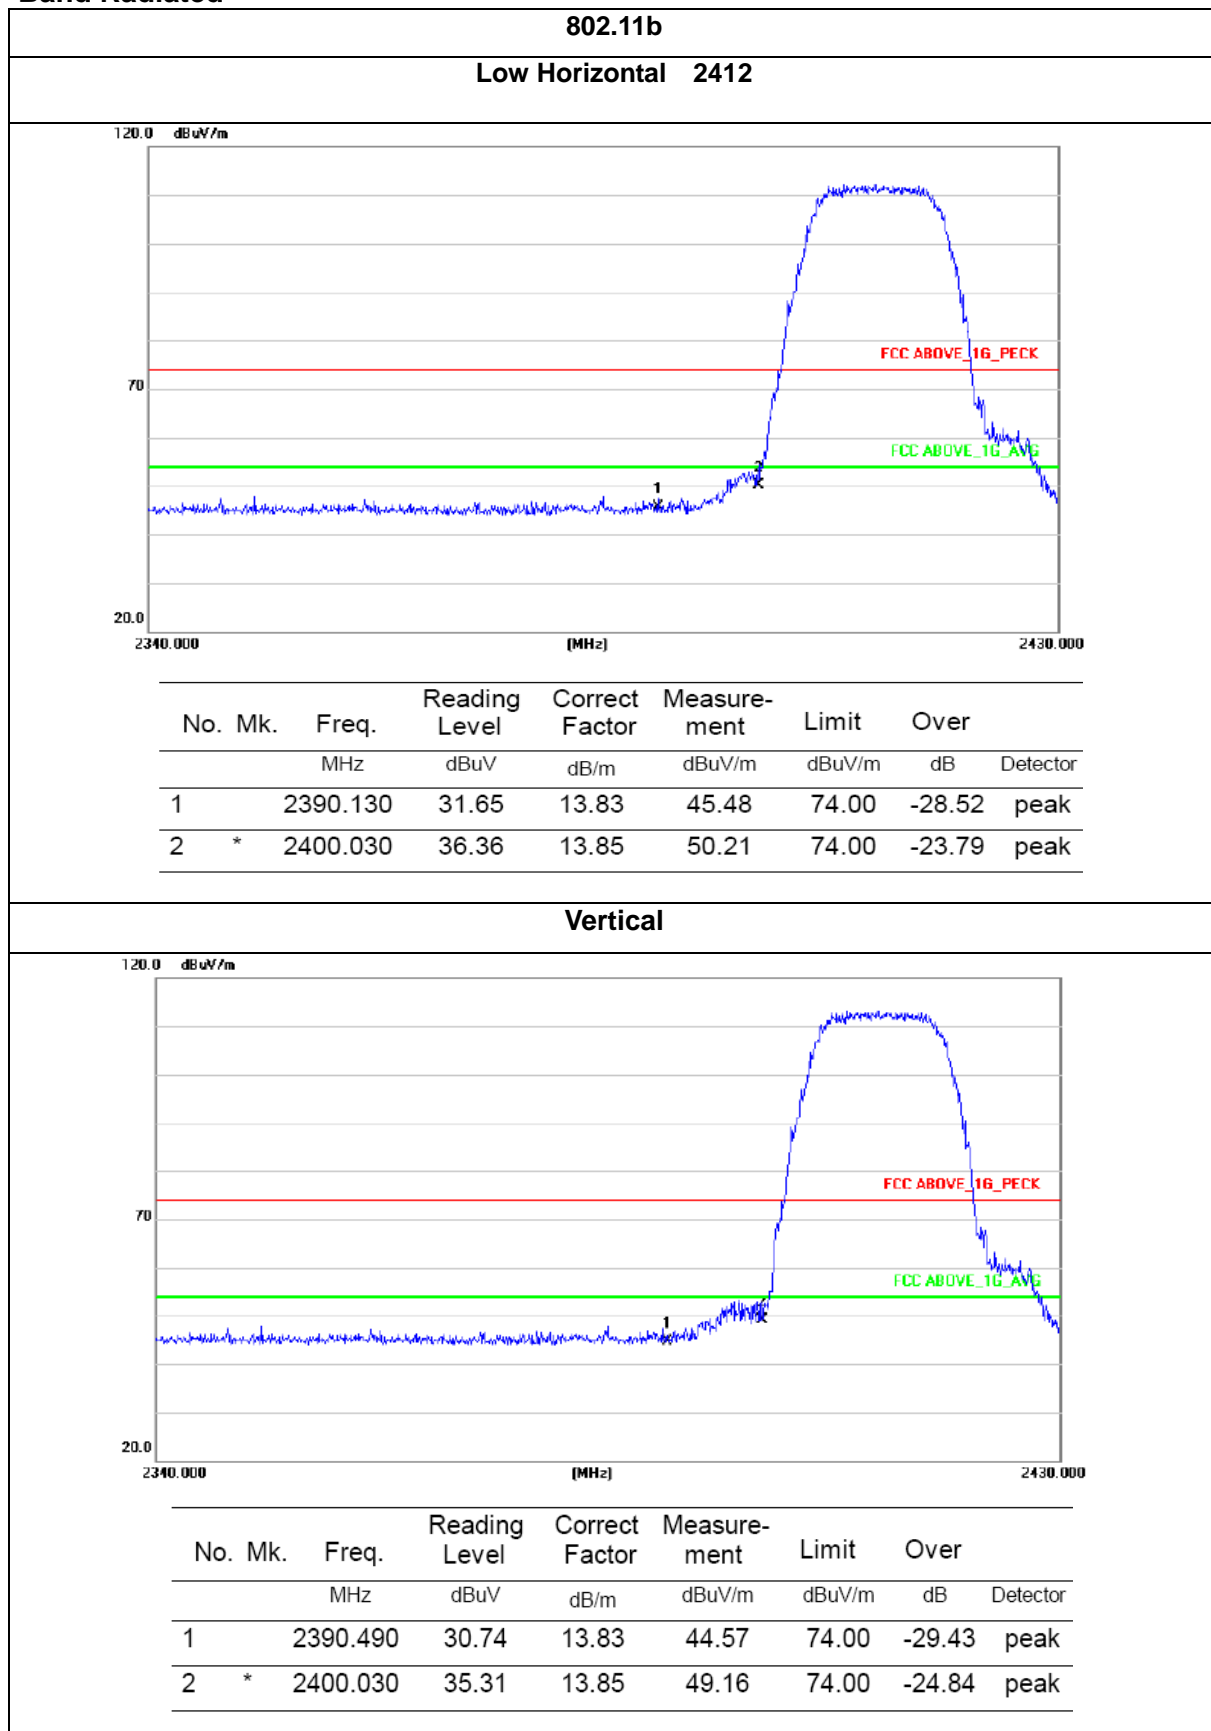

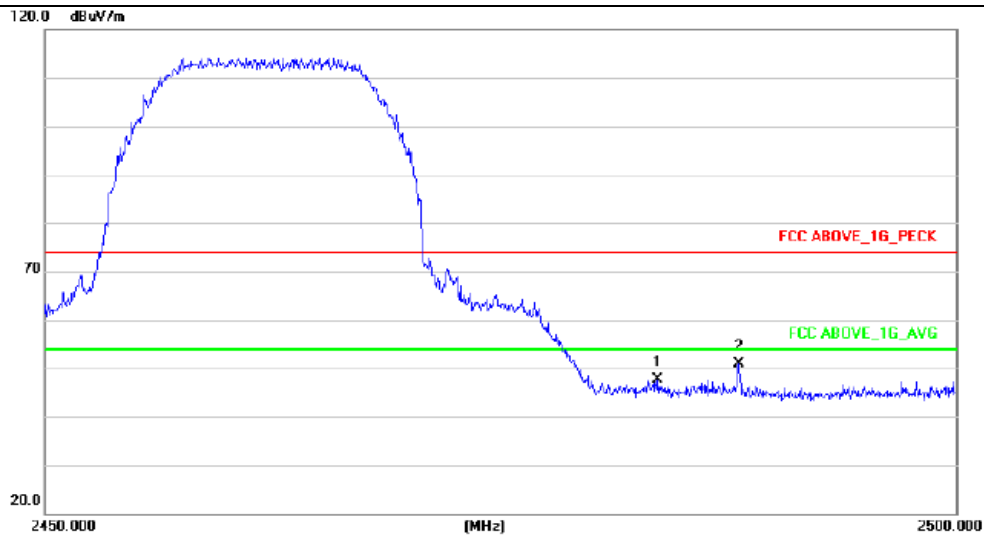**High Horizontal 2462**

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2483.550	33.71	14.02	47.73	74.00	-26.27	peak
2	*	2488.050	36.76	14.04	50.80	74.00	-23.20	peak

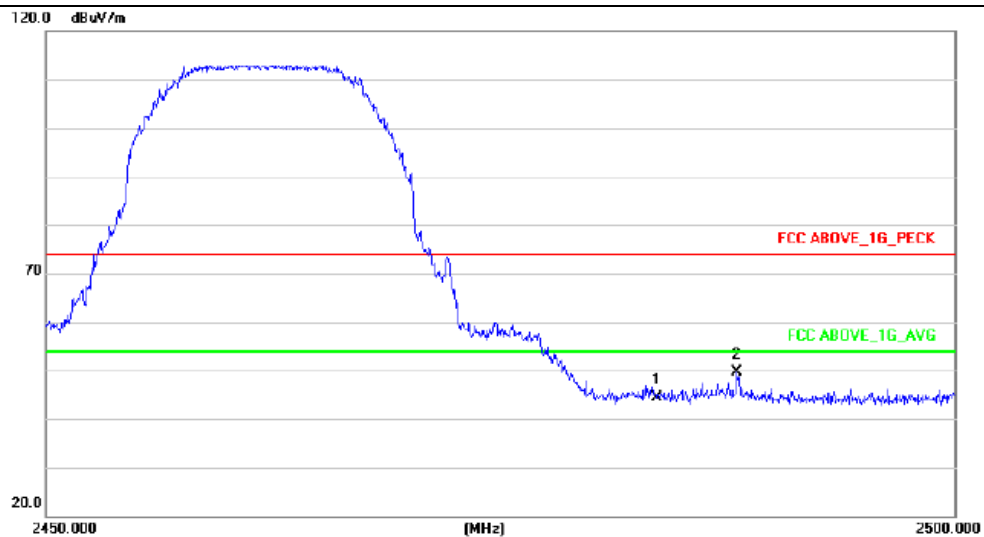
Vertical

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2483.550	30.45	14.02	44.47	74.00	-29.53	peak
2	*	2488.000	35.57	14.04	49.61	74.00	-24.39	peak




802.11g

Low Horizontal 2412

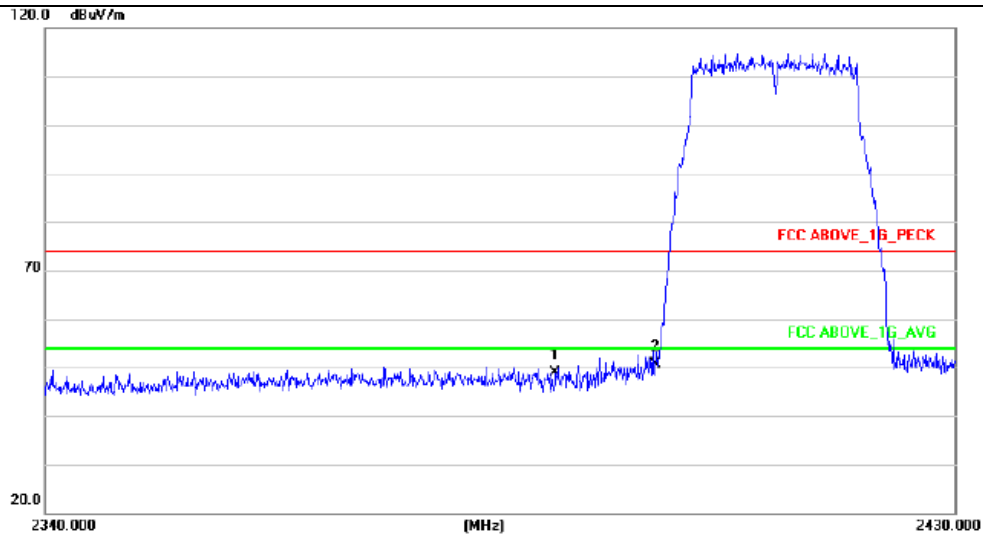


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2390.130	35.21	13.83	49.04	74.00	-24.96	peak
2	*	2400.030	36.59	13.85	50.44	74.00	-23.56	peak


Vertical

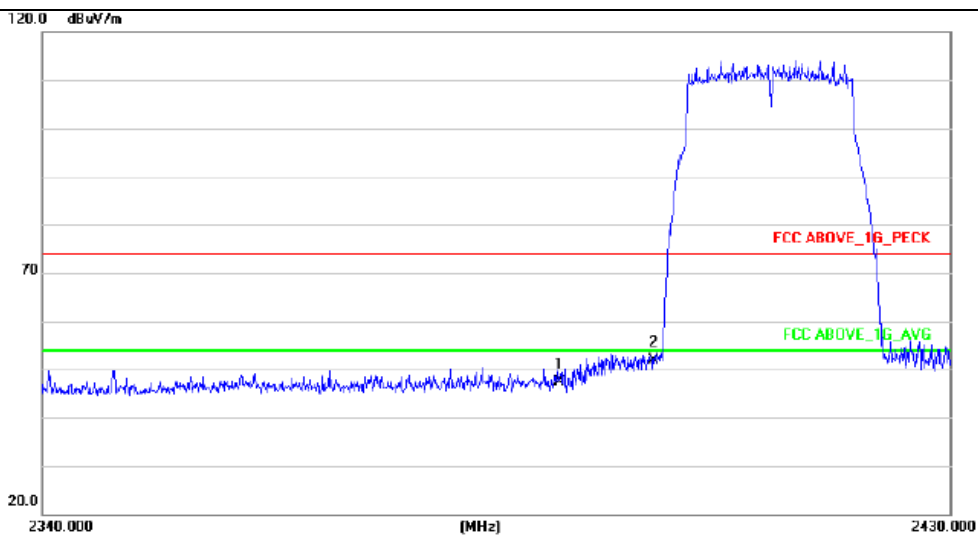

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2390.850	33.64	13.83	47.47	74.00	-26.53	peak
2	*	2400.300	37.93	13.85	51.78	74.00	-22.22	peak

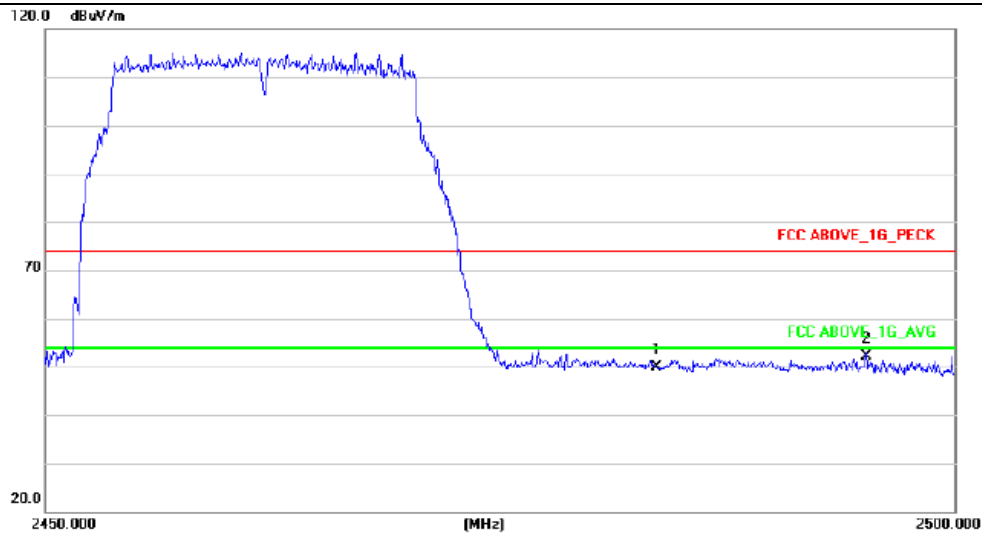**High Horizontal 2462**

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		2483.550	35.76	14.02	49.78	74.00	-24.22 peak
2	*	2495.100	38.07	14.04	52.11	74.00	-21.89 peak

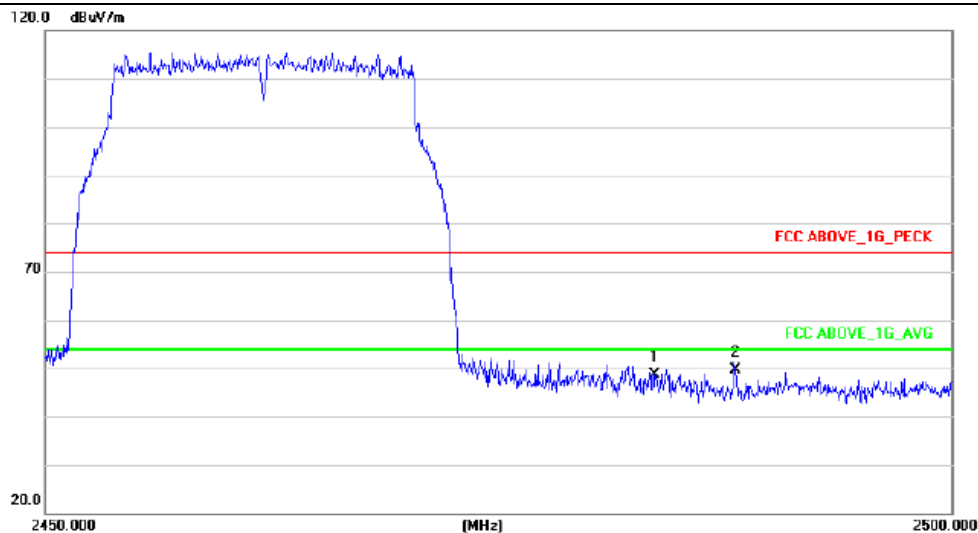
Vertical

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB Detector
1		2483.500	34.50	14.02	48.52	74.00	-25.48 peak
2	*	2488.050	35.69	14.04	49.73	74.00	-24.27 peak




802.11n(20)

Low Horizontal 2412

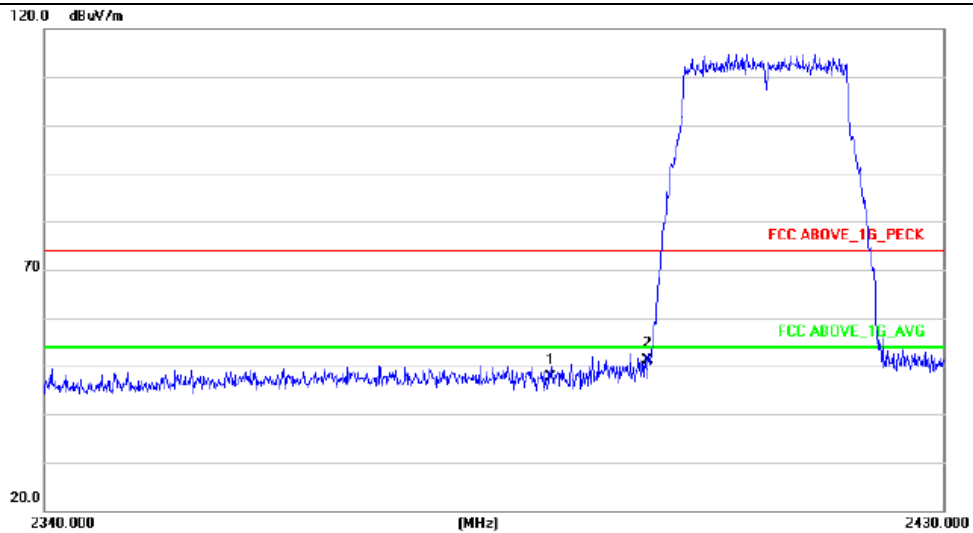


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2390.220	33.75	13.83	47.58	74.00	-26.42	peak
2	*	2400.030	37.32	13.85	51.17	74.00	-22.83	peak


Vertical

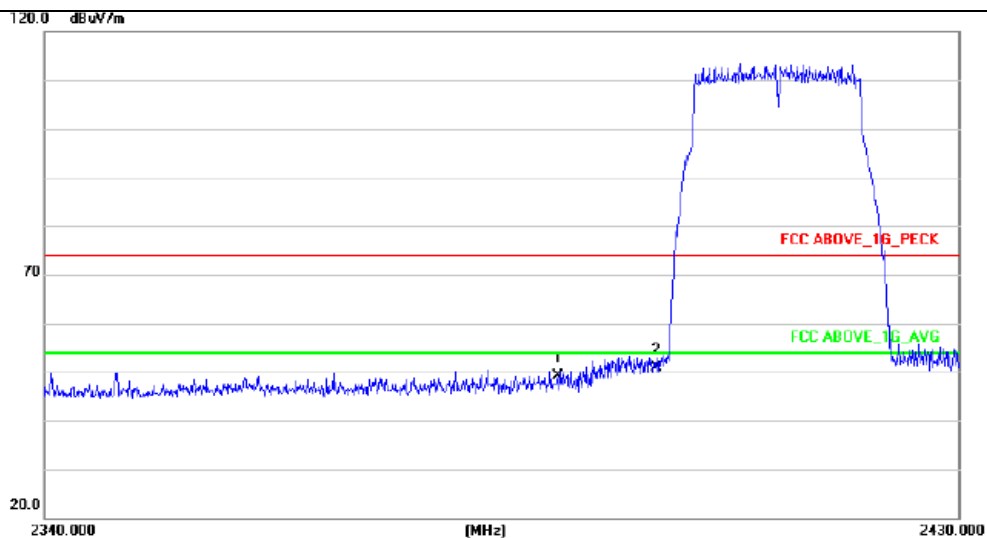

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2390.220	35.46	13.83	49.48	74.00	-24.52	peak
2	*	2400.000	37.69	13.85	51.73	74.00	-22.27	peak

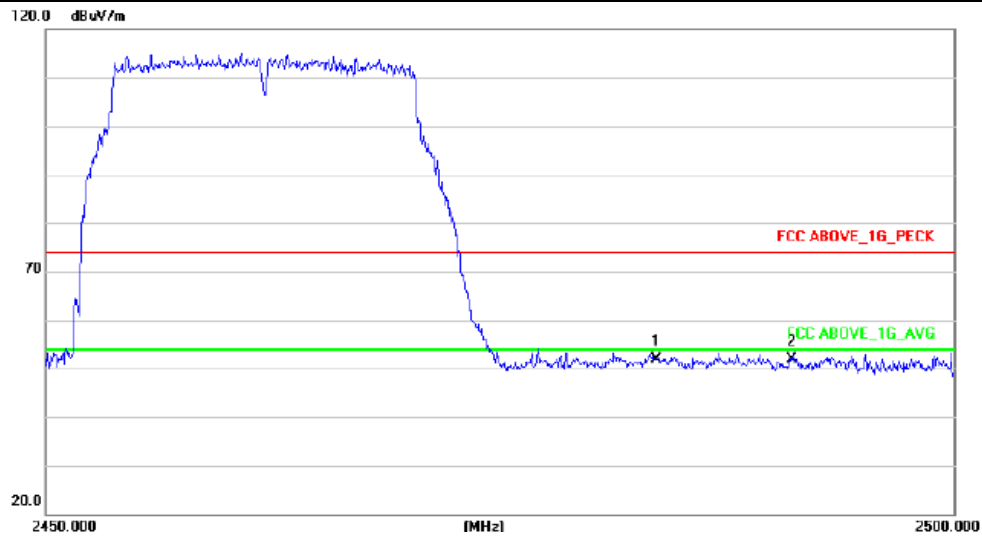**High Horizontal 2462**

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2483.550	37.71	14.02	51.73	74.00	-22.27	peak
2	*	2491.050	37.93	14.04	51.97	74.00	-22.03	peak

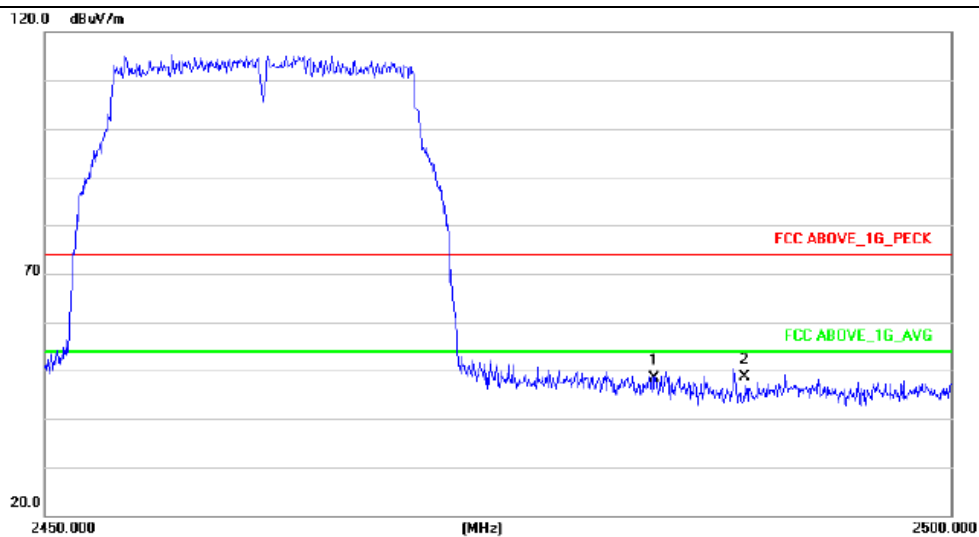
Vertical

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2483.550	34.42	14.02	48.44	74.00	-25.56	peak
2	*	2488.550	34.74	14.04	48.78	74.00	-25.22	peak




802.11n(40)

Low Horizontal 2422

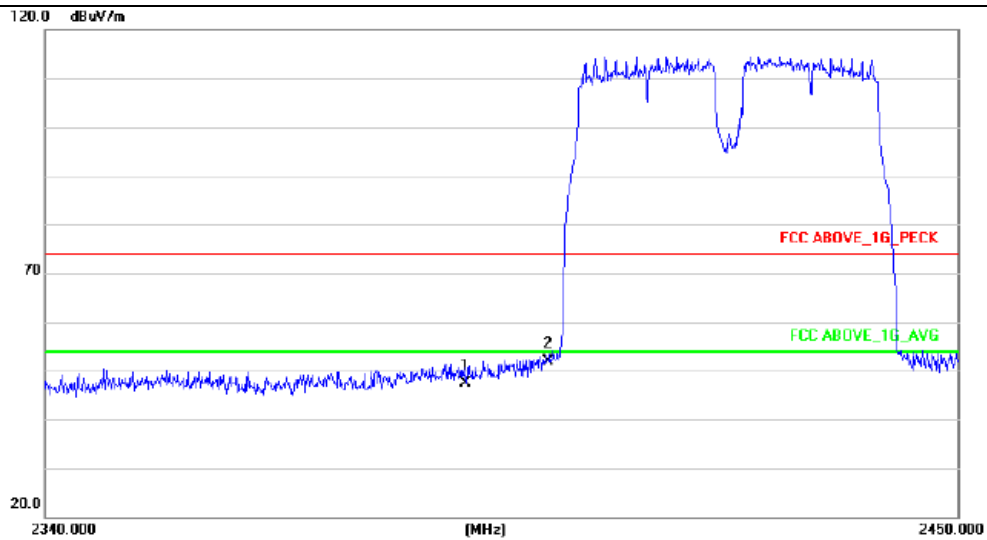


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2390.000	33.75	13.83	47.58	74.00	-26.42	peak
2	*	2400.000	38.63	13.85	52.48	74.00	-21.52	peak


Vertical

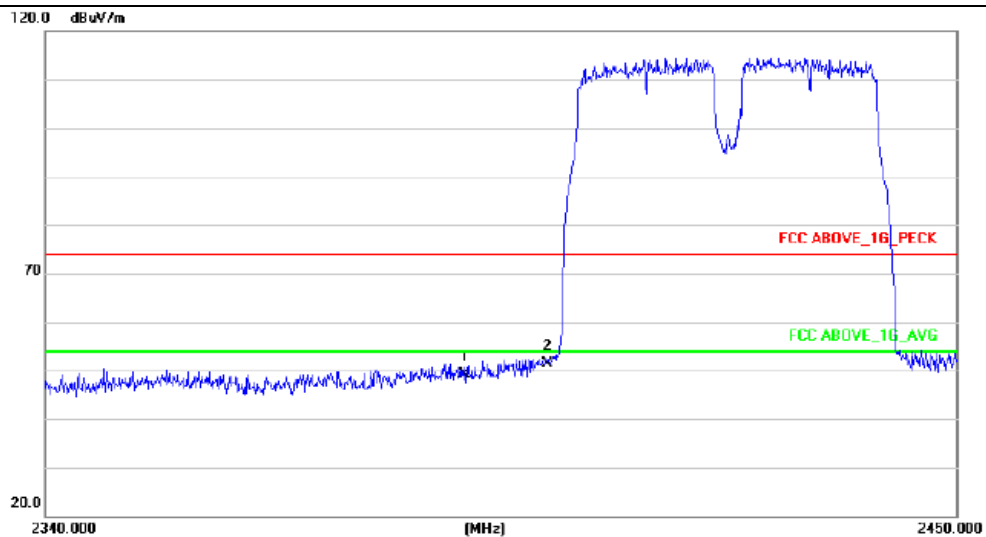

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2390.020	35.08	13.83	48.91	74.00	-25.09	peak
2	*	2400.050	37.38	13.85	51.23	74.00	-22.77	peak

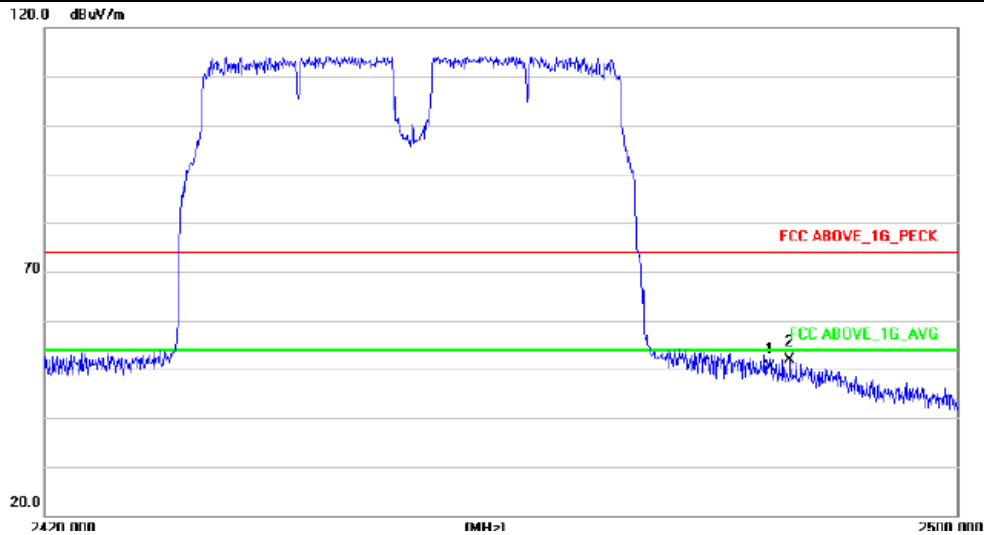
**High Horizontal 2452**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			
			dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2483.500	36.45	14.02	50.47	74.00	-23.53	peak
2	*	2485.200	37.87	14.02	51.89	74.00	-22.11	peak

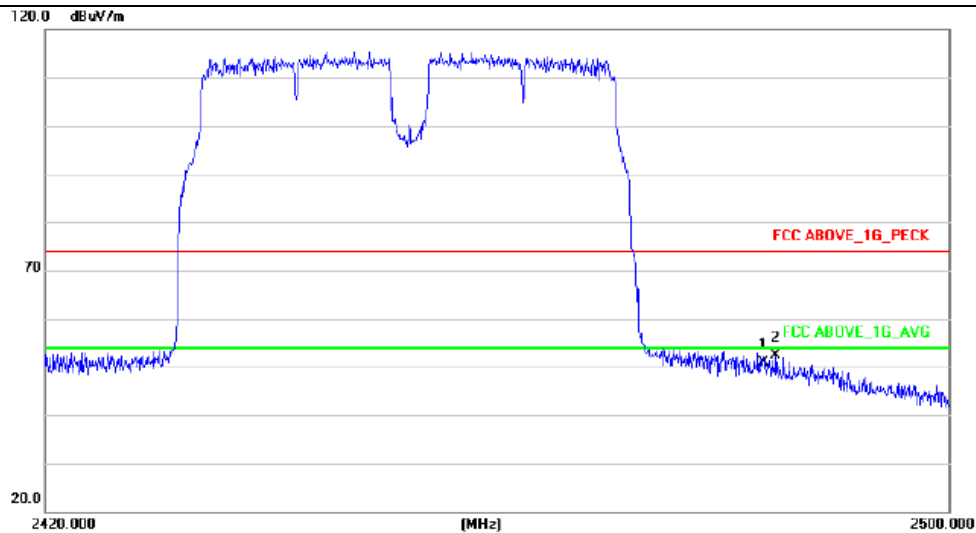
Vertical

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			
			dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2483.500	36.59	14.02	50.61	74.00	-23.39	peak
2	*	2484.560	38.62	14.02	52.64	74.00	-21.36	peak


If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

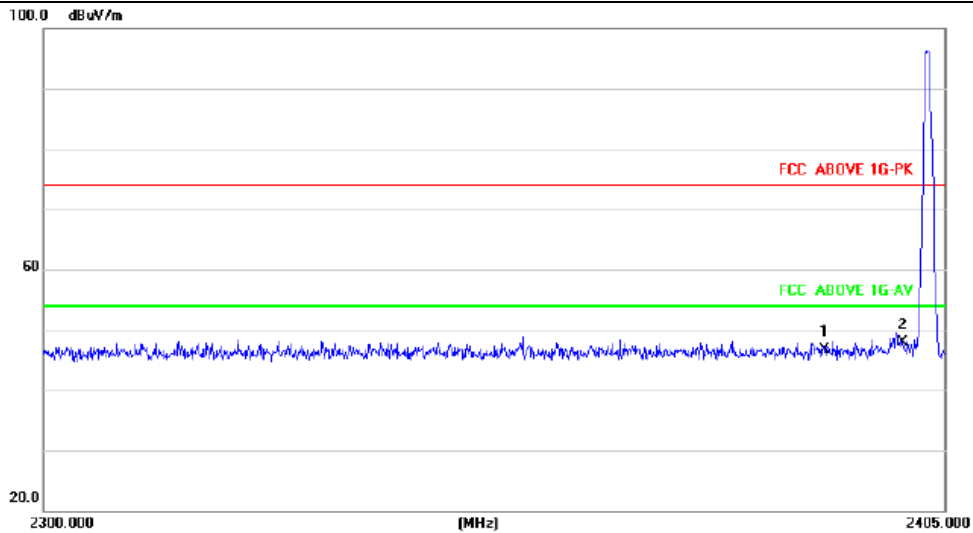**BT****Low Horizontal 2402**


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2390.825	32.80	13.83	46.63	74.00	-27.37	peak
2	*	2400.170	34.03	13.85	47.88	74.00	-26.12	peak

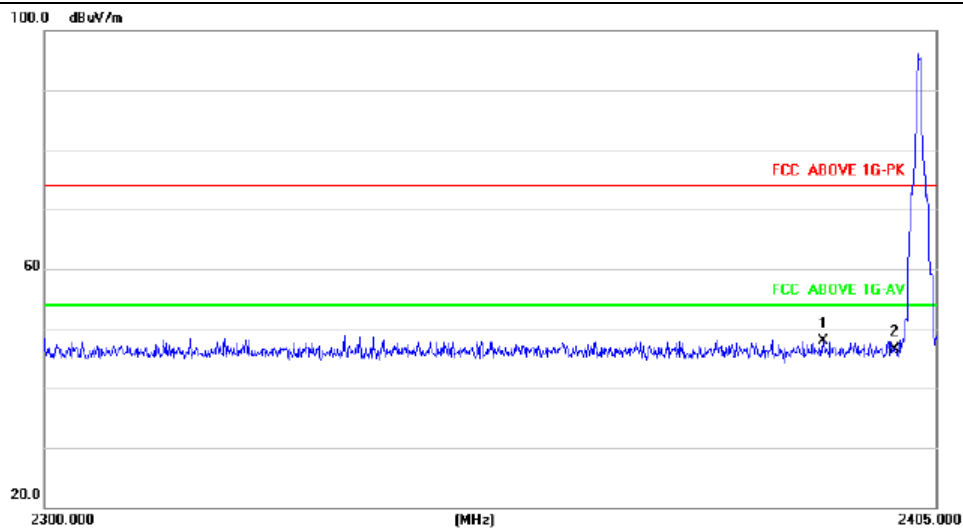Vertical

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	2391.560	34.04	13.83	47.87	74.00	-26.13	peak
2		2400.170	32.71	13.85	46.56	74.00	-27.44	peak

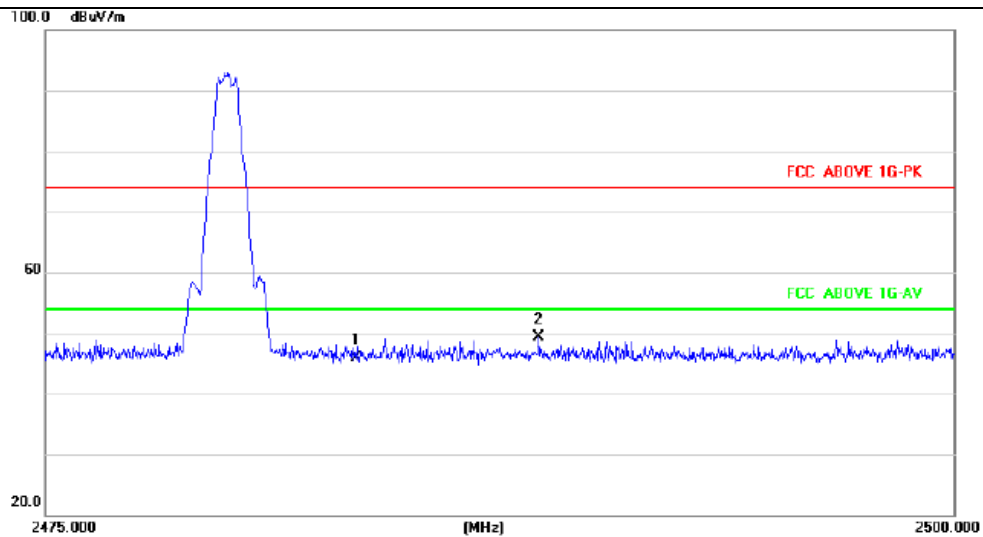**High Horizontal 2480**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		2483.525	31.98	14.02	46.00	74.00	-28.00	peak
2	*	2488.550	35.33	14.04	49.37	74.00	-24.63	peak

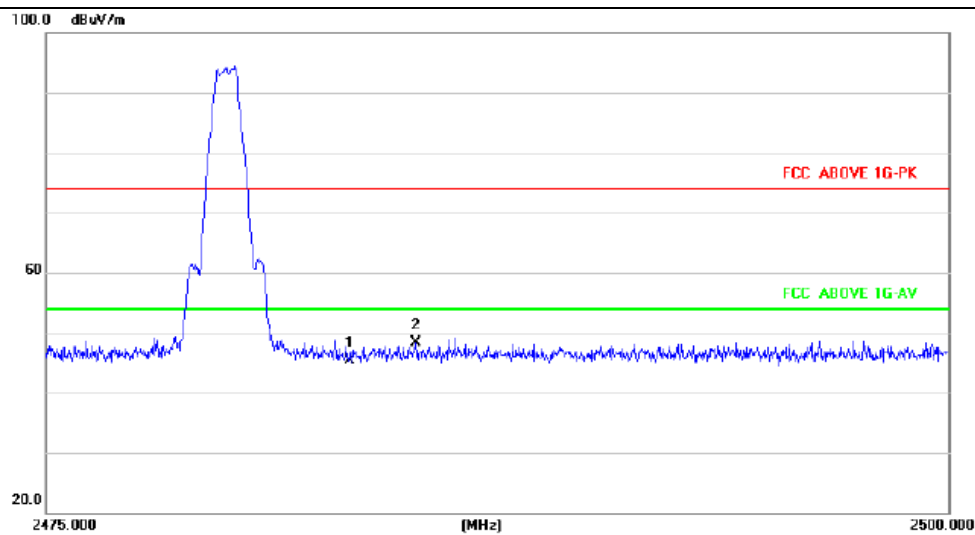Vertical

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		2483.350	31.24	14.02	45.26	74.00	-28.74	peak
2	*	2485.225	34.25	14.02	48.27	74.00	-25.73	peak

If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.



4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.




4.1.5 TEST RESULTS

Temperature :	25℃	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX b Mode		


Frequency	Power Spectral Density(dBm)	Limit (dBm)	Result
2412 MHz	-13.06	8	PASS
2437 MHz	-12.19	8	PASS
2462 MHz	-12.55	8	PASS

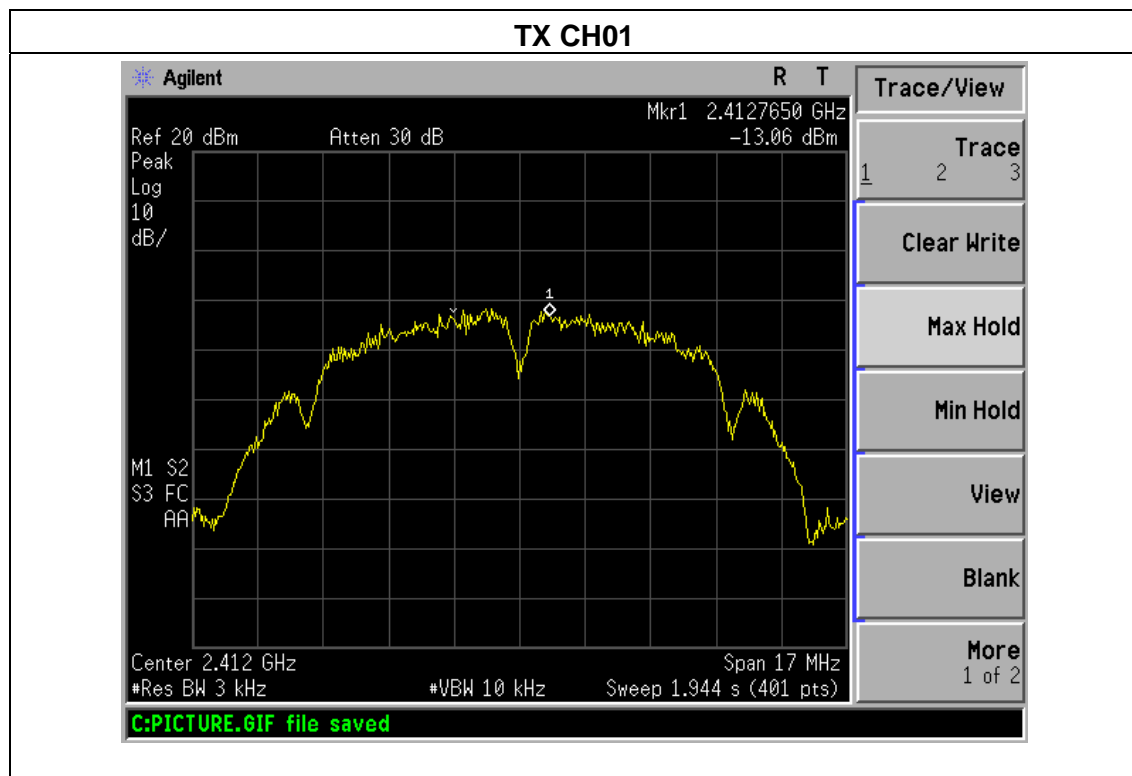

TX CH06

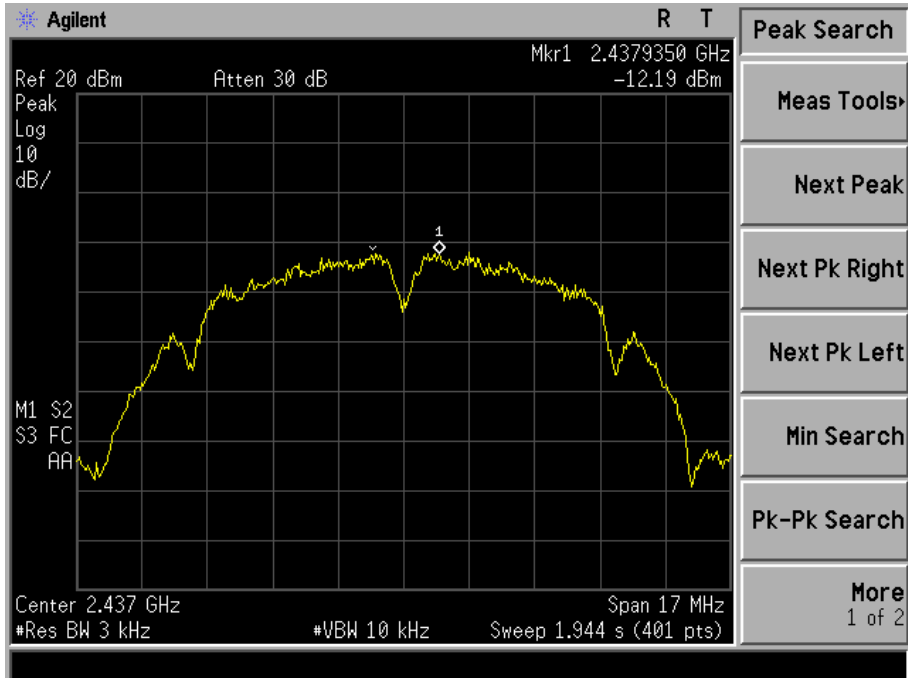


TX CH11


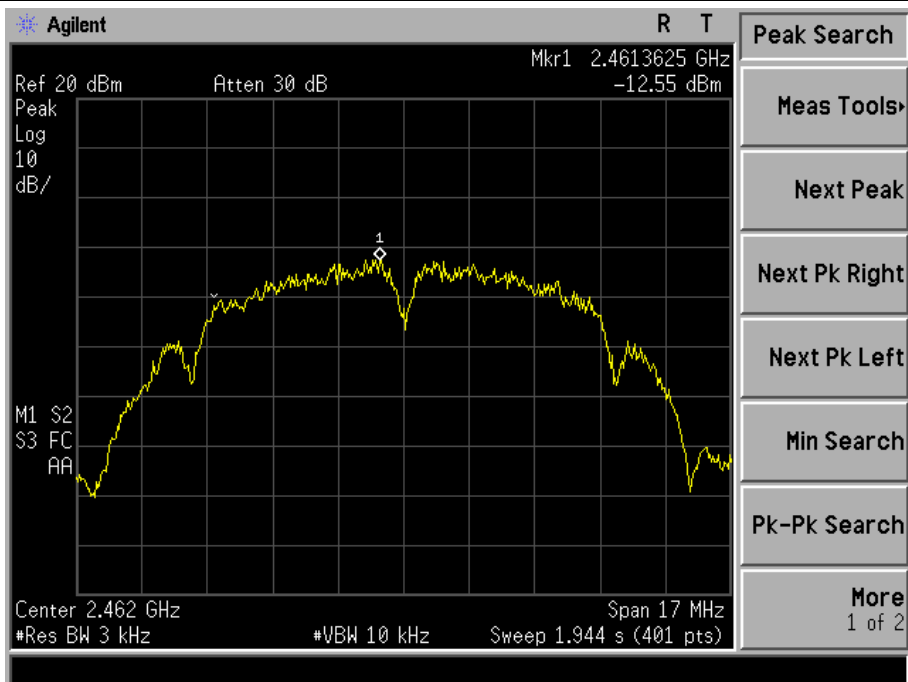




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX g Mode		

Frequency	Power Spectral Density(dBm)	Limit (dBm)	Result
2412 MHz	-14.92	8	PASS
2437 MHz	-14.99	8	PASS
2462 MHz	-18.30	8	PASS

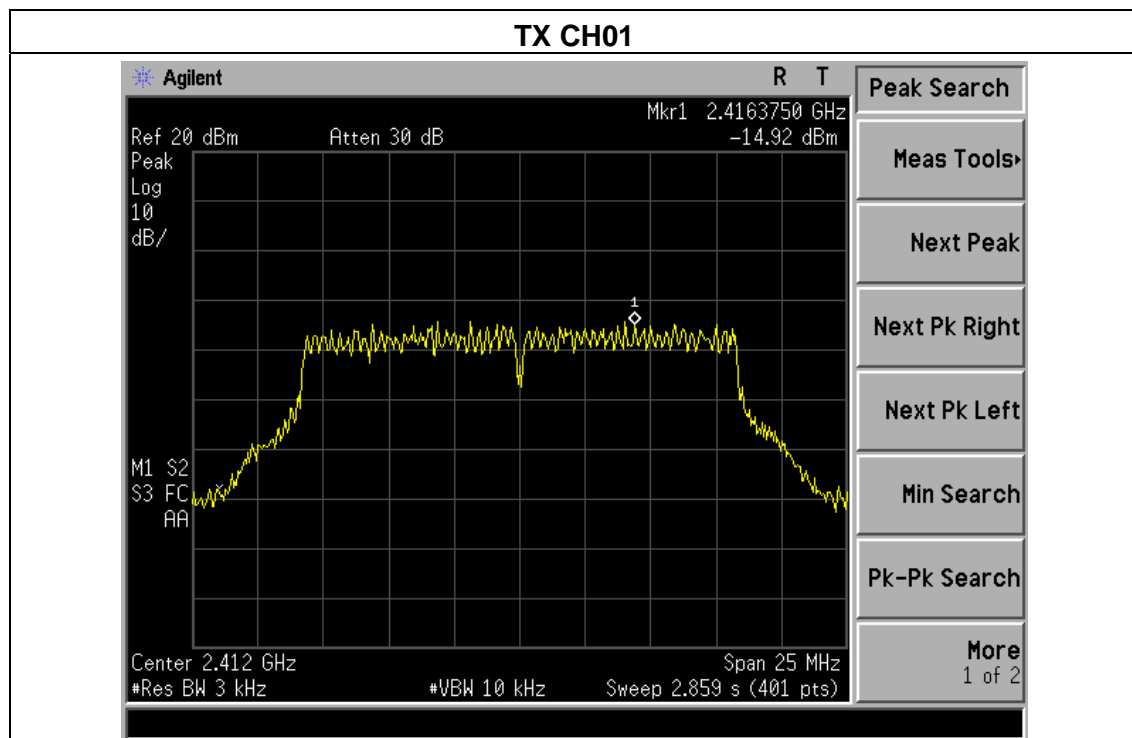


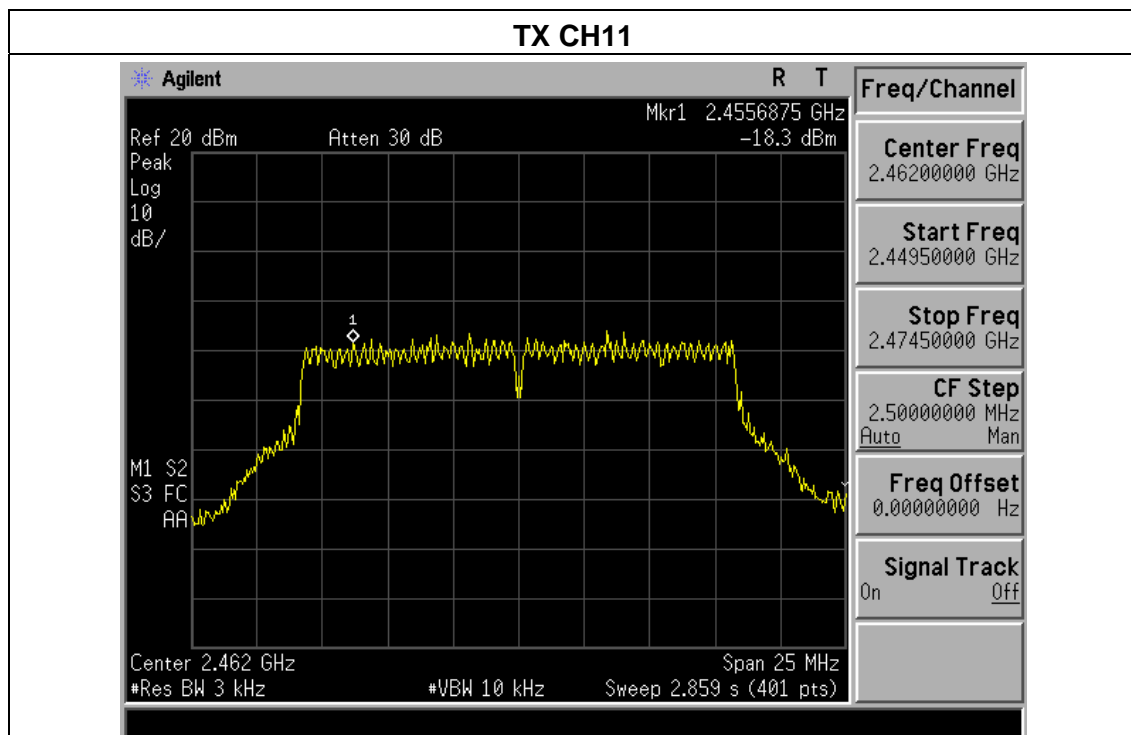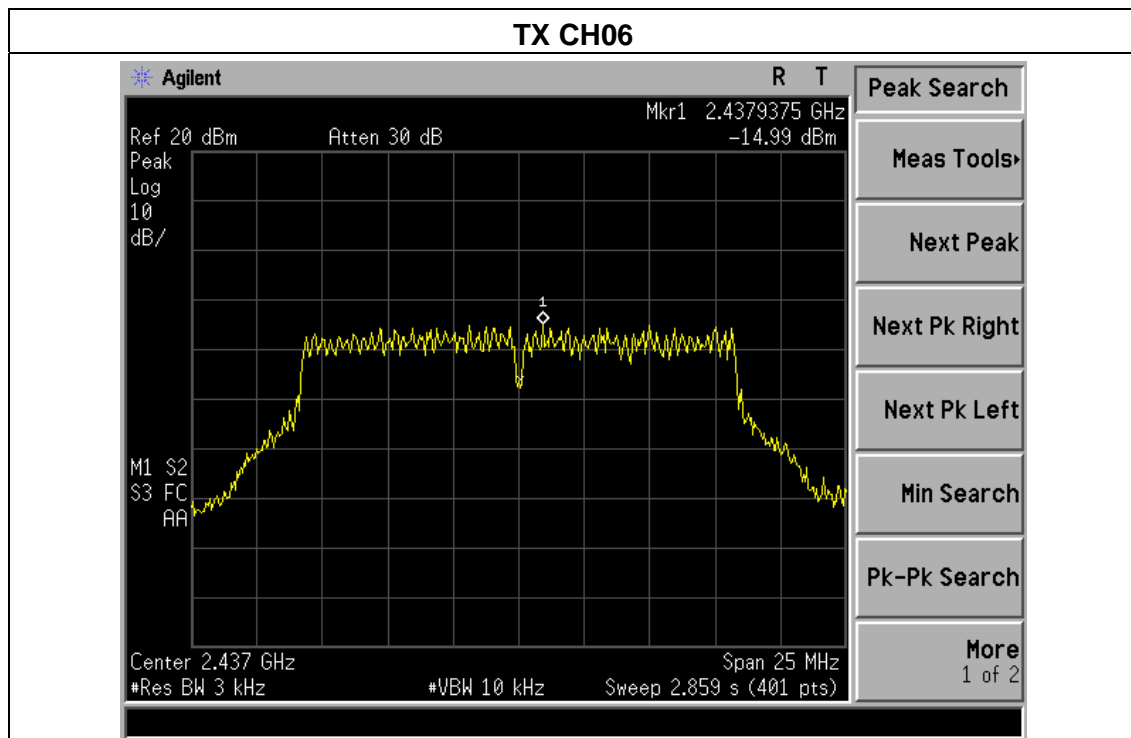




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode(20M)		


Frequency	Power Spectral Density(dBm)	Limit (dBm)	Result
2412 MHz	-15.99	8	PASS
2437 MHz	-15.66	8	PASS
2462 MHz	-14.30	8	PASS

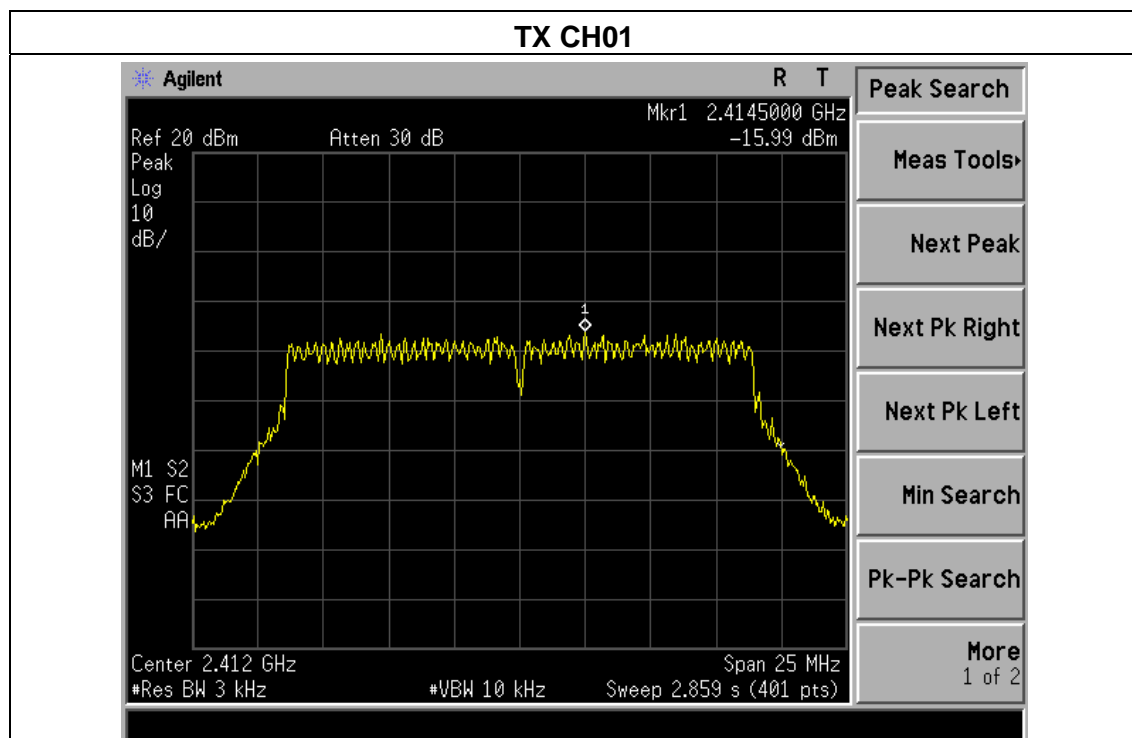

TX CH06

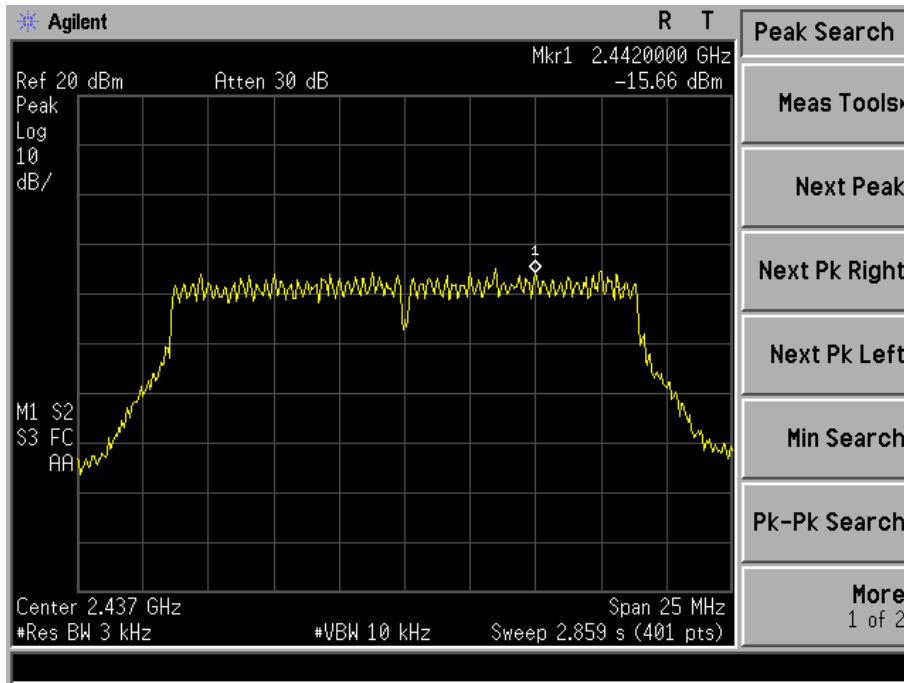


TX CH11

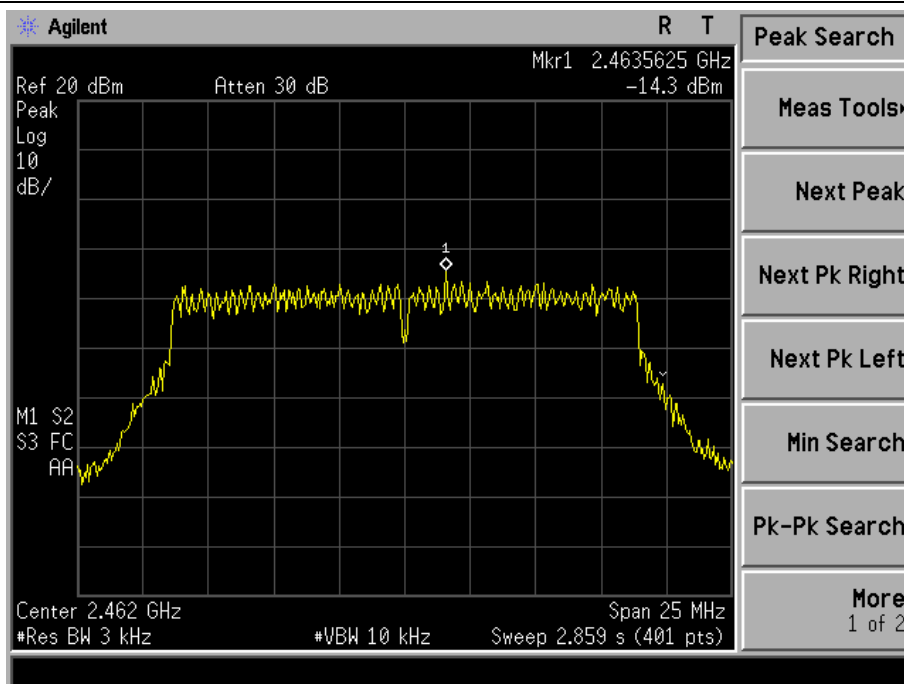




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode(40M)		


Frequency	Power Spectral Density(dBm)	Limit (dBm)	Result
2422 MHz	-32.15	8	PASS
2437 MHz	-31.30	8	PASS
2452 MHz	-33.43	8	PASS

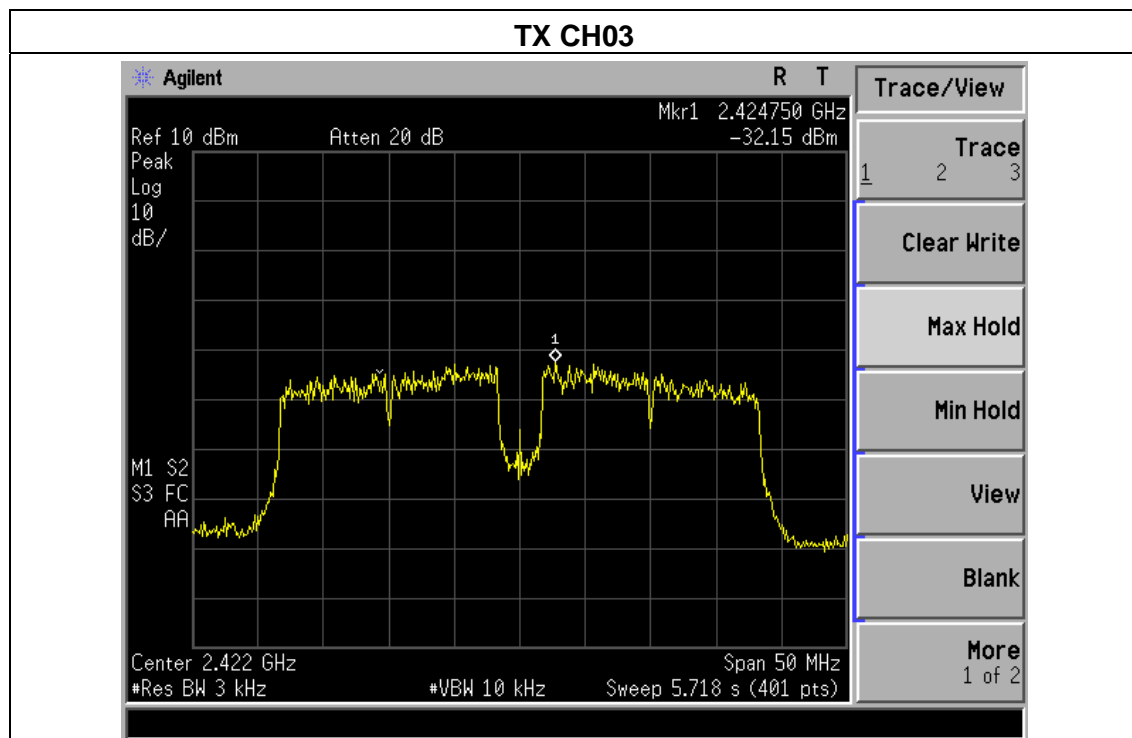

TX CH06

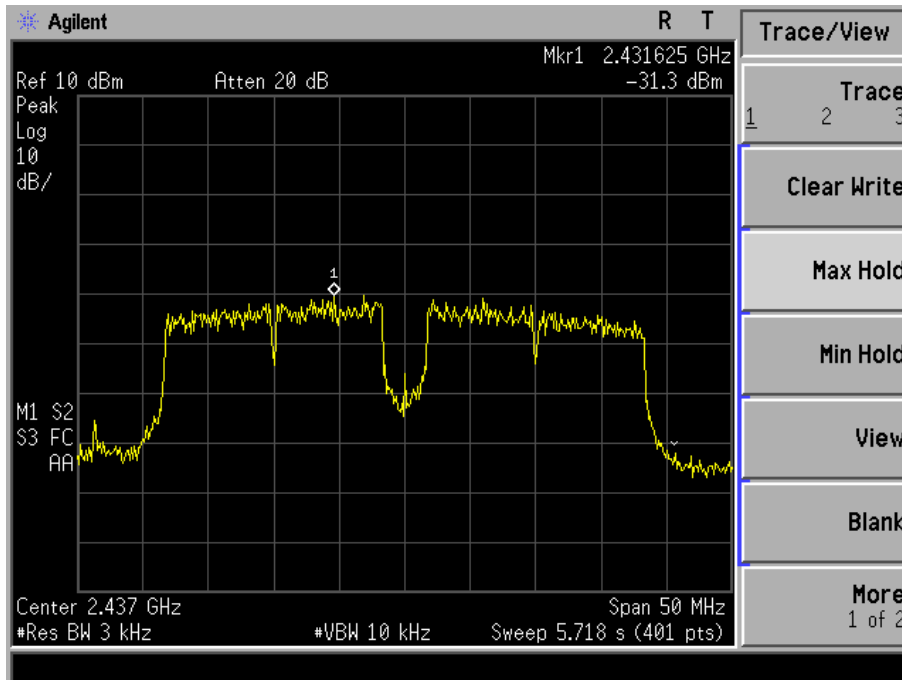


TX CH09

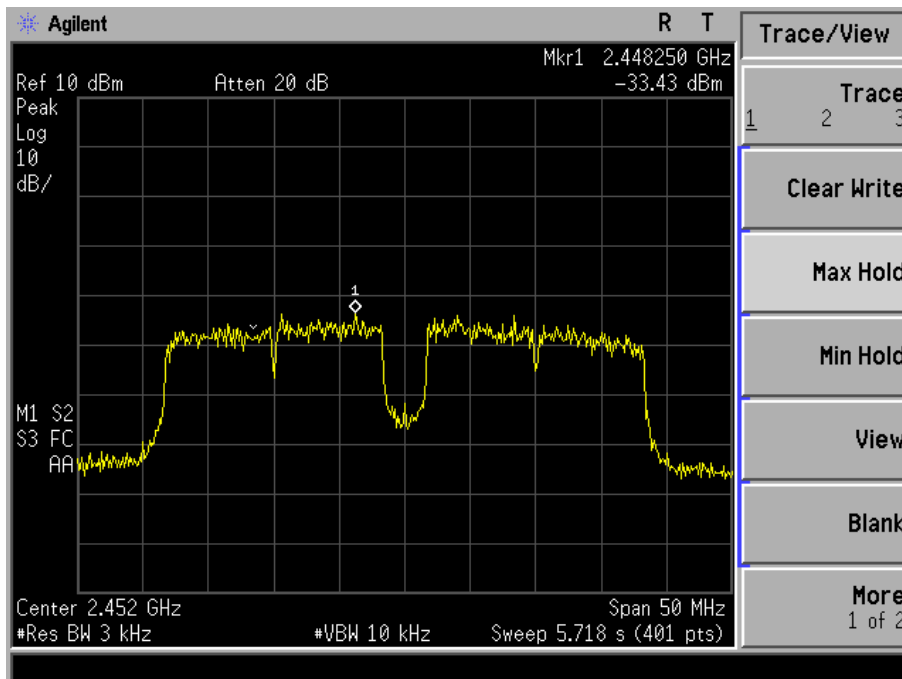




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	BT		

Frequency	Power Spectral Density(dBm)	Limit (dBm)	Result
2402 MHz	-17.36	8	PASS
2440 MHz	-17.53	8	PASS
2480 MHz	-18.01	8	PASS

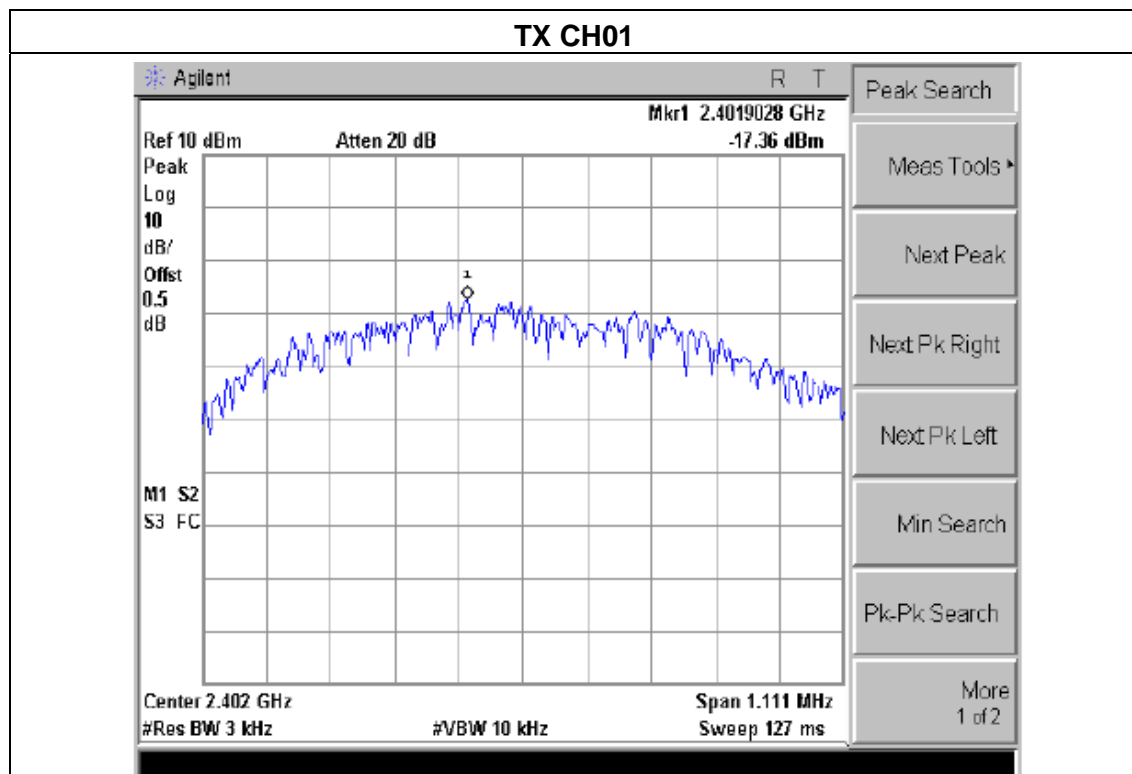




TX CH20

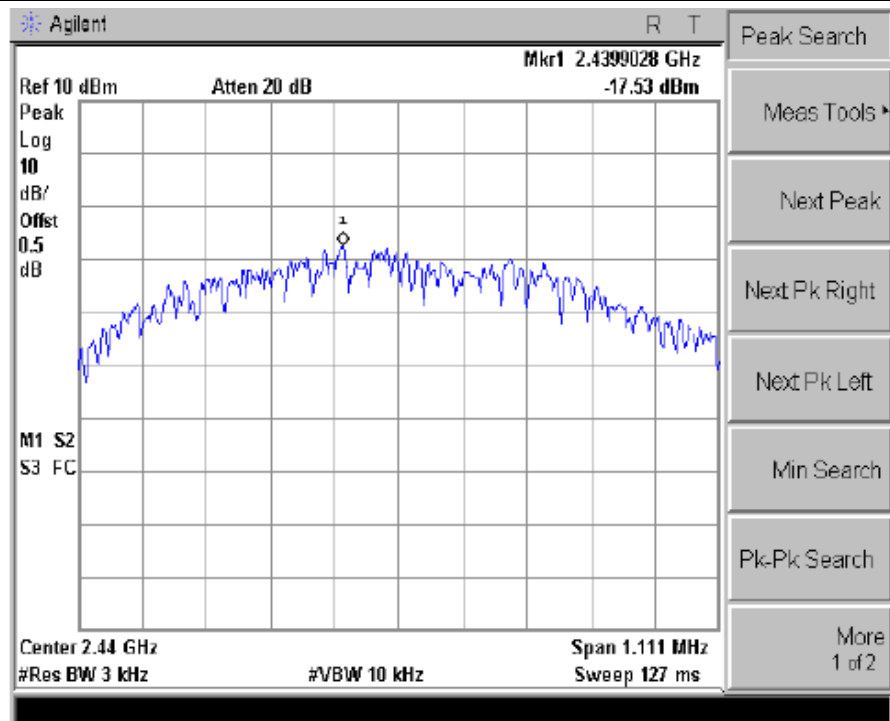

TX CH40

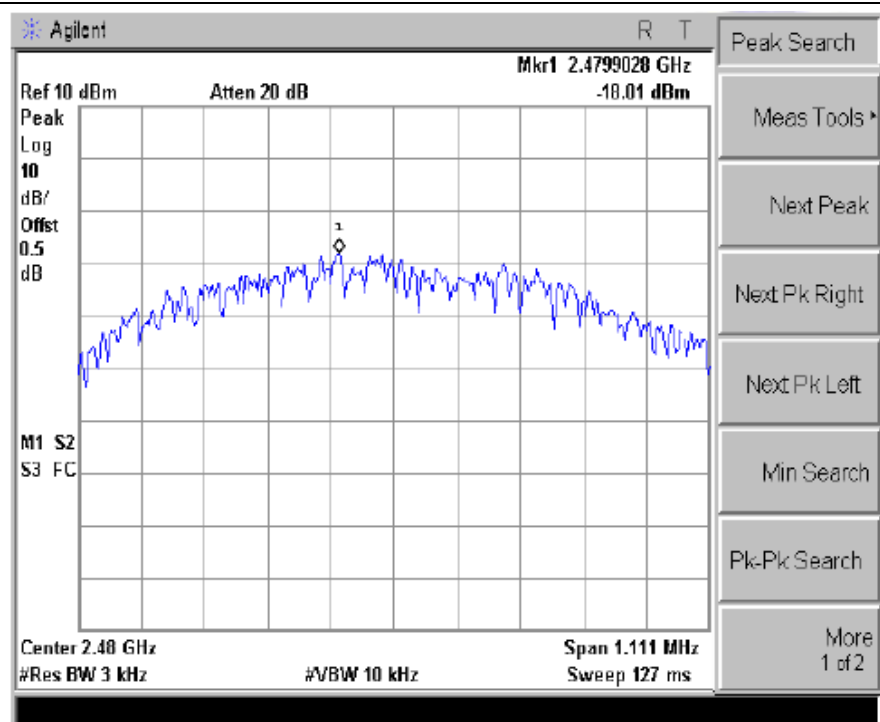



5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




5.1.5 TEST RESULTS

Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX b Mode		


Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
2412	8.106	500	Pass
2437	7.597	500	Pass
2462	7.571	500	Pass

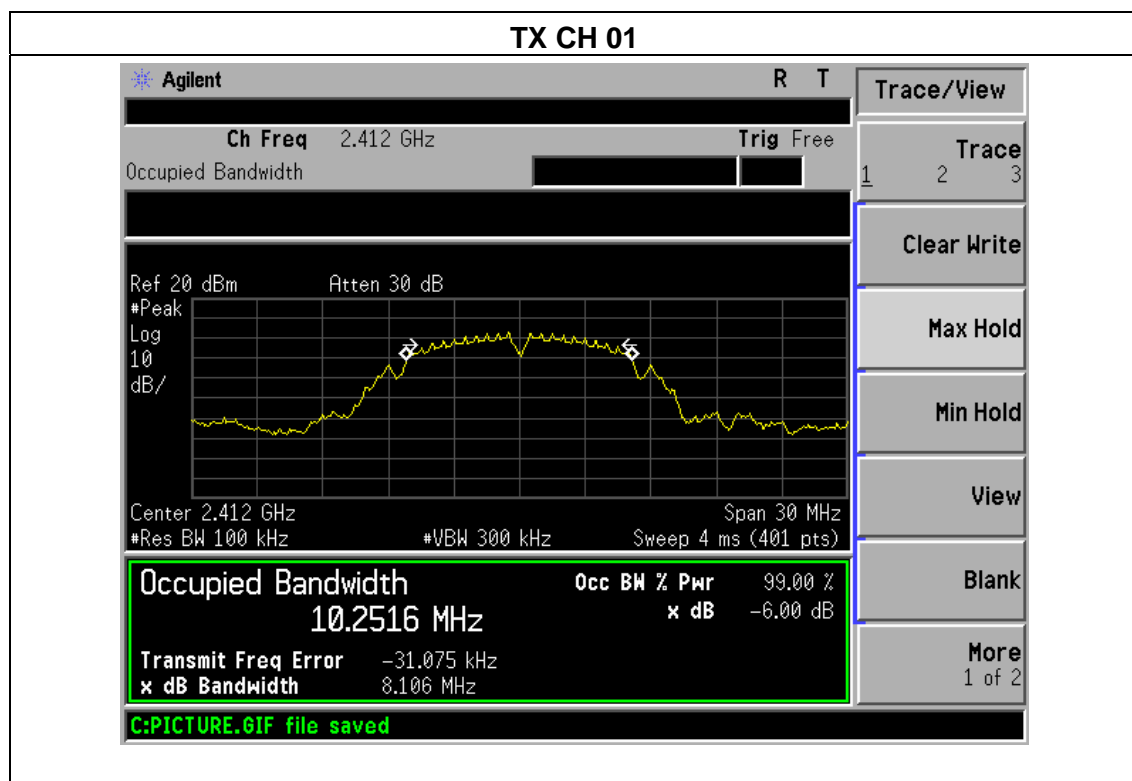

TX CH 06

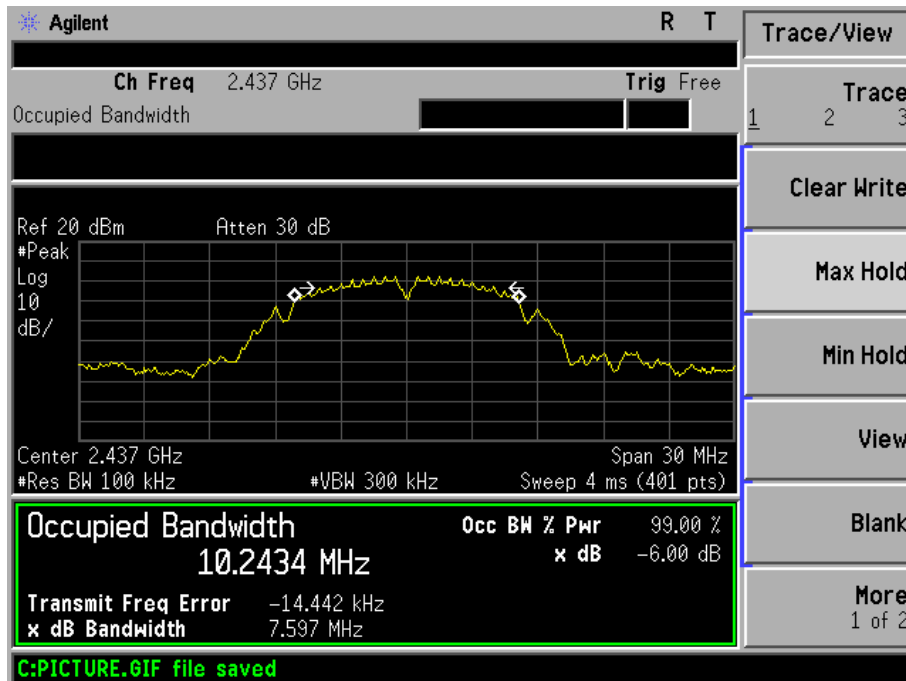


TX CH 11

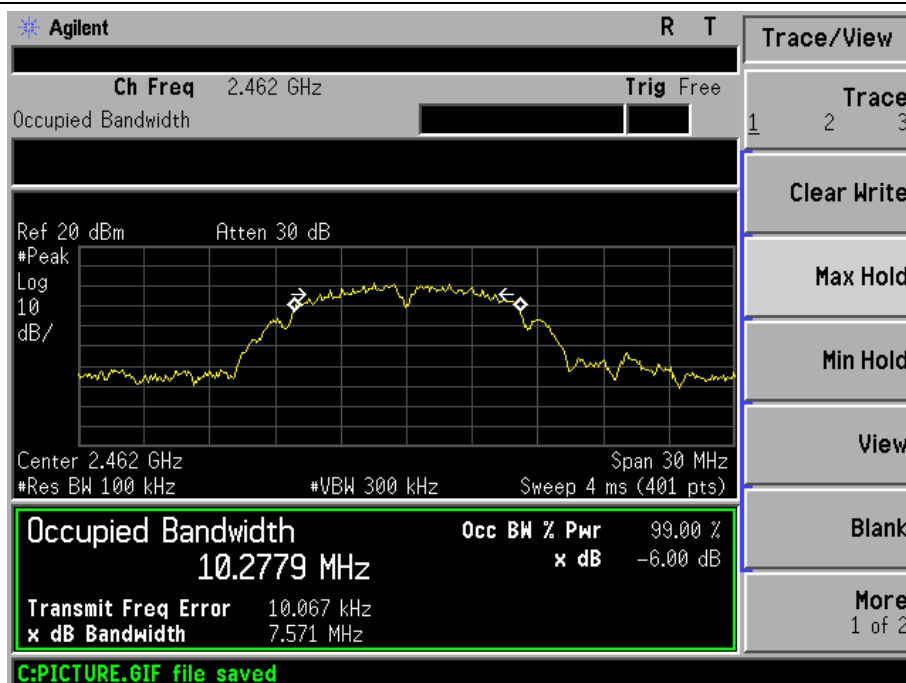




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX g Mode		

Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
2412	16.434	500	Pass
2437	16.425	500	Pass
2462	16.389	500	Pass

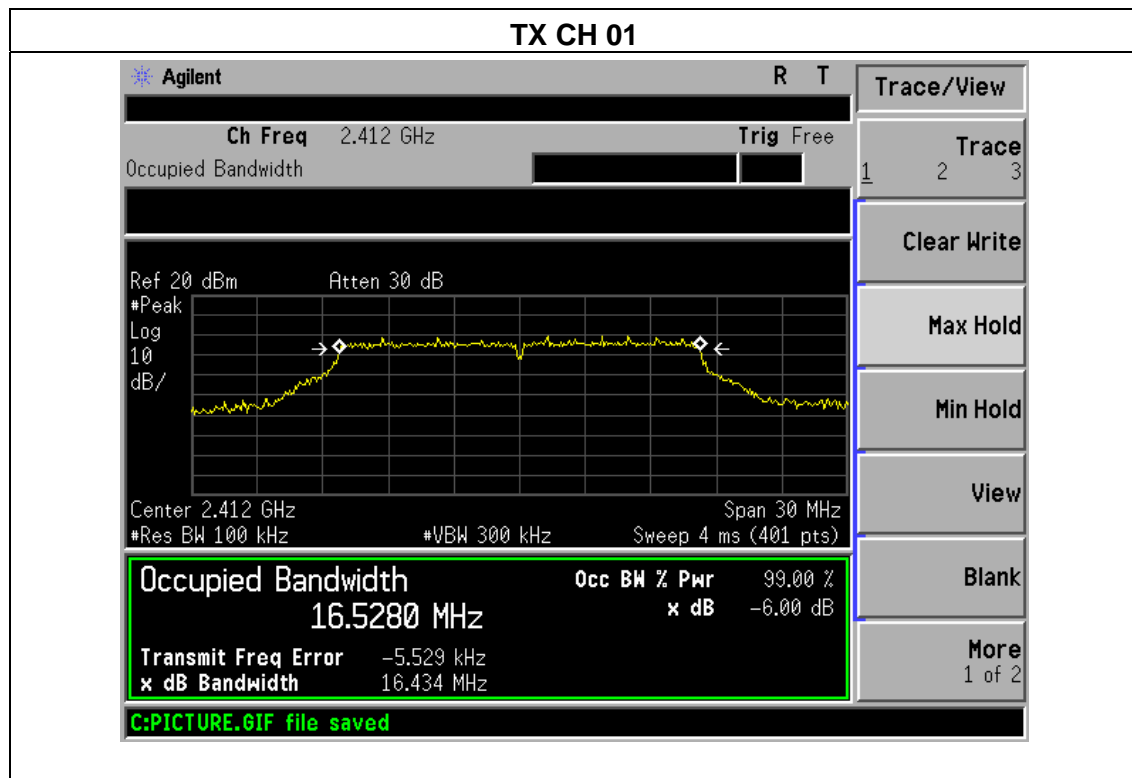




TX CH 06

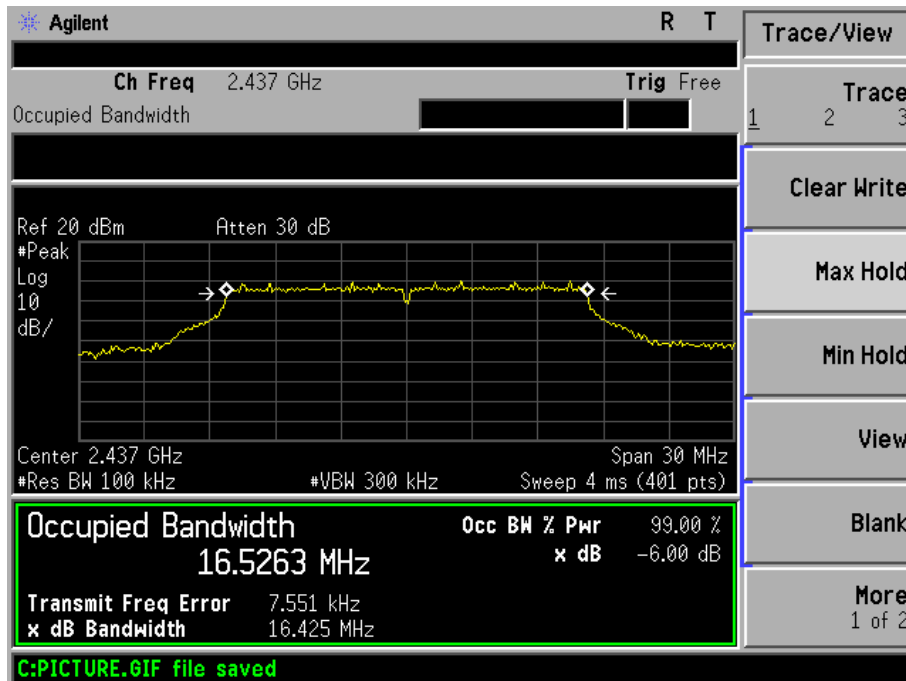


TX CH 11

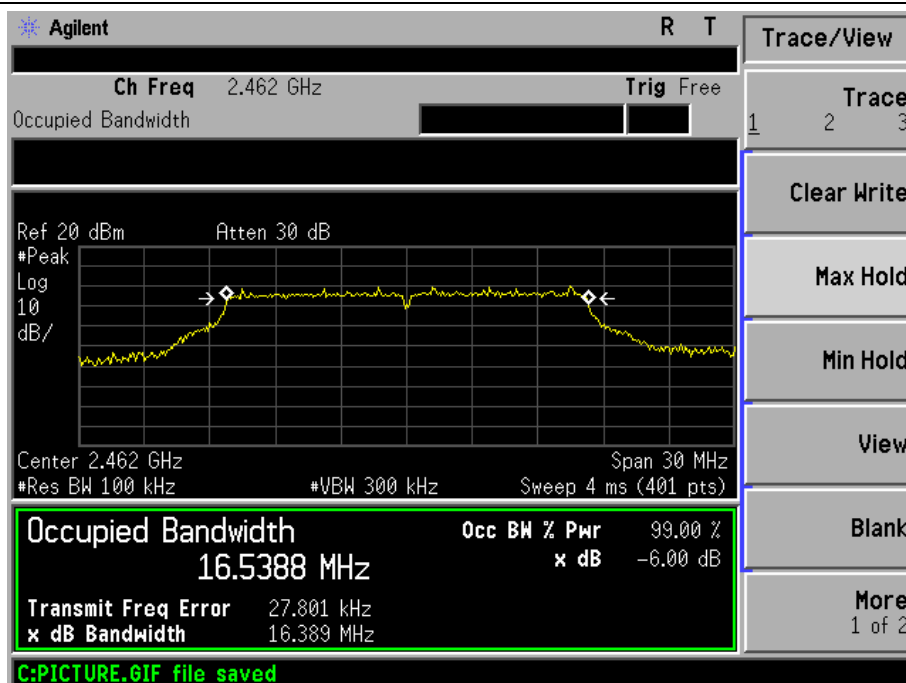




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode(20M)		

Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
2412	17.634	500	Pass
2437	17.651	500	Pass
2462	17.607	500	Pass

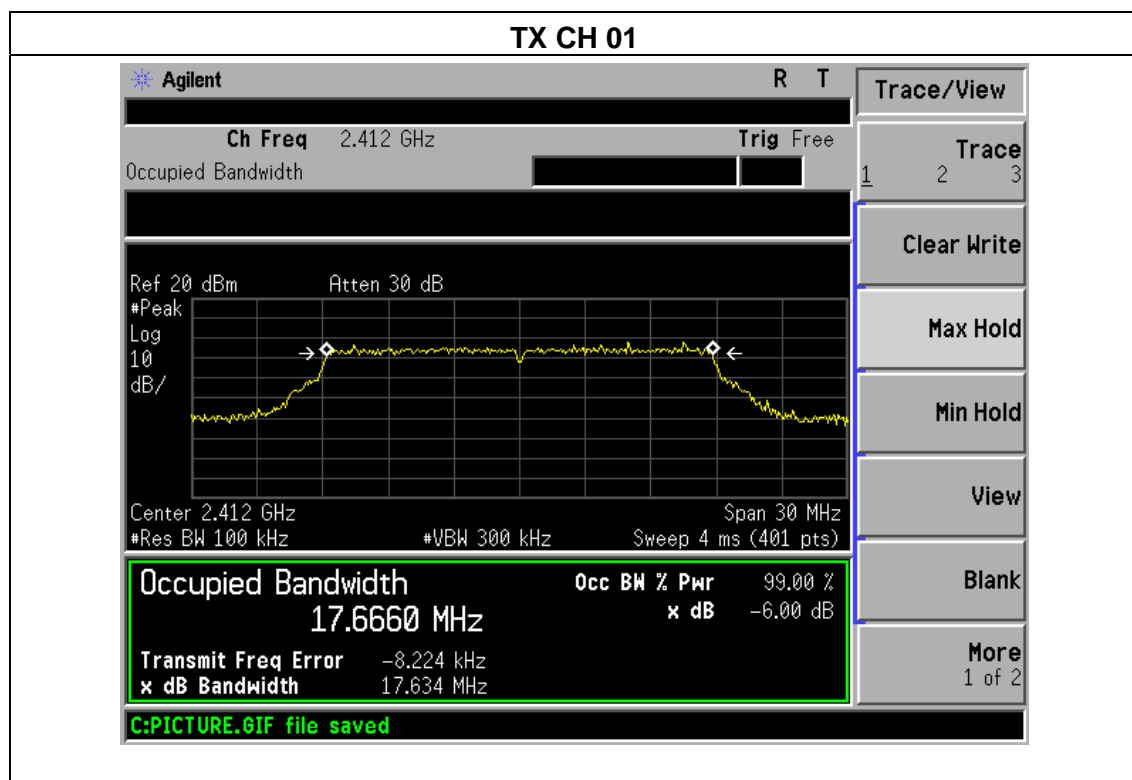




TX CH 06

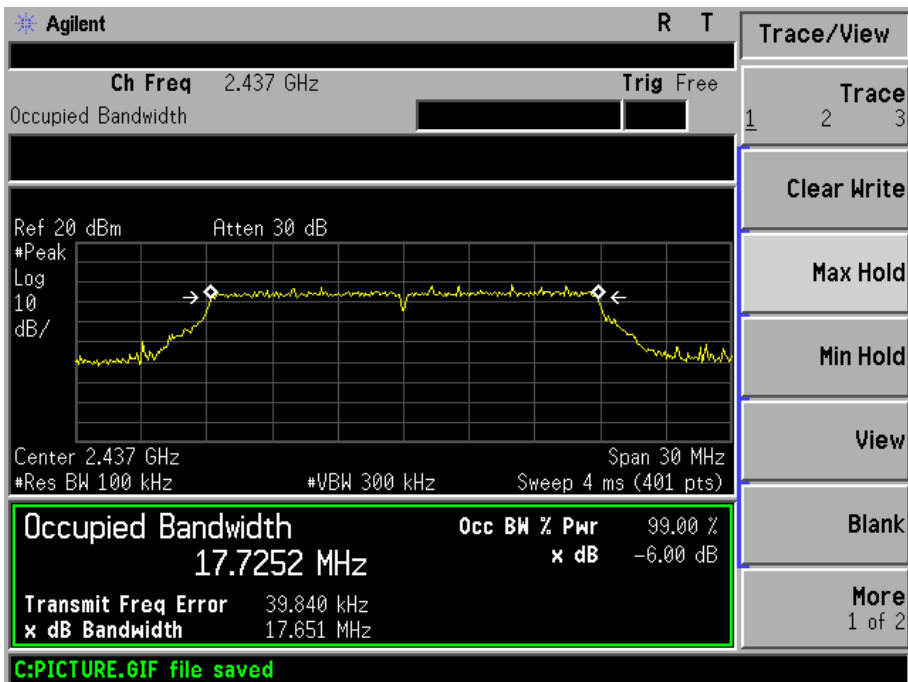



TX CH 11

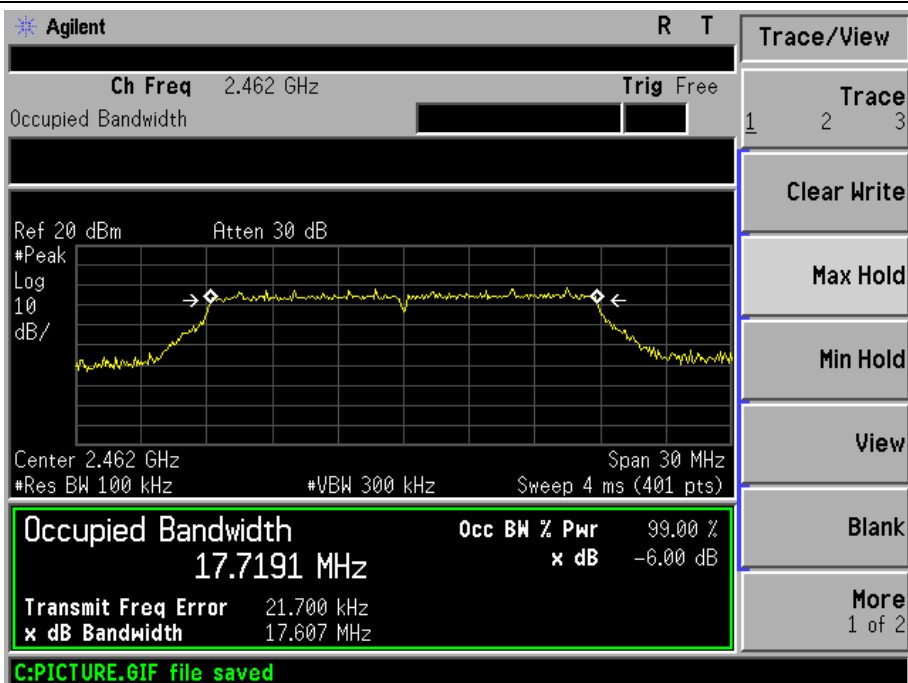



Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
2422	35.259	500	Pass
2437	34.987	500	Pass
2452	35.169	500	Pass




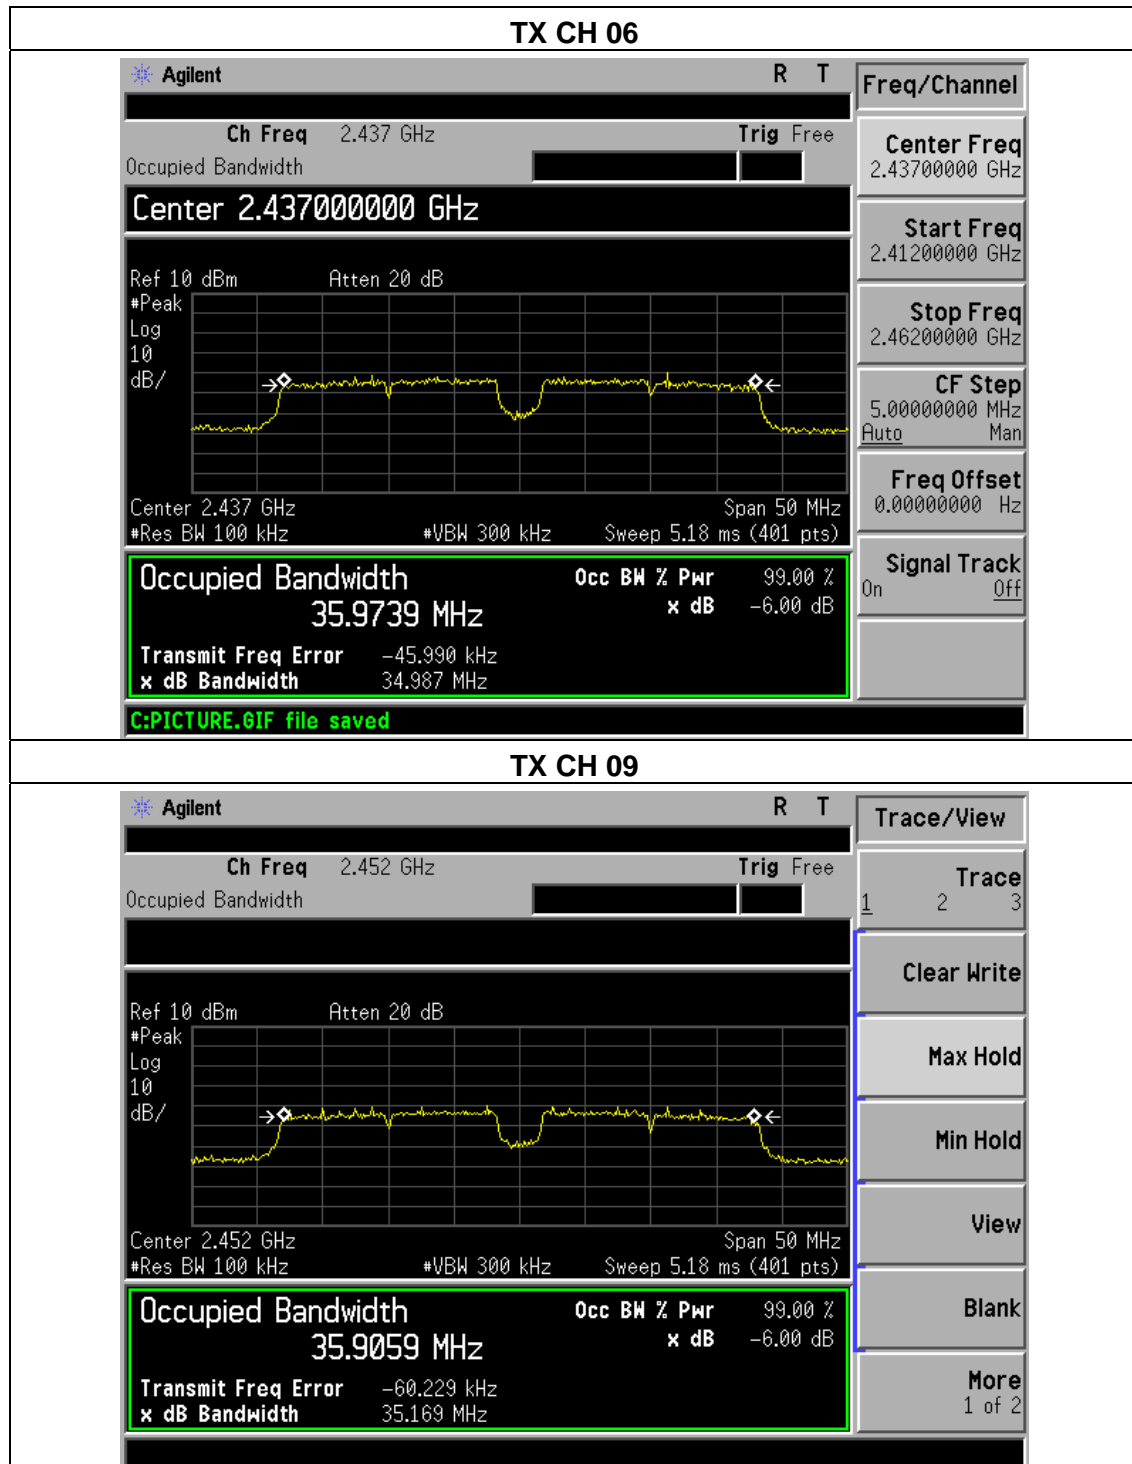




Temperature :	25°C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	BT		

Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
2402	0.740	500	Pass
2440	0.737	500	Pass
2480	0.740	500	Pass

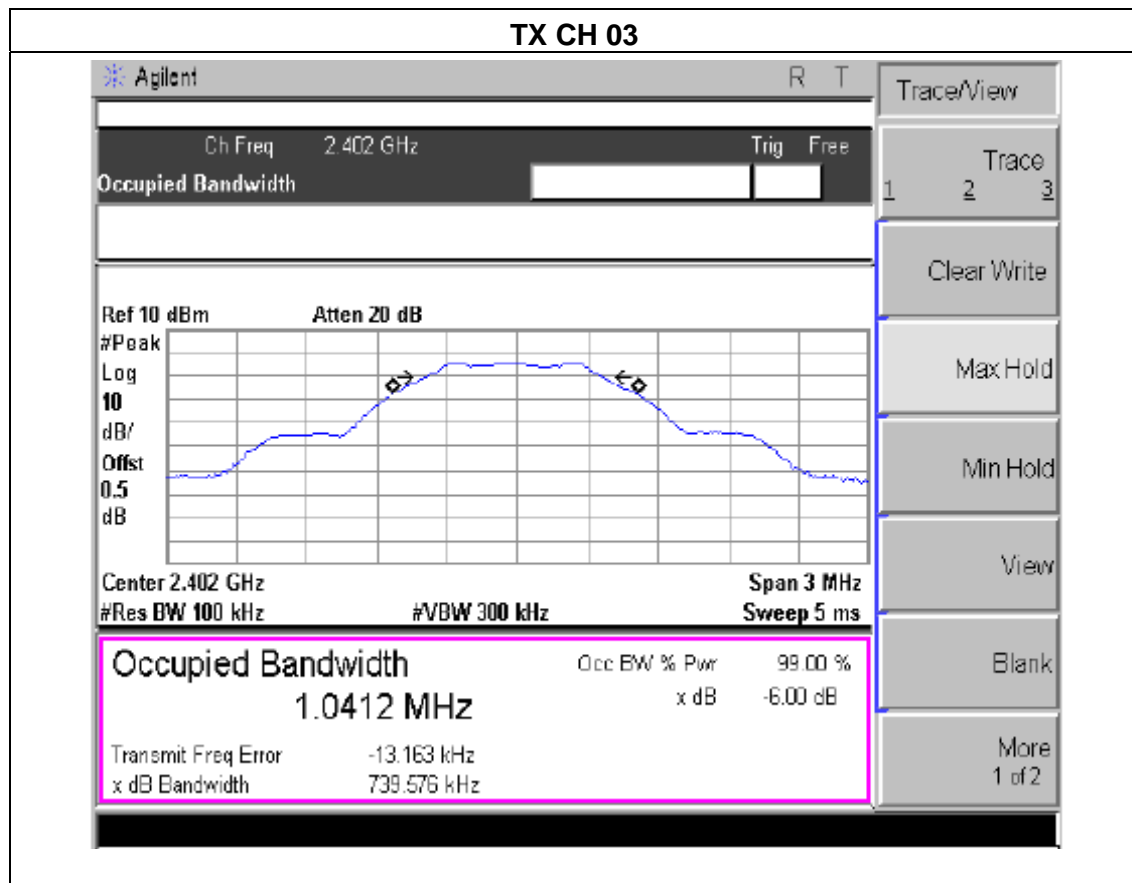

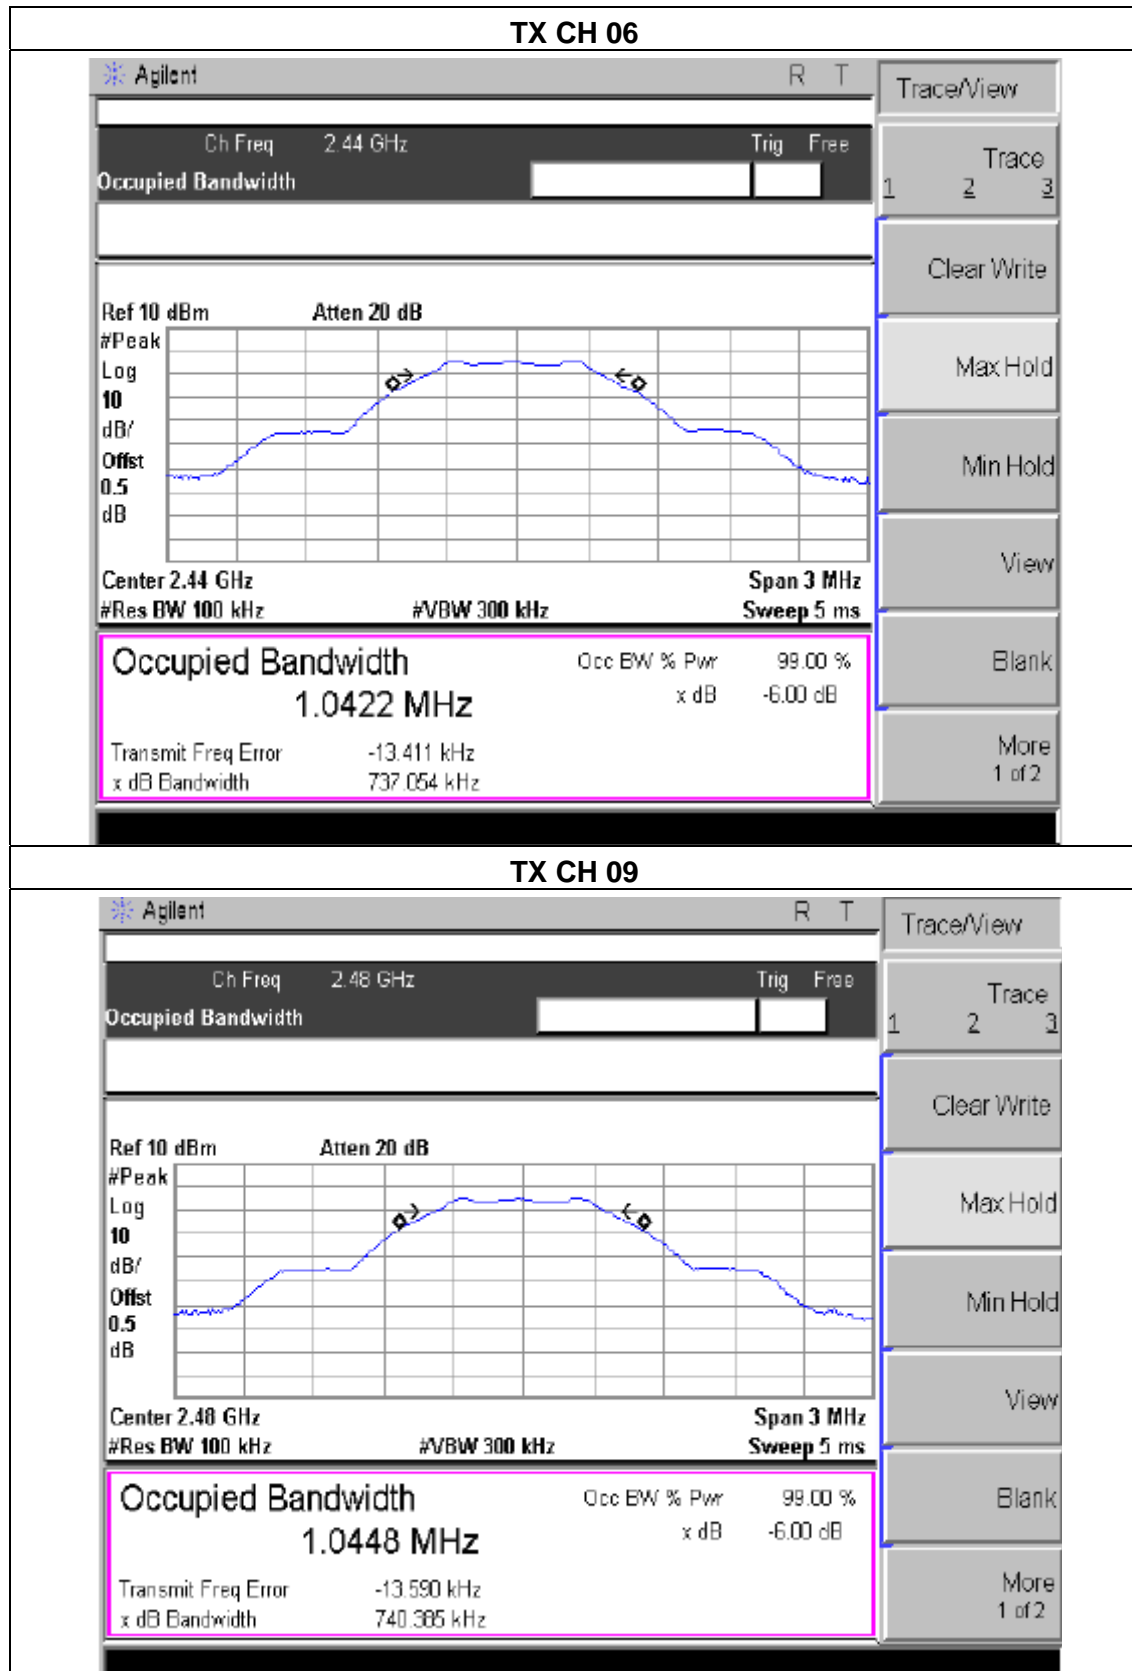



6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



6.1.5 TEST RESULTS

Temperature :	25℃	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V

	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
802.11b	2412	11.85	30
	2437	12.15	30
	2462	11.76	30
802.11g	2412	10.54	30
	2437	10.37	30
	2462	10.22	30
802.11n20	2412	10.63	30
	2437	10.48	30
	2462	10.61	30
802.11n40	2422	9.84	30
	2437	9.79	30
	2452	9.65	30
BT	2402	0.25	30
	2440	0.18	30
	2480	0.05	30



7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

7.1 APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

7.2 TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- Repeat above procedures until all measured frequencies were complete.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP




7.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1 TEST RESULTS

802.11b: Band Edge, Left Side

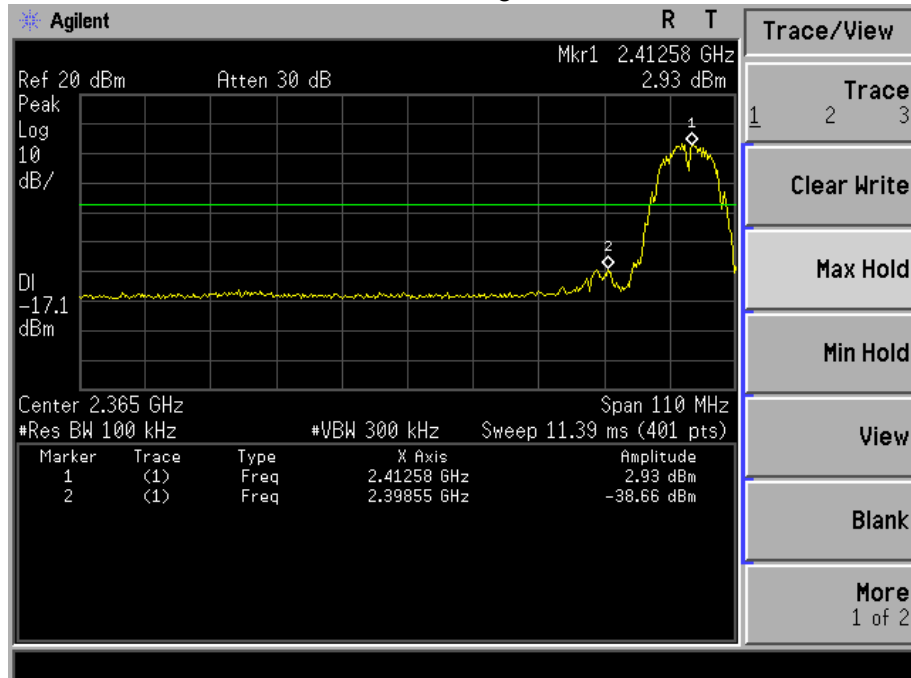


802.11b: Band Edge, Right Side

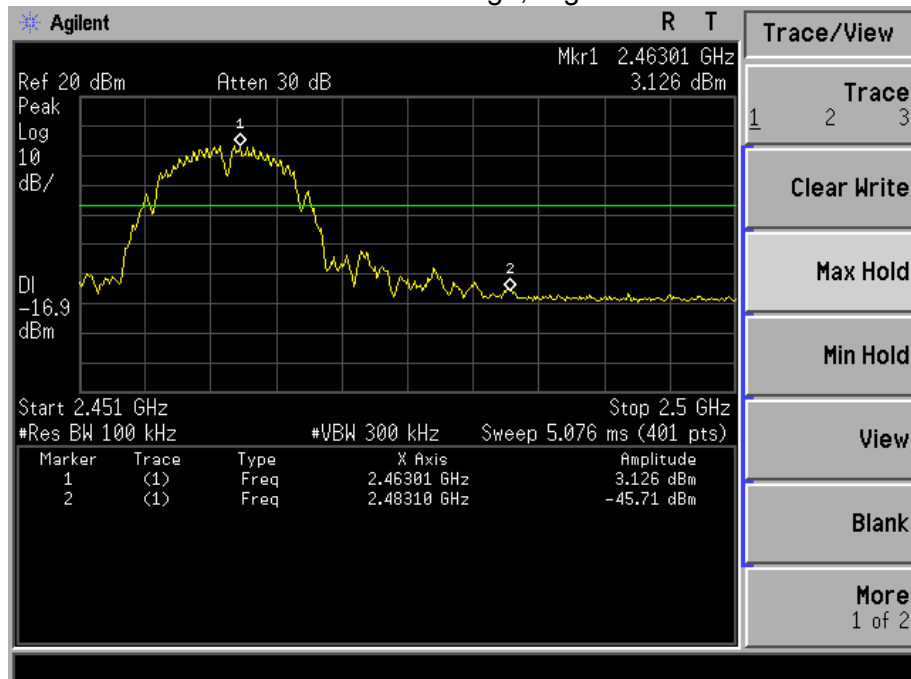





802.11g: Band Edge, Left Side

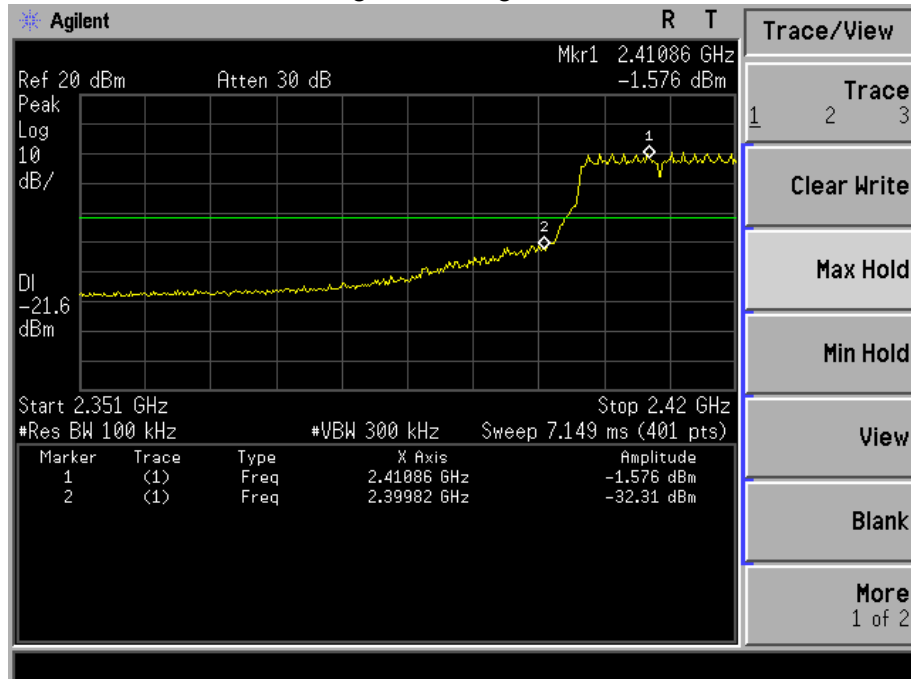


802.11g: Band Edge, Right Side

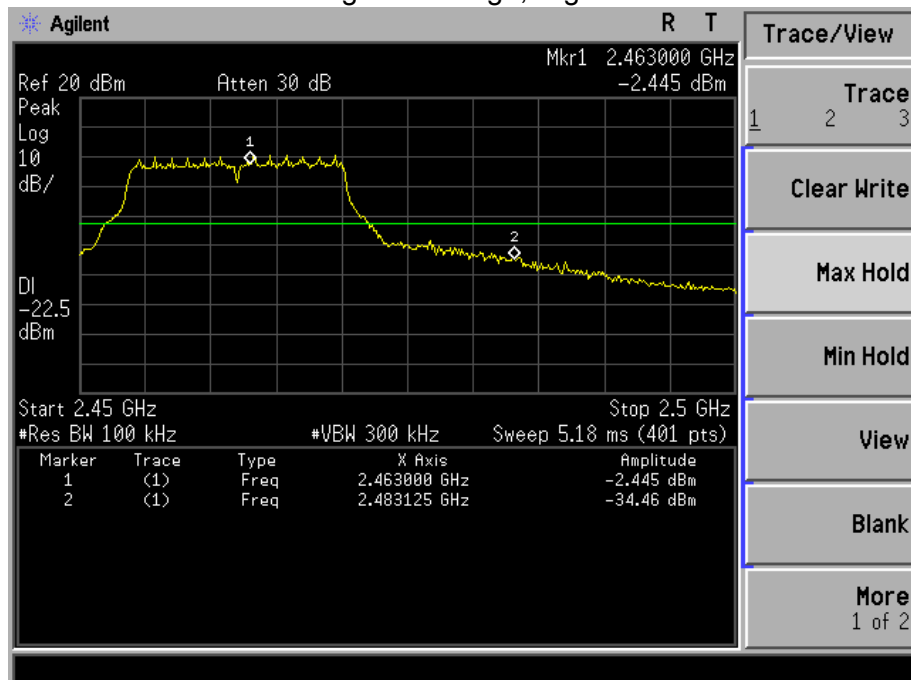


802.11n-HT20: Band Edge, Left Side

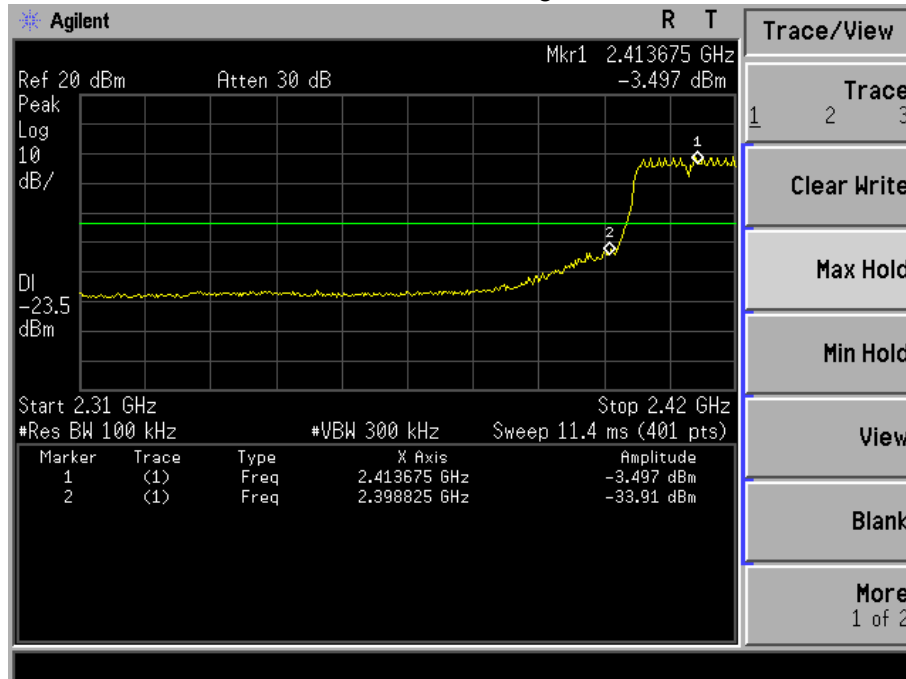


802.11n-HT20: Band Edge, Right Side

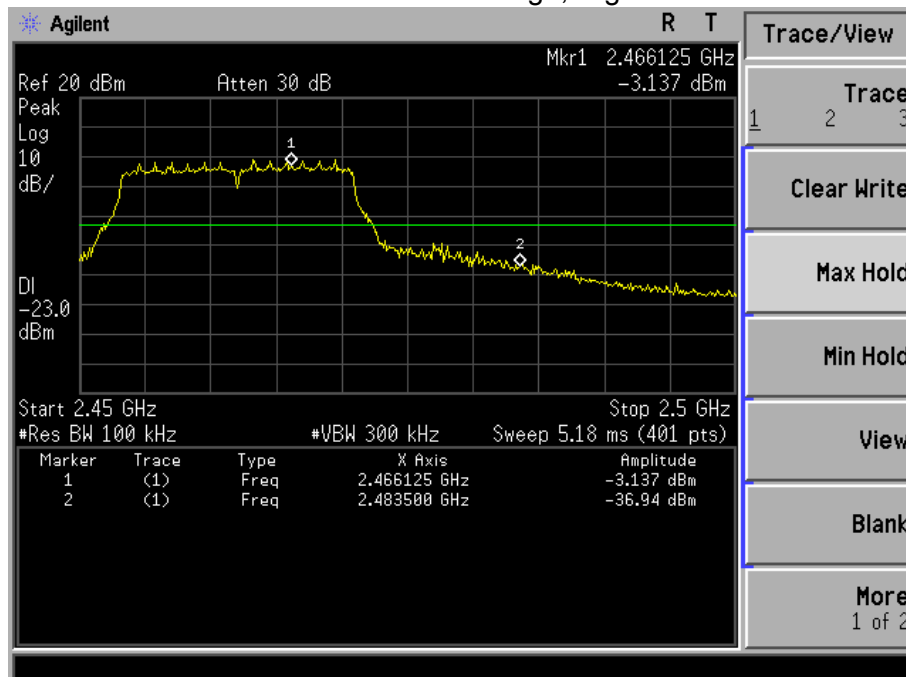


802.11n-HT40: Band Edge, Left Side

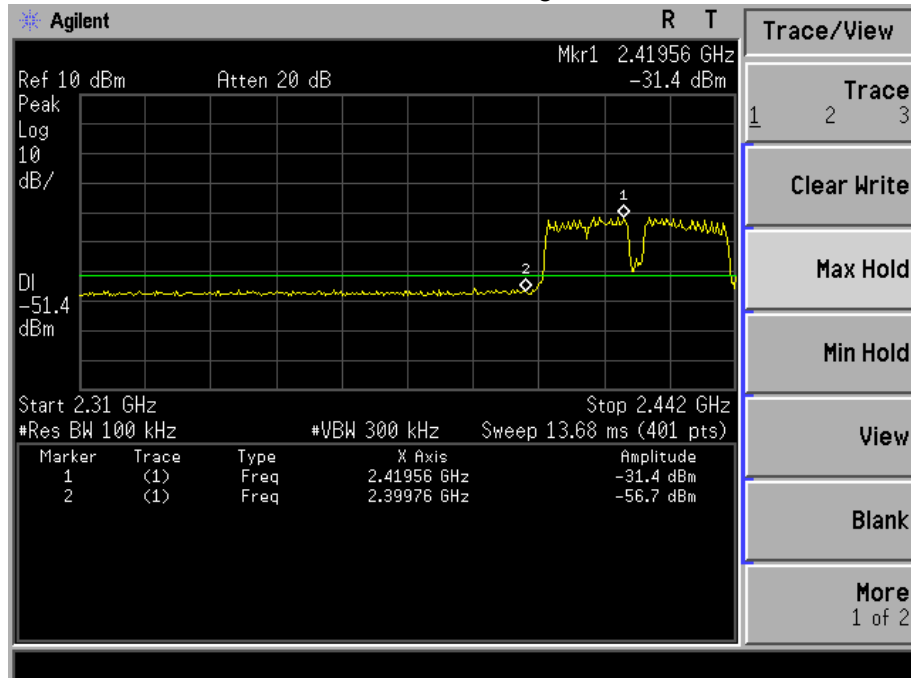


802.11n-HT40: Band Edge, Right Side

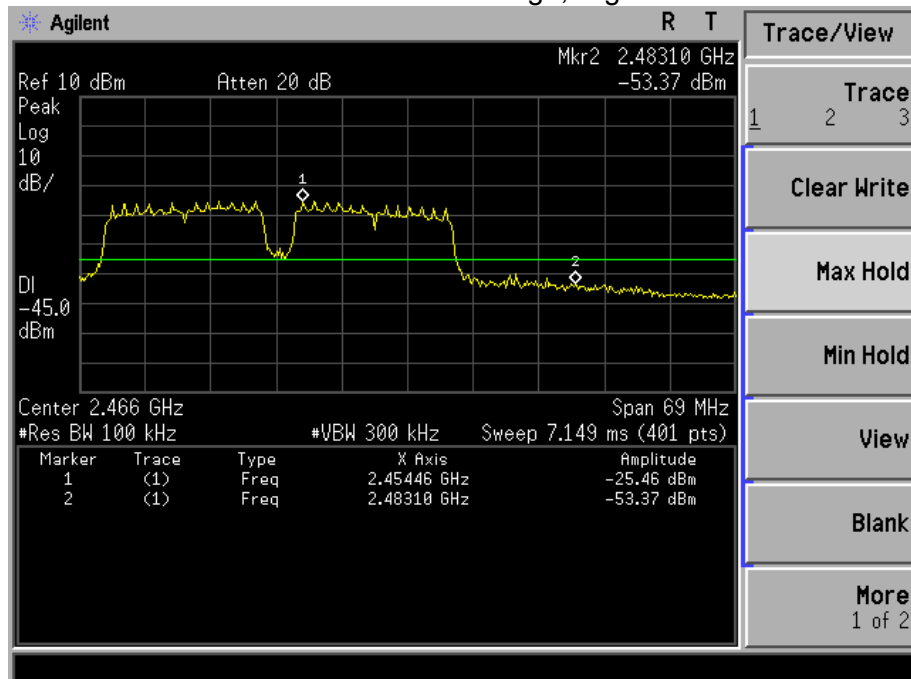

BT: Band Edge, Left Side

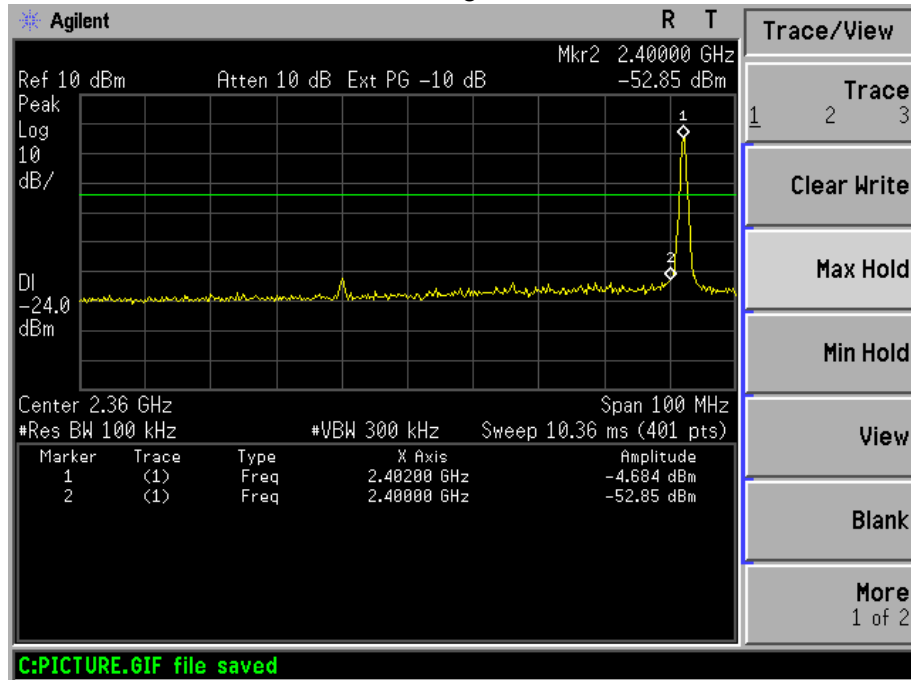

BT: Band Edge, Right Side

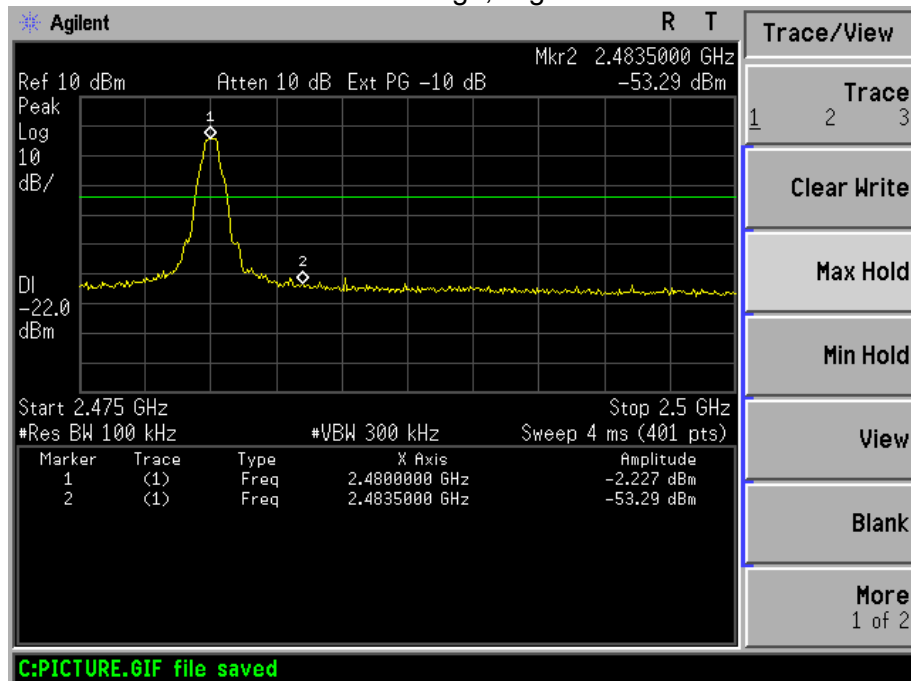



8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT


15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is CHIP antenna, It comply with the standard requirement.

9. EUT TEST PHOTO

Radiated Measurement Photos

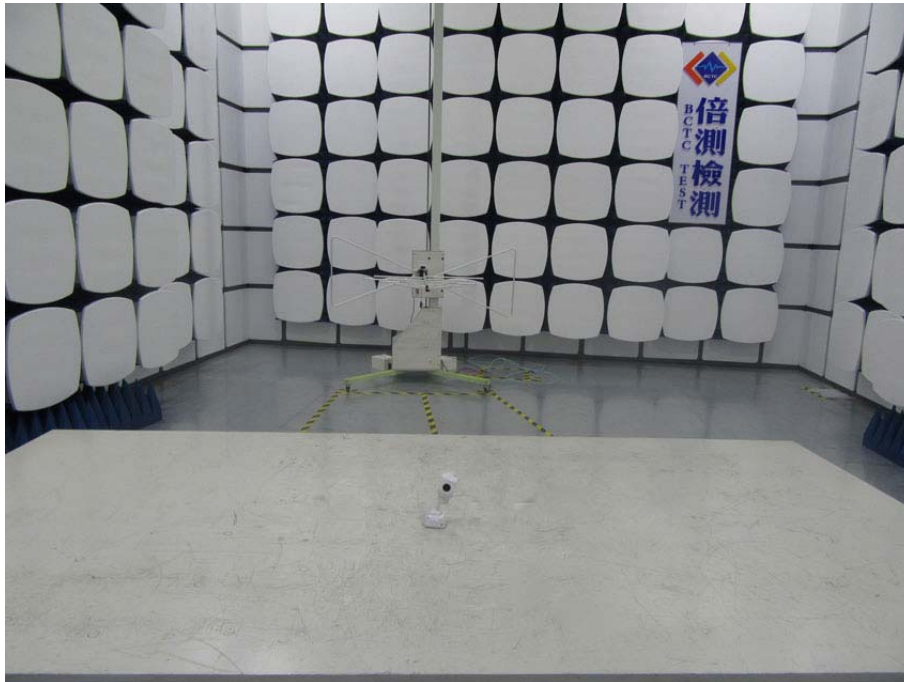

Radiated Measurement Photos



Conducted Emission



10. EUT PHOTO



***** END OF REPORT *****