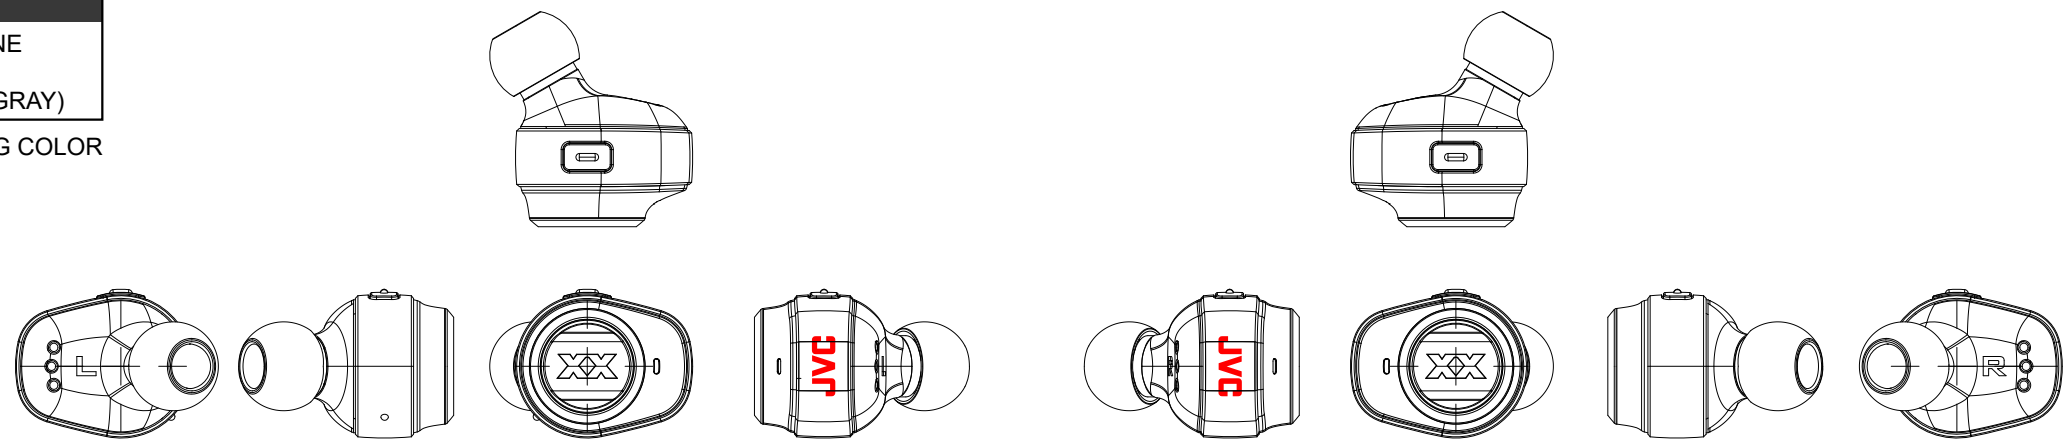PANTONE
425 C
(DARK GRAY)
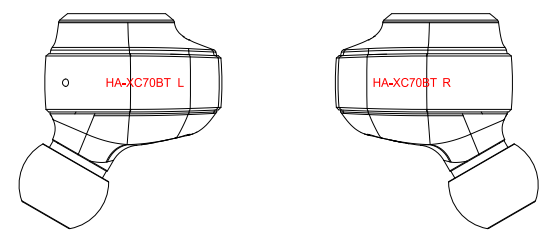
PRINTING COLOR

PANTONE
7540C
(DARK GRAY)

PRINTING COLOR

JPN / F / J ver


HA-XC70BT L

HA-XC70BT R

L side   R side

Made in China

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1)this device may not cause harmful interference,and
(2)this device must accept any interference received, including interference that may cause undesired operation.

IC:12522A-XC70BT
FCC ID:2AKMBHA-XC70BT

CAN ICES-3 B/NMB-3 B

WIRELESS HEADPHONES

INPUT:5V ⎓470mA
CAPACITY:3.7V 520mAh

Model: HA-XC70BT   S/N 09300001 JD6156-J00A

22±0.5 ②

46±0.5 ①

S/N: 09300001

序列號:00001,00002,......生產的序列號要累積,當累積到99999時,再從00001開始累積,產品上的SN序列號要同彩盒上的SN序列號要一致.

生產年份末尾+5: 3表示2018年,取末尾8,加5. 2018年則是3,2019年則是4.

生產月份+5: 09表示04月加5. 5月則為10,6月則為11.

比如:首批2018年4月生產序列號是09300001~09300100, 則2018年5月再生產序列號則是從10300101累積開始......

備註: 1.字體 要求 Arial
　　　2.單位：mm

說明: 1.要求貼紙背膠強粘,可以粘在塑料上和其它紙材上,具體滿足以下條件.
　　　耐磨油墨,能过酒精擦拭
　　　2. 生管通知序號

高溫儲存	60℃ 168H	實驗後,在室溫下各再放置 2HRS以上使之自然乾燥, 無上翹.
低溫儲存	-10℃ 168H	
高溫高溼	40℃ 95%RH 168H	
溫度冲击	-20℃/1H,60℃/1H 4个循环	

2.符合RoHS2.0+REACH+CA65.

MATERIAL 黑底白字,SN處白底黑字過啞膠

FINISH

SELECT V					✓
mm TOL	1	2	3	4	EXTRA
~8	0.03	0.05	0.10	0.20	0.5
8~25	0.05	0.08	0.20	0.30	0.5
25~80	0.08	0.12	0.30	0.40	0.5
80~250	0.12	0.20	0.40	0.50	1.0
250~	0.20	0.30	0.50	0.80	1.0

DRAWING 闫文双 4/20/18`

CHECKED

APPROVED

KINGSTATE KINGSTATE ELECTRONICS CORP.
http://www.kingstate.com.tw

DESCRIPTION 電池座貼紙-美国版

PART NO. KJ212SPDD10-A2

DRAWN NO. DRX-B271

THIRD ANGLE PROJECTION ⊕ ⊟

| SCALE | Unit: | SHEET |
| 1:1 | mm | 1/1 |