



849 NW State Road 45
Newberry, FL 32669 USA
Ph.: 888.472.2424 or
352.472.5500
Fax: 352.472.2030
Email: info@timcoengr.com
Website: www.timcoengr.com

FCC PART 15.249 & IC RSS-210 UNLICENSED INTENTIONAL RADIATOR TEST REPORT

| | |
|-----------------------------|---|
| Applicant | IRADIMED CORPORATION |
| Address | 1025 WILLA SPRINGS DRIVE WINTER SPRINGS FL 32708 |
| FCC ID | 2AKRU-IRM01 |
| IC | 22312-IRM01 |
| Model Number | 3881 |
| Product Description | MRI WIRELESS ECG ePOD |
| Date Sample Received | 12/8/2016 |
| Final Test Date | 03/10/2017 |
| Tested By | Tim Royer |
| Approved By | Cory Leverett |

| Report Number | Version Number | Description | Issue Date |
|----------------------|----------------|------------------------------------|------------|
| 2449AUT16TestReport_ | Rev1 | Initial Issue | 01/16/2017 |
| 2449AUT16TestReport_ | Rev1 | Added Bandedge plots pg 11 - 13 | 03/10/2017 |

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

TABLE OF CONTENTS

| | |
|---|----|
| GENERAL INFORMATION | 4 |
| EUT Specification | 4 |
| Test Supporting Equipment | 4 |
| RESULTS SUMMARY | 5 |
| OCCUPIED BANDWIDTH | 6 |
| Test Data: Measurement Table..... | 6 |
| Test Data: Low end of Band Plot..... | 7 |
| Test Data: Middle of Band Plot | 8 |
| Test Data: High end of Band Plot | 9 |
| BANDEDGE | 10 |
| Test Data: Measurement Table..... | 10 |
| Test Data: Low end of Band Peak Plot | 11 |
| Test Data: Low end of Band Average Plot | 12 |
| Test Data: Upper end of Band Peak Plot | 13 |
| Test Data: Upper end of Band Average Plot | 14 |
| RADIATED SPURIOUS EMISSIONS | 15 |
| Test Data: Measurement Table..... | 17 |
| EMC EQUIPMENT LIST | 18 |

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

- ☒ Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- ☐ Not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669



Tested by:

Name and Title: **Tim Royer**, Project Manager/Testing Engineer

Date: 03/10/2017



Reviewed and approved by:

Name and Title: Cory Leverett, Engineering Project Manager

Date: 03/10/2017

Applicant: IRADIMED CORPORATION
FCC ID: 2AKRU-IRM01
IC: 22312-IRM01
Report: 2449AUT16TestReport_Rev1

[Table of Contents](#)

GENERAL INFORMATION

EUT Specification

| | | | |
|----------------------|---|---|--|
| Regulatory Standards | FCC Title 47 CFR Part 15.249 IC RSS-210 Issue 8 A2.9 & RSS-GEN Issue 4 | | |
| FCC ID | 2AKRU-IRM01 | | |
| IC | 22312-IRM01 | | |
| Model | 3881 | | |
| EUT Description | MRI WIRELESS ECG ePOD | | |
| Modulation Type | GFSK | | |
| Operating Frequency | TX: 2404 – 2434 MHz | RX: 2404 – 2434 MHz | |
| EUT Power Source | <input type="checkbox"/> 110–120Vac/50– 60Hz | | |
| | <input type="checkbox"/> DC Power | | |
| | <input checked="" type="checkbox"/> Battery Operated Exclusively 3.7 VDC | | |
| Test Item | <input type="checkbox"/> Prototype | <input type="checkbox"/> Pre-Production | <input checked="" type="checkbox"/> Production |
| Type of Equipment | <input type="checkbox"/> Fixed | <input type="checkbox"/> Mobile | <input checked="" type="checkbox"/> Portable |
| Antenna Connector | None | | |
| Antenna | Integral | | |
| Test Conditions | Temperature: 24-26°C Relative humidity: 50-65% | | |
| Measurement Standard | ANSI C63.10-2013 ANSI C63.4-2014 (Radiated Site Validation) | | |

Test Supporting Equipment

| Device | Manufacturer | Model | S/N | Supplied By | Used For |
|--------|--------------|-------|-----|-------------|----------|
| N/A | | | | | |

RESULTS SUMMARY

| FCC Rule Part No. | IC Standard Ref. | Requirement | Test Item | Result |
|-------------------|-------------------|---------------------------|-----------------------------|--------|
| 2.1049 | RSS-GEN 6.6 | Occupied Bandwidth | 99% Bandwidth | Pass |
| 15.249(a)(c) | RSS-210 § A2.9(a) | Fundamental and Harmonics | Radiated Spurious Emissions | Pass |
| 15.249(d)(e) | RSS-247 § 5.5 | Spurious Emissions | Bandedge | Pass |
| | | | Radiated Spurious Emissions | Pass |

Notes: none

OCCUPIED BANDWIDTH


Rules Part No.: FCC 2.1049, IC RSS GEN § 6.6

FCC Requirements: Reporting only

IC Requirements: Reporting Only

Test Method: THE TEST PROCEDURES USED ARE DETAILED IN THE STANDARD LISTED ABOVE.

Setup:

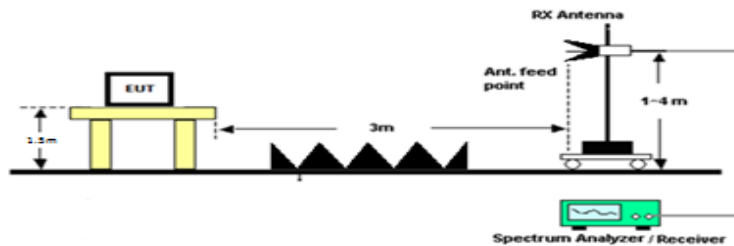


Test Data: Measurement Table

| Tuned Frequency (MHz) | 99% BW (KHz) |
|-----------------------|--------------|
| 2404 | 861.4 |
| 2412 | 867.0 |
| 2434 | 867.0 |

RESULTS:

OCCUPIED BANDWIDTH

Test Data: Low end of Band Plot

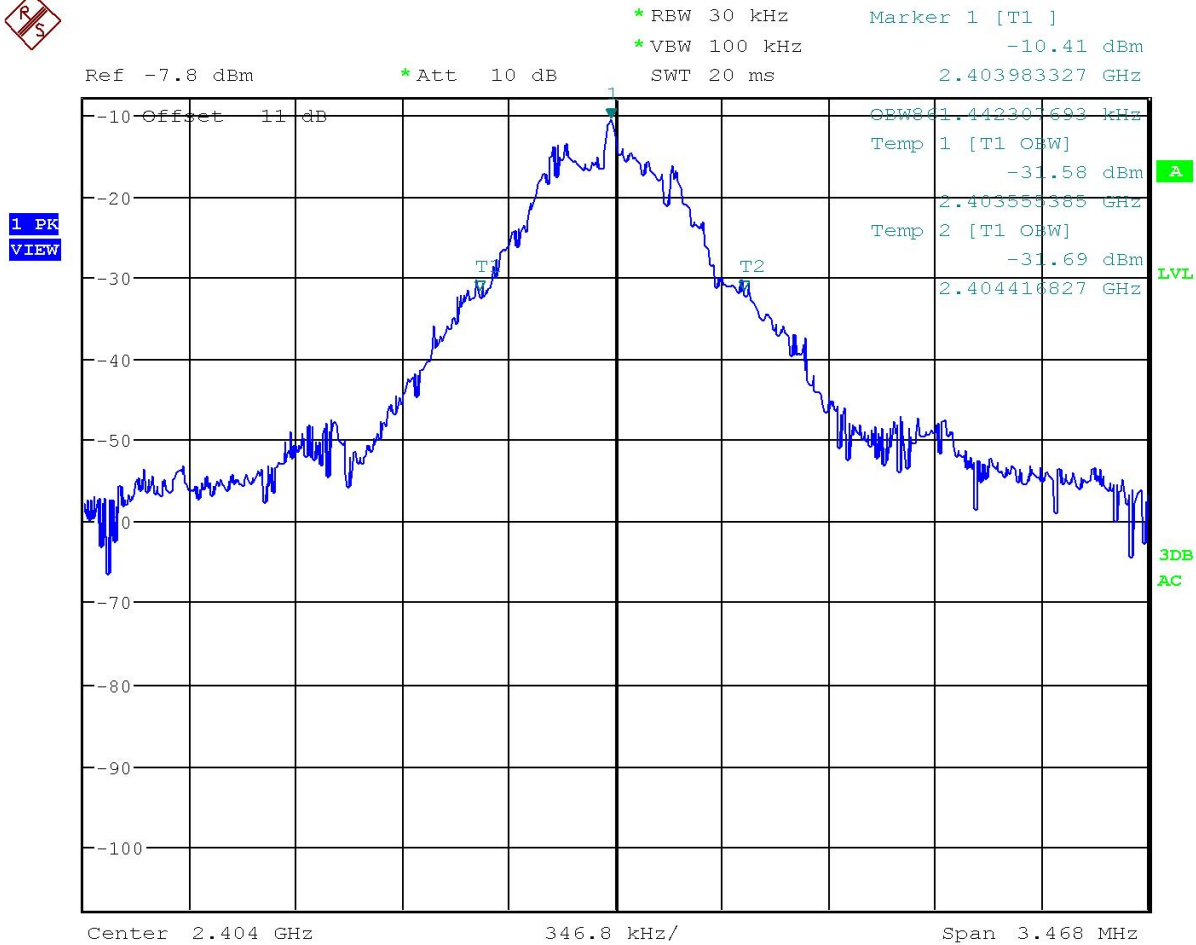

Date: 16.JAN.2017 11:36:10

RESULTS: Meets Requirements

Applicant: IRADIMED CORPORATION
 FCC ID: 2AKRU-IRM01
 IC: 22312-IRM01
 Report: 2449AUT16TestReport_Rev1

[Table of Contents](#)

OCCUPIED BANDWIDTH

Test Data: Middle of Band Plot




* RBW 30 kHz
* VBW 100 kHz
SWT 20 ms
Marker 1 [T1]
-18.70 dBm
2.411983327 GHz

Ref -7.8 dBm

* Att 10 dB

SWT 20 ms

2.411983327 GHz

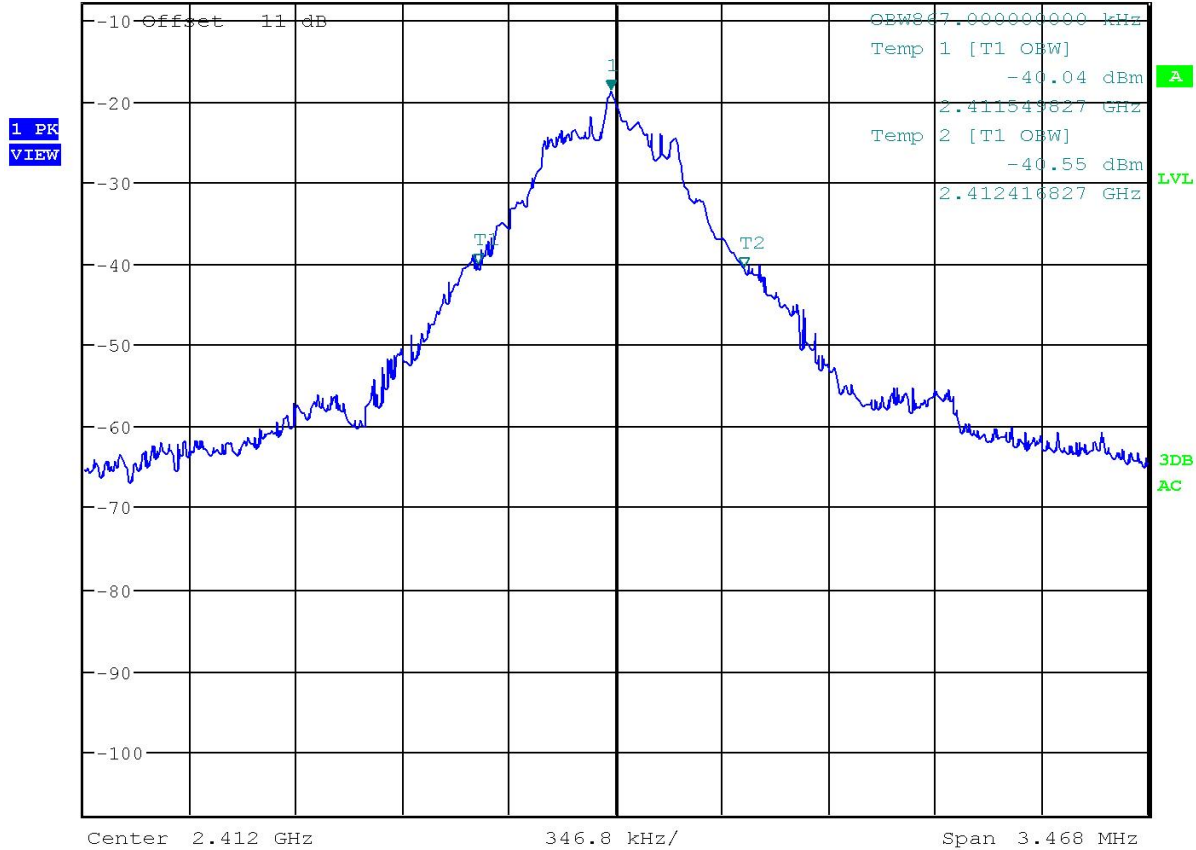

Date: 16.JAN.2017 14:14:01


RESULTS: Meets Requirements

Applicant: IRADIMED CORPORATION
FCC ID: 2AKRU-IRM01
IC: 22312-IRM01
Report: 2449AUT16TestReport_Rev1

[Table of Contents](#)

OCCUPIED BANDWIDTH

Test Data: High end of Band Plot

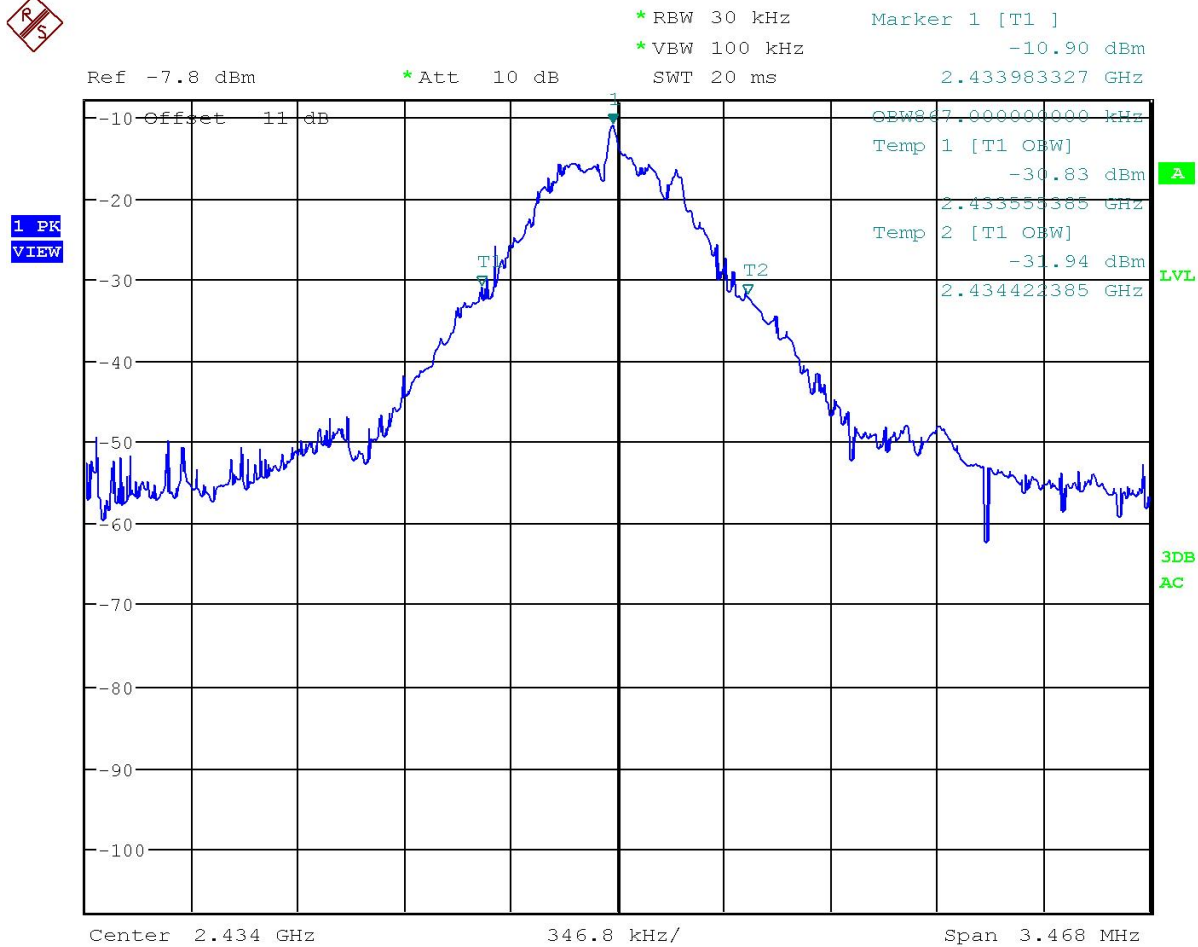

Date: 16.JAN.2017 11:33:48

RESULTS: Meets Requirements

Applicant: IRADIMED CORPORATION
 FCC ID: 2AKRU-IRM01
 IC: 22312-IRM01
 Report: 2449AUT16TestReport_Rev1

[Table of Contents](#)


BANDEDGE

Rule Part No.: FCC 15.249(d), IC RSS 210 § A2.9(b)

Requirements: Emissions must be at least 50 dB down from the highest emission level Within the authorized band as measured with a 100 kHz RBW, or to the limits of 15.209.

Test Method: THE TEST PROCEDURES USED ARE DETAILED IN THE STANDARD LISTED ABOVE.

Setup:

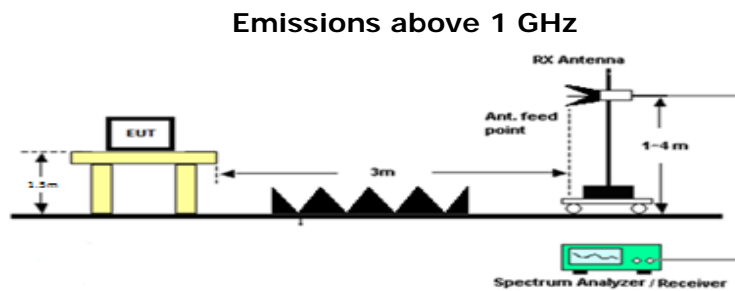

Test Data: Bandedge Measurement Table

| Tuned Frequency (MHz) | Emission Frequency (MHz) | Detector (PK/AV) | Read Level (dBuV) | Polarity | Coax Loss (dB) | ACF (dB) | Field Strength (dBuV/M) | Limit (dBuV/M) | Margin (dB) |
|-----------------------|--------------------------|------------------|-------------------|----------|----------------|----------|-------------------------|----------------|-------------|
| 2404 | 2399.73 | Peak | 19.00 | V | 5.69 | 31.89 | 56.58 | 74 | 17.48 |
| 2404 | 2399.73 | Average | 1.75 | V | 5.69 | 31.89 | 39.33 | 54 | 14.67 |
| 2434 | 2484.30 | Peak | 14.69 | V | 5.78 | 32.67 | 53.14 | 74 | 20.86 |
| 2434 | 2484.30 | Average | 1.53 | V | 5.78 | 32.67 | 39.98 | 54 | 14.02 |


Results Meet Requirements

BANDEDGE

Test Data: Lower Bandedge Peak Plot



| | | | | | |
|---------|----------------|-----|-------|--------|------|
| Ref Lvl | Marker 1 [T1] | RBW | 1 MHz | RF Att | 0 dB |
| 72 dBμV | 19.00 dBμV | VBW | 3 MHz | | |
| | 2.39973146 GHz | SWT | 5 ms | Unit | dBμV |

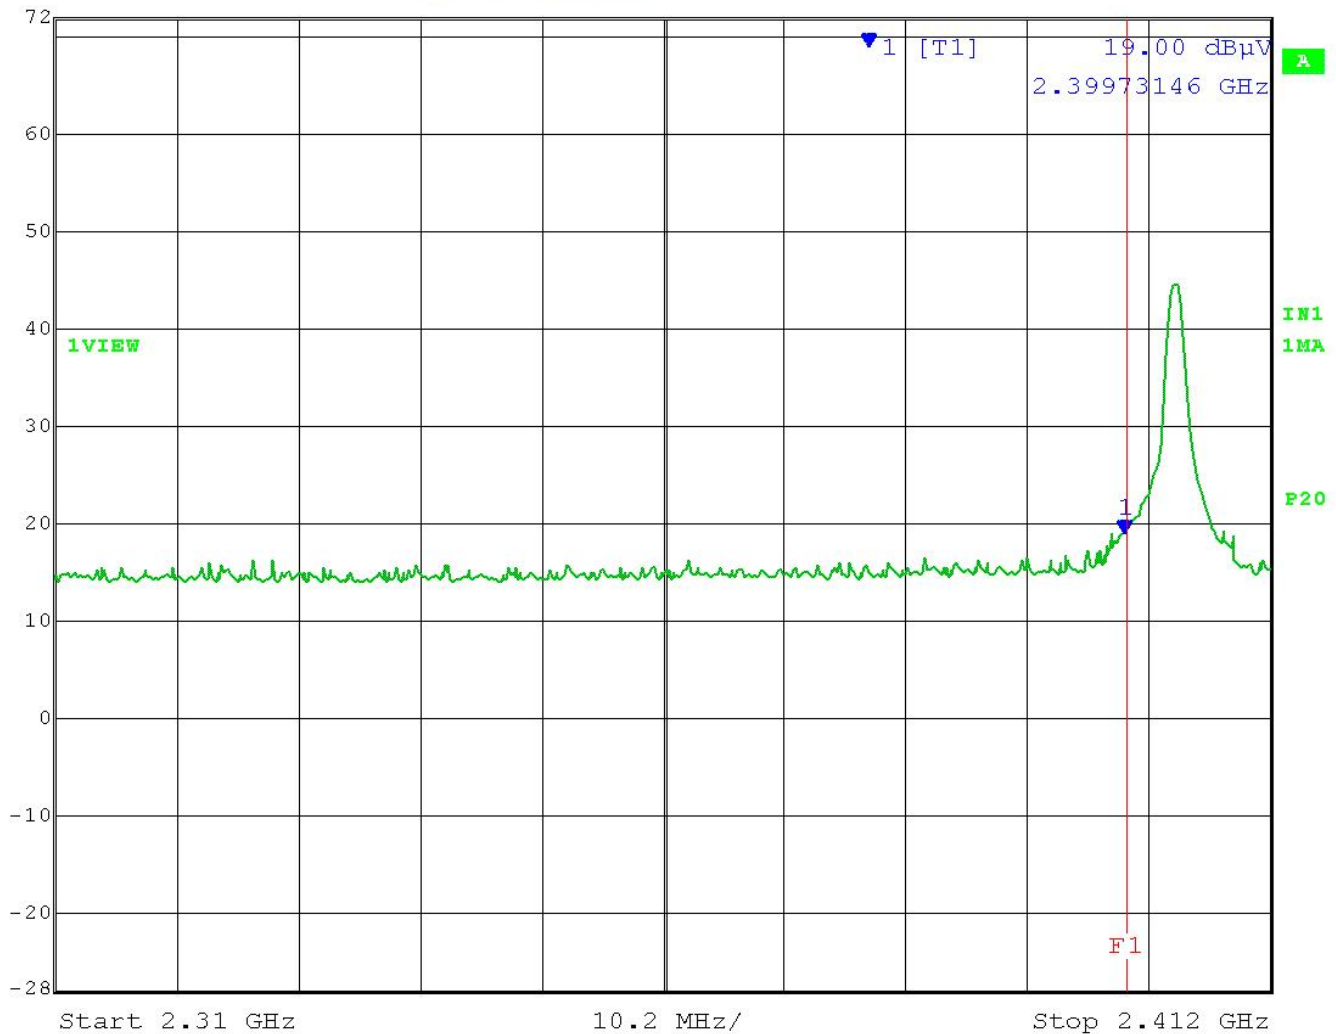

Date: 10.MAR.2017 10:24:38

RESULTS: Meets Requirements

Applicant: IRADIMED CORPORATION
 FCC ID: 2AKRU-IRM01
 IC: 22312-IRM01
 Report: 2449AUT16TestReport_Rev1


[Table of Contents](#)

BANDEDGE

Test Data: Lower Bandedge Average Plot



| | | | | | |
|---------|----------------|-----|-------|--------|------|
| Ref Lvl | Marker 1 [T1] | RBW | 1 MHz | RF Att | 0 dB |
| 72 dBμV | 1.75 dBμV | VBW | 10 Hz | | |
| | 2.39973146 GHz | SWT | 5.6 s | Unit | dBμV |

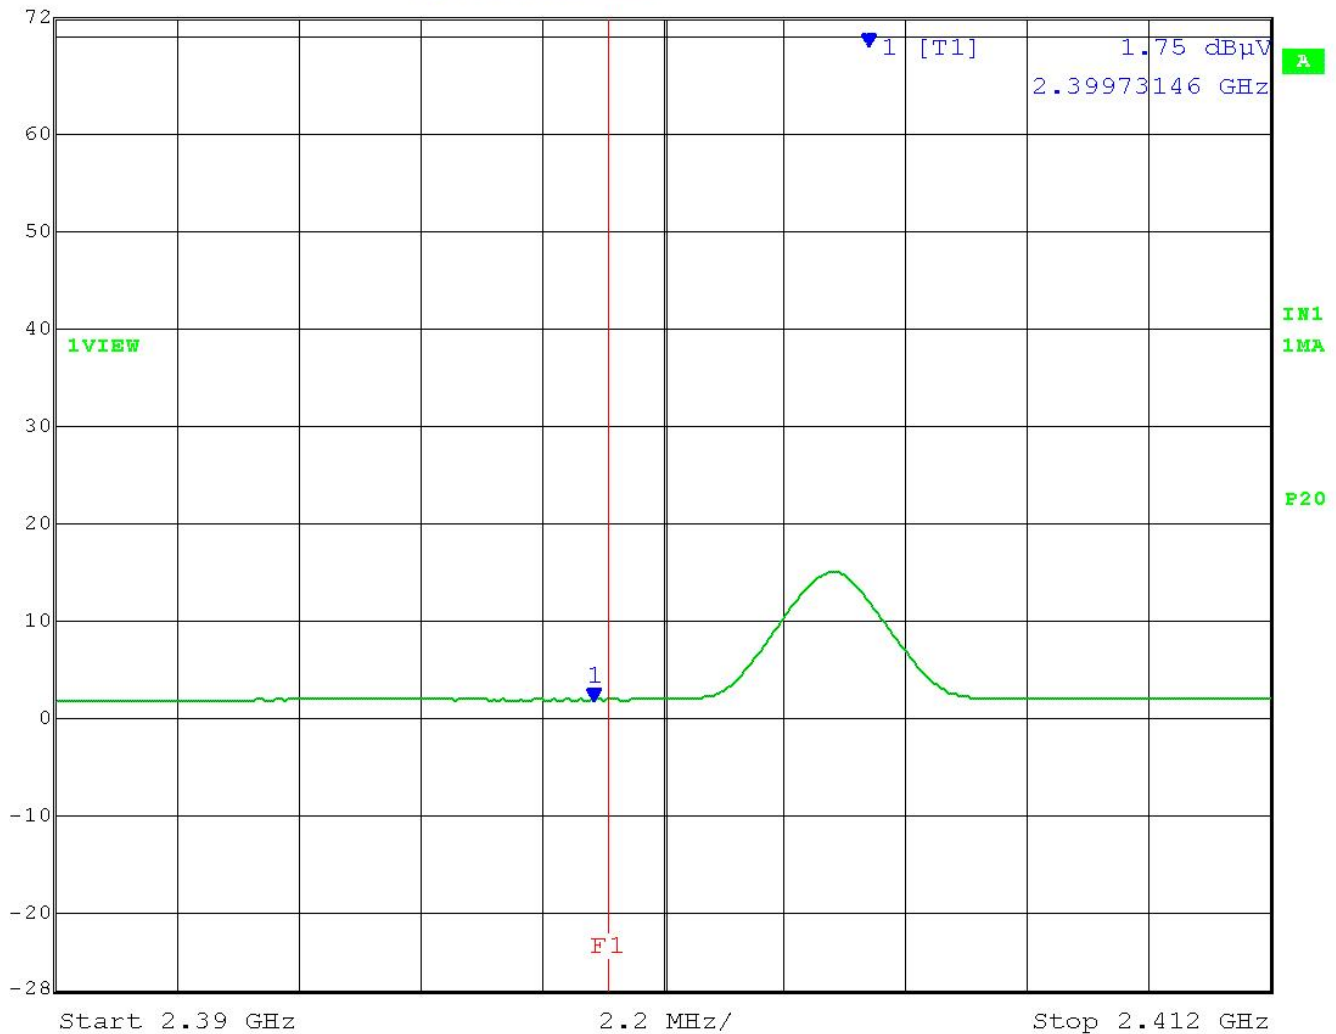

Date: 10.MAR.2017 10:26:11


RESULTS: Meets Requirements


Applicant: IRADIMED CORPORATION
 FCC ID: 2AKRU-IRM01
 IC: 22312-IRM01
 Report: 2449AUT16TestReport_Rev1

[Table of Contents](#)

BANDEDGE

Test Data: Upper Bandedge Peak Plot


 Ref Lvl 72 dBμV
 Marker 1 [T1] 14.69 dBμV
 2.48431810 GHz
 RBW 1 MHz
 VBW 3 MHz
 SWT 5 ms
 RF Att 0 dB
 Unit dBμV

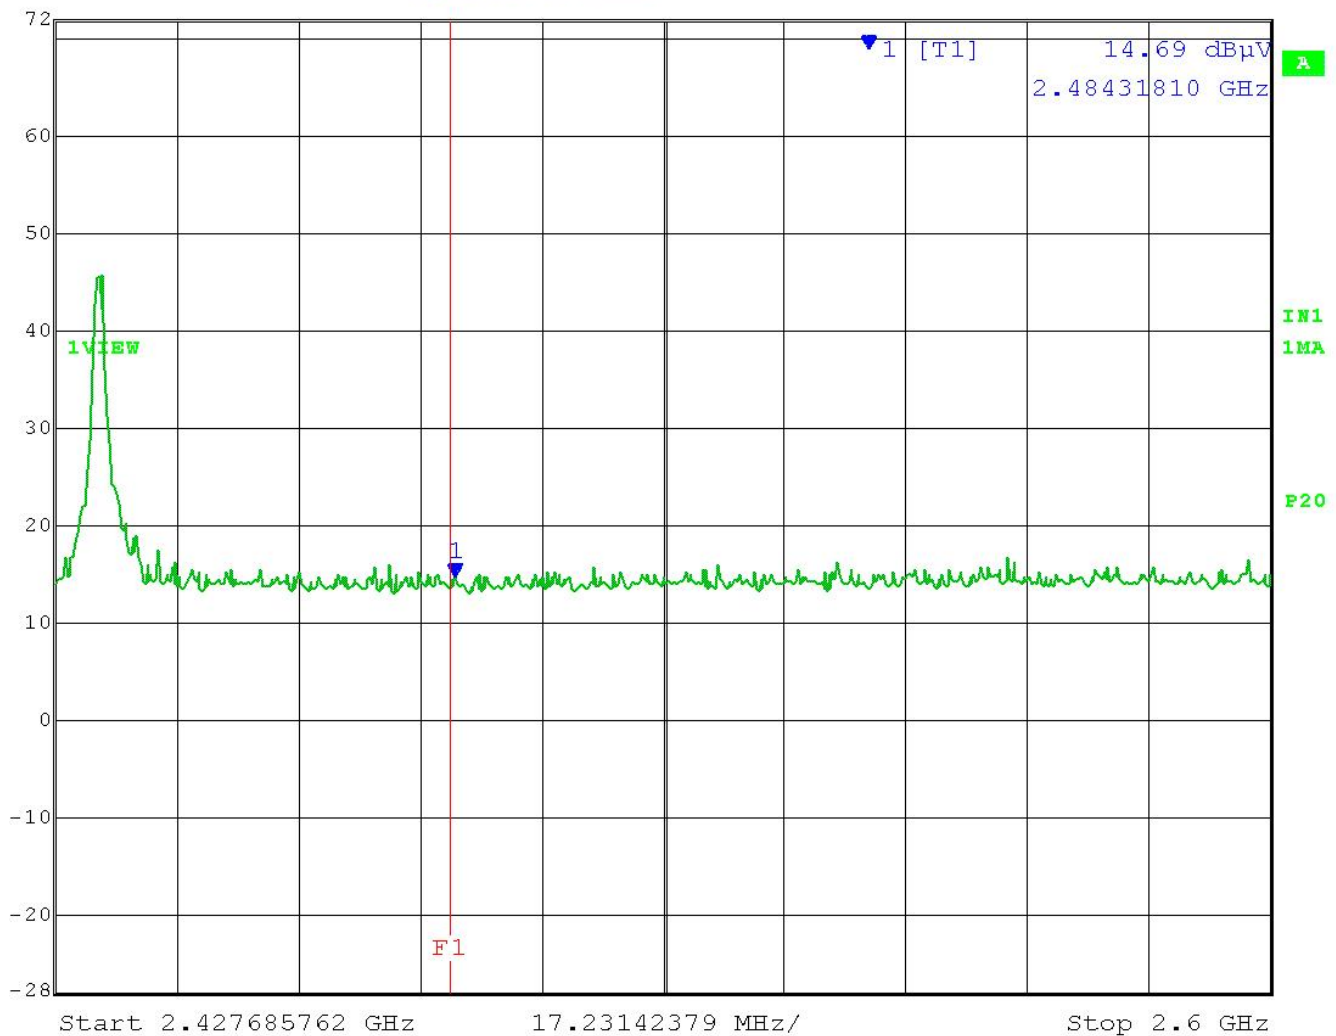

Date: 10.MAR.2017 10:32:36


RESULTS: Meets Requirements


Applicant: IRADIMED CORPORATION
 FCC ID: 2AKRU-IRM01
 IC: 22312-IRM01
 Report: 2449AUT16TestReport_Rev1

[Table of Contents](#)

BANDEDGE

Test Data: Upper Bandedge Average Plot


 Marker 1 [T1] RBW 1 MHz RF Att 0 dB
 Ref Lvl 1.53 dBμV VBW 10 Hz
 72 dBμV 2.48431810 GHz SWT 18.5 s Unit dBμV

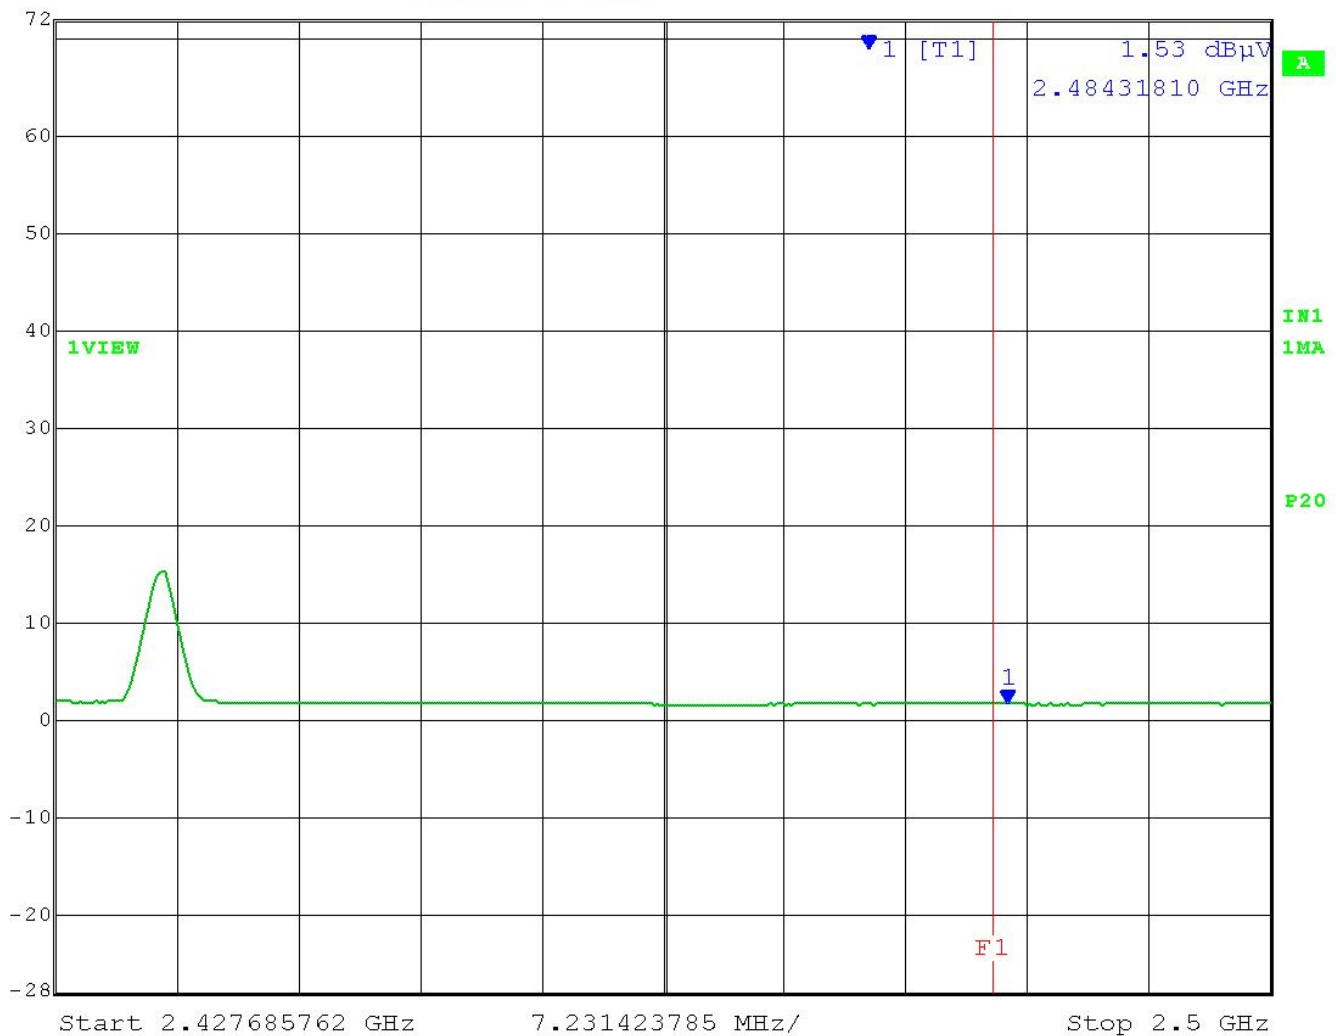

RESULTS: Meets Requirements

RADIATED SPURIOUS EMISSIONS

Rules Part No.: FCC part 15.249 (a)(c)(d)(e)

Requirements: the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation

Field strength limits are specified at a distance of 3 meters

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

| Frequency | Limits |
|------------------------------|-------------------------------------|
| Part 15.209 | |
| 9 to 490 kHz | 2400/F (kHz) μ V/m @ 300 meters |
| 490 to 1705 kHz | 24000/F (kHz) μ V/m @ 30 meters |
| 1705 kHz to 30 MHz | 29.54 dB μ V/m @ 30 meters |
| 30 – 88 | 40.0 dB μ V/m @ 3 meters |
| 80 – 216 | 43.5 dB μ V/m @ 3 meters |
| 216 – 960 | 46.0 dB μ V/m @ 3 meters |
| Above 960 | 54.0 dB μ V/m @ 3 meters |
| Part 15.249 | |
| Fundamental 902 – 928 MHz | 94.0 dB μ V/m @ 3 meters |
| Fundamental 2.4 – 2.4835 GHz | 94.0 dB μ V/m @ 3 meters |
| Harmonics | 54.0 dB μ V/m @ 3 meters |

Test Method: ANSI C63.4 § Annex D Validation of radiated emissions standard test sites
 ANSI C63.10 § 6.3 Common requirements radiated emissions
 ANSI C63.10 § 6.4 Emissions below 30 MHz
 ANSI C63.10 § 6.5 Emissions between 30 & 1000 MHz
 ANSI C63.10 § 6.6 Emissions above 1 GHz

Field Strength Calculation:

The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

| | | | |
|------------|---------------|------------|---------------------------------|
| Freq (MHz) | Meter Reading | + ACF | + CL = FS |
| 33 | 20 dB μ V | + 10.36 dB | + 0.5 = 30.86 dB μ V/m @ 3m |

Applicant: IRADIMED CORPORATION

[Table of Contents](#)

FCC ID: 2AKRU-IRM01


IC: 22312-IRM01

Report: 2449AUT16TestReport_Rev1


RADIATED SPURIOUS EMISSIONS

Setup:


Emissions below 30 MHz

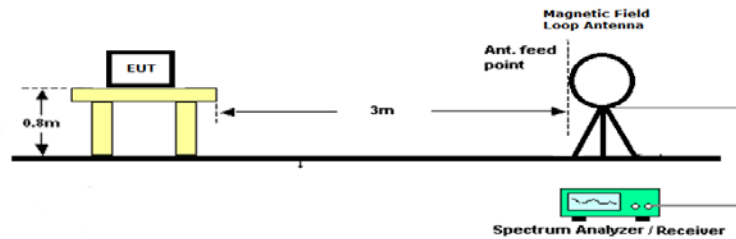

Emissions 30 – 1000 MHz

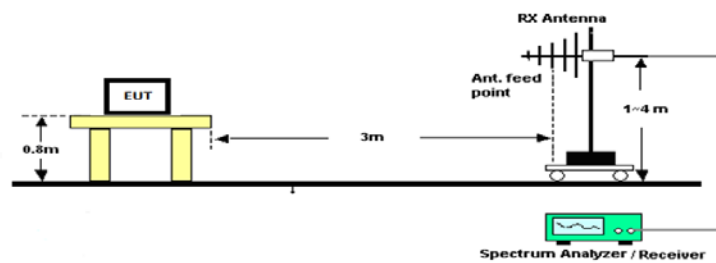

Emissions above 1 GHz

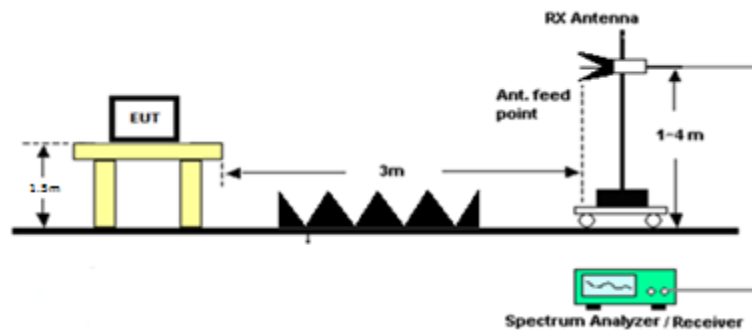

RADIATED SPURIOUS EMISSIONS

Notes: The EUT was checked in three orthogonal planes as required, a setup photo is provided to show the orientation of the worst case position.

Only emissions within 20dB of the limit are reported.

The spectrum was measured from 9 KHz to 25 GHz

Test Data: Measurement Table

| Tuned Freq (MHz) | Emission Frequency (MHz) | Detector (QP/PK/AV) | Meter Reading (dBuV) | Antenna Polarity (H/V) | Coax Loss (dB) | Correction Factor (dB/M) | Field Strength (dBuV/M) | Limit (dBuV/M) | Margin (dB) |
|------------------|--------------------------|---------------------|----------------------|------------------------|----------------|--------------------------|-------------------------|----------------|-------------|
| 2404.00 | 271.79 | PK | 19.97 | V | 1.93 | 14.09 | 35.99 | 46.00 | 10.01 |
| 2404.00 | 332.05 | PK | 20.83 | H | 2.11 | 13.60 | 36.54 | 46.00 | 9.46 |
| 2404.00 | 580.76 | PK | 21.26 | V | 2.78 | 18.26 | 42.30 | 46.00 | 3.70 |
| 2404.00 | 733.33 | PK | 20.57 | H | 3.12 | 20.20 | 43.89 | 46.00 | 2.11 |
| 2404.00 | 2338.90 | PK | 13.65 | H | 5.61 | 32.09 | 51.35 | 54.00 | 2.65 |
| 2404.00 | 2397.00 | PK | 13.28 | V | 5.62 | 32.14 | 51.04 | 54.00 | 2.96 |
| 2404.00 | 2398.00 | PK | 12.77 | H | 5.66 | 32.29 | 50.72 | 54.00 | 3.28 |
| 2404.00 | 2404.00 | PK | 48.89 | V | 5.69 | 32.41 | 86.99 | 94.00 | 7.01 |
| 2404.00 | 4808.00 | PK | 0.29 | V | 8.07 | 33.99 | 42.35 | 54.00 | 11.65 |
| 2404.00 | 7212.00 | PK | -0.82 | V | 9.92 | 35.42 | 44.52 | 54.00 | 9.48 |
| 2404.00 | 9616.00 | PK | -1.46 | V | 11.43 | 36.83 | 46.80 | 54.00 | 7.20 |
| 2412.00 | 170.03 | PK | 0.01 | V | 1.49 | 15.79 | 17.29 | 43.50 | 26.21 |
| 2412.00 | 325.64 | PK | 23.23 | H | 2.09 | 13.60 | 38.92 | 46.00 | 7.08 |
| 2412.00 | 398.72 | PK | 23.23 | V | 2.28 | 15.35 | 40.86 | 46.00 | 5.14 |
| 2412.00 | 629.92 | PK | 22.06 | H | 2.89 | 18.90 | 43.85 | 46.00 | 2.15 |
| 2412.00 | 700.00 | PK | 21.68 | V | 3.06 | 20.60 | 45.34 | 46.00 | 0.66 |
| 2412.00 | 2412.00 | PK | 53.01 | V | 5.70 | 32.44 | 91.15 | 94.00 | 2.85 |
| 2412.00 | 4824.00 | PK | 0.56 | H | 8.09 | 33.98 | 42.63 | 54.00 | 11.37 |
| 2412.00 | 7236.00 | PK | -0.39 | V | 9.94 | 35.47 | 45.02 | 54.00 | 8.98 |
| 2412.00 | 9648.00 | PK | -1.22 | H | 11.45 | 36.90 | 47.13 | 54.00 | 6.87 |
| 2434.00 | 301.28 | PK | 23.36 | V | 2.03 | 13.27 | 38.66 | 46.00 | 7.34 |
| 2434.00 | 352.56 | PK | 24.02 | H | 2.16 | 14.71 | 40.89 | 46.00 | 5.11 |
| 2434.00 | 617.98 | PK | 22.70 | V | 2.86 | 18.76 | 44.32 | 46.00 | 1.68 |
| 2434.00 | 635.89 | PK | 21.17 | H | 2.91 | 19.25 | 43.33 | 46.00 | 2.67 |
| 2434.00 | 2434.00 | PK | 52.19 | V | 5.73 | 32.50 | 90.42 | 94.00 | 3.58 |
| 2434.00 | 2485.80 | PK | 13.98 | V | 5.78 | 32.66 | 52.42 | 54.00 | 1.58 |
| 2434.00 | 2488.90 | PK | 13.60 | V | 5.79 | 32.67 | 52.06 | 54.00 | 1.94 |

Results: Meets Requirements

Applicant: IRADIMED CORPORATION
FCC ID: 2AKRU-IRM01
IC: 22312-IRM01
Report: 2449AUT16TestReport_Rev1

[Table of Contents](#)



EMC EQUIPMENT LIST

| Device | Manufacturer | Model | Serial Number | Cal/Char Date | Due Date |
|---|----------------------|-------------------------------|--|---------------|------------|
| Antenna: Biconical 1096 Chamber | Eaton | 94455-1 | 1096 | 07/14/15 | 07/14/17 |
| Antenna: Log-Periodic 1122 | Electro-Metrics | LPA-25 | 1122 | 07/14/15 | 07/14/17 |
| Antenna: Standard Gain Horn 18.0-26.3 GHz | Systron Donner | DBE-520-20 | Not Serialized | NA | NA |
| Antenna: Standard Gain Horn 12.4-18.0 GHz | ATM | 62-442-6 | D262108-01 | NA | NA |
| CHAMBER | Panashield | 3M | N/A | 04/25/16 | 12/31/17 |
| Antenna: Double-Ridged Horn/ETS Horn 1 | ETS-Lindgren Chamber | 3117 | 00035923 | 01/30/17 | 01/30/2017 |
| Software: Field Strength Program | Timco | N/A | Version 4.0 | NA | NA |
| Antenna: Active Loop | ETS-Lindgren | 6502 | 00062529 | 11/18/15 | 11/18/17 |
| EMI Test Receiver R & S ESU 40 Chamber | Rohde & Schwarz | ESU 40 | 100320 | 04/01/16 | 04/01/18 |
| Coaxial Cable - Chamber 3 cable set (Primary) | Micro-Coax | Chamber 3 cable set (Primary) | KMKM-0244-01; KMKM-0670-00; KFKF-0198-01 | 08/08/16 | 08/08/18 |
| Pre-amp | RF-LAMBDA | RNLA00M45GA | NA | 01/04/16 | 01/04/18 |
| Band Reject Filter 2.4 GHz | Micro-Tronics | BRM50702-02 | -G042 | 9/27/16 | 9/27/18 |
| High Pass Filter 18GHz | Micro-Tronics | HPS18771 | -002 | 9/27/16 | 9/27/18 |
| Bore-sight Antenna Positioning Tower | Sunol Sciences | TLT2 | N/A | NA | NA |

*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

END OF TEST REPORT