

Annex 1: Measurement diagrams to

TEST REPORT No.: 16-1-0116301T02a-C1

According to: **FCC Regulations** Part 22, Part 24

IC-Regulations

RSS-132 Issue 3, RSS-133 Issue 6, RSS-Gen Issue 4

for

WAGO Kontakttechnik GmbH & Co. KG

SPS Controller 750-8207/025-001

FCC-ID: 2AKUEPFC200 IC: 22322-07508207 PMN: PFC200 CS 2ETH RS 3G Telecontrol/T HVIN: 750-8207/025-001

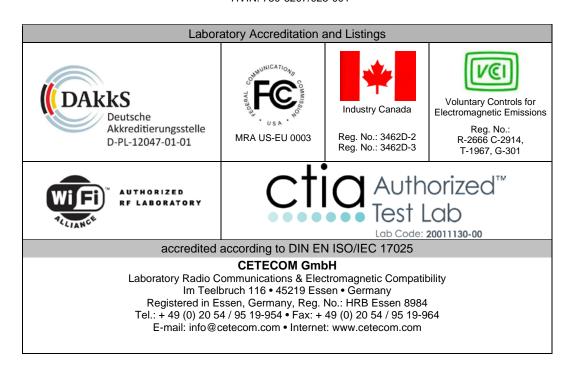




Table of contents

1. SUMMARY OF TEST RESULTS	3
2. CONDUCTED POWER MEASUREMENTS ON RF-PORT	3
3. PAPR-MEASUREMENTS (CCDF-PLOTS)	
3.1. FDD Band II transmitting mode	
3.2. FDD Band V transmitting mode	5
4. RADIATED EMISSION MEASUREMENTS	7
4.1. Magnetic field emission measurements §15.209 (FDD Band II transmitting mode)	7
4.2. Magnetic field emission measurements §15.209 (FDD Band V transmitting mode)	11
4.3. Spurious emissions radiated (FDD Band II transmitting mode)	12
4.4. Spurious emissions radiated (FDD Band V transmitting mode)	15
4.5. Radiated emissions on FDD Band II band-edge	
4.6. Radiated emissions on FDD Band V band-edge	




1. Summary of test results

2. Conducted power measurements on RF-port


3. PAPR-Measurements (CCDF-plots)

3.1. FDD Band II transmitting mode

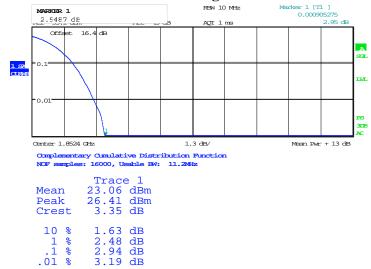

Date: 8.FEB.2017 11:47:12


Diagram 1: Channel 9262

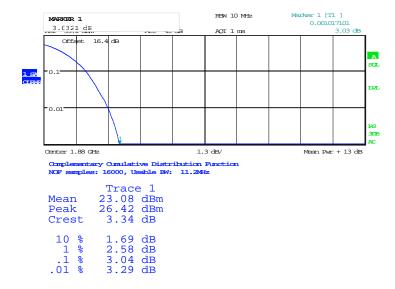

Date: 8.FEB.2017 11:48:43

Diagram 2: Channel 9400



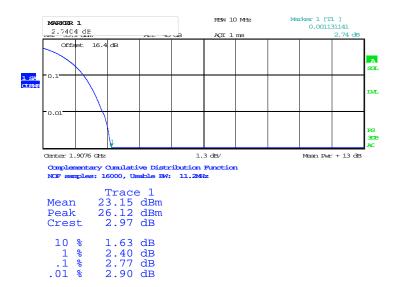


Date: 8.FEB.2017 11:50:46

Diagram 3: Channel 9538




3.2. FDD Band V transmitting mode

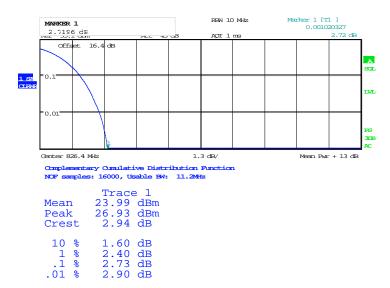

Date: 8.FEB.2017 11:44:30


Diagram 4: Channel 4132

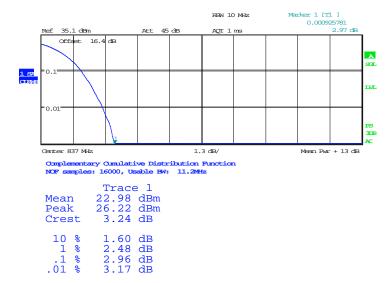

Date: 8.FEB.2017 11:39:06

Diagram 5: Channel 4185



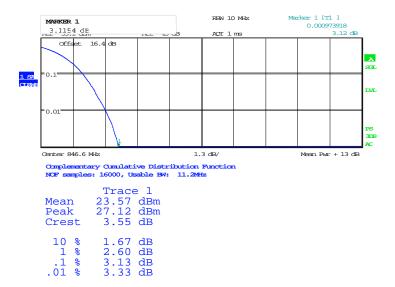

Date: 8.FEB.2017 11:35:39

Diagram 6: Channel 4233



4. Radiated emission measurements

4.1. Magnetic field emission measurements §15.209 (FDD Band II transmitting mode)

Diagram 2.01_RSE_R_Ch9262_RMC

Common Information

Test description: Magnetic Field Strength Measurement related to 30 m distance

Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance

Version of Testsoftware: EMC32 V9.25.00

Distance correction: used accord. table, pls. see test report

Technical Data: Please see page 2 for detailed data of measurement setup Rec. antenna (pre-scan): height 1.00 m, parallel and 90° to EUT polarisation

Test specification: FCC 15.209; RSS-Gen: Issue 4

Operator: RIs

Operating conditions: TX-on - nominal channel, continuous, modulation on

Power during tests: 24V DC

Comment 1:

EUT Information

Manufacturer: WAGO Kontakttechnik GmbH

Model: Serie750

ITEM-NO: 750-8207/025-001


HW version: 06 SW version: 02

Serial number: MAC-ID: 00:30:DE:41_2A:23

Connected Interfaces: LAN Cable+WAGO-USB-Komunikationskabel+Magnetic food antenna

Power Supply:24V DC -Comments: -

Full Spectrum

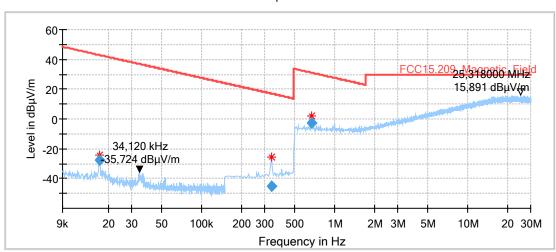

Final Result

Frequency (MHz)	RMS (dBµV/m)	Limit (dBµV/m)	Margi n (dB)	Meas. Time (ms)	Bandwidt h (kHz)	Heigh t (cm)	Pol	Azimut h (deg)	Elevatio n (deg)	Corr. (dB)
0.017000	-27.52	42.99	70.51	1000.0	0.200	100.0	V	222.0	0.0	-58.7
0.334000	-45.30	17.13	62.43	1000.0	10.000	100.0	Н	49.0	90.0	-53.7
0.670000	-2.84	31.09	33.93	1000.0	10.000	100.0	Н	304.0	90.0	-20.1

(continuation of the "Final_Result" table from column 17 ...)

Frequency (MHz)	Comment
0.017000	19:58:28 - 28.11.2016
0.334000	20:06:20 - 28.11.2016
0.670000	20:14:46 - 28.11.2016



Diagram 2.02_RSE_R_Ch9400_RMC

Common Information

Test description: Magnetic Field Strength Measurement related to 30 m distance

Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance

Version of Testsoftware: EMC32 V9.25.00

Distance correction: used accord. table, pls. see test report

Technical Data: Please see page 2 for detailed data of measurement setup

Rec. antenna (pre-scan): height 1.00 m, parallel and 90° to EUT polarisation

Test specification: FCC 15.209; RSS-Gen: Issue 4

Operator: RIs

Operating conditions: TX-on - nominal channel, continuous, modulation on

Power during tests: 24V DC

Comment 1:

EUT Information

Manufacturer: WAGO Kontakttechnik GmbH

Model: Serie750


ITEM-NO: 750-8207/025-001

HW version: 06 SW version: 02

Serial number: MAC-ID: 00:30:DE:41_2A:23

Connected Interfaces: LAN Cable+WAGO-USB-Komunikationskabel+Magnetic food antenna

Power Supply:24V DC Comments: -

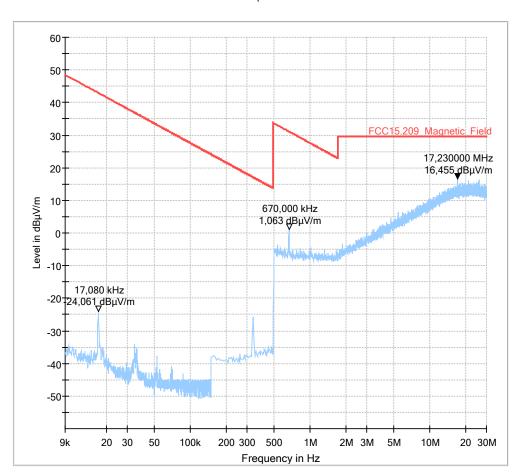



2.03_mgn_ch9538_Laying_Position

Common Information

Test description: Magnetic Field Strength Measurement related to 30 m distance

Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance

Version of Testsoftware: EMC32 V9.25.00

Distance correction: used accord. table, pls. see test report

Technical Data: Please see page 2 for detailed data of measurement setup Rec. antenna (pre-scan): height 1.00 m, parallel and 90° to EUT polarisation

Test specification: FCC 15.209; RSS-Gen: Issue 4

Operator: DLe

Operating conditions: TX-on - CH_9538

Power during tests: 24V DC

Comment 1:

EUT Information

Manufacturer: WAGO Kontakttechnik GmbH

Model: Serie750

ITEM-NO: 750-8207/025-001

HW version: 06 SW version: 02

Serial number: MAC-ID: 00:30:DE:41_2A:23

Connected Interfaces: LAN Cable+WAGO-USB-Komunikationskabel+Magnetic food antenna

Power Supply:24V DC Comments: -

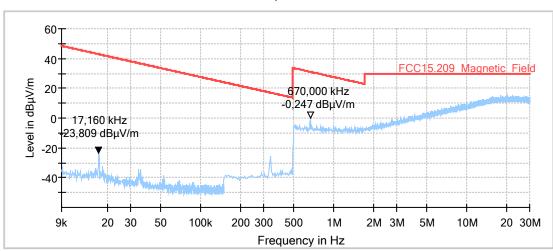




Diagram 2.03b_mgn_ch9538_Standing_Position

Common Information

Test description: Magnetic Field Strength Measurement related to 30 m distance

Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance

Version of Testsoftware: EMC32 V9.25.00

Distance correction: used accord. table, pls. see test report

Technical Data: Please see page 2 for detailed data of measurement setup Rec. antenna (pre-scan): height 1.00 m, parallel and 90° to EUT polarisation

Test specification: FCC 15.205; RSS-Gen: Issue 4

Operator: DLe

Operating conditions: TX-on - CH_9538

Power during tests: 24V DC

Comment 1:

EUT Information

Manufacturer: WAGO Kontakttechnik GmbH

Model: Serie750


ITEM-NO: 750-8207/025-001

HW version: 06 SW version: 02

Serial number: MAC-ID: 00:30:DE:41_2A:23

Connected Interfaces: LAN Cable+WAGO-USB-Komunikationskabel+Magnetic food antenna

Power Supply:24V DC -Comments: -

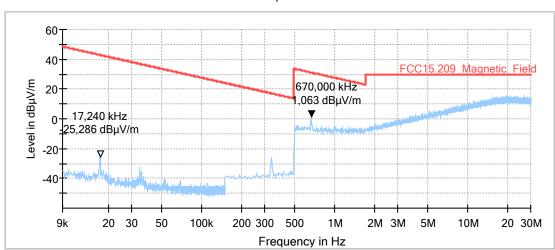



4.2. Magnetic field emission measurements §15.209 (FDD Band V transmitting mode)

Diagram 2.04_mgn_ch4132

Common Information

Test description: Magnetic Field Strength Measurement related to 30 m distance

Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance

Version of Testsoftware: EMC32 V9.25.00

Distance correction: used accord. table, pls. see test report

Technical Data: Please see page 2 for detailed data of measurement setup Rec. antenna (pre-scan): height 1.00 m, parallel and 90° to EUT polarisation

Test specification: FCC 15.207; RSS-Gen: Issue 4

Operator: DLe

Operating conditions: TX-on - CH_4132

Power during tests: 24V DC

Comment 1:

EUT Information

Manufacturer: WAGO Kontakttechnik GmbH

Model: Serie750 -ITEM-NO: 750-8207/025-001


11LW-NO. 150-0201/025-001

HW version: 06 SW version: 02

Serial number: MAC-ID: 00:30:DE:41_2A:23

Connected Interfaces: LAN Cable+WAGO-USB-Komunikationskabel+Magnetic food antenna

Power Supply:24V DC Comments: -

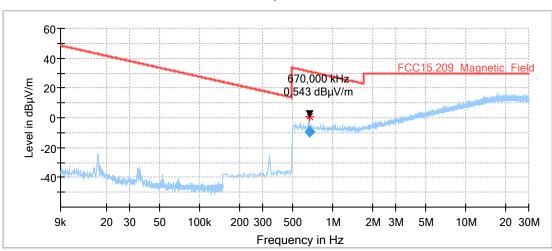



4.3. Spurious emissions radiated (FDD Band II transmitting mode)

8.20_RSE_R_Ch9262_RMC

Common Information

Test Description: Radiated Spurious Emissions UMTS FDDII

Test Site Location: CETECOM GmbH Essen
Test Site: Fully Anechoic Room (FAR)

Test Standard: FCC Part 24

Operating Mode: UE allocated channel 9262 (fc = 1852.4 MHz) Environmental Conditions: Humidity: 35%rH; Temperature: 22°C

Operator: RIs

EUT Information

Manufacturer: WAGO Kontakttechnik

GmbH

Model: Serie750

ITEM-NO: 750-8207/025-001

HW version: 06

SW version: 02


Serial number: MAC-ID: 00:30:DE:41_2A:23

Connected Interfaces: LAN Cable+WAGO-USB-Komunikationskabel+Magnetic food antenna

Power Supply: 24V DC

Comments: -

Full Spectrum

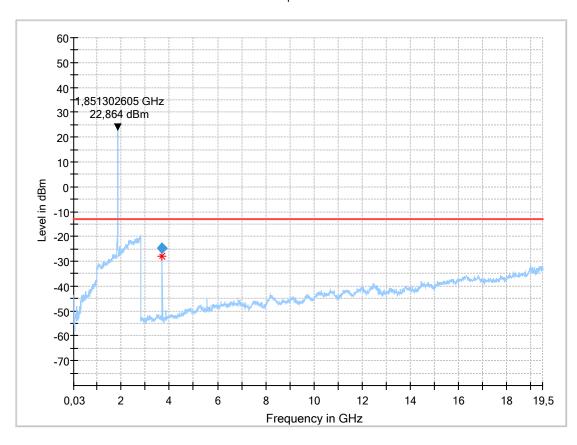

IIIai_NeSuit							
Frequency (MHz)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
3702.960921	-13.00	11.71	10000.0	Н	304.0	90.0	-94.9



8.21_RSE_R_Ch9400_RMC

Common Information

Test Description: Radiated Spurious Emissions UMTS FDDII

Test Site Location: CETECOM GmbH Essen
Test Site: Fully Anechoic Room (FAR)

Test Standard: FCC Part 24

Operating Mode: UE allocated channel 9400 (fc = 1880.0 MHz) Environmental Conditions: Humidity: 35%rH; Temperature: 22°C

Operator: RI

EUT Information

Manufacturer: WAGO Kontakttechnik

GmbH

Model: Serie750

ITEM-NO: 750-8207/025-001

HW version: 06 SW version: 02


Serial number: MAC-ID: 00:30:DE:41 2A:23

Connected Interfaces: LAN Cable+WAGO-USB-Komunikationskabel+Magnetic food antenna

Power Supply: 24V DC

Comments:

Full Spectrum

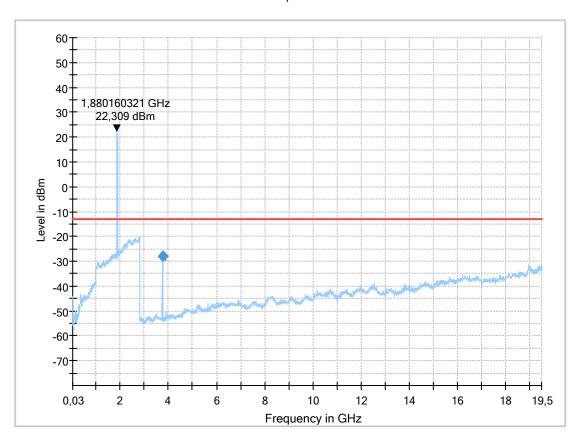

Frequency (MHz)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
3758.572144	-13.00	14.85	10000.0	Н	316.0	90.0	-95.1



8.22_RSE_R_Ch9538_RMC

Common Information

Test Description: Radiated Spurious Emissions UMTS FDDII

Test Site Location: CETECOM GmbH Essen
Test Site: Fully Anechoic Room (FAR)

Test Standard: FCC Part 24

Operating Mode: UE allocated channel 9538 (fc = 1907.6 MHz) Environmental Conditions: Humidity: 35%rH; Temperature: 22°C

Operator: RI

EUT Information

Manufacturer: WAGO Kontakttechnik

GmbH

Model: Serie750

ITEM-NO: 750-8207/025-001

HW version: 06 SW version: 02


Serial number: MAC-ID: 00:30:DE:41 2A:23

Connected Interfaces: LAN Cable+WAGO-USB-Komunikationskabel+Magnetic food antenna

Power Supply: 24V DC

Comments:

Full Spectrum

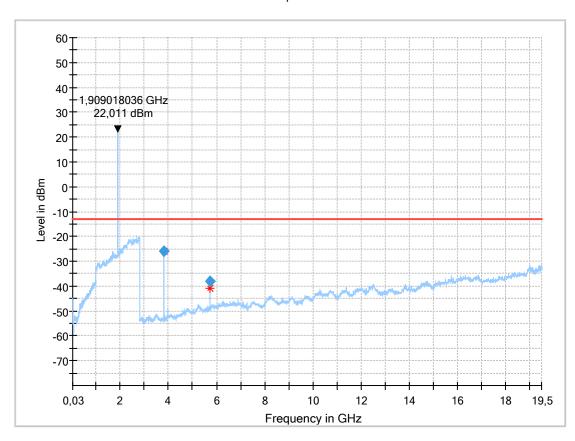

Frequency (MHz)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
3816.618237	-13.00	13.05	10000.0	Н	316.0	90.0	-95.1
5721.528057	-13.00	24.91	10000.0	Н	204.0	90.0	-89.5



4.4. Spurious emissions radiated (FDD Band V transmitting mode)

8.50_RSE_R_Ch4132_RMC

Common Information

Test Description: Radiated Spurious Emissions UMTS FDDV

Test Site Location: CETECOM GmbH Essen
Test Site: Fully Anechoic Room (FAR)
Test Standard: FCC Part 22.917(a)

Operating Mode: UE allocated channel 4133 (fc = 826.6 MHz) Environmental Conditions: Humidity: 35%rH; Temperature: 22°C

Operator: RI

EUT Information

Manufacturer: WAGO Kontakttechnik

GmbH

Model: Serie750

ITEM-NO: 750-8207/025-001


HW version: 06 SW version: 02

Serial number: MAC-ID: 00:30:DE:41_2A:23

Connected Interfaces: LAN Cable+WAGO-USB-Komunikationskabel+Magnetic food antenna

Power Supply:24V DC -Comments: -

Full Spectrum

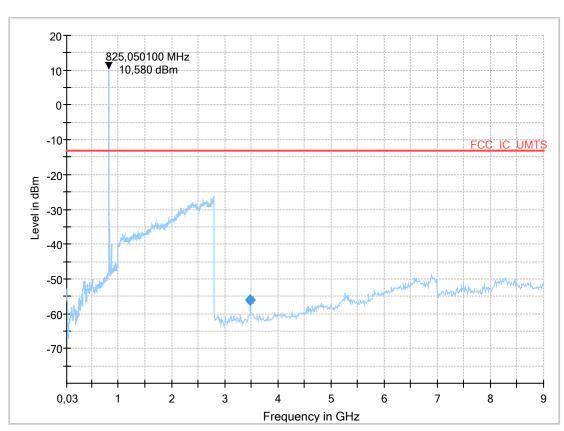

-								
	Frequency (MHz)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Pol	Azimut h (deg)	Elevatio n (deg)	Corr. (dB)
	3485.561123	-	43.01	1000.0	Н	147.0	90.0	-93.7



Diagram 8.51_RSE_R_Ch4183_RMC

Common Information

Test Description: Radiated Spurious Emissions UMTS FDDV

Test Site Location: CETECOM GmbH Essen
Test Site: Fully Anechoic Room (FAR)
Test Standard: FCC Part 22.917(a)

Operating Mode: UE allocated channel 4183 (fc = 836.6 MHz) Environmental Conditions: Humidity: 35%rH; Temperature: 22°C

Operator: RI

EUT Information

Manufacturer: WAGO Kontakttechnik

GmbH

Model: Serie750

ITEM-NO: 750-8207/025-001

HW version: 06


SW version:

Serial number: MAC-ID: 00:30:DE:41_2A:23

Connected Interfaces: LAN Cable+WAGO-USB-Komunikationskabel+Magnetic food antenna

Power Supply:24V DC Comments: -

Full Spectrum

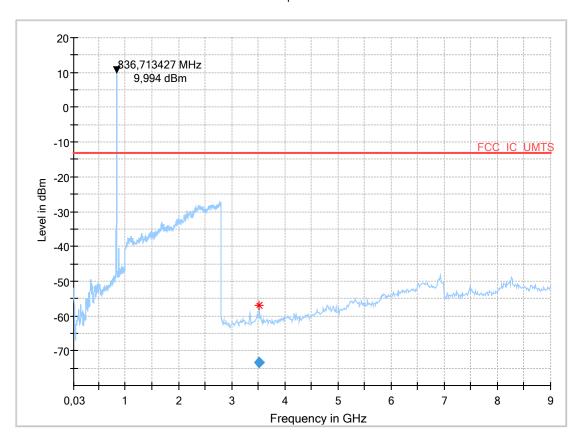

Frequency (MHz)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Pol	Azimut h (deg)	Elevatio n (deg)	Corr. (dB)
3521.172345	-	60.37	1000.0	Н	14.0	0.0	-93.7



Diagram 8.52_RSE_R_Ch4233_RMC

Common Information

Test Description: Radiated Spurious Emissions UMTS FDDV

Test Site Location: CETECOM GmbH Essen
Test Site: Fully Anechoic Room (FAR)
Test Standard: FCC Part 22.917(a)

Operating Mode: UE allocated channel 4233 (fc = 846.6 MHz) Environmental Conditions: Humidity: 35%rH; Temperature: 22°C

Operator: RI

EUT Information

Manufacturer: WAGO Kontakttechnik

GmbH

Model: Serie750

ITEM-NO: 750-8207/025-001


HW version: 06 SW version: 02

Serial number: MAC-ID: 00:30:DE:41_2A:23

Connected Interfaces: LAN Cable+WAGO-USB-Komunikationskabel+Magnetic food antenna

Power Supply:24V DC Comments: -

Full Spectrum

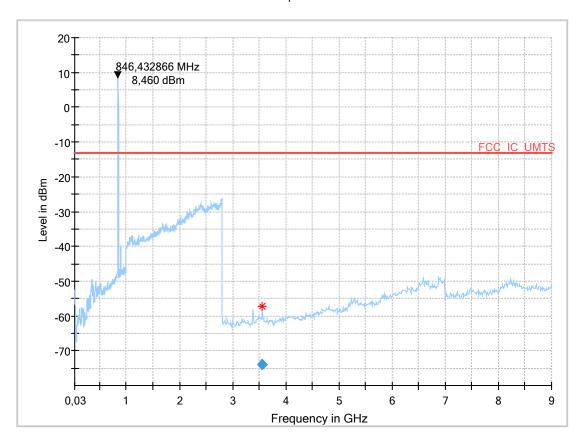

Frequency (MHz)	Limit (dBm)	Margin (dB)	Meas. Time (ms)	Pol	Azimut h (deg)	Elevatio n (deg)	Corr. (dB)
3554.959920	-	60.85	1000.0	Н	144.0	90.0	-94.1



4.5. Radiated emissions on FDD Band II band-edge

9.20_BE_R_Ch9262_RMC

Common Information

Test Description: Band-Edge: Radiated Field Strength Emissions Emissions in 3m distance

Test Site Location: CETECOM GmbH Essen
Test Site: Fully Anechoic Room (FAR)

Test Standard: FCC Part 24

Operation mode: UE allocated channel 9262 (fc = 1852.4 MHz)

Operator Name: RIs

Comment: Channel no. low

EUT Information

Manufacturer: WAGO Kontakttechnik

GmbH

Model: Serie750


ITEM-NO: 750-8207/025-001

HW version: 06 SW version: 02

Serial number: MAC-ID: 00:30:DE:41_2A:23

Connected Interfaces: LAN Cable+WAGO-USB-Komunikationskabel+Magnetic food antenna

Power Supply:24V DC -Comments: -

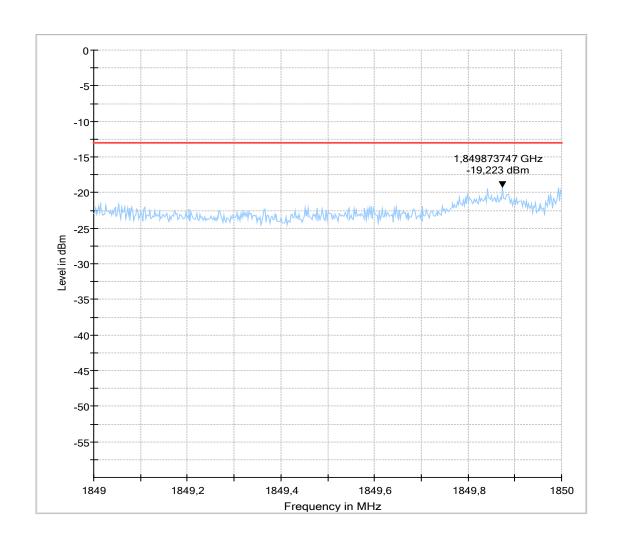



9.21_BE_R_Ch9538_RMC

Common Information

Band-Edge: Radiated Field Strength Emissions Emissions in 3m distance Test Description:

Test Site Location: CETECOM GmbH Essen Test Site: Fully Anechoic Room (FAR)

Test Standard: FCC Part 24

UE allocated channel 9538 (fc = 1907.6 MHz) Operation mode:

Operator Name: RIs

Comment: Channel no.high

EUT Information

Manufacturer: WAGO Kontakttechnik

GmbH

Model: Serie750


ITEM-NO: 750-8207/025-001

HW version: 06 SW version: 02

MAC-ID: 00:30:DE:41 2A:23 Serial number:

LAN Cable+WAGO-USB-Komunikationskabel+Magnetic food antenna Connected Interfaces:

Power Supply:24V DC Comments:

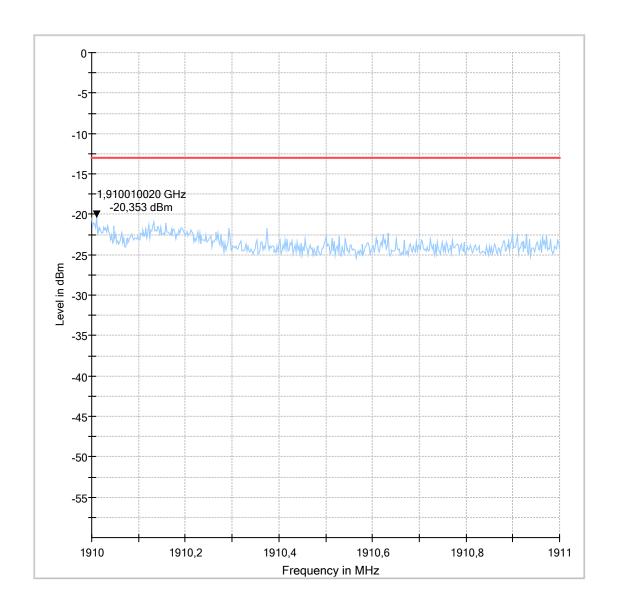



4.6. Radiated emissions on FDD Band V band-edge

Diagram 9.50_BE_R_Ch4132_RMC

Common Information

Test Description: Band-Edge low - Radiated Spurious Emissions UMTS FDDV

Test Site Location:

CETECOM GmbH Essen

Test Site:

Fully Anechoic Room (FAR)

Test Standard:

Operating Mode:

FCC Part 22.917(a)

UE allocated channel 4132

Environmental Conditions: Humidity: 35%rH; Temperature: 22°C

Operator: RIs

EUT Information

Manufacturer: WAGO Kontakttechnik

GmbH

Model: Serie750

ITEM-NO: 750-8207/025-001

HW version: 06 SW version: 02

Serial number: MAC-ID: 00:30:DE:41_2A:23

Connected Interfaces: LAN Cable+WAGO-USB-Komunikationskabel+Magnetic food antenna

Power Supply:24V DC -Comments: -

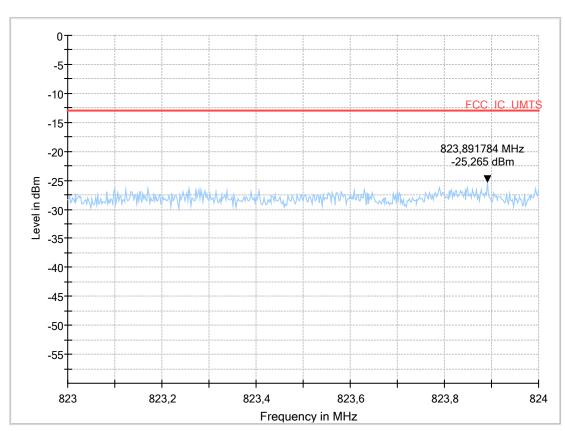




Diagram 9.51_BE_R_Ch4233_RMC

Common Information

Test Description: Band-Edge low - Radiated Spurious Emissions UMTS FDDV

Test Site Location:

CETECOM GmbH Essen

Test Site:

Fully Anechoic Room (FAR)

Test Standard:

Operating Mode:

CETECOM GmbH Essen

Fully Anechoic Room (FAR)

FCC Part 22.917(a)

UE allocated channel 4133

Environmental Conditions: Humidity: 35%rH; Temperature: 22°C

Operator: RI

EUT Information

Manufacturer: WAGO Kontakttechnik

GmbH

Model: Serie750

ITEM-NO: 750-8207/025-001

HW version: 06 SW version: 02

Serial number: MAC-ID: 00:30:DE:41_2A:23

Connected Interfaces: LAN Cable+WAGO-USB-Komunikationskabel+Magnetic food antenna

Power Supply:24V DC Comments: -

