

# FCC Report

**Applicant:** Smartree Technology Co., Ltd.

**Address of Applicant:** Room 704, Building A, Bangweiyuan, Yongxian Road, Bantian Area, Longgang District, Shenzhen, China

**Manufacturer/ Factory:** Smartree Technology Co., Ltd.

**Address of Manufacturer/ Factory:** Room 704, Building A, Bangweiyuan, Yongxian Road, Bantian Area, Longgang District, Shenzhen, China

**Equipment Under Test (EUT)**

Product Name: baby monitor

Model No.: SM24RX

**FCC ID:** 2AKVZ-SM24RX

**Applicable standards:** FCC CFR Title 47 Part 15.247:2016

**Date of sample receipt:** January 12, 2017

**Date of Test:** January 12-17, 2017

**Date of report issued:** January 17, 2017

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A circular blue stamp with the text "GTS" in the center, "GLOBAL UNITED TECHNOLOGY SERVICES" around the perimeter, and "EST. 1998" at the bottom. A handwritten signature in black ink is written over the stamp.

**Robinson Lo**  
**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	January 17, 2017	Original

Prepared By:

*Tiger Chen*

Date:

January 17, 2017

Project Engineer

Check By:

*Andy Wu*

Date:

January 17, 2017

Reviewer

## 3 Contents

	Page
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 VERSION .....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>3</b>
<b>4 TEST SUMMARY .....</b>	<b>4</b>
<b>5 GENERAL INFORMATION .....</b>	<b>5</b>
5.1 GENERAL DESCRIPTION OF EUT .....	5
5.2 TEST MODE .....	7
5.3 TEST FACILITY .....	7
5.4 TEST LOCATION.....	7
5.5 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	7
5.6 DESCRIPTION OF SUPPORT UNITS .....	7
<b>6 TEST INSTRUMENTS LIST .....</b>	<b>8</b>
<b>7 TEST RESULTS AND MEASUREMENT DATA.....</b>	<b>9</b>
7.1 ANTENNA REQUIREMENT .....	9
7.2 CONDUCTED EMISSIONS .....	10
7.3 CONDUCTED PEAK OUTPUT POWER .....	15
7.4 20dB EMISSION BANDWIDTH.....	17
7.5 CARRIER FREQUENCIES SEPARATION.....	19
7.6 HOPPING CHANNEL NUMBER.....	21
7.7 DWELL TIME .....	22
7.8 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE .....	23
7.9 BAND EDGE.....	24
7.9.1 Conducted Emission Method.....	24
7.9.2 Radiated Emission Method.....	26
7.10 SPURIOUS EMISSION.....	28
7.10.1 Conducted Emission Method .....	28
7.10.2 Radiated Emission Method.....	30
<b>8 TEST SETUP PHOTO .....</b>	<b>36</b>
<b>9 EUT CONSTRUCTIONAL DETAILS .....</b>	<b>38</b>

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

*Pass: The EUT complies with the essential requirements in the standard.*

*Remark: Test according to ANSI C63.4:2014 and ANSI C63.10:2013*

### Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	$\pm 4.34\text{dB}$	(1)
Radiated Emission	30MHz ~ 1000MHz	$\pm 4.24\text{dB}$	(1)
Radiated Emission	1GHz ~ 26.5GHz	$\pm 4.68\text{dB}$	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	$\pm 3.45\text{dB}$	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

Product Name:	baby monitor
Model No.:	SM24RX
Operation Frequency:	2410.875MHz~2471.625MHz
Channel Numbers:	19
Channel Separation:	3.375MHz
Modulation Type:	GFSK
Antenna Type:	Integral Antenna
Antenna Gain:	0dBi
Power Supply:	AC Adapter: Model:K05S050060U Input: AC 100-240V, 50/60Hz, 0.2A Output: DC 5V, 0.6A Adaptor: Model:EP19-050060WXLA Input: AC 100-240V, 50/60Hz, 200mA Max. Output: DC 5V, 0.6A or DC 3.7V 950mAh Rechargeable Li-ion Battery

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2410.875	6	2427.750	11	2444.625	16	2461.500
2	2414.250	7	2431.125	12	2448.000	17	2464.875
3	2417.625	8	2434.500	13	2451.375	18	2468.250
4	2421.000	9	2437.875	14	2454.750	19	2471.625
5	2424.375	10	2441.250	15	2458.125	20	

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2410.875
The middle channel	2441.250
The Highest channel	2471.625

## 5.2 Test mode

Transmitting mode	keep the EUT in continuously transmitting mode
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

## 5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:	
<b>• FCC —Registration No.: 600491</b>	
Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 22, 2016.	
<b>• Industry Canada (IC) —Registration No.: 9079A-2</b>	
The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.	

## 5.4 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

## 5.5 Other Information Requested by the Customer

None.
-------

## 5.6 Description of Support Units

None.
-------

## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 29 2016	June 28 2017
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 29 2016	June 28 2017
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 29 2016	June 28 2017
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 29 2016	June 28 2017
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 29 2016	June 28 2017
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 29 2016	June 28 2017
10	Coaxial Cable	GTS	N/A	GTS211	June 29 2016	June 28 2017
11	Coaxial cable	GTS	N/A	GTS210	June 29 2016	June 28 2017
12	Coaxial Cable	GTS	N/A	GTS212	June 29 2016	June 28 2017
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 29 2016	June 28 2017
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 29 2016	June 28 2017
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 29 2016	June 28 2017
16	Band filter	Amindeon	82346	GTS219	June 29 2016	June 28 2017


Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 29 2016	June. 28 2017
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 29 2016	June. 28 2017
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 29 2016	June. 28 2017
5	Coaxial Cable	GTS	N/A	GTS227	June. 29 2016	June. 28 2017
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 29 2016	June. 28 2017

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 29 2016	June 28 2017



## 7 Test results and Measurement Data

### 7.1 Antenna requirement

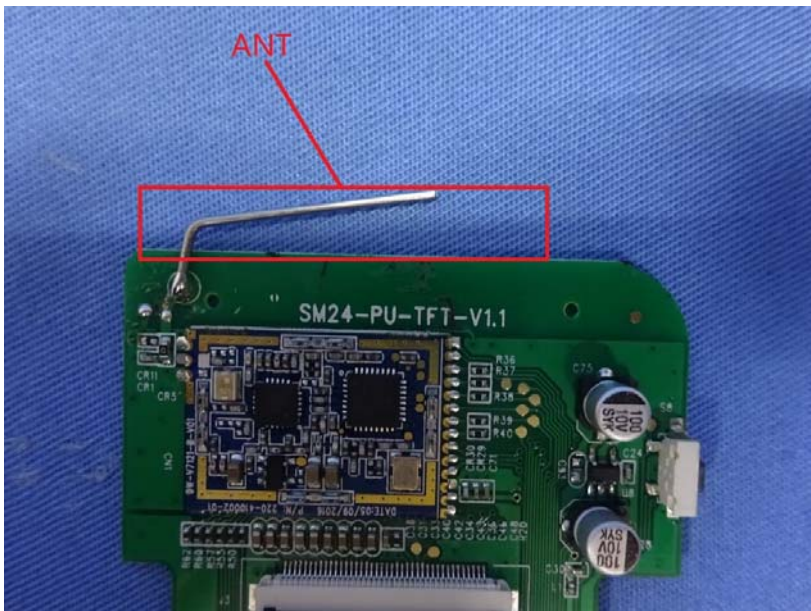Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p><b>15.203 requirement:</b></p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><b>15.247(c) (1)(i) requirement:</b></p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
E.U.T Antenna:	
<p>The antenna is integrity antenna, the best case gain of the antenna is 0 dBi</p> 	


## 7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.10:2013																
Test Frequency Range:	150KHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> <p>* Decreases with the logarithm of the frequency.</p>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
Test setup:	<div><p style="text-align: center;"><b>Reference Plane</b></p><p style="text-align: center;">Test table/Insulation plane</p><p><i>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</i></p></div>																
Test procedure:	<ol style="list-style-type: none"><li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li><li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li><li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</li></ol>																
Test Instruments:	Refer to section 6.0 for details																
Test mode:	Refer to section 5.2 for details																
Test results:	Pass																

### Measurement data:


Model No.: K05S050060U

Line:

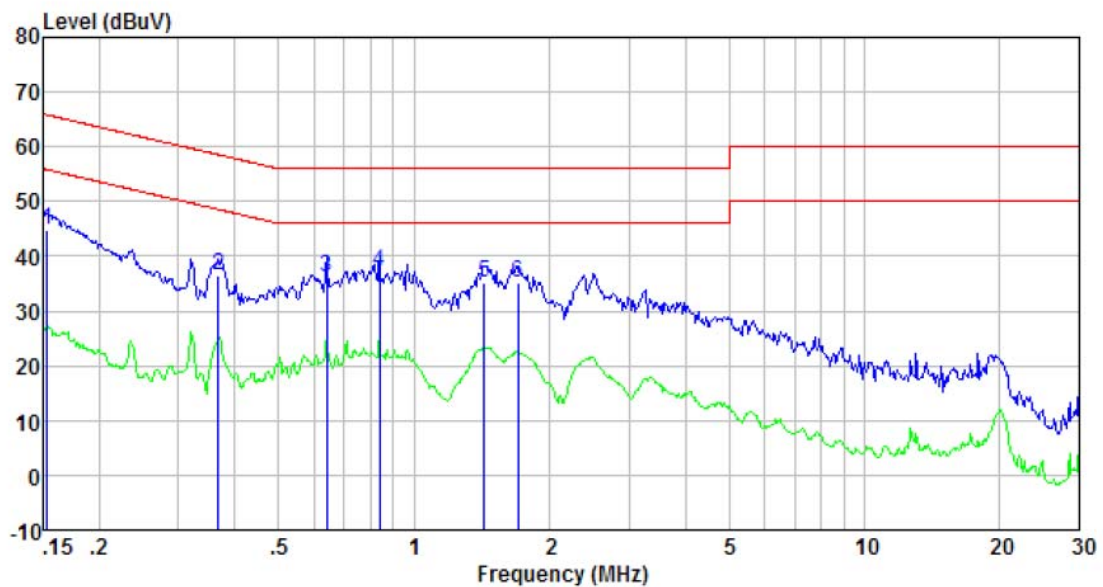

Freq MHz	Reading level dBuV	IISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.153	44.38	0.42	0.12	44.92	65.82	-20.90	QP
0.367	35.88	0.42	0.10	36.40	58.56	-22.16	QP
0.641	35.62	0.30	0.13	36.05	56.00	-19.95	QP
0.839	36.74	0.26	0.13	37.13	56.00	-18.87	QP
1.433	34.96	0.22	0.13	35.31	56.00	-20.69	QP
1.698	34.73	0.21	0.14	35.08	56.00	-20.92	QP


Neutral:

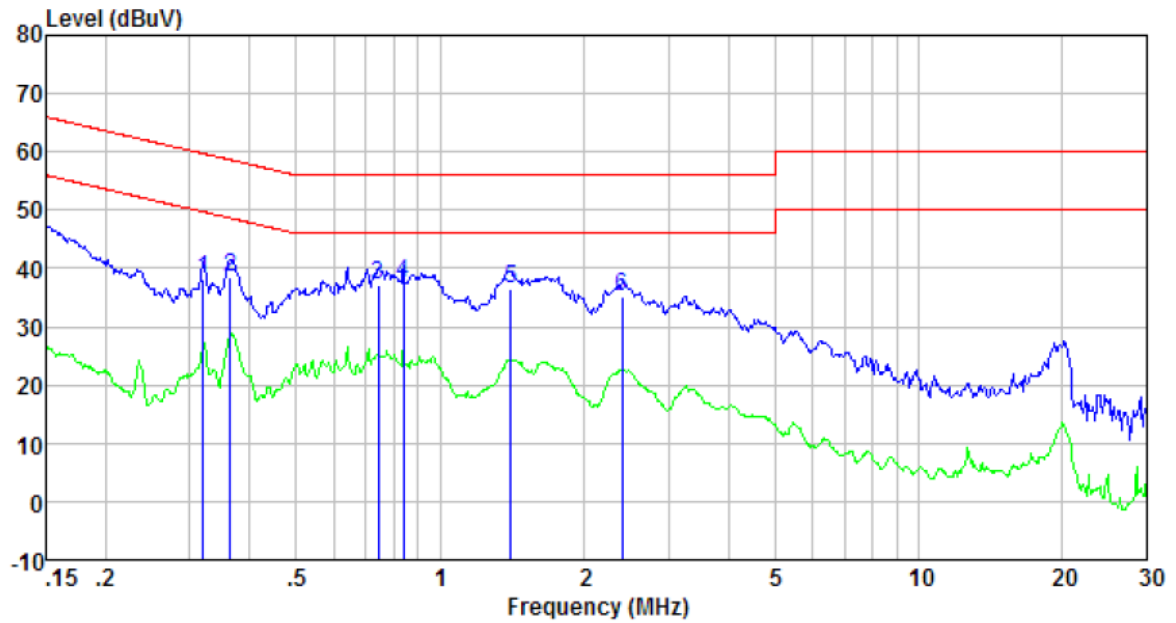

Freq MHz	Reading level dBuV	LIISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.320	37.56	0.42	0.10	38.08	59.71	-21.63	QP
0.363	38.12	0.40	0.10	38.62	58.65	-20.03	QP
0.743	36.85	0.24	0.13	37.22	56.00	-18.78	QP
0.839	37.16	0.22	0.13	37.51	56.00	-18.49	QP
1.403	36.17	0.21	0.13	36.51	56.00	-19.49	QP
2.396	34.89	0.20	0.15	35.24	56.00	-20.76	QP


Model No.: EP19-050060WXL

Line:

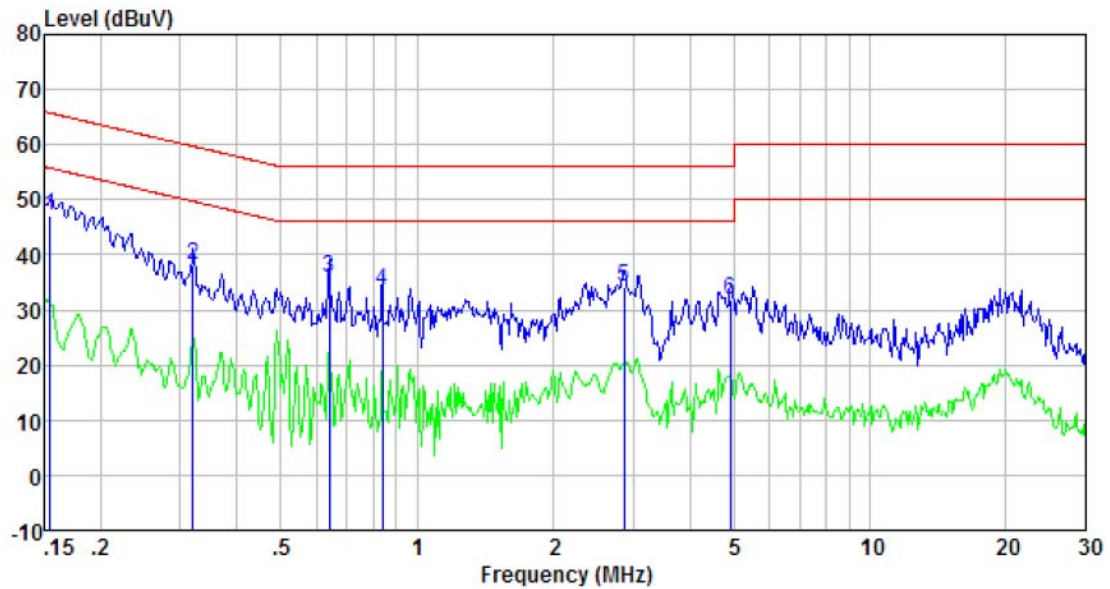

Freq MHz	Reading level dBuV	1ISM/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.155	46.50	0.42	0.12	47.04	65.74	-18.70	QP
0.320	37.58	0.44	0.10	38.12	59.71	-21.59	QP
0.641	35.56	0.30	0.13	35.99	56.00	-20.01	QP
0.839	33.17	0.26	0.13	33.56	56.00	-22.44	QP
2.869	33.73	0.20	0.15	34.08	56.00	-21.92	QP
4.926	31.59	0.21	0.15	31.95	56.00	-24.05	QP

Neutral:

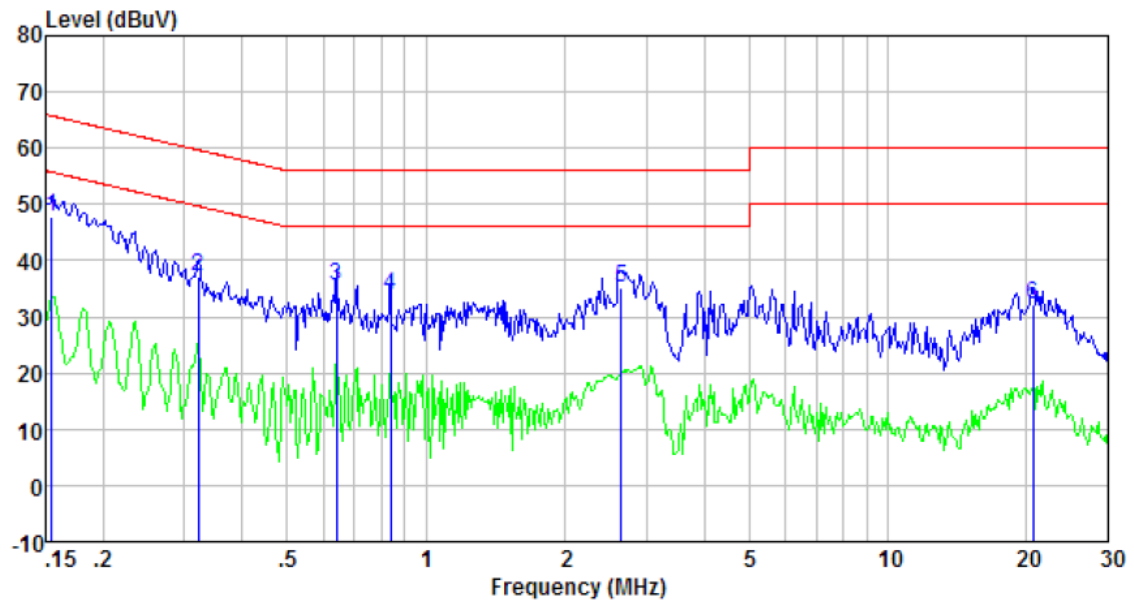


Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.155	47.42	0.41	0.12	47.95	65.74	-17.79	QP
0.322	36.50	0.41	0.10	37.01	59.66	-22.65	QP
0.641	35.22	0.26	0.13	35.61	56.00	-20.39	QP
0.839	33.65	0.22	0.13	34.00	56.00	-22.00	QP
2.650	34.85	0.20	0.15	35.20	56.00	-20.80	QP
20.594	31.53	0.31	0.22	32.06	60.00	-27.94	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.


## 7.3 Conducted Peak Output Power

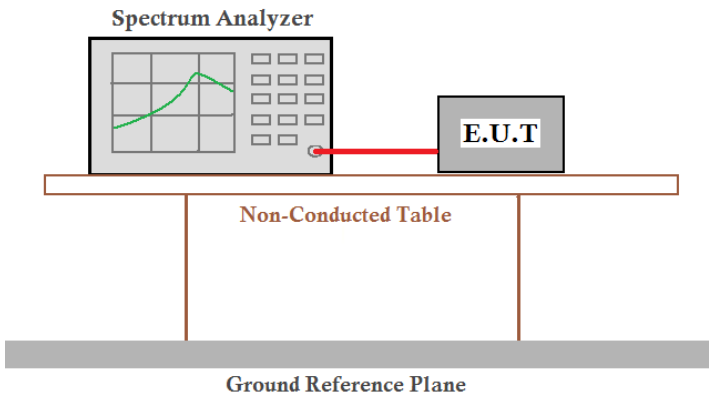Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013
Limit:	20.97dBm
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


### Measurement Data

Test channel	Peak Output Power (dBm)	Limit(dBm)	Result
Lowest	18.14	20.97	Pass
Middle	17.61		
Highest	16.65		


Test plot as follows:

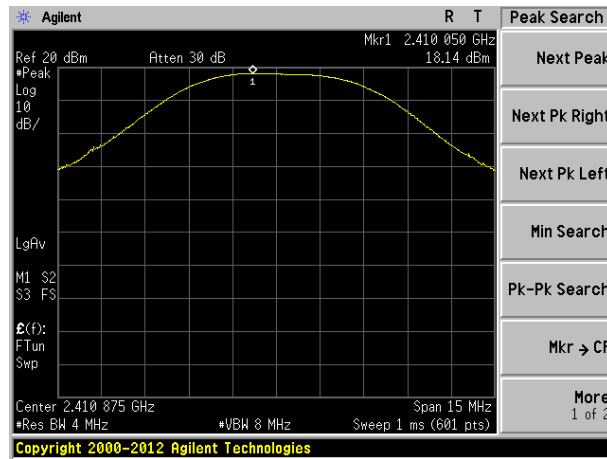

Lowest channel

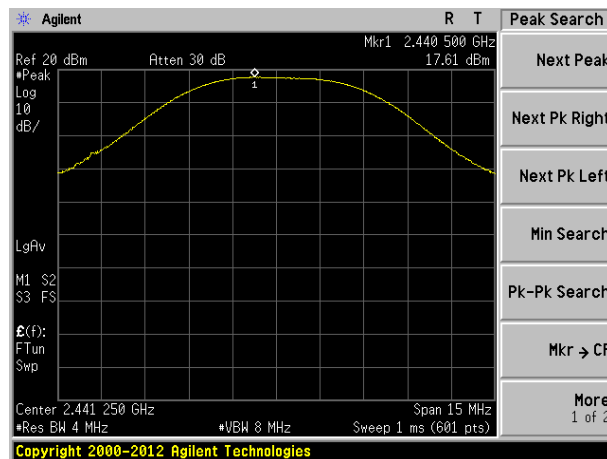


Middle channel

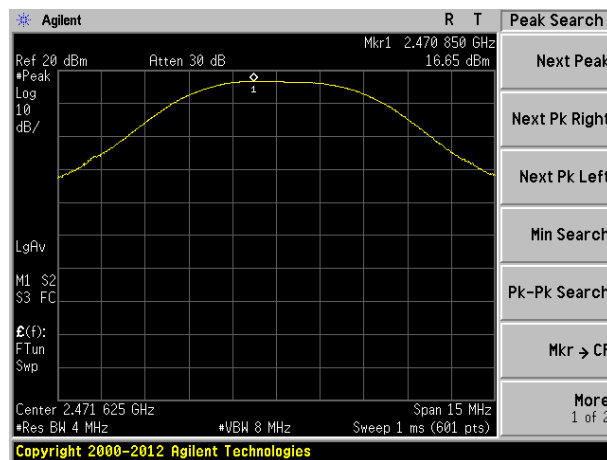

Highest channel




## 7.4 20dB Emission Bandwidth

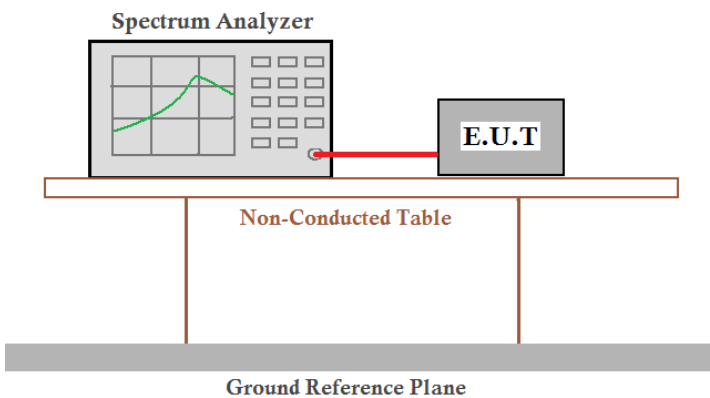Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013
Limit:	N/A
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


### Measurement Data

Test channel	Channel Bandwidth (MHz)	Limit(KHz)	Result
Lowest	3.640	N/A	Pass
Middle	3.661		
Highest	3.653		


Test plot as follows:

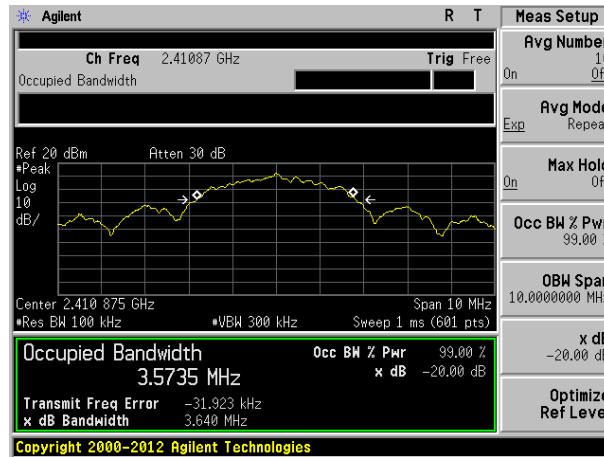

Lowest channel

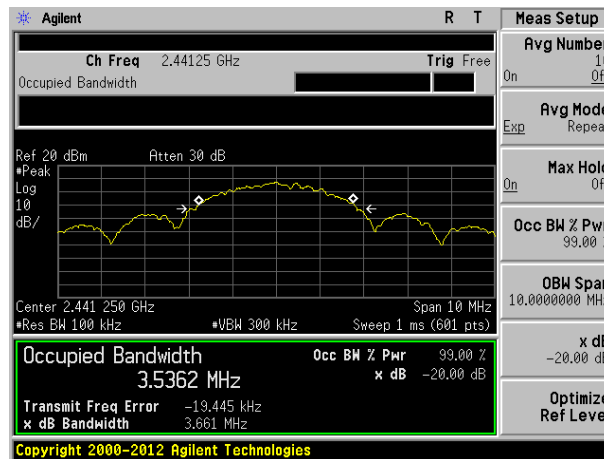


Middle channel

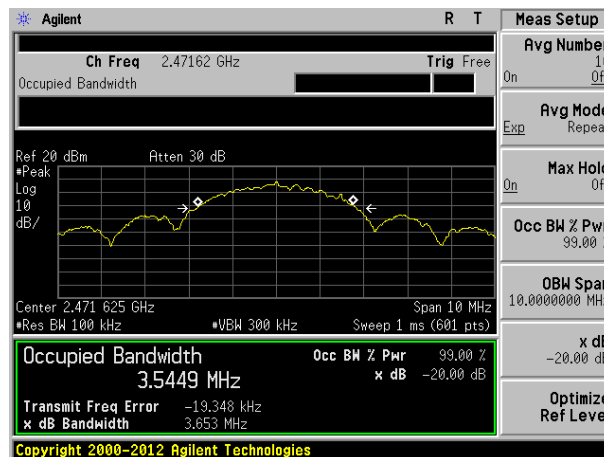

Highest channel

## 7.5 Carrier Frequencies Separation

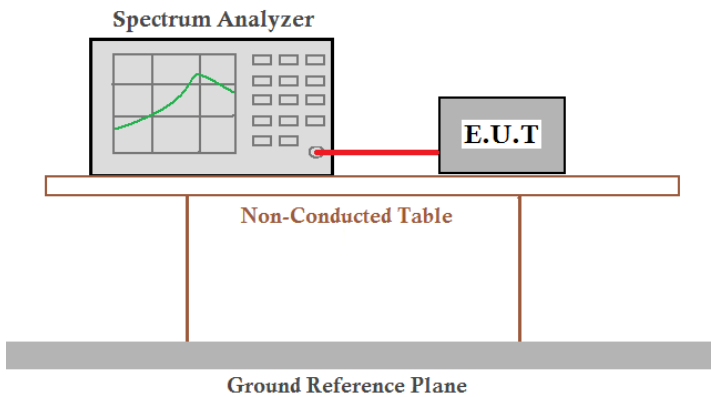Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


### Measurement Data

Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	3400	2426.66	Pass
Middle	3367	2440.66	Pass
Highest	3367	2435.33	Pass


Note: According to section 7.4

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
Lowest	3640	2426.66
Middle	3661	2440.66
Highest	3653	2435.33


Test plot as follows:

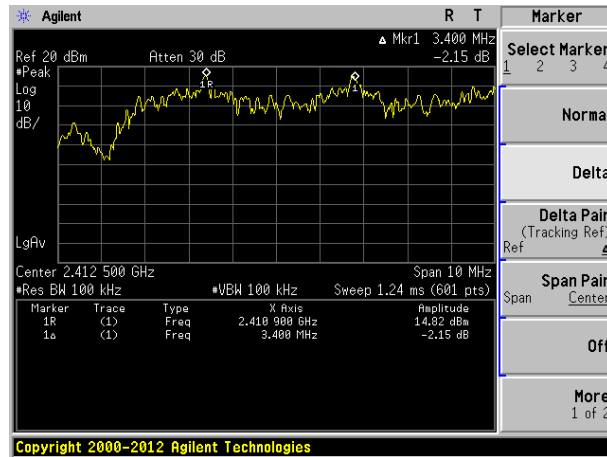

Lowest channel

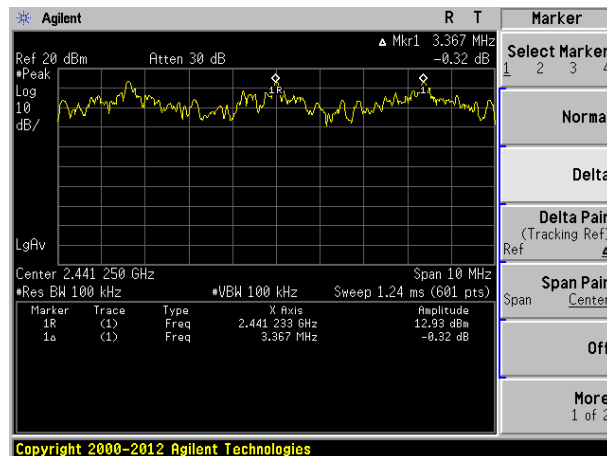


Middle channel

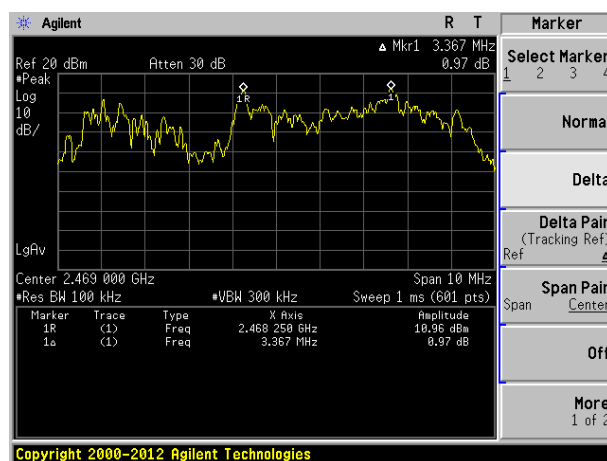


Highest channel

## 7.6 Hopping Channel Number

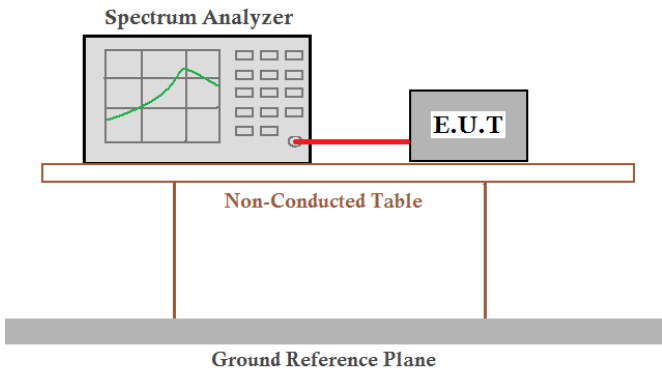
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data:

Hopping channel numbers	Limit	Result
19	15	Pass

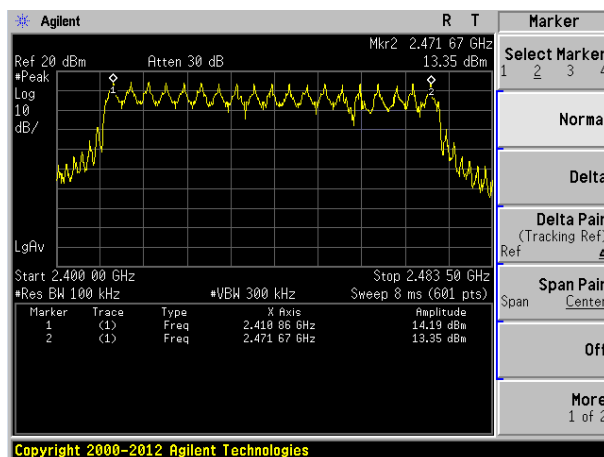

## 7.7 Dwell Time

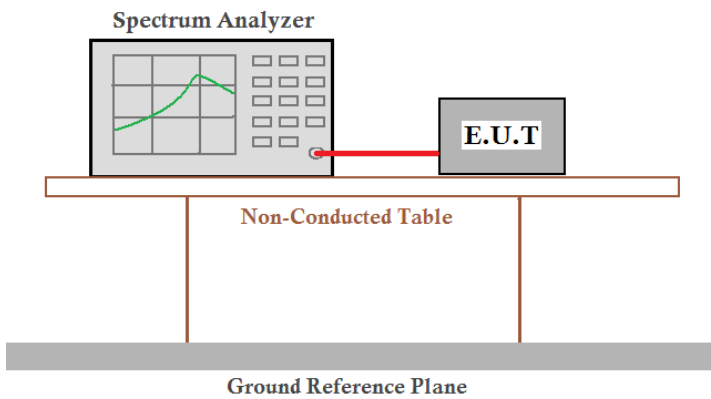
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

## Measurement Data

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441.250MHz	0.1117ms	$6\text{hops}/1\text{s} \times 0.1117 = 5.09\text{ms}$	400	Pass

The test period:  $T = 0.4 \text{ Second/Channel} \times 19 \text{ Channel} = 7.6\text{s}$

Test plot as follows:

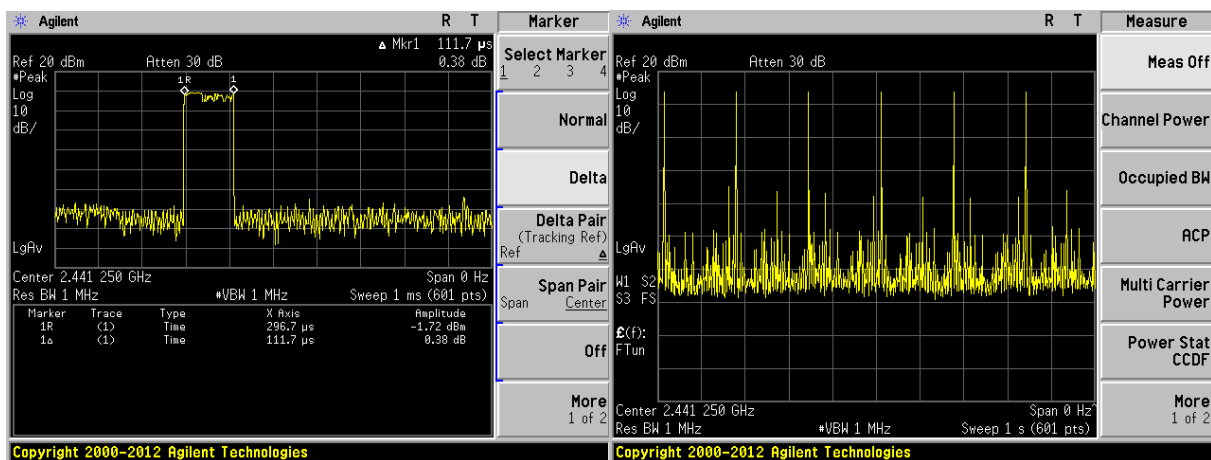


## 7.8 Pseudorandom Frequency Hopping Sequence

Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:
<p><i>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</i></p> <p><i>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</i></p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p><i>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</i></p> <ul style="list-style-type: none"> <li>• Number of shift register stages: 9</li> <li>• Length of pseudo-random sequence: <math>2^9 - 1 = 511</math> bits</li> <li>• Longest sequence of zeros: 8 (non-inverted signal)</li> </ul> <div data-bbox="242 1005 1299 1158" data-label="Diagram"> </div> <p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p><i>An example of Pseudorandom Frequency Hopping Sequence as follow:</i></p> <div data-bbox="242 1256 1244 1411" data-label="Diagram"> </div> <p><i>Each frequency used equally on the average by each transmitter.</i></p> <p><i>The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</i></p>	


## 7.9 Band Edge

### 7.9.1 Conducted Emission Method

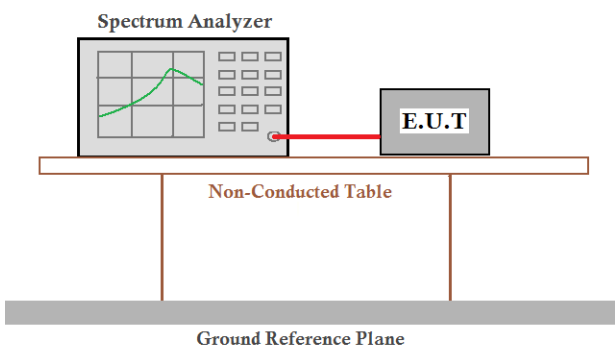Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Test plot as follows:



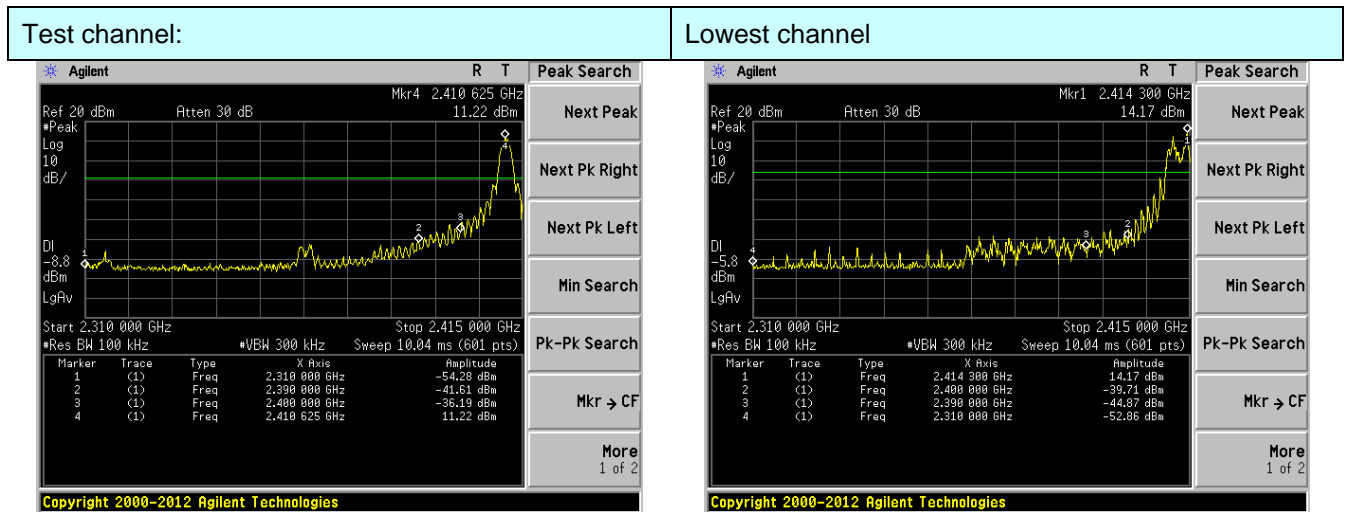

No-hopping mode


Hopping mode

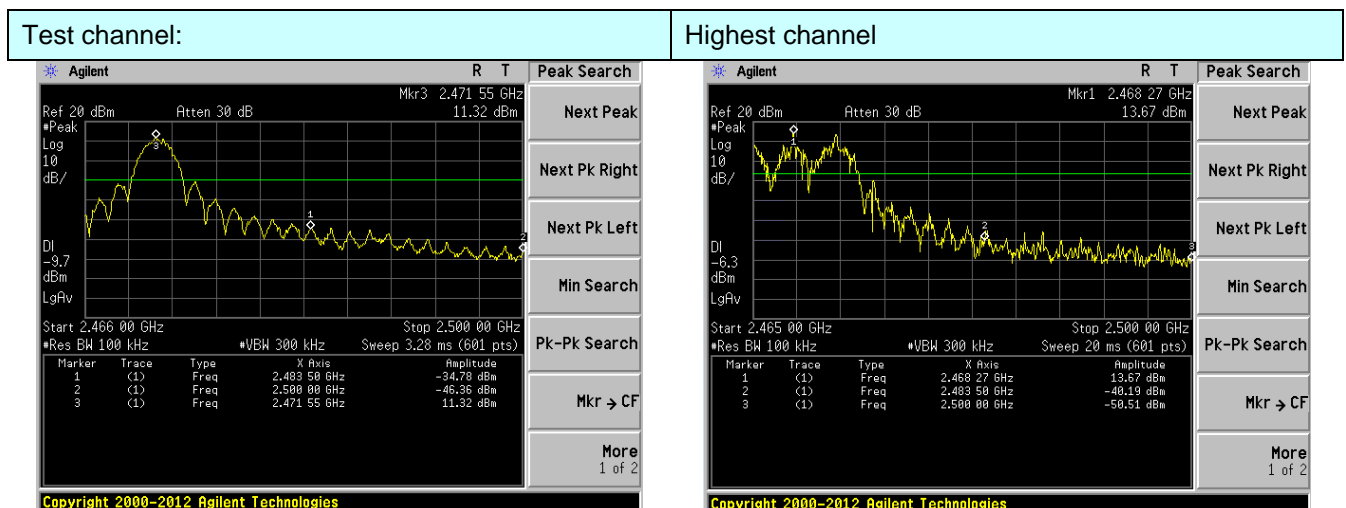

No-hopping mode

Hopping mode

## 7.9.2 Radiated Emission Method

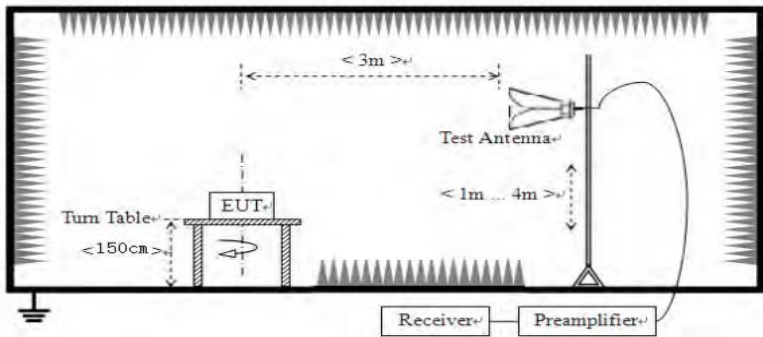Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	All restriction band have been tested, and 2.3GHz to 2.5GHz band is the worse case				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	Above 1GHz		54.00		Average Value
			74.00		Peak Value
Test setup:					
Test Procedure:	<div>1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</div> <div>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</div> <div>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</div> <div>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</div> <div>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</div> <div>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</div>				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2for details				

Test results:	Pass
---------------	------

Remark:

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	48.17	27.59	5.38	30.18	50.96	74.00	-23.04	Horizontal
2400.00	50.42	27.58	5.39	30.18	53.21	74.00	-20.79	Horizontal
2390.00	47.03	27.59	5.38	30.18	49.82	74.00	-24.18	Vertical
2400.00	55.81	27.58	5.39	30.18	58.60	74.00	-15.40	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	35.97	27.59	5.38	30.18	38.76	54.00	-15.24	Horizontal
2400.00	37.41	27.58	5.39	30.18	40.20	54.00	-13.81	Horizontal
2390.00	36.15	27.59	5.38	30.18	38.94	54.00	-15.06	Vertical
2400.00	39.37	27.58	5.39	30.18	42.16	54.00	-11.84	Vertical

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	48.66	27.53	5.47	29.93	51.73	74.00	-22.27	Horizontal
2500.00	47.21	27.55	5.49	29.93	50.32	74.00	-23.68	Horizontal
2483.50	50.05	27.53	5.47	29.93	53.12	74.00	-20.88	Vertical
2500.00	48.52	27.55	5.49	29.93	51.63	74.00	-22.37	Vertical

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	38.84	27.53	5.47	29.93	41.91	54.00	-12.09	Horizontal
2500.00	36.37	27.55	5.49	29.93	39.48	54.00	-14.52	Horizontal
2483.50	40.32	27.53	5.47	29.93	43.39	54.00	-10.61	Vertical
2500.00	36.57	27.55	5.49	29.93	39.68	54.00	-14.32	Vertical

Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.10 Spurious Emission

### 7.10.1 Conducted Emission Method

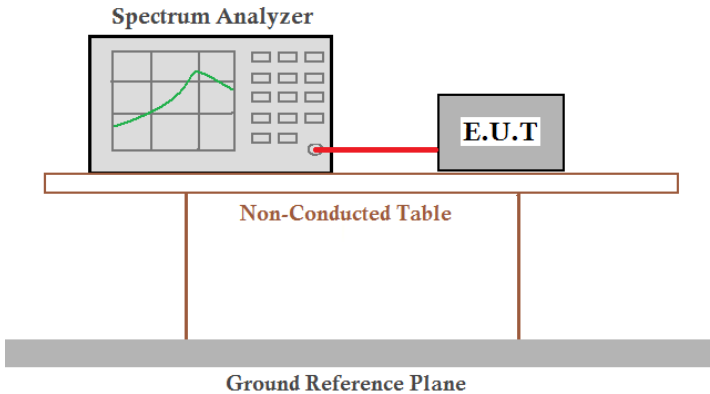
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 Meas Guidance
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane, represented by a thick grey bar.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

## Lowest channel

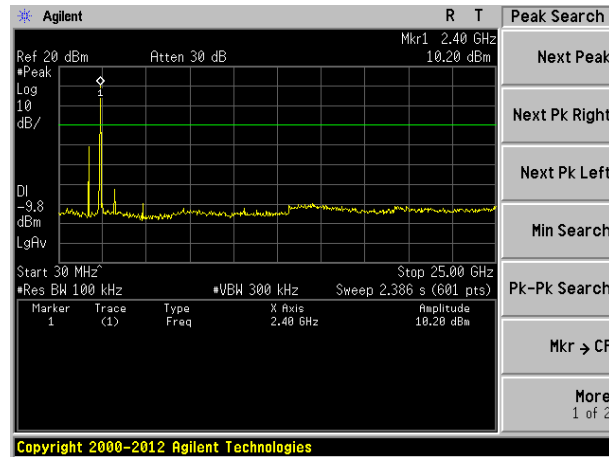


30MHz~25GHz

## Middle channel

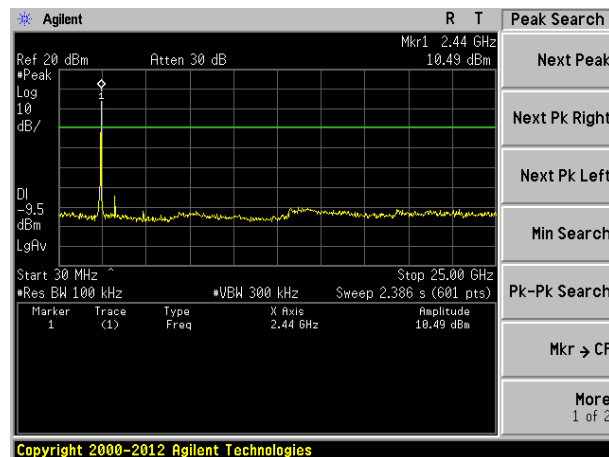


30MHz~25GHz


## Highest channel

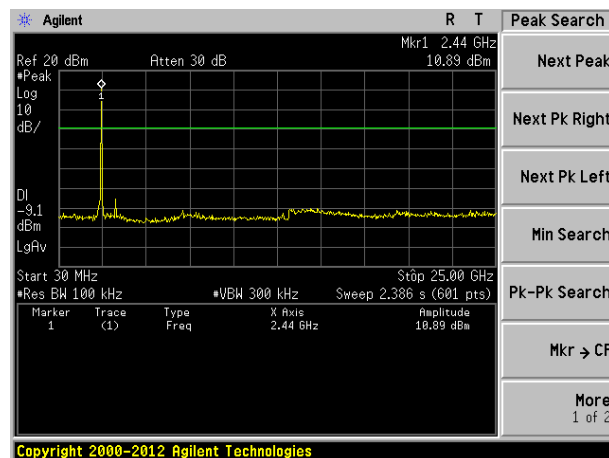

30MHz~25GHz

## 7.10.2 Radiated Emission Method

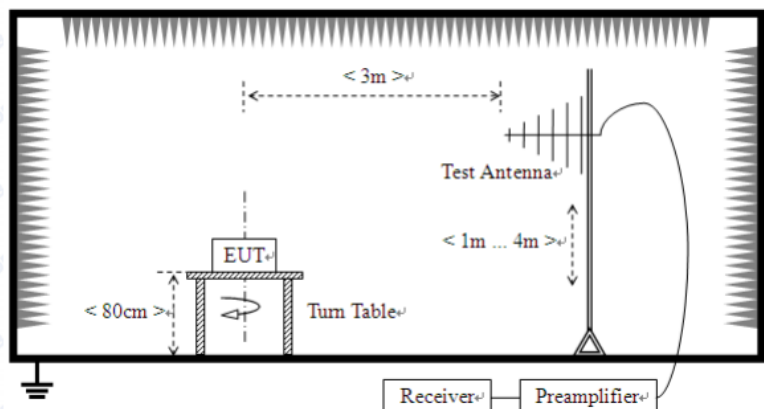Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		54.0		Average Value
			74.0		Peak Value
Test setup:	Below 1GHz				
	<div></div>				
	Above 1GHz				

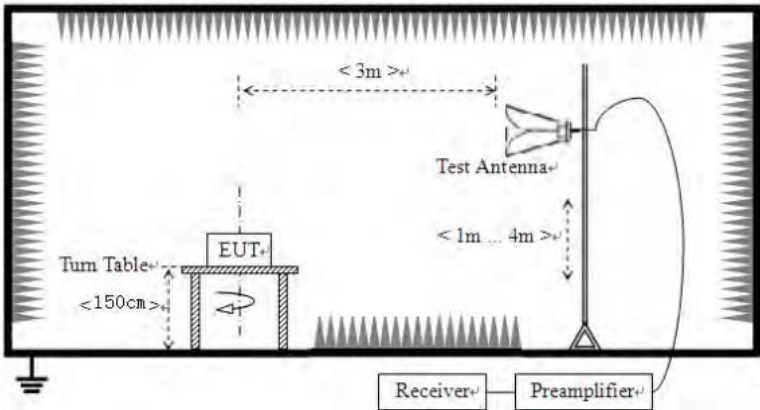	
<p>Test Procedure:</p>	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8 meters below 1G and 1.5 meters above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.2 for details</p>
<p>Test results:</p>	<p>Pass</p>

**Remark:**

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case. Only the worst case shows below.

**Measurement data:**

■ **Below 1GHz**

Model No.: EP19-050060WXL

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
30.00	47.60	11.30	0.55	30.10	29.35	40.00	-10.65	Vertical
52.21	45.04	12.20	0.79	29.98	28.05	40.00	-11.95	Vertical
149.49	58.73	7.50	1.56	29.41	38.38	43.50	-5.12	Vertical
154.82	59.81	7.85	1.60	29.39	39.87	43.50	-3.63	Vertical
159.78	57.19	8.20	1.63	29.36	37.66	43.50	-5.84	Vertical
165.49	57.69	8.33	1.66	29.34	38.34	43.50	-5.16	Vertical
149.49	52.40	7.50	1.56	29.41	32.05	43.50	-11.45	Horizontal
154.82	52.35	7.85	1.60	29.39	32.41	43.50	-11.09	Horizontal
165.49	49.97	8.33	1.66	29.34	30.62	43.50	-12.88	Horizontal
213.02	44.97	10.69	1.92	29.32	28.26	43.50	-15.24	Horizontal
310.00	44.48	13.68	2.42	29.94	30.64	46.00	-15.36	Horizontal
351.71	43.75	14.50	2.63	29.73	31.15	46.00	-14.85	Horizontal



## ■ Above 1GHz

Test channel:	Lowest
---------------	--------

### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4821.750	46.50	31.79	14.44	37.67	55.06	74.00	-18.94	Vertical
7232.625	36.69	36.19	16.31	35.68	53.51	74.00	-20.49	Vertical
9643.500	34.67	38.07	18.24	34.92	56.06	74.00	-17.94	Vertical
12054.375	33.87	39.05	19.47	36.14	56.25	74.00	-17.75	Vertical
14465.250	*	*	*	*	*	*	*	Vertical
16876.125	*	*	*	*	*	*	*	Vertical
4821.750	45.48	31.79	14.44	37.67	54.04	74.00	-19.96	Horizontal
7232.625	35.66	36.19	16.31	35.68	52.48	74.00	-21.52	Horizontal
9643.500	34.35	38.07	18.24	34.92	55.74	74.00	-18.26	Horizontal
12054.375	33.90	39.05	19.47	36.14	56.28	74.00	-17.72	Horizontal
14465.250	*	*	*	*	*	*	*	Horizontal
16876.125	*	*	*	*	*	*	*	Horizontal

### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4821.750	35.71	31.79	14.44	37.67	44.27	54.00	-9.73	Vertical
7232.625	26.66	36.19	16.31	35.68	43.48	54.00	-10.52	Vertical
9643.500	26.01	38.07	18.24	34.92	47.40	54.00	-6.60	Vertical
12054.375	25.44	39.05	19.47	36.14	47.82	54.00	-6.18	Vertical
14465.250	*	*	*	*	*	*	*	Vertical
16876.125	*	*	*	*	*	*	*	Vertical
4821.750	36.98	31.79	14.44	37.67	45.54	54.00	-8.46	Horizontal
7232.625	27.34	36.19	16.31	35.68	44.16	54.00	-9.84	Horizontal
9643.500	26.21	38.07	18.24	34.92	47.60	54.00	-6.40	Horizontal
12054.375	26.31	39.05	19.47	36.14	48.69	54.00	-5.31	Horizontal
14465.250	*	*	*	*	*	*	*	Horizontal
16876.125	*	*	*	*	*	*	*	Horizontal

### Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle
---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2441.250	49.32	31.85	14.51	37.68	58.00	74.00	-16.00	Vertical
4882.500	37.43	36.37	16.48	35.64	54.64	74.00	-19.36	Vertical
7323.750	33.21	38.35	18.52	34.99	55.09	74.00	-18.91	Vertical
9765.000	32.57	38.92	19.78	36.26	55.01	74.00	-18.99	Vertical
12206.250	*	*	*	*	*	*	*	Vertical
14647.500	*	*	*	*	*	*	*	Vertical
4882.500	47.20	31.85	14.51	37.68	55.88	74.00	-18.12	Horizontal
7323.750	38.19	36.37	16.48	35.64	55.40	74.00	-18.60	Horizontal
9765.000	33.26	38.35	18.52	34.99	55.14	74.00	-18.86	Horizontal
12206.250	31.40	38.92	19.78	36.26	53.84	74.00	-20.16	Horizontal
14647.500	*	*	*	*	*	*	*	Horizontal
17088.750	*	*	*	*	*	*	*	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2441.250	37.73	31.85	14.51	37.68	46.41	54.00	-7.59	Vertical
4882.500	31.15	36.37	16.48	35.64	48.36	54.00	-5.64	Vertical
7323.750	26.43	38.35	18.52	34.99	48.31	54.00	-5.69	Vertical
9765.000	25.33	38.92	19.78	36.26	47.77	54.00	-6.23	Vertical
12206.250	*	*	*	*	*	*	*	Vertical
14647.500	*	*	*	*	*	*	*	Vertical
4882.500	36.76	31.85	14.51	37.68	45.44	54.00	-8.56	Horizontal
7323.750	30.10	36.37	16.48	35.64	47.31	54.00	-6.69	Horizontal
9765.000	27.53	38.35	18.52	34.99	49.41	54.00	-4.59	Horizontal
12206.250	26.31	38.92	19.78	36.26	48.75	54.00	-5.25	Horizontal
14647.500	*	*	*	*	*	*	*	Horizontal
17088.750	*	*	*	*	*	*	*	Horizontal

Remark:

Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

“\*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest
---------------	---------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4943.250	48.21	31.91	14.61	37.69	57.04	74.00	-16.96	Vertical
7414.875	36.62	36.56	16.63	35.60	54.21	74.00	-19.79	Vertical
9886.500	33.25	38.72	18.51	35.05	55.43	74.00	-18.57	Vertical
12358.125	31.17	38.78	20.09	36.38	53.66	74.00	-20.34	Vertical
14829.750	*	*	*	*	*	*	*	Vertical
17301.375	*	*	*	*	*	*	*	Vertical
4943.250	47.96	31.91	14.61	37.69	56.79	74.00	-17.21	Horizontal
7414.875	35.84	36.56	16.63	35.60	53.43	74.00	-20.57	Horizontal
9886.500	31.23	38.72	18.51	35.05	53.41	74.00	-20.59	Horizontal
12358.125	30.71	38.78	20.09	36.38	53.20	74.00	-20.80	Horizontal
14829.750	*	*	*	*	*	*	*	Horizontal
17301.375	*	*	*	*	*	*	*	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4943.250	37.41	31.91	14.61	37.69	46.24	54.00	-7.76	Vertical
7414.875	32.73	36.56	16.63	35.60	50.32	54.00	-3.68	Vertical
9886.500	27.44	38.72	18.51	35.05	49.62	54.00	-4.38	Vertical
12358.125	26.87	38.78	20.09	36.38	49.36	54.00	-4.64	Vertical
14829.750	*	*	*	*	*	*	*	Vertical
17301.375	*	*	*	*	*	*	*	Vertical
4943.250	36.41	31.91	14.61	37.69	45.24	54.00	-8.76	Horizontal
7414.875	33.12	36.56	16.63	35.60	50.71	54.00	-3.29	Horizontal
9886.500	27.61	38.72	18.51	35.05	49.79	54.00	-4.21	Horizontal
12358.125	26.61	38.78	20.09	36.38	49.10	54.00	-4.90	Horizontal
14829.750	*	*	*	*	*	*	*	Horizontal
17301.375	*	*	*	*	*	*	*	Horizontal



Remark:

Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

“\*”, means this data is the too weak instrument of signal is unable to test.

## 8 Test Setup Photo

Radiated Emission

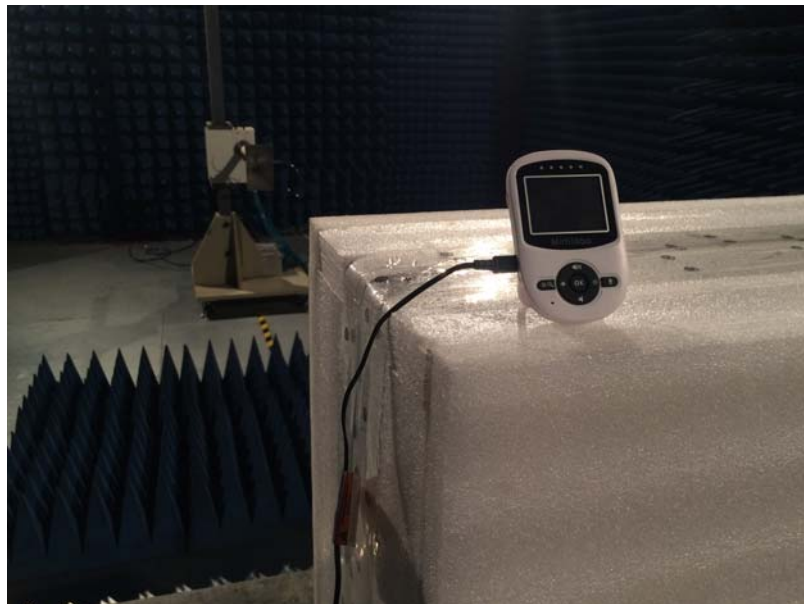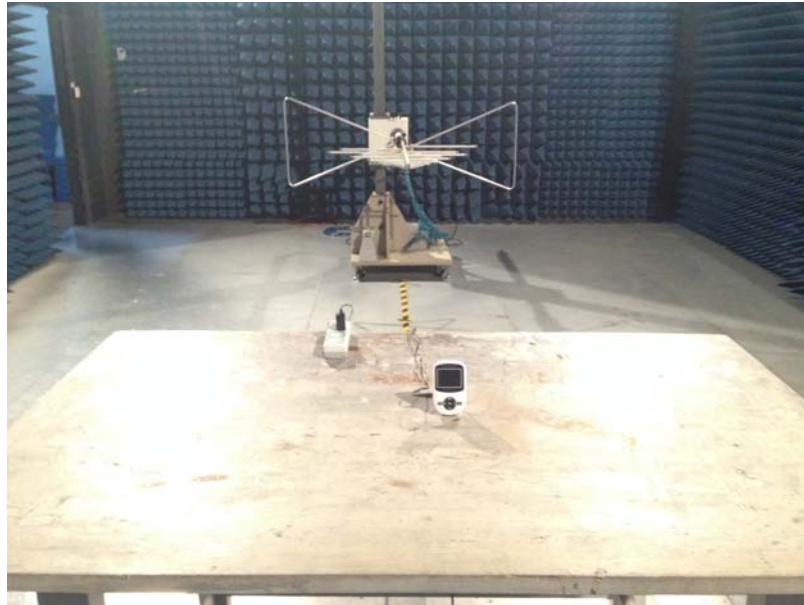

## Conducted Emission



## 9 EUT Constructional Details














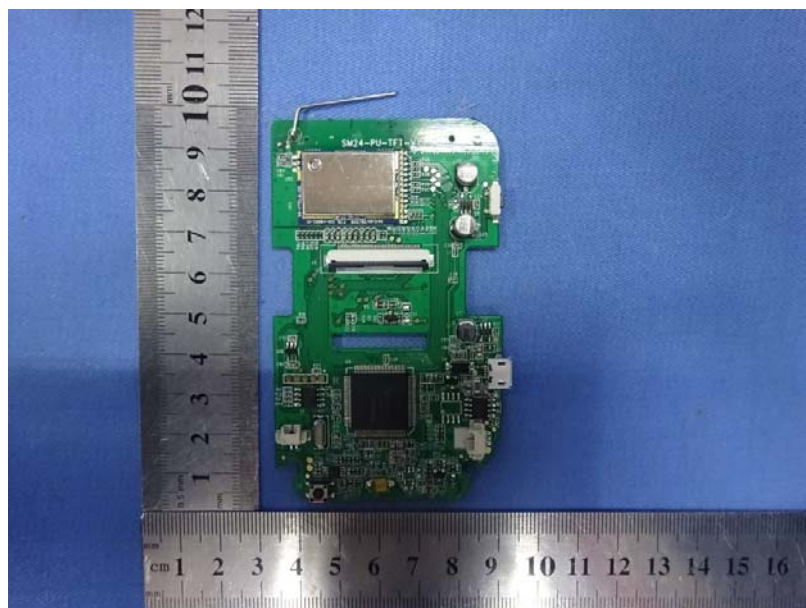

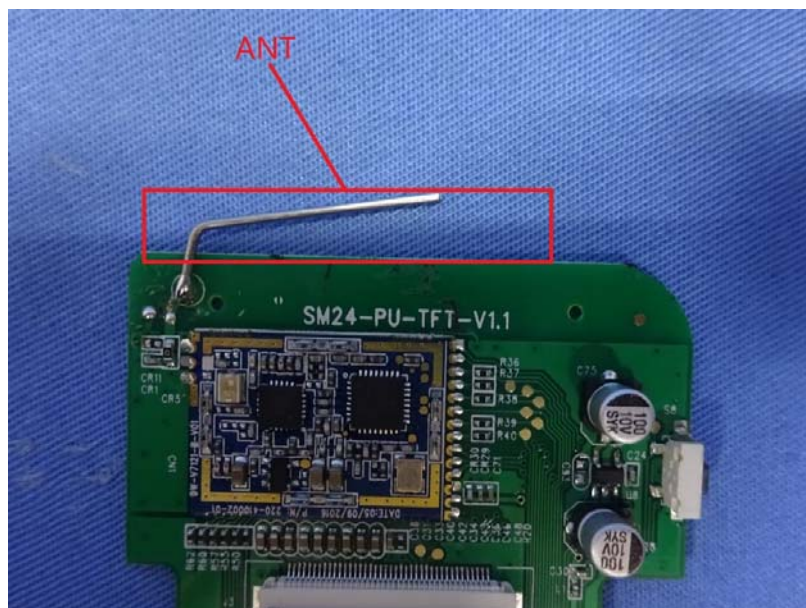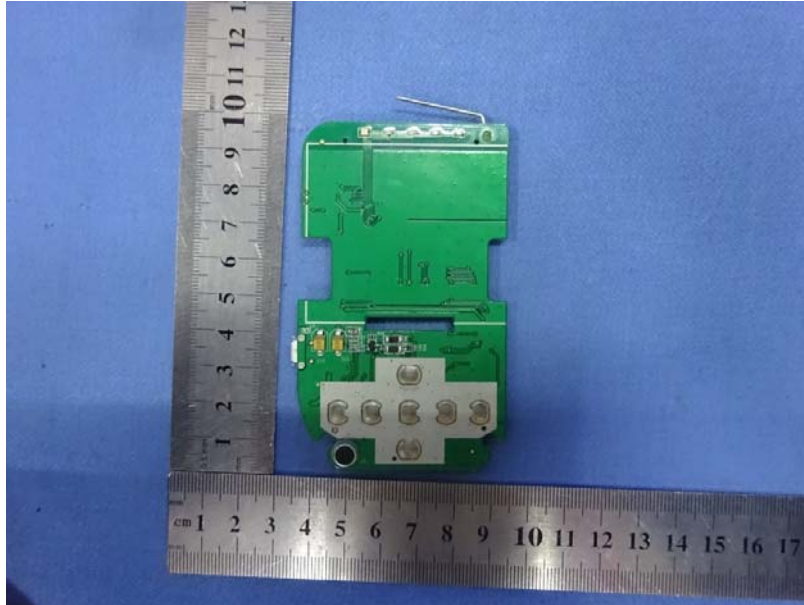





-----End-----