



FCC ID: 2AKZA-QCA9377  
Report No.: T180627D11-RP1

Page: 1 / 87  
Rev.: 02

# RADIO TEST REPORT

## FCC 47 CFR PART 15 SUBPART C

<b>Test Standard</b>	<b>FCC Part 15.247</b>
<b>Product name</b>	<b>WiFi+Bluetooth 4.1(HS) System on Module</b>
<b>Brand Name</b>	<b>TechNexion</b>
<b>Model No.</b>	<b>PIXI-9377</b>
<b>Test Result</b>	<b>Pass</b>

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory)

Approved by:

Reviewed by:

  
Sam Chuang  
Manager

  
Jerry Chuang  
Engineer

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部分複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T180627D11-RP1

Page: 2 / 87  
Rev.: 02

## **Revision History**

Rev.	Issue Date	Revisions	Revised By
00	August 28, 2018	Initial Issue	May Lin
01	September 20, 2018	1. Added information about the FHSS characteristics in P.5. 2. Revised antenna information in P.6. 3. Revised the test procedure in P.19, P.33. 4. Added note in P.29-30, P.35, P.39. 5. Revised the test result and test data in P.38-39. 6. Update KDB 937606 to KDB 414788 in P.40.	May Lin
02	September 27, 2018	1. Revised the worst mode of measurement in P.13.	May Lin

## Table of contents

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
<b>1.1 EUT INFORMATION .....</b>	<b>4</b>
<b>1.2 EUT CHANNEL INFORMATION .....</b>	<b>6</b>
<b>1.3 ANTENNA INFORMATION .....</b>	<b>6</b>
<b>1.4 MEASUREMENT UNCERTAINTY .....</b>	<b>7</b>
<b>1.5 FACILITIES AND TEST LOCATION .....</b>	<b>8</b>
<b>1.6 INSTRUMENT CALIBRATION .....</b>	<b>9</b>
<b>1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT .....</b>	<b>10</b>
<b>1.8 TEST METHODOLOGY AND APPLIED STANDARDS .....</b>	<b>10</b>
<b>2. TEST SUMMERY .....</b>	<b>11</b>
<b>3. DESCRIPTION OF TEST MODES .....</b>	<b>12</b>
<b>3.1 THE WORST MODE OF OPERATING CONDITION .....</b>	<b>12</b>
<b>3.2 THE WORST MODE OF MEASUREMENT .....</b>	<b>13</b>
<b>3.3 EUT DUTY CYCLE .....</b>	<b>15</b>
<b>4. TEST RESULT .....</b>	<b>16</b>
<b>4.1 AC POWER LINE CONDUCTED EMISSION .....</b>	<b>16</b>
<b>4.2 20dB BANDWIDTH AND OCCUPIED BANDWIDTH (99%) .....</b>	<b>19</b>
<b>4.3 OUTPUT POWER MEASUREMENT .....</b>	<b>25</b>
<b>4.4 FREQUENCY SEPARATION .....</b>	<b>27</b>
<b>4.5 NUMBER OF HOPPING .....</b>	<b>31</b>
<b>4.6 CONDUCTED BANDEDGE AND SPURIOUS EMISSION .....</b>	<b>33</b>
<b>4.7 TIME OF OCCUPANCY (DWELL TIME) .....</b>	<b>38</b>
<b>4.8 RADIATION BANDEDGE AND SPURIOUS EMISSION .....</b>	<b>40</b>
<b>APPENDIX 1 - PHOTOGRAPHS OF EUT</b>	

# 1. GENERAL INFORMATION

## 1.1 EUT INFORMATION

Applicant	TechNexion Ltd. 16f-5, No.736, Zhongzheng Road, Zhonghe Dist., New Taipei City, 23511 Taiwan ROC
Manufacturer	TechNexion Ltd. 16f-5, No.736, Zhongzheng Road, Zhonghe Dist., New Taipei City, 23511 Taiwan ROC
Equipment	WiFi+Bluetooth 4.1(HS) System on Module
Model No.	PIXI-9377
Model Discrepancy	N/A
Trade Name	TechNexion
Received Date	June 27, 2018
Date of Test	July 16 ~August 10, 2018
Output Power (W)	GFSK : 0.0111 8DPSK : 0.0097
Power Operation	Power by host system
HW Version	A1
FW Version	A1

## **1.2 INFORMATION ABOUT THE FHSS CHARACTERISTICS**

### **1.2.1 Pseudorandom Frequency Hopping Sequence**

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1 600 hops/s.

### **1.2.2 Equal Hopping Frequency Use**

The channels of this system will be used equally over the long-term distribution of the hopsets.

### **1.2.3 Example of a 79 hopping sequence in data mode:**

02, 05, 31, 24, 20, 10, 43, 36, 30, 23, 40, 06, 21, 50, 44, 09, 71, 78, 01, 13, 73, 07, 70, 72, 35, 62, 42, 11, 41, 08, 16, 29, 60, 15, 34, 61, 58, 04, 67, 12, 22, 53, 57, 18, 27, 76, 39, 32, 17, 77, 52, 33, 56, 46, 37, 47, 64, 49, 45, 38, 69, 14, 51, 26, 79, 19, 28, 65, 75, 54, 48, 03, 25, 66, 05, 16, 68, 74, 59, 63, 55

### **1.2.4 System Receiver Input Bandwidth**

Each channel bandwidth is 1MHz.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

### **1.2.5 Equipment Description**

15.247(a)(1) that the Rx input bandwidths shift frequencies in synchronization with the transmitted signals.

15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.

15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.



Report No.: T180627D11-RP1

Page: 6 / 87  
Rev.: 02

### 1.3 EUT CHANNEL INFORMATION

Frequency Range	2402MHz-2480MHz
Modulation Type	1. GFSK for BR-1Mbps 2. $\pi/4$ -DQPSK for EDR-2Mbps 3. 8DPSK for EDR-3Mbps
Number of channel	79 Channels

**Remark:**

Refer as ANSI 63.10:2013 clause 5.6.1 Table 4 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
<input type="checkbox"/> 1 MHz or less	1	Middle
<input type="checkbox"/> 1 MHz to 10 MHz	2	1 near top and 1 near bottom
<input checked="" type="checkbox"/> More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

### 1.4 ANTENNA INFORMATION

Antenna Type	<input checked="" type="checkbox"/> Dipole <input checked="" type="checkbox"/> PIFA <input type="checkbox"/> PCB <input type="checkbox"/> Coils					
Antenna Gain		Brand	P/N	Type	Peak Gain	Worst Mode
	Antenna 1	TechNexion	VM2450-25523-OOX-180	PIFA	2.5dBi	X
	Antenna 2	TechNexion	VM2450-ASSY1005	Dipole	4dBi	O

## 1.5 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 1.4003
RF output power, conducted	+/- 1.1372
Power density, conducted	+/- 1.4003
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

**Remark:**

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.



Report No.: T180627D11-RP1

Page: 8 / 87

Rev.: 02

## 1.6 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at  
No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Test site	Test Engineer	Remark
AC Conduction Room	Dally Hong	-
Radiation	Jerry Chuang	-
RF Conducted	Jerry Chuang	-

**Remark:** The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.



## 1.7 INSTRUMENT CALIBRATION

RF Conducted Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	06/29/2018	06/28/2019
Power Meter	Anritsu	ML2495A	1012009	09/18/2017	09/17/2018
Power Sensor	Anritsu	MA2411B	1126148	02/06/2018	02/05/2019
Signal Analyzer	R&S	FSV 40	101073	10/02/2017	10/01/2018

Wugu 966 Chamber A					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Band Reject Filters	MICRO TRONICS	BRM 50702	120	05/14/2018	05/13/2019
Bilog Antenna	Sunol Sciences	JB3	A030105	07/13/2018	07/12/2019
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	07/31/2017	07/30/2018
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	07/31/2017	07/30/2018
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	02/08/2018	02/07/2019
Double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/25/2017	08/24/2018
Loop Ant	COM-POWER	AL-130	121051	03/21/2018	03/20/2019
Pre-Amplifier	EMEC	EM330	060609	06/29/2018	06/28/2019
Pre-Amplifier	HP	8449B	3008A00965	06/29/2018	06/28/2019
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/31/2018	05/30/2019
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R

Conducted Emission Room # B					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
LISN	R&S	ENV216	101054	02/06/2018	02/05/2019
LISN	SCHWARZBECK	NSLK 8127	8127-541	02/09/2018	02/08/2019
EMI Test Receiver	R&S	ESCI	101203	11/02/2017	11/01/2018
CABLE	EMCI	CFD300-NL	CERF	07/03/2018	07/02/2019

**Remark:** Each piece of equipment is scheduled for calibration once a year.



Report No.: T180627D11-RP1

Page: 10 / 87  
Rev.: 02

## 1.8 SUPPORT AND EUT ACCESSORIES EQUIPMENT

EUT Accessories Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
	N/A				

Support Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	NB(K)	Toshiba	voyager	ZD 154034s	N/A
2	NB	Lenovo	TP00056A	R33B65	PD97260HU

## 1.9 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247



Report No.: T180627D11-RP1

Page: 11 / 87  
Rev.: 02

## 2. TEST SUMMERY

FCC Standard Section	Report Section	Test Item	Result
15.203	1.3	Antenna Requirement	Pass
15.207(a)	4.1	AC Conducted Emission	Pass
15.247(a)(1)	4.2	20 dB Bandwidth	Pass
-	4.2	Occupied Bandwidth (99%)	Pass
15.247(b)(1)	4.3	Output Power Measurement	Pass
15.247(a)(1)	4.4	Frequency Separation	Pass
15.247(a)(1)(iii)	4.5	Number of Hopping	Pass
15.247(d)	4.6	Conducted Band Edge	Pass
15.247(d)	4.6	Conducted Emission	Pass
15.247(a)(1)(iii)	4.7	Time of Occupancy	Pass
15.247(d)	4.8	Radiation Band Edge	Pass
15.247(d)	4.8	Radiation Spurious Emission	Pass



Report No.: T180627D11-RP1

Page: 12 / 87  
Rev.: 02

### 3. DESCRIPTION OF TEST MODES

#### 3.1 THE WORST MODE OF OPERATING CONDITION

Operation mode	GFSK for BR-1Mbps (DH5) 8DPSK for EDR-3Mbps (3DH5)
Test Channel Frequencies	<b>GFSK for BR-1Mbps:</b> 1.Lowest Channel : 2402MHz 2.Middle Channel : 2441MHz 3.Highest Channel : 2480MHz  <b>8DPSK for EDR-3Mbps:</b> 1.Lowest Channel : 2402MHz 2.Middle Channel : 2441MHz 3.Highest Channel : 2480MHz

*Remark:*

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.



Report No.: T180627D11-RP1

Page: 13 / 87  
Rev.: 02

## 3.2 THE WORST MODE OF MEASUREMENT

### For PIFA Antenna

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT power by host system
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Radiated Emission Measurement Above 1G	
Test Condition	Band edge, Emission for Unwanted and Fundamental
Power supply Mode	Mode 1: EUT power by host system
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4
Worst Position	<input type="checkbox"/> Placed in fixed position. <input checked="" type="checkbox"/> Placed in fixed position at X-Plane (E2-Plane) <input type="checkbox"/> Placed in fixed position at Y-Plane (E1-Plane) <input type="checkbox"/> Placed in fixed position at Z-Plane (H-Plane)
Worst Polarity	<input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical

#### Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis, X, Y, Z and two polarity, Horizontal and Vertical for radiated measurement. The worst case (X-Plane and Horizontal) were recorded in this report
3. AC power line conducted emission and for below 1G radiation emission were performed the EUT transmit at the highest output power channel as worse case.



Report No.: T180627D11-RP1

Page: 14 / 87  
Rev.: 02

**For Dipole Antenna**

AC Power Line Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Power supply Mode	Mode 1: EUT power by host system
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT power by host system
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Radiated Emission Measurement Above 1G	
Test Condition	Band edge, Emission for Unwanted and Fundamental
Power supply Mode	Mode 1: EUT power by host system
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4
Worst Position	<input type="checkbox"/> Placed in fixed position. <input type="checkbox"/> Placed in fixed position at X-Plane (E2-Plane) <input type="checkbox"/> Placed in fixed position at Y-Plane (E1-Plane) <input checked="" type="checkbox"/> Placed in fixed position at Z-Plane (H-Plane)
Worst Polarity	<input type="checkbox"/> Horizontal <input checked="" type="checkbox"/> Vertical

*Remark:*

- 1. The worst mode was record in this test report.*
- 2. EUT pre-scanned in three axis, X, Y, Z and two polarity, Horizontal and Vertical for radiated measurement. The worst case (Z-Plane and Vertical) were recorded in this report*
- 3. AC power line conducted emission and for below 1G radiation emission were performed the EUT transmit at the highest output power channel as worse case.*




Report No.: T180627D11-RP1

Page: 15 / 87  
Rev.: 02

### 3.3 EUT DUTY CYCLE

Duty Cycle			
Configuration	TX ON (ms)	TX ALL (ms)	Duty Cycle (%)
BR-1Mbps	2.9400	3.7600	78.19%
EDR-3Mbps	2.9200	3.7400	78.07%

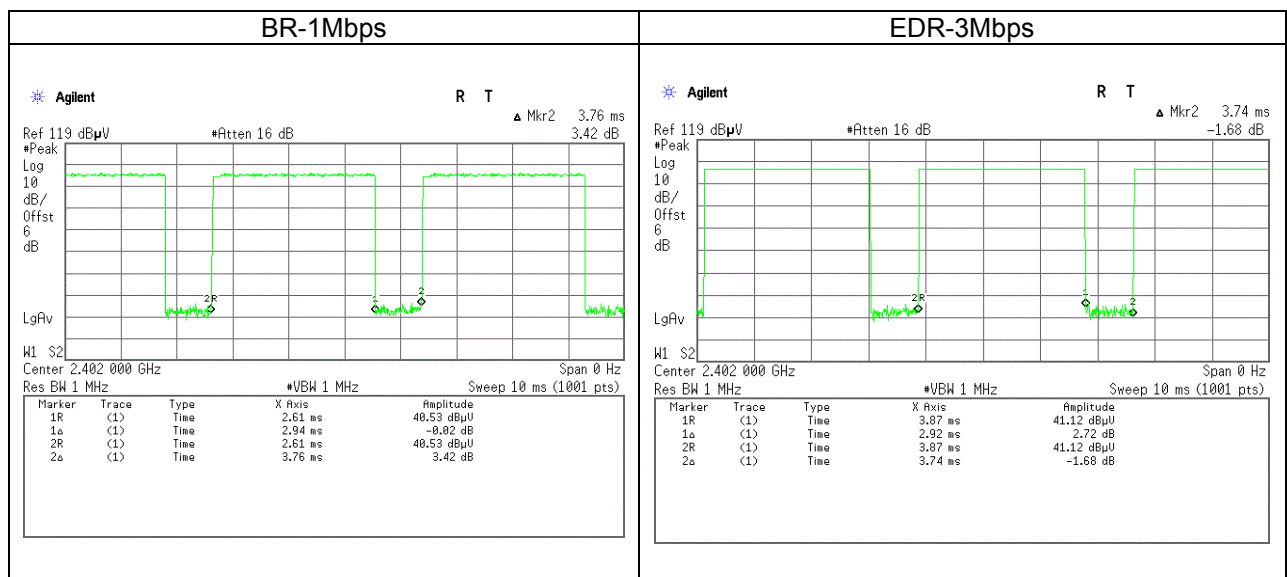

## 4. TEST RESULT

### 4.1 AC POWER LINE CONDUCTED EMISSION

#### 4.1.1 Test Limit

According to §15.207(a)

Frequency Range (MHz)	Limits(dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


\* Decreases with the logarithm of the frequency.

#### 4.1.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 6.2,

1. The EUT was placed on a non-conducted table, which is 0.8m above horizontal ground plane and 0.4m above vertical ground plane.
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

#### 4.1.3 Test Setup

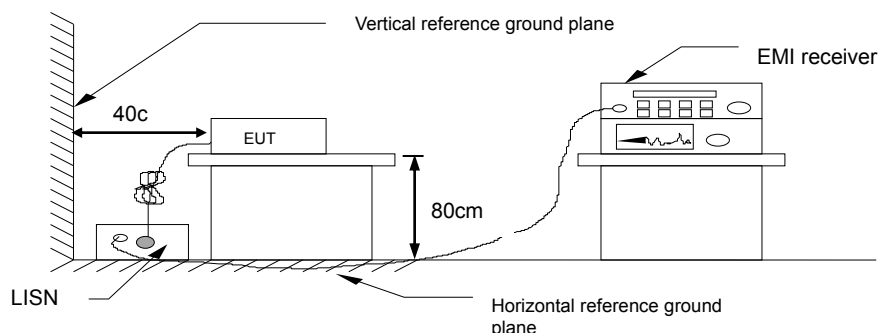


#### 4.1.4 Test Result

**PASS**




## Test Data

Test Mode:	Mode 1	Temp/Hum	24(°C)/ 50%RH
Phase:	Line	Test Date	July 19, 2018
Test Voltage:	120Vac	Test Engineer	Dally Hong

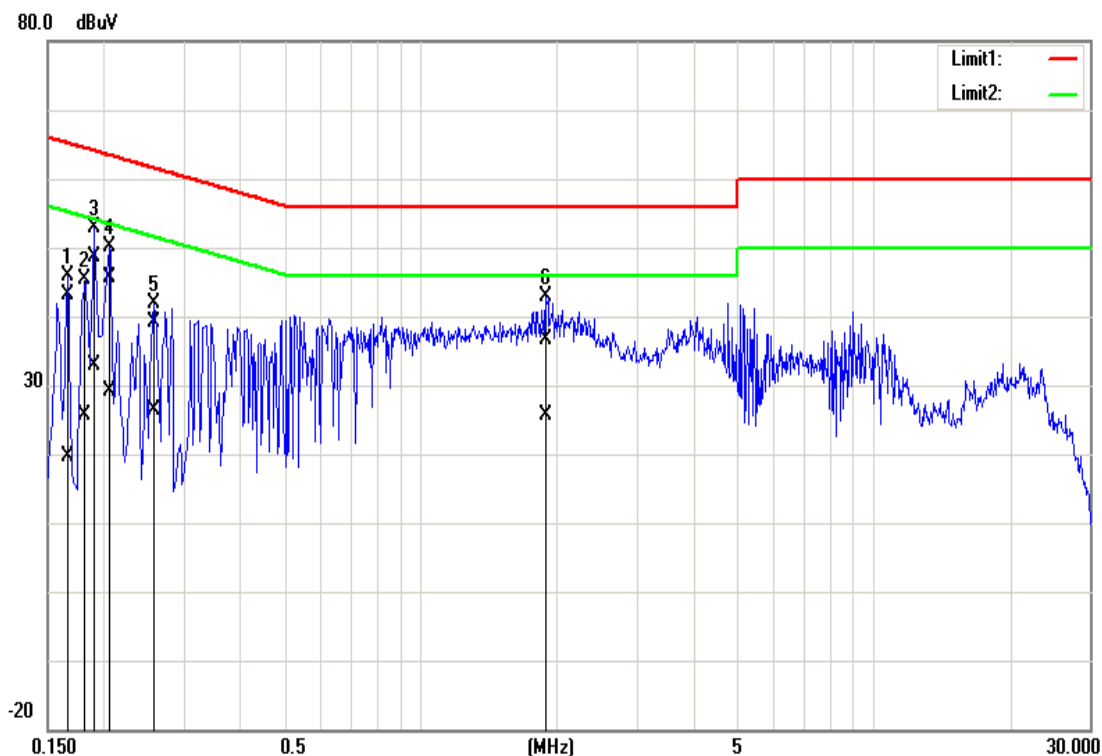

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.1660	43.06	19.41	0.11	43.17	19.52	65.16	55.16	-21.99	-35.64	Pass
0.1820	45.33	25.48	0.11	45.44	25.59	64.39	54.39	-18.95	-28.80	Pass
0.1900	48.46	32.72	0.11	48.57	32.83	64.04	54.04	-15.47	-21.21	Pass
0.2060	45.57	28.98	0.11	45.68	29.09	63.37	53.37	-17.69	-24.28	Pass
0.2580	39.04	26.23	0.11	39.15	26.34	61.50	51.50	-22.35	-25.16	Pass
1.8940	36.51	25.54	0.15	36.66	25.69	56.00	46.00	-19.34	-20.31	Pass

Test Mode:	Mode 1	Temp/Hum	24(°C)/ 50%RH
Phase:	Neutral	Test Date	July 19, 2018
Test Voltage:	120Vac	Test Engineer	Dally Hong

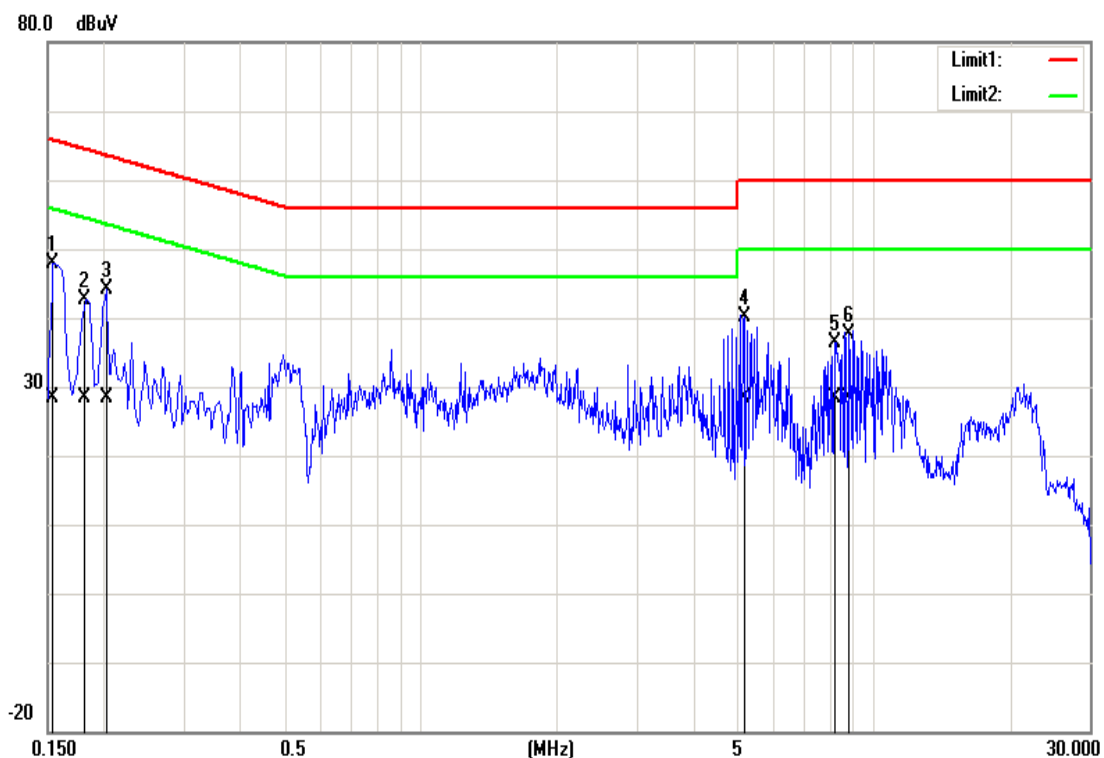

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
1.8940	31.03	22.97	0.16	31.19	23.13	56.00	46.00	-24.81	-22.87	Pass
0.1825	40.91	28.44	0.13	41.04	28.57	64.37	54.37	-23.33	-25.80	Pass
0.2007	40.02	26.02	0.13	40.15	26.15	63.58	53.58	-23.43	-27.43	Pass
5.1660	39.14	35.87	0.22	39.36	36.09	60.00	50.00	-20.64	-13.91	Pass
8.2300	34.97	30.49	0.27	35.24	30.76	60.00	50.00	-24.76	-19.24	Pass
8.7020	35.42	26.13	0.28	35.70	26.41	60.00	50.00	-24.30	-23.59	Pass

## 4.2 20dB BANDWIDTH AND OCCUPIED BANDWIDTH (99%)

### 4.2.1 Test Limit

According to §15.247(a) (1)

**20 dB Bandwidth** : For reporting purposes only.


**Occupied Bandwidth(99%)** : For reporting purposes only.

### 4.2.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 11.8.1,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 30kHz, VBW = 100kHz and Detector = Peak, to measurement 20 dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth.
5. Measure and record the result of 20 dB Bandwidth and 99% Bandwidth. in the test report.

### 4.2.3 Test Setup





Report No.: T180627D11-RP1

Page: 20 / 87  
Rev.: 02

#### 4.2.4 Test Result

Test mode: GFSK_BR-1Mbps mode / 2402-2480 MHz			
Channel	Frequency (MHz)	OBW (99%) (MHz)	20dB BW (MHz)
Low	2402	0.9073	1.1260
Mid	2441	0.8986	1.1217
High	2480	0.8986	1.1260



Test mode: 8DPSK_EDR-3Mbps mode / 2402-2480 MHz			
Channel	Frequency (MHz)	OBW (99%) (MHz)	20dB BW (MHz)
Low	2402	1.1852	1.3869
Mid	2441	1.1765	1.3826
High	2480	1.1722	1.3739

Report No.: T180627D11-RP1


## Test Data

## 20dB BANDWIDTH

### GFSK\_BR-1Mbps mode

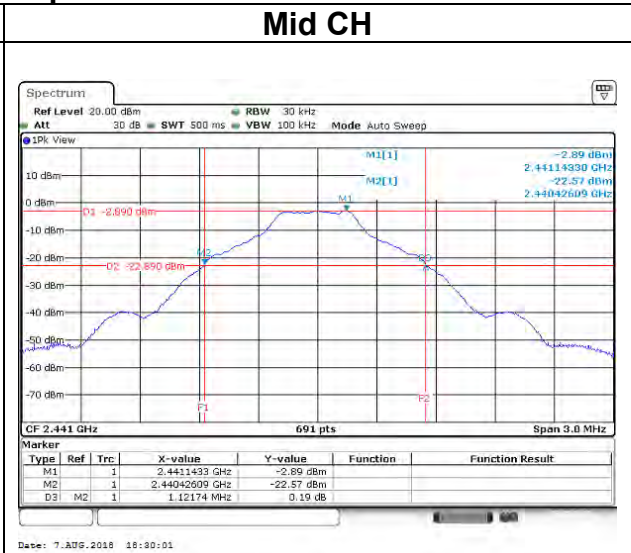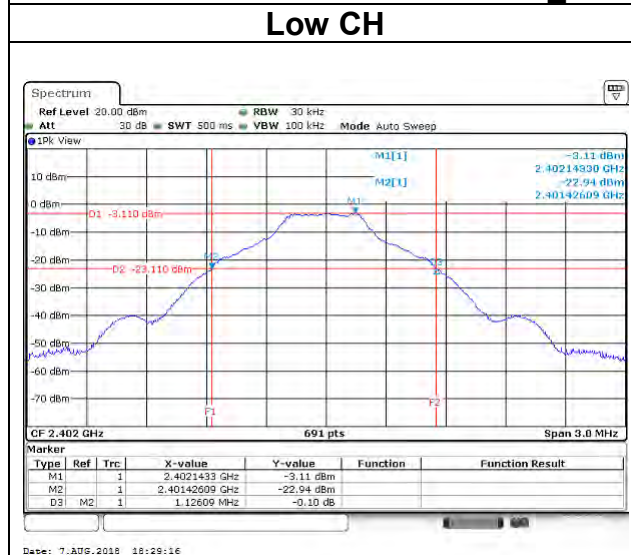

## High CH

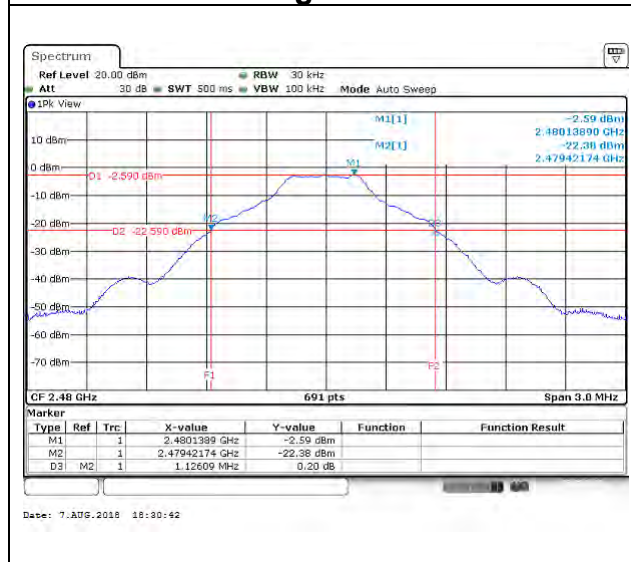




Report No.: T180627D11-RP1


Page: 22 / 87  
Rev.: 02

### 8DPSK\_EDR-3Mbps mode


#### Low CH

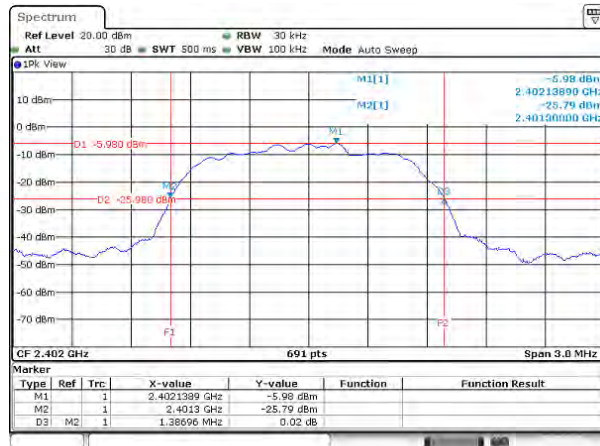

#### Mid CH

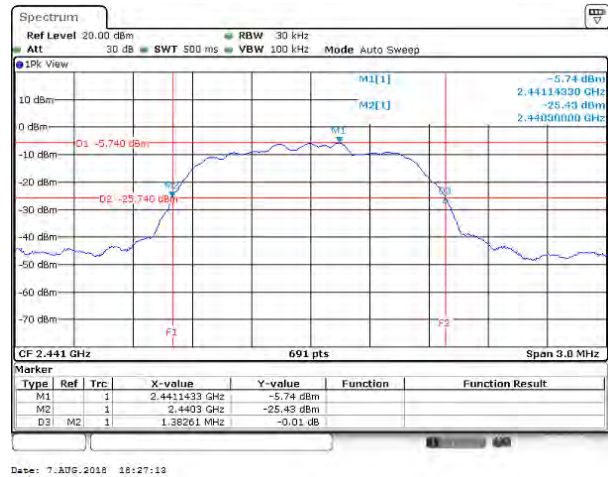



#### High CH

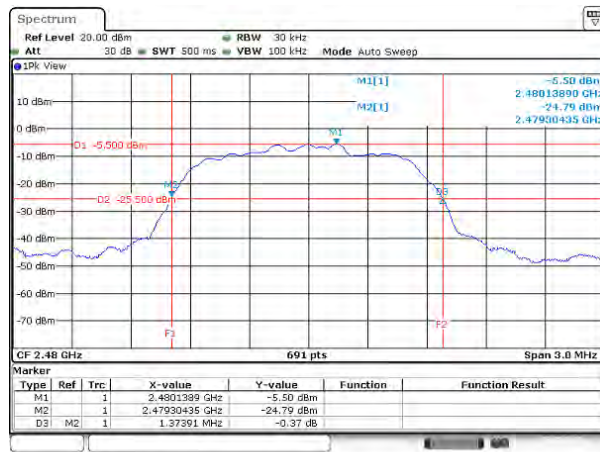



## BANDWIDTH (99%)

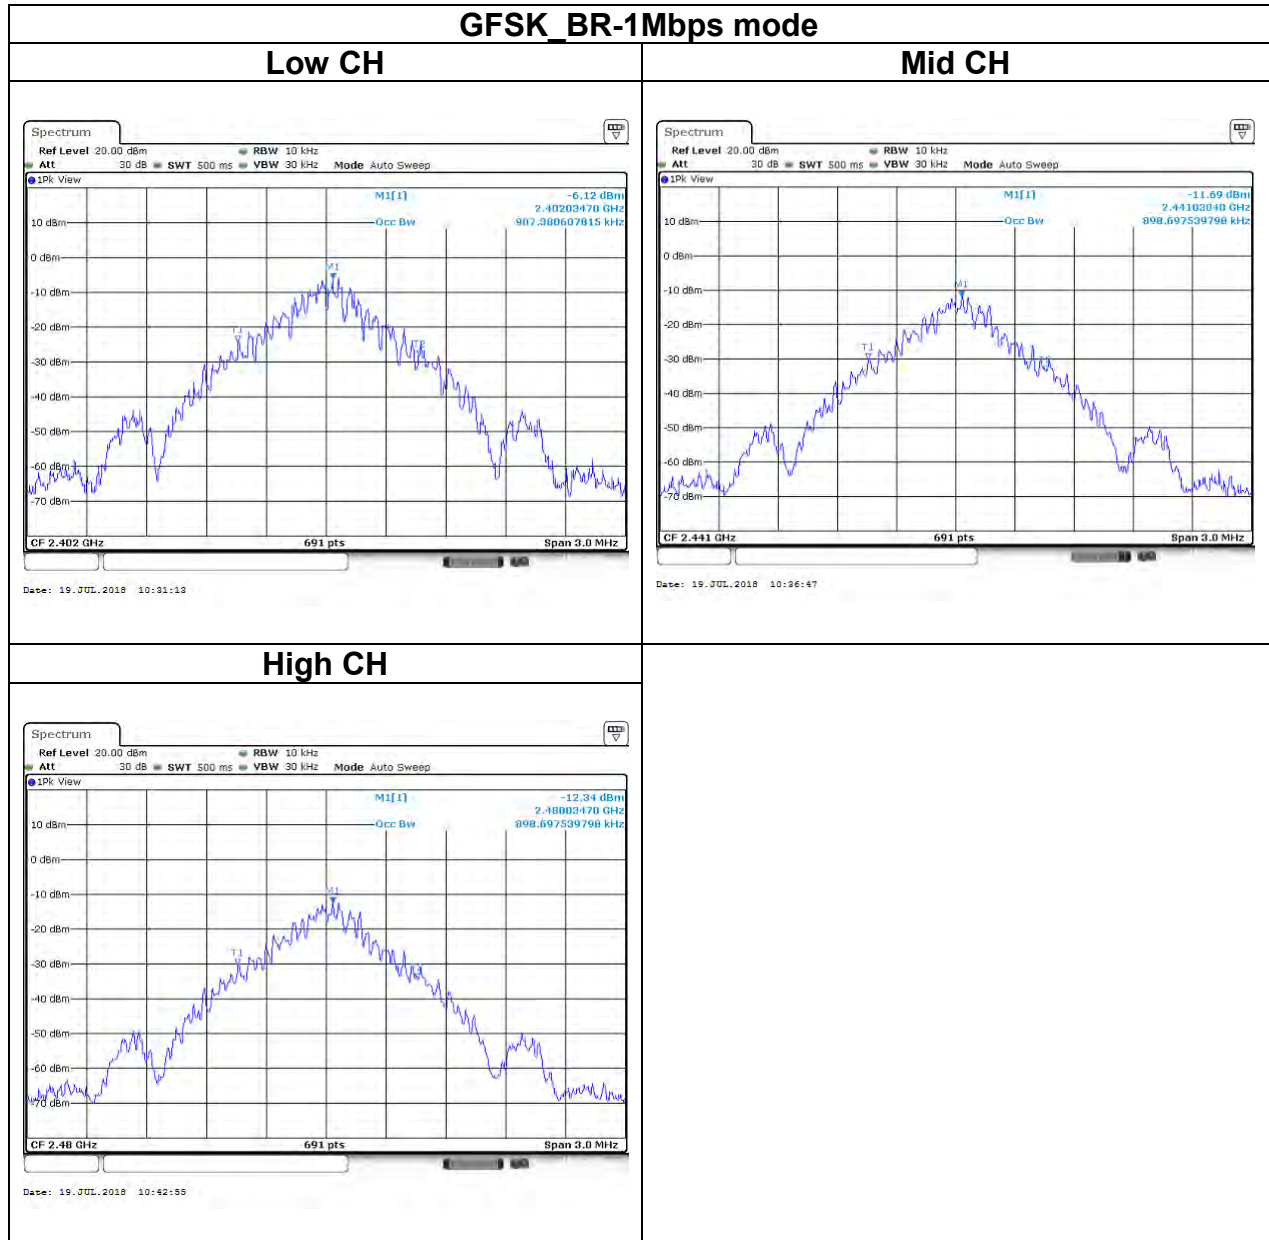

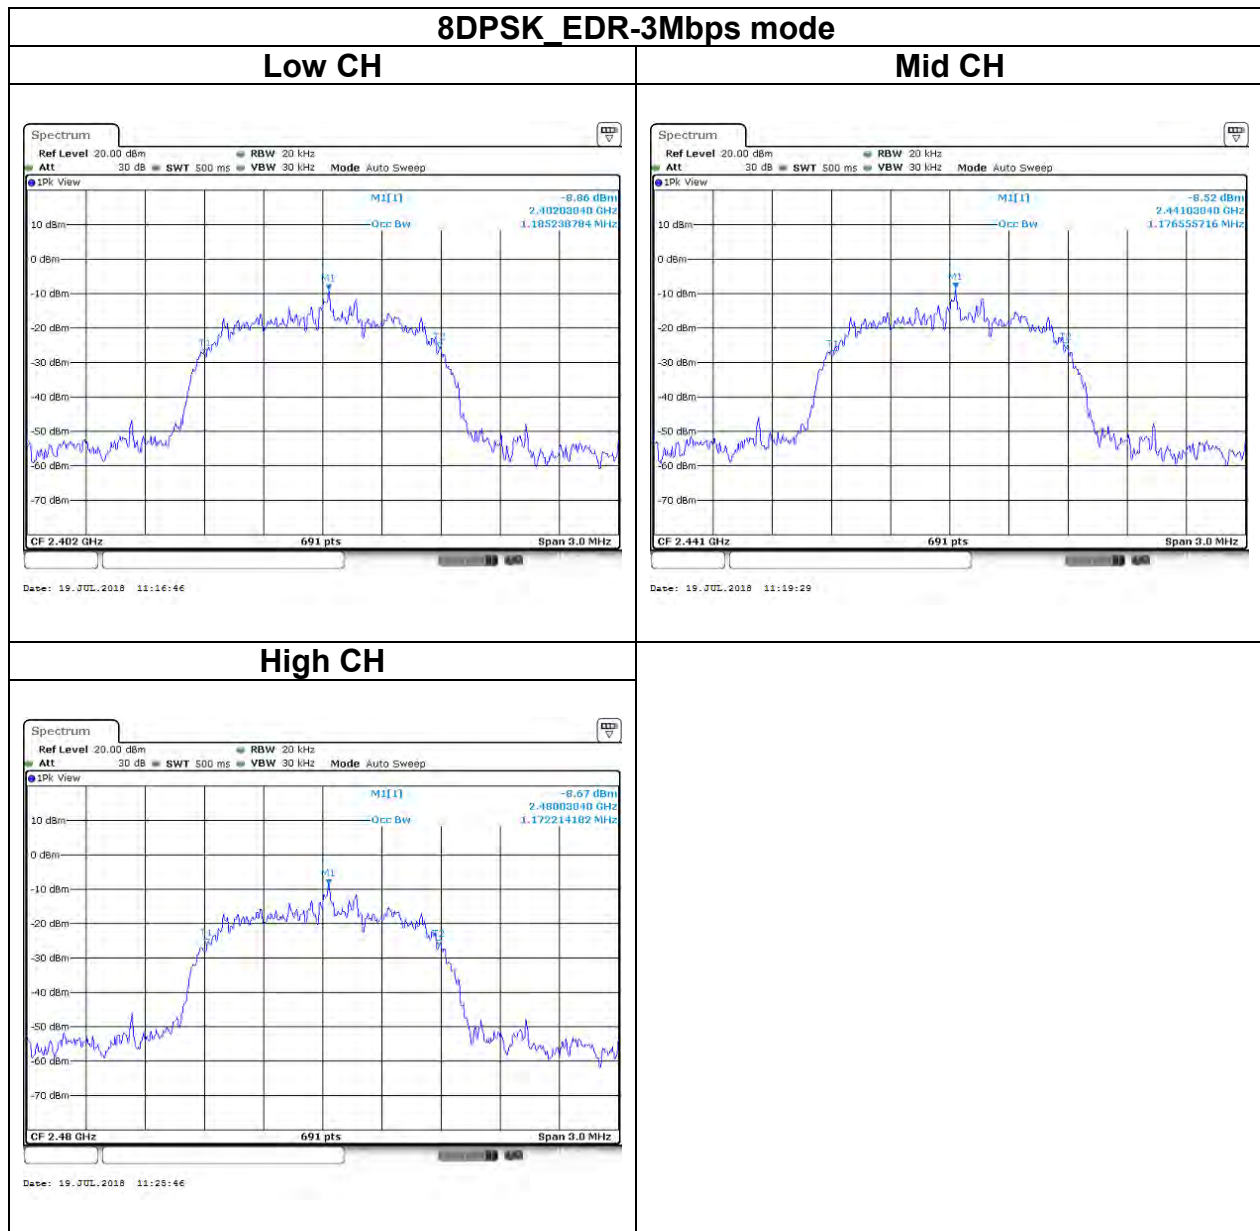



## 4.3 OUTPUT POWER MEASUREMENT

### 4.3.1 Test Limit

According to §15.247(a)(1)

**Peak output power** :

#### **FCC**

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 21dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : 21dBm [ Limit = 30 – (DG – 6)]
-------	---

**Average output power** : For reporting purposes only.

### 4.3.2 Test Procedure

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

### 4.3.3 Test Setup





Report No.: T180627D11-RP1

Page: 26 / 87  
Rev.: 02

#### 4.3.4 Test Result

##### Peak output power :

BT					
Config.	CH	Freq. (MHz)	PK Power (dBm)	PK Power (W)	FCC Limit (dBm)
GFSK BR-1Mbps (DH5)	0	2402	10.13	0.0103	21
	39	2441	10.46	0.0111	
	78	2480	10.41	0.0110	
8DPSK EDR-3Mbps (DH5)	0	2402	9.23	0.0084	
	39	2441	9.87	0.0097	
	78	2480	9.83	0.0096	

##### Average output power :

BT			
Config.	CH	Freq. (MHz)	AV Power (dBm)
GFSK BR-1Mbps (DH5)	0	2402	10.00
	39	2441	10.37
	78	2480	10.29
8DPSK EDR-3Mbps (DH5)	0	2402	6.73
	39	2441	7.03
	78	2480	6.99

## 4.4 FREQUENCY SEPARATION

### 4.4.1 Test Limit

According to §15.247(a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit	> two-thirds of the 20 dB bandwidth
-------	-------------------------------------

### 4.4.2 Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Sweep = auto.  
Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency

### 4.4.3 Test Setup




#### 4.4.4 Test Result


Test mode: GFSK_BR-1Mbps mode / 2402-2480 MHz				
Channel	Frequency (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)	Result
Low	2402	1.0029	>0.7507	PASS
Mid	2441	1.0029	>0.7478	PASS
High	2480	1.0029	>0.7507	PASS

Test mode: 8DPSK_EDR-3Mbps mode / 2402-2480 MHz				
Channel	Frequency (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)	Result
Low	2402	1.0029	>0.9246	PASS
Mid	2441	1.0029	>0.9217	PASS
High	2480	1.0029	>0.9159	PASS

## Test Data

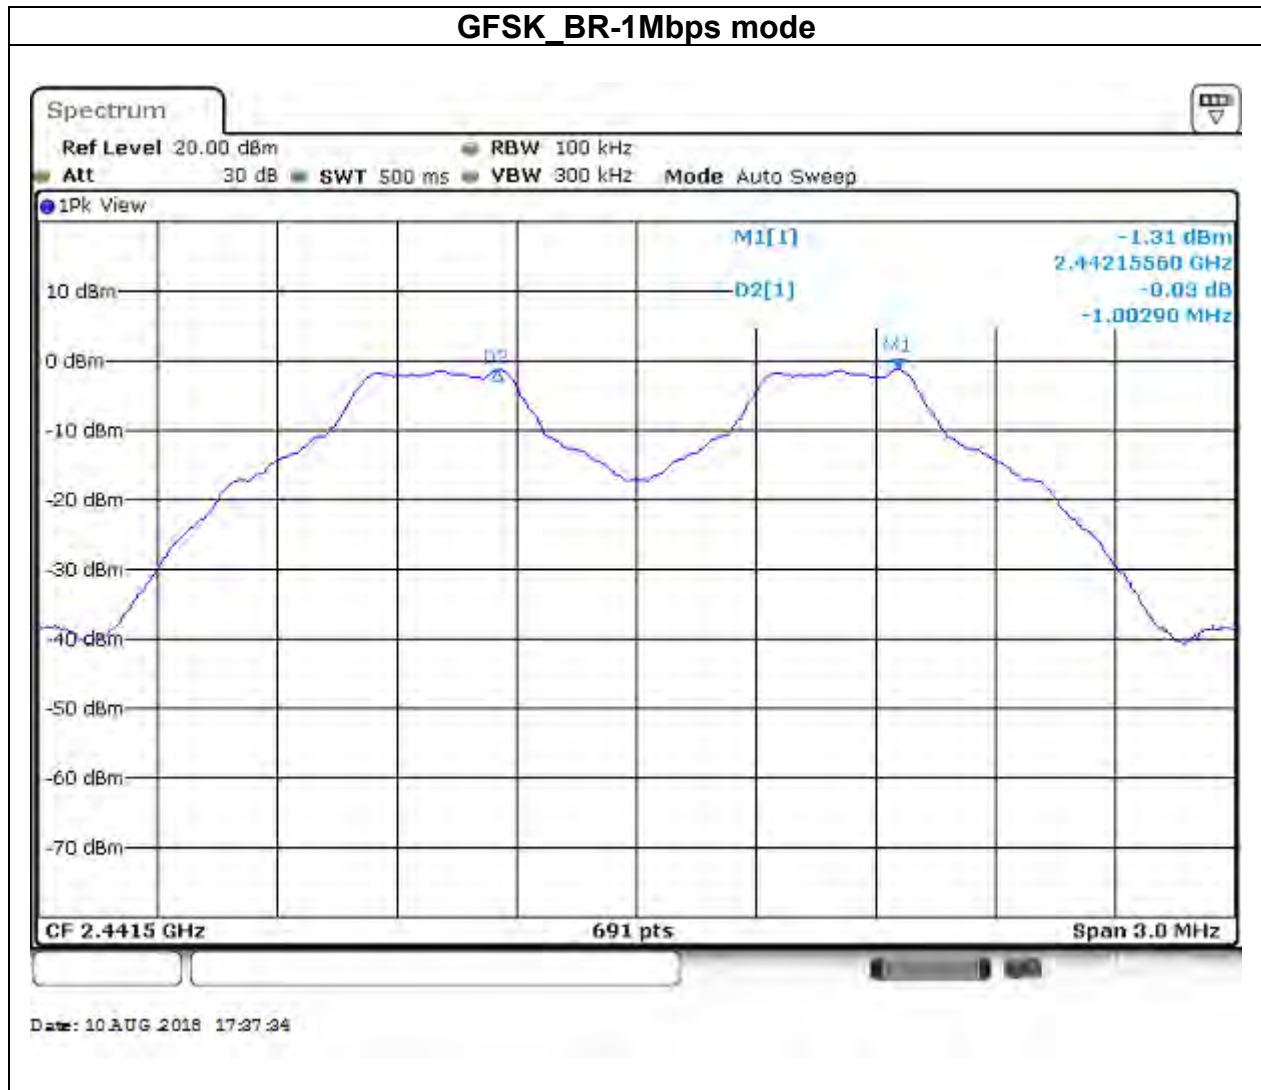

**Note:** We selected worst case to performed test in middle channel, The results can be meet other channel.

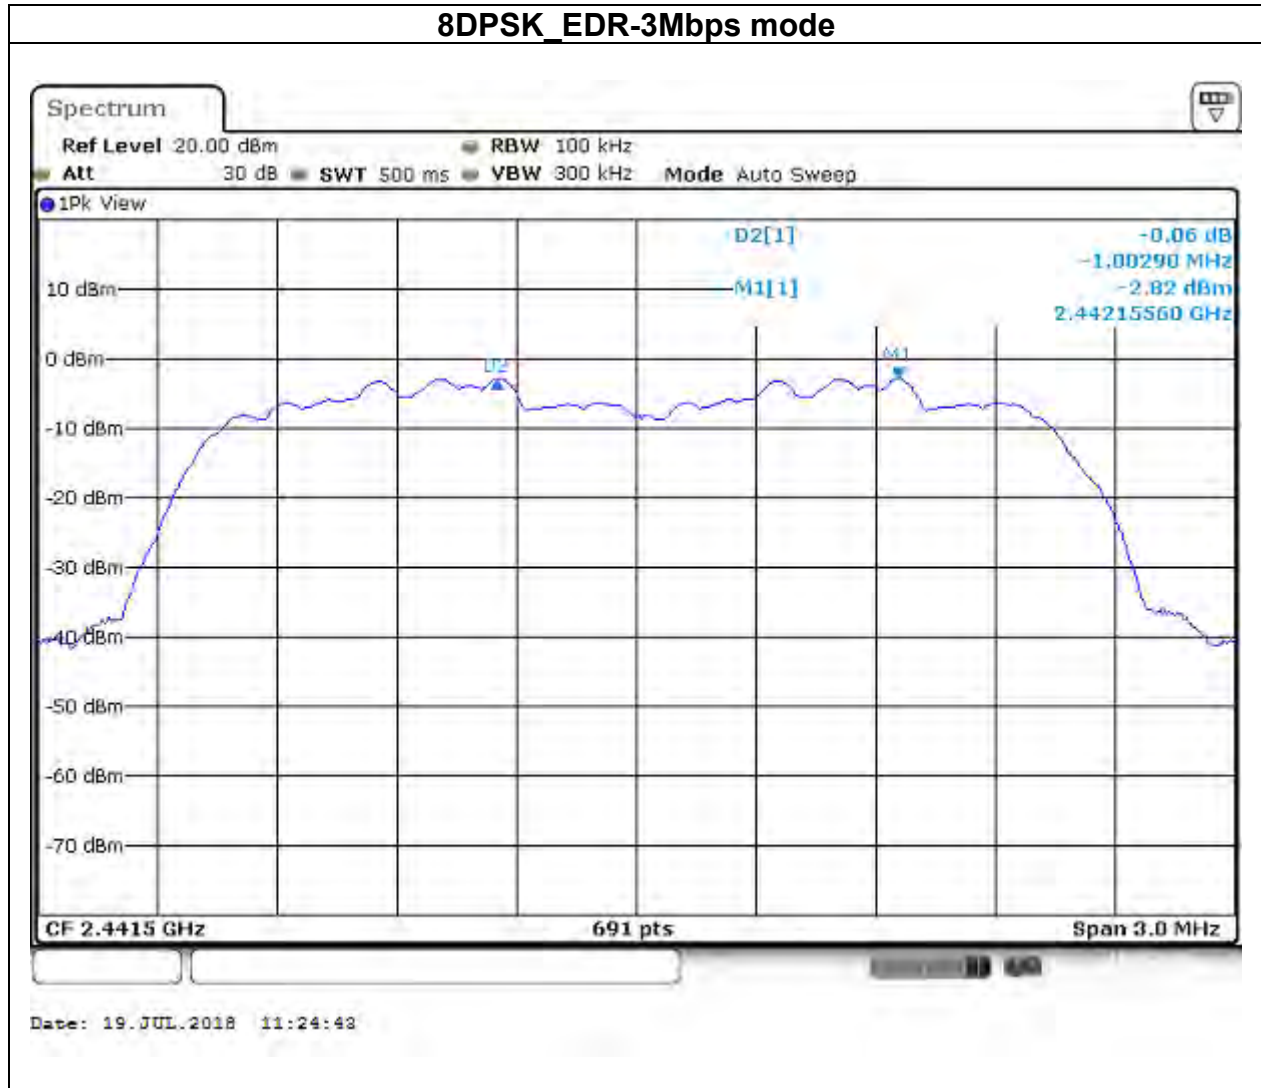

**Note:** We selected worst case to performed test in middle channel, The results can be meet other channel.

## 4.5 NUMBER OF HOPPING

### 4.5.1 Test Limit

According to §15.247(a)(1)(iii)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 4.5.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 7.8.3

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set spectrum analyzer Start Freq. = 2400 MHz, Stop Freq. = 2483.5 MHz, RBW = 100KHz, VBW = 300KHz.
4. Max hold, view and count how many channel in the band.

### 4.5.3 Test Setup



### 4.5.4 Test Result


Number of Hopping				
Mode	Frequency (MHz)	Hopping Channel Number	Hopping Channel Number Limits	Result
BR-1Mbps	2402-2480	79	15	Pass
EDR-3Mbps	2402-2480	79	15	



Report No.: T180627D11-RP1

Page: 32 / 87  
Rev.: 02

## Test Data

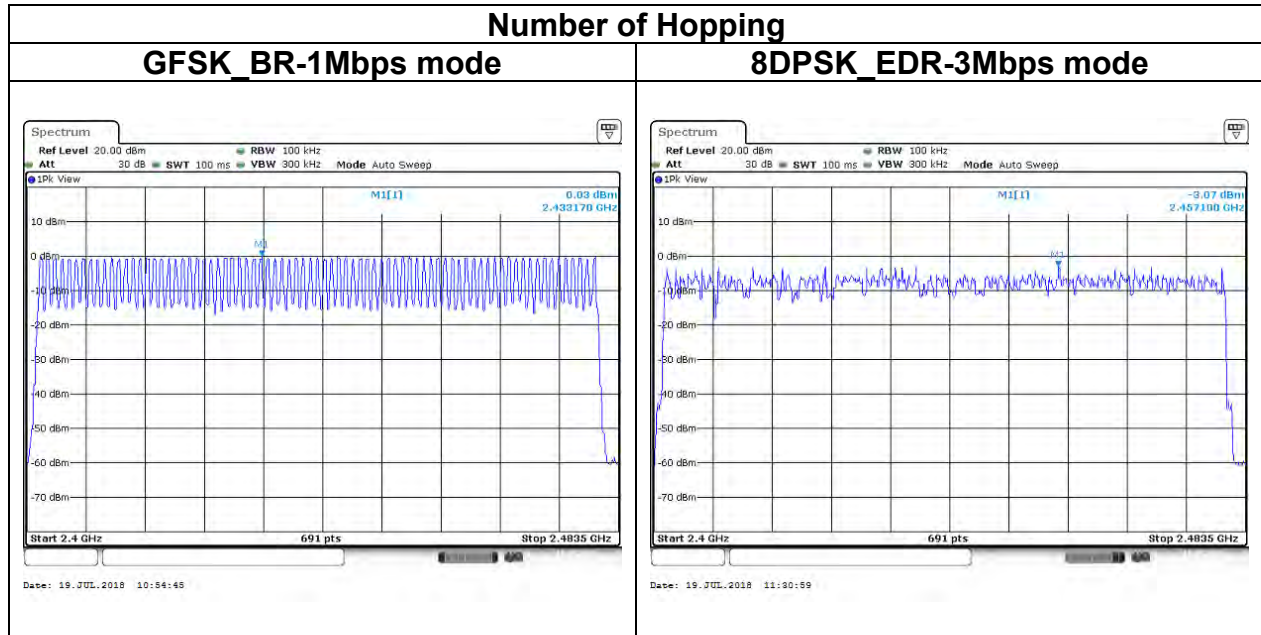



## 4.6 CONDUCTED BANDEDGE AND SPURIOUS EMISSION

### 4.6.1 Test Limit


According to §15.247(d)

Limit	-20 dBc
-------	---------

### 4.6.2 Test Procedure



1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. The Band Edge at 2.4GHz and 2.4835GHz are investigated with both hopping “ON” and “OFF” modes “.



### 4.6.3 Test Setup





## 4.6.4 Test Result

### Test Data

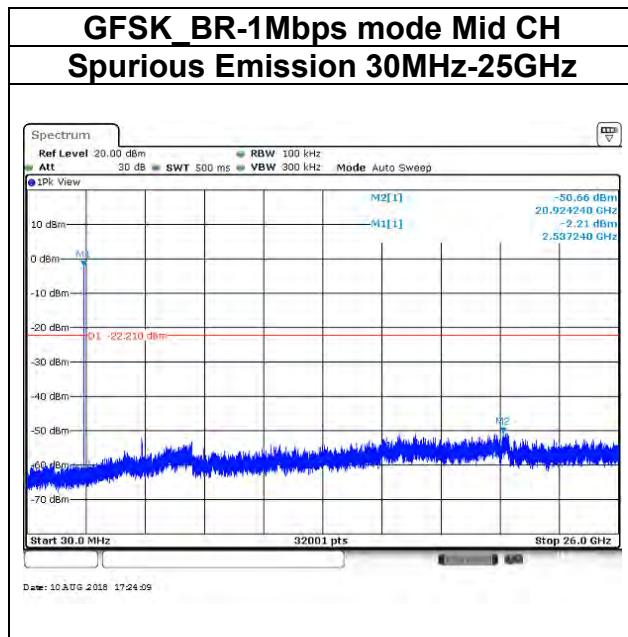
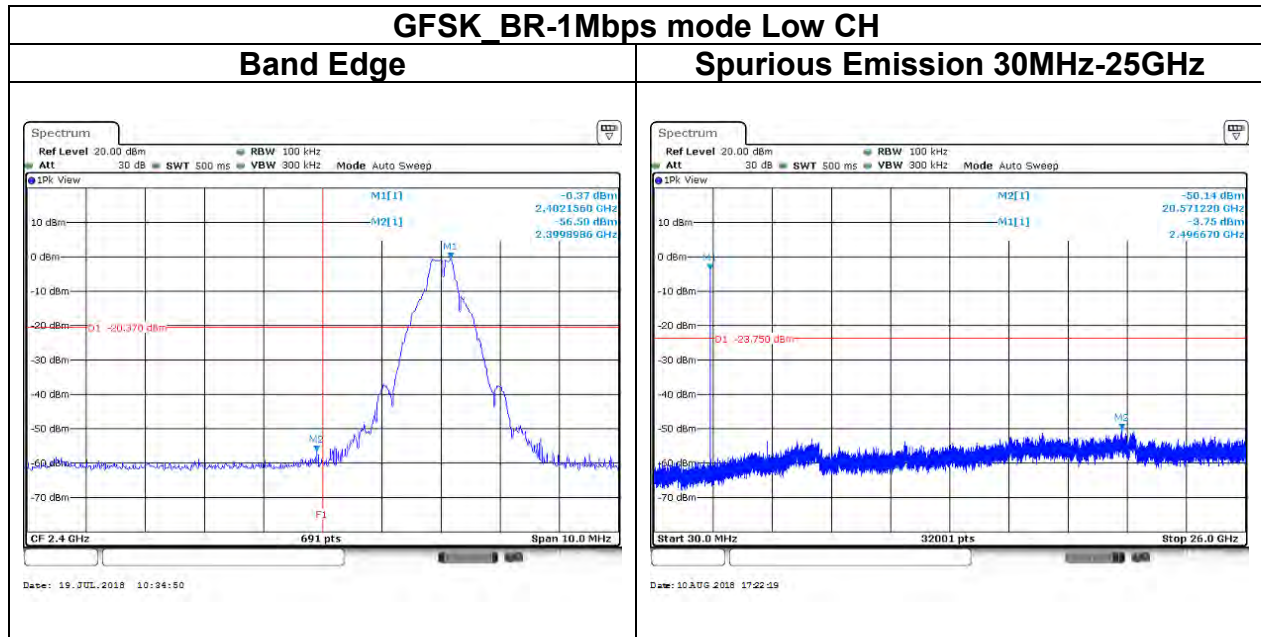


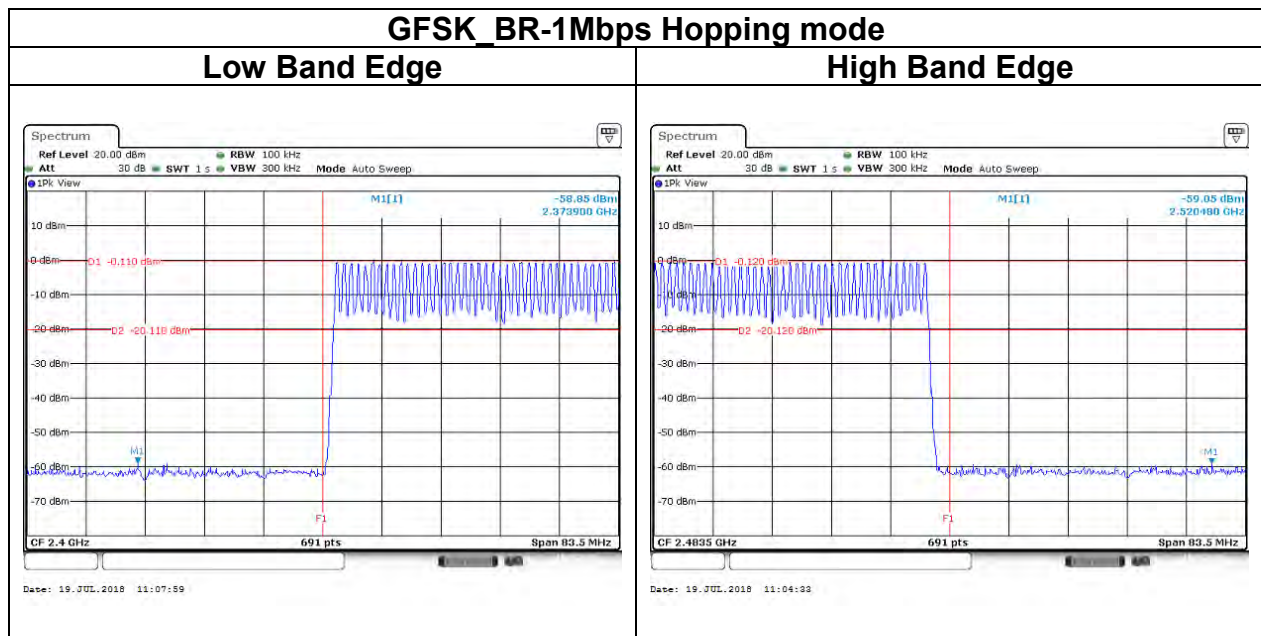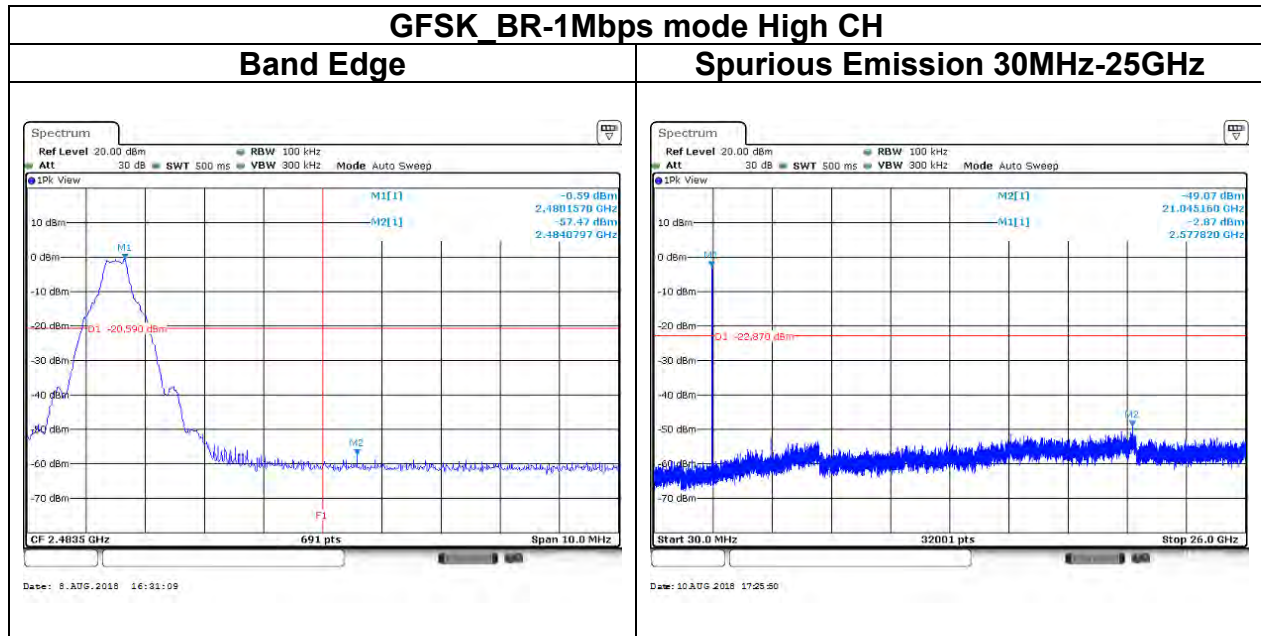

Note: The D1 line is at the maximum peak power point.

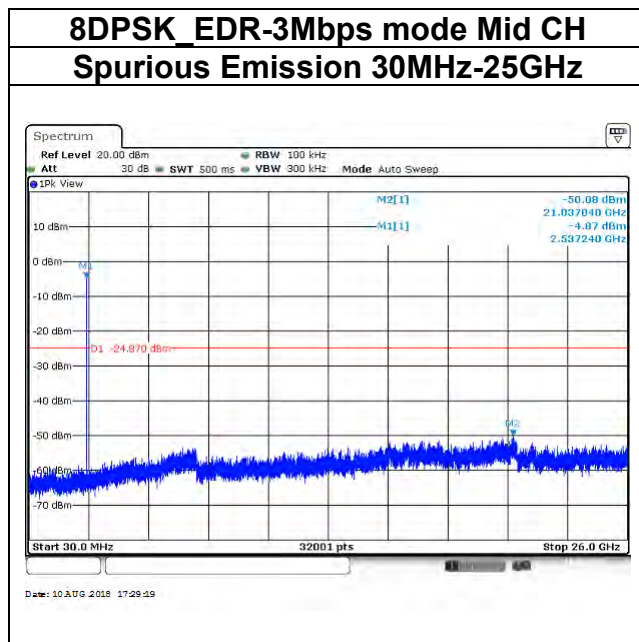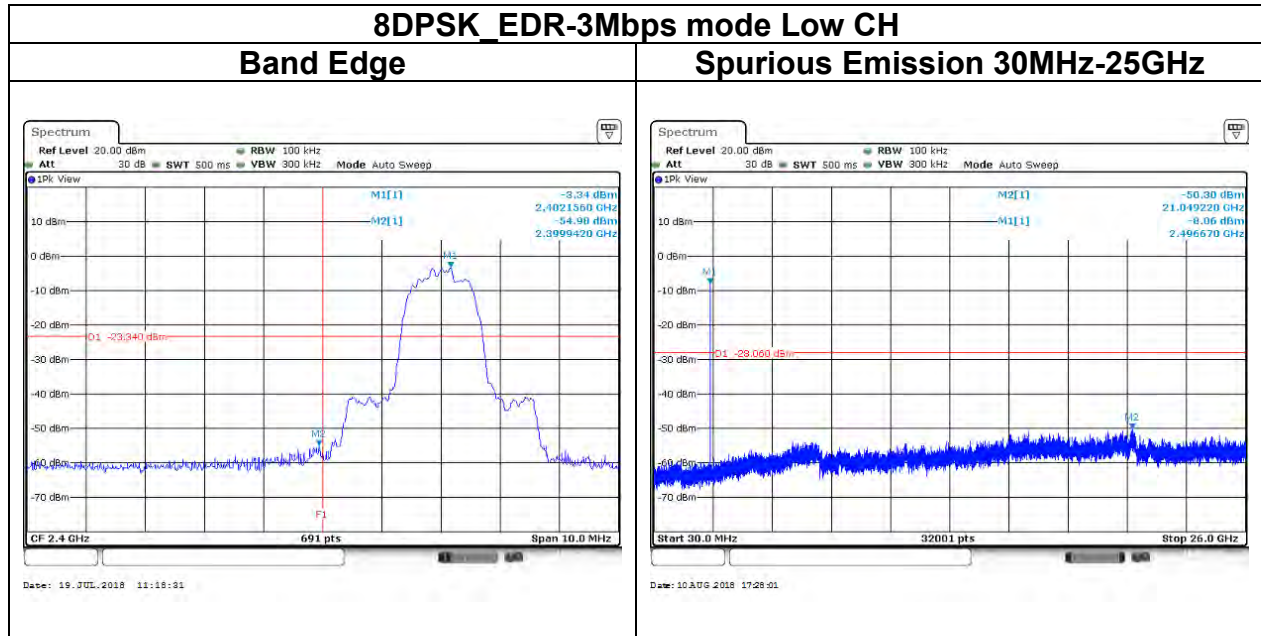



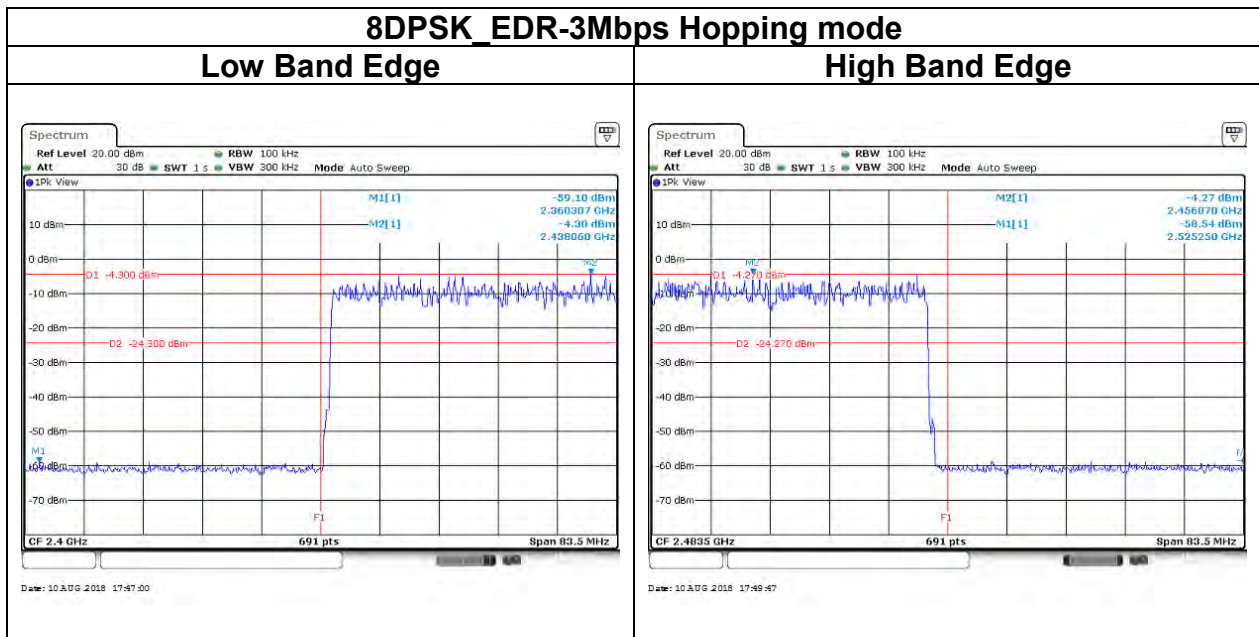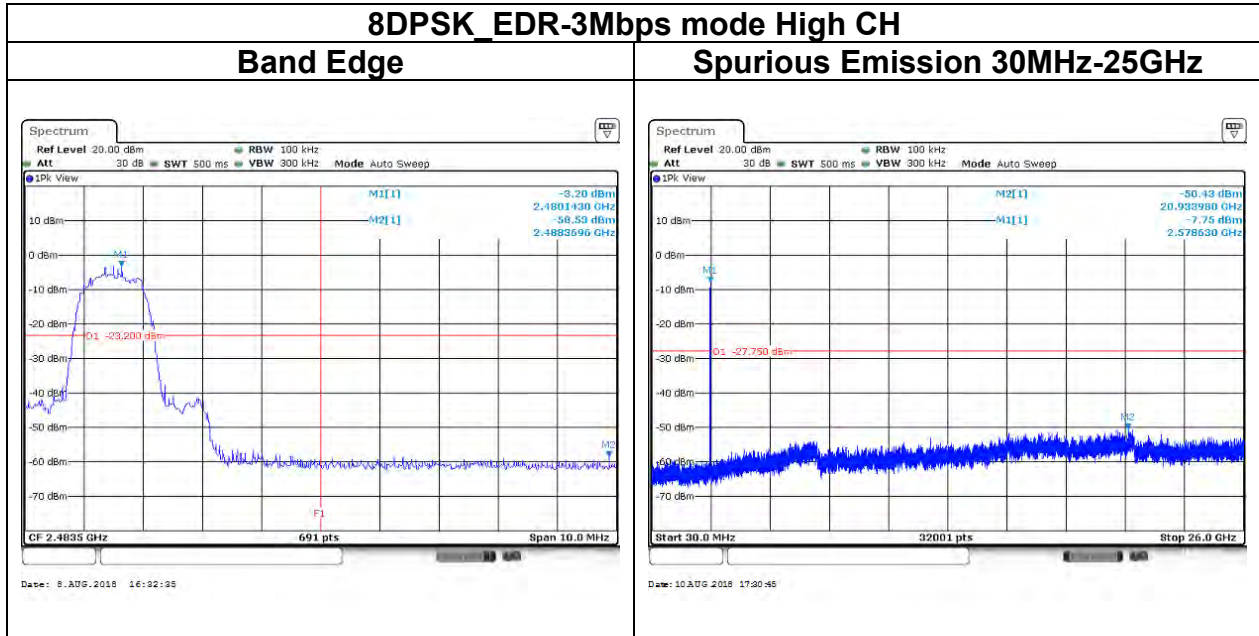

## 4.7 TIME OF OCCUPANCY (DWELL TIME)

### 4.7.1 Test Limit


According to §15.247(a)(1)(iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 4.7.2 Test Procedure

1. EUT RF output port connected to the SA by RF cable.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW, VBW=1MHz, Sweep = 1 ms

### 4.7.3 Test Setup




### 4.7.4 Test Result

Time of Occupancy (Dwell Time)							
Mode	Frequency (MHz)	Pulse Time Per Hopping (ms)	Minimum Number of Hopping Freq.	Number of pulse in	Dwell Time IN	Dwell Time Limits (s)	Result
				(0.4 * N sec)	(0.4 * N sec)		
BR-1Mbps	2441	2.942	79	106.67	0.3138	0.4	Pass
EDR-3Mbps	2441	2.942	79	106.67	0.3138	0.4	
Non-AFH: DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $3.37 * 0.4 * 79 = 106.6$							



Report No.: T180627D11-RP1

## Test Data

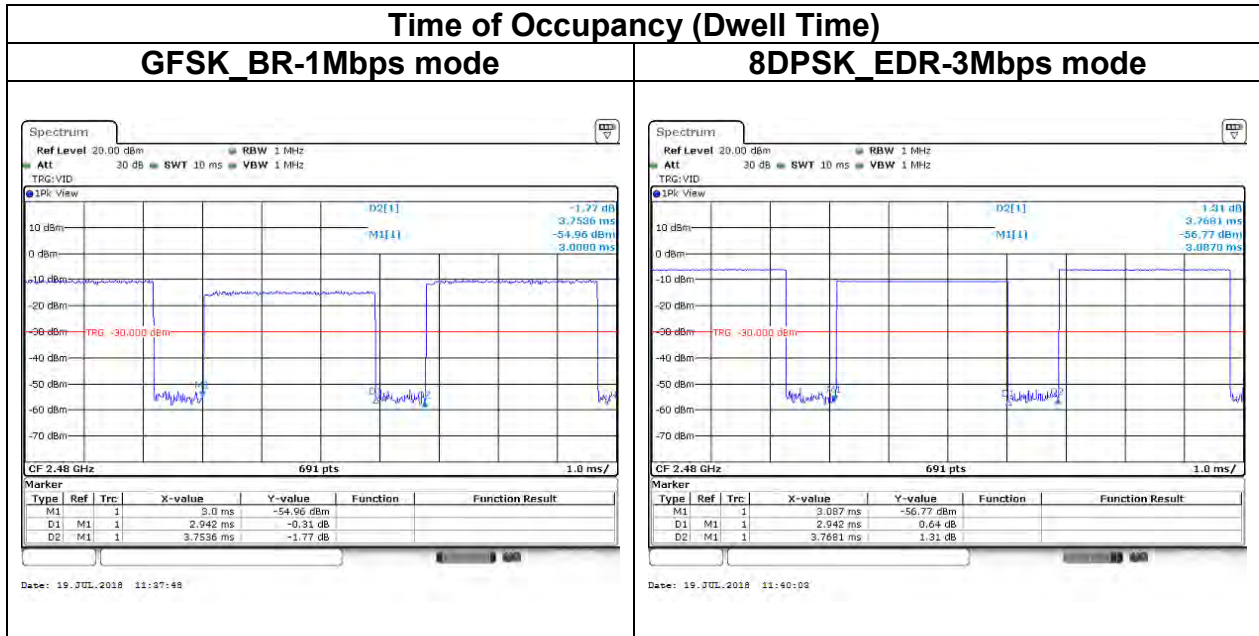

**Note:** We selected worst case to performed test in middle channel, The results can be meet other channel.

## 4.8 RADIATION BANDEDGE AND SPURIOUS EMISSION

### 4.8.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

#### Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

#### Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.





#### 4.8.2 Test Procedure

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10, and the EUT set in a continuous mode.

2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.

3. Span shall wide enough to full capture the emission measured. The SA from 9kHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.

Note: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)

4. For harmonic, the worst case of output power was BR-1Mbps. Therefore only BR-1Mbps record in the report.

5. The SA setting following :

(1) Below 1G : RBW = 100kHz, VBW  $\geq$  3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.

(2) Above 1G :

(2.1) For Peak measurement : RBW = 1MHz, VBW  $\geq$  3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.

(2.2) For Average measurement : RBW = 1MHz, VBW


·If Duty Cycle  $\geq$  98%, VBW=10Hz.

·If Duty Cycle < 98%, VBW $\geq$ 1/T.


Configuration	Duty Cycle (%)	T(ms)	1/T (Hz)	VBW setting
GFSK_BR-1Mbps	78.19%	2.9400	0.340	360Hz
8DPSK_EDR-3Mbps	78.07%	2.9200	0.342	360Hz

### 4.8.3 Test Setup


#### 9kHz ~ 30MHz

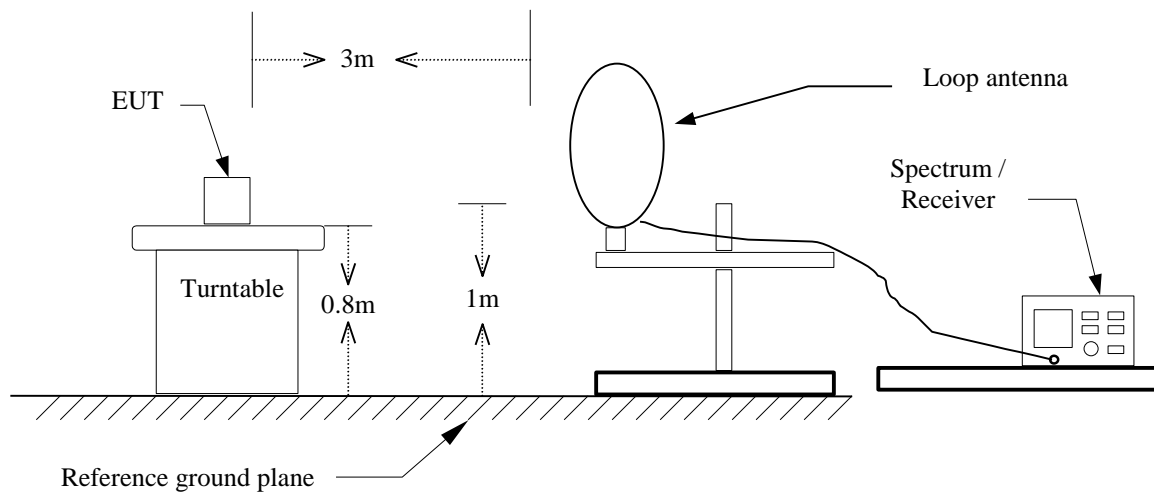

#### 30MHz ~ 1GHz

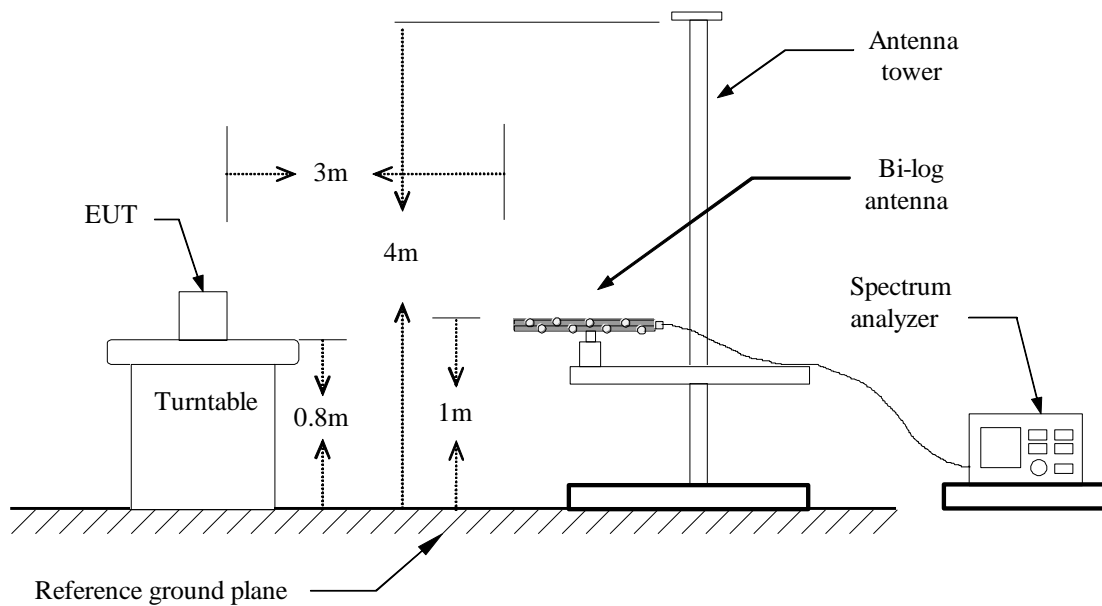

**Above 1 GHz**

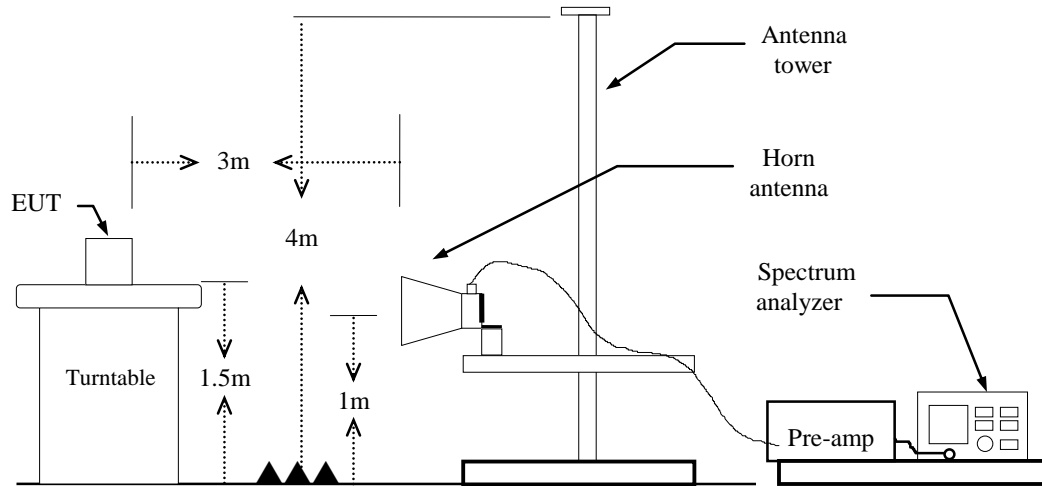


#### 4.8.4 Test Result

##### Band Edge Test Data

##### For PIFA Antenna

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

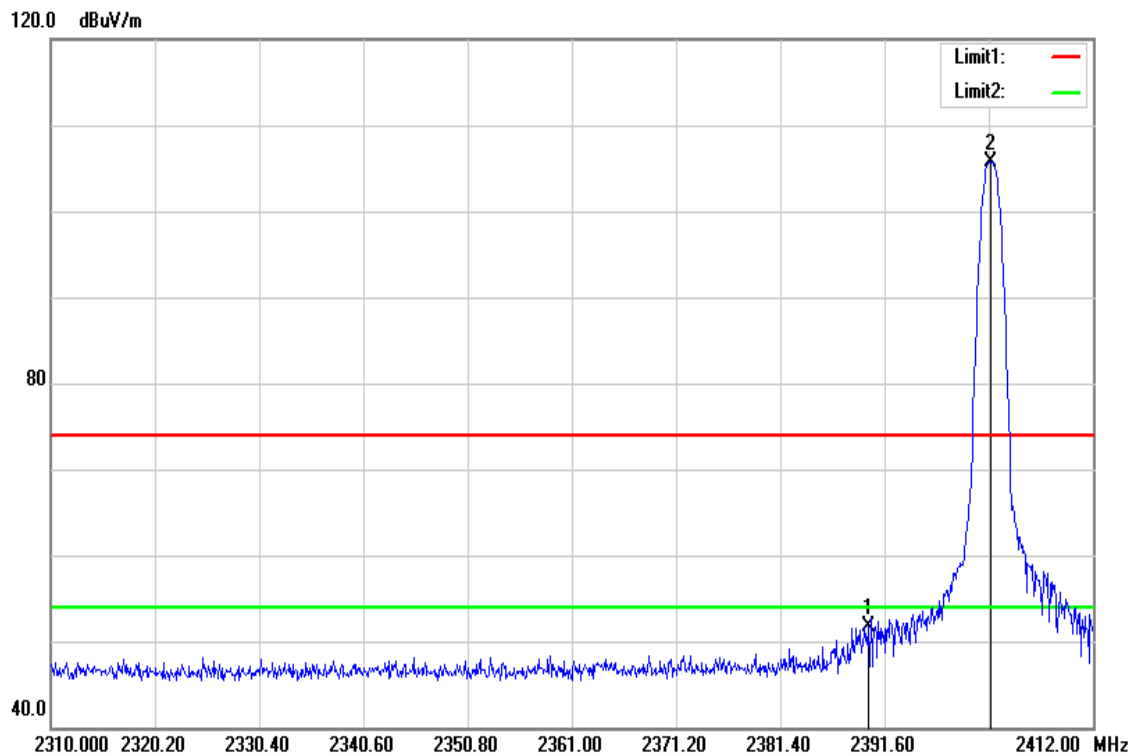


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	54.77	-2.98	51.79	74.00	-22.21	peak
2	2402.004	108.64	-2.95	105.69	-	-	peak



Report No.: T180627D11-RP1

Page: 45 / 87  
Rev.: 02

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	22(°C) / 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

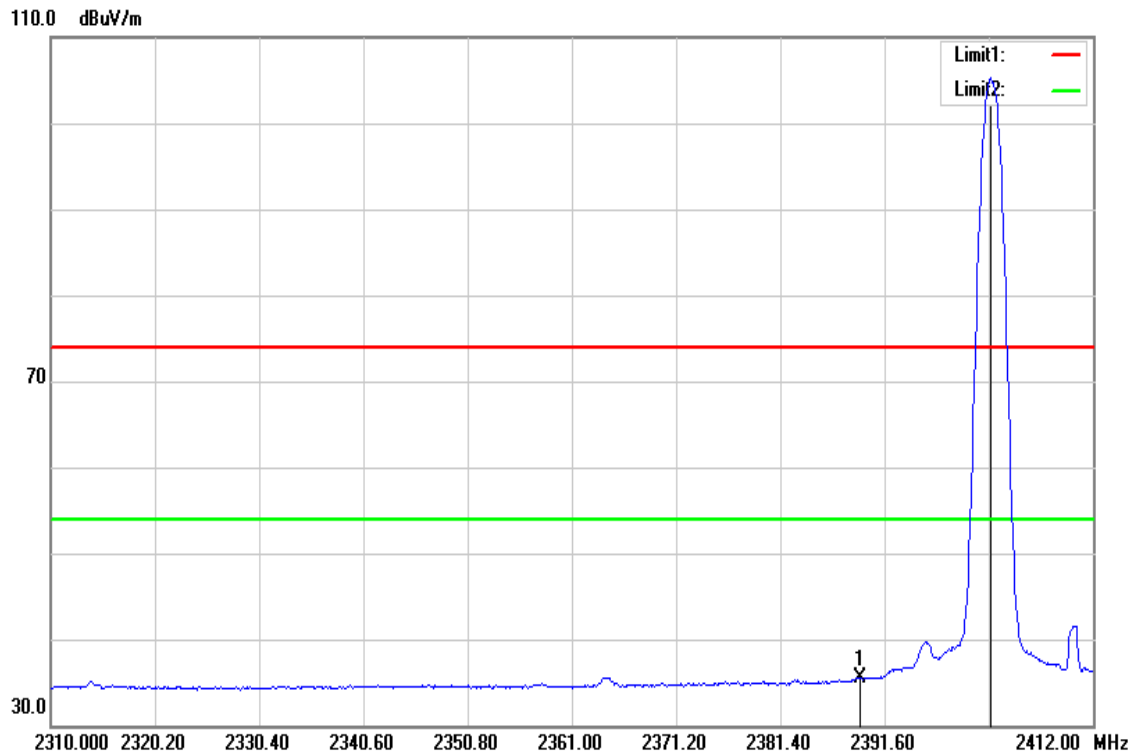


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.152	38.57	-2.98	35.59	54.00	-18.41	AVG
2	2402.004	108.25	-2.95	105.30	-	-	AVG



Report No.: T180627D11-RP1

Page: 46 / 87  
Rev.: 02

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

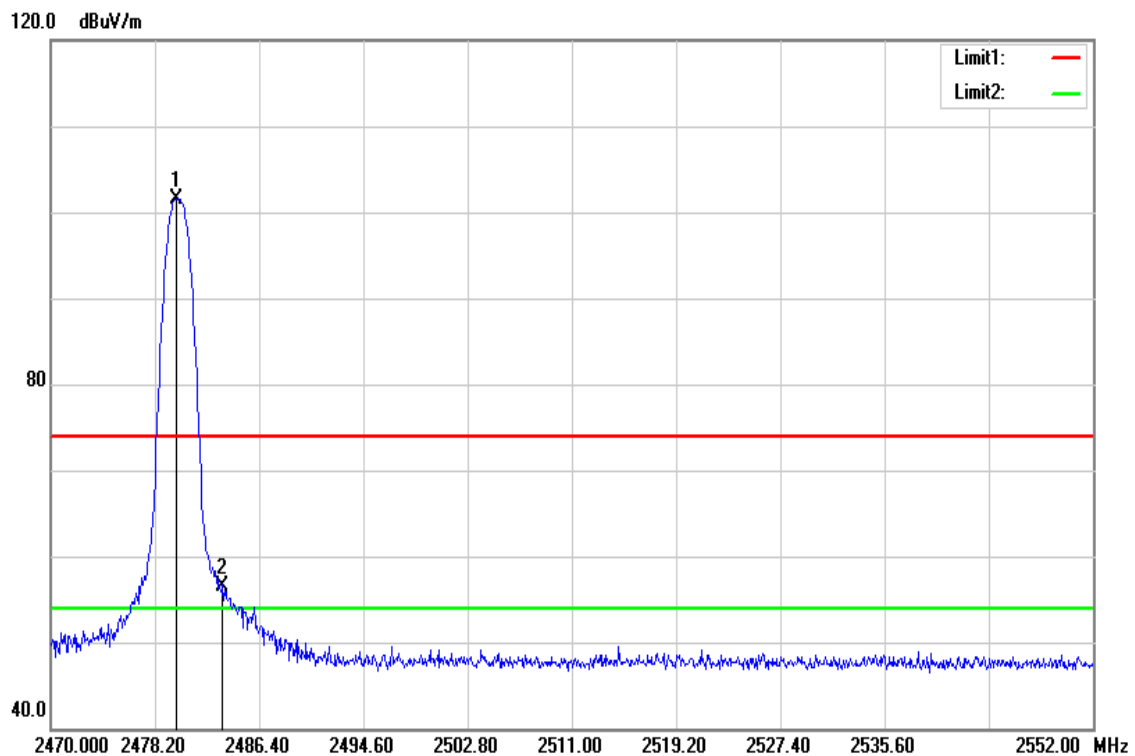


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.840	104.14	-2.70	101.44	-	-	peak
2	2483.500	59.29	-2.69	56.60	74.00	-17.40	peak



Report No.: T180627D11-RP1

Page: 47 / 87  
Rev.: 02

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

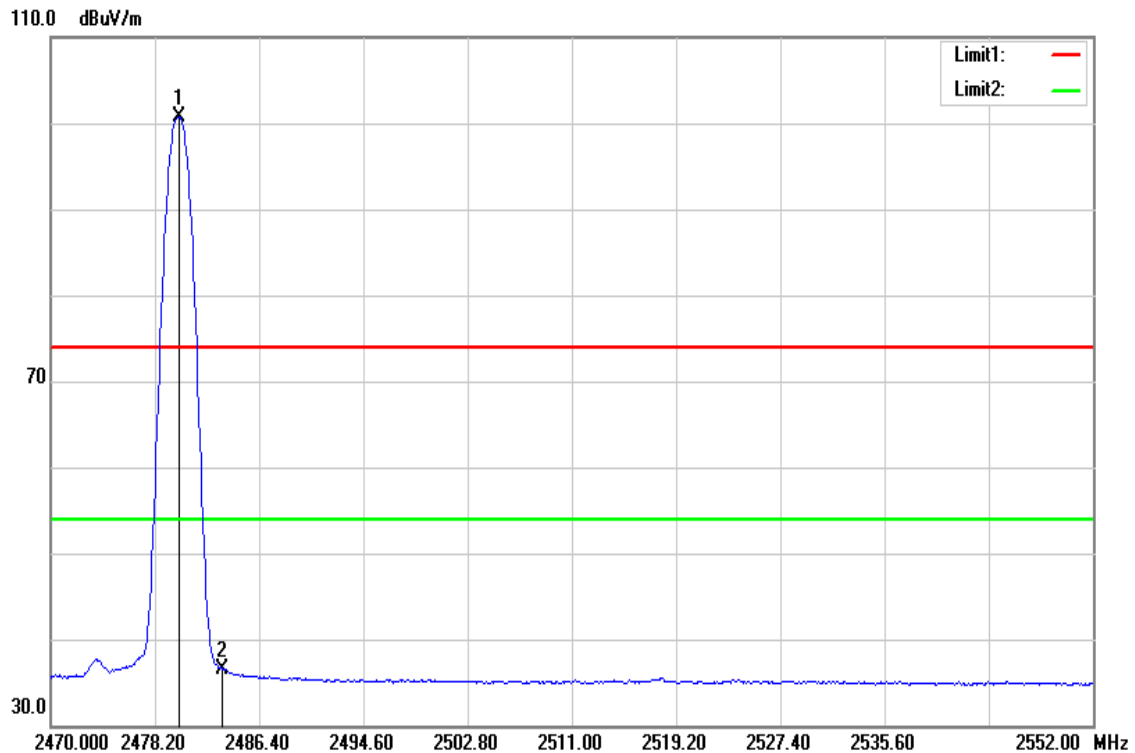


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.086	103.50	-2.70	100.80	-	-	AVG
2	2483.500	39.16	-2.69	36.47	54.00	-17.53	AVG



Report No.: T180627D11-RP1

Page: 48 / 87  
Rev.: 02

Test Mode:	8DPSK_EDR-3Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

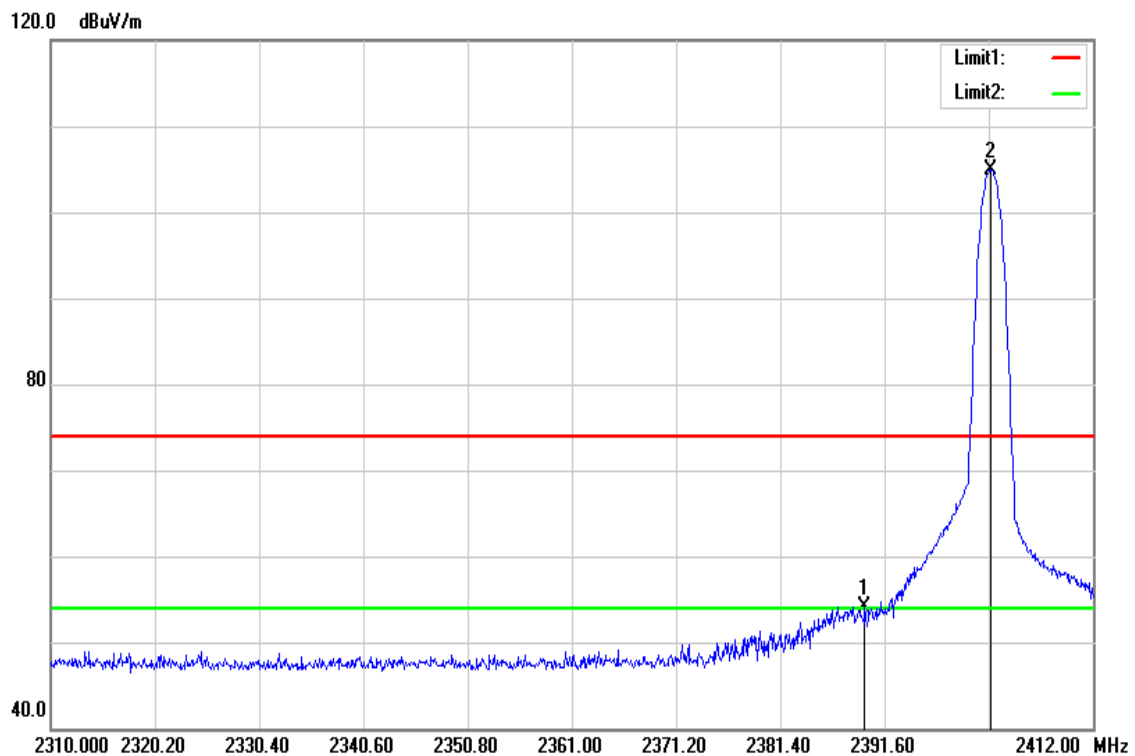

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.662	57.17	-2.98	54.19	74.00	-19.81	peak
2	2402.004	107.92	-2.95	104.97	-	-	peak






Report No.: T180627D11-RP1

Page: 49 / 87  
Rev.: 02

Test Mode:	8DPSK_EDR-3Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

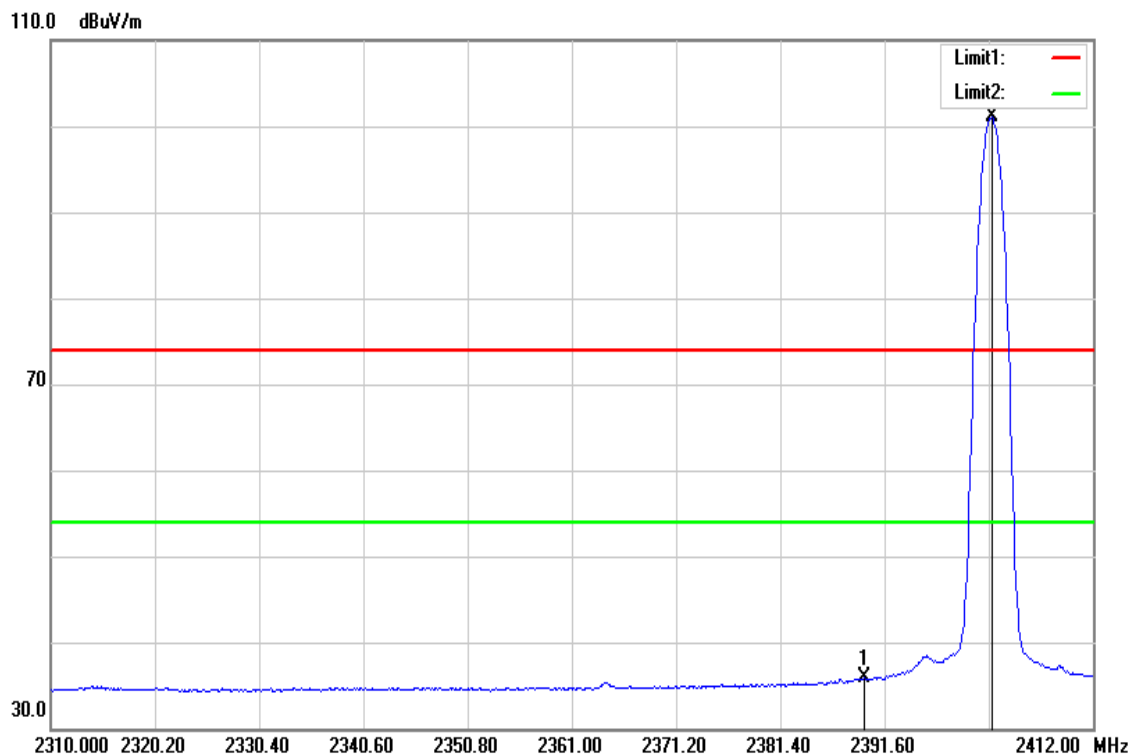


No.	Frequen cy (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.662	38.90	-2.98	35.92	54.00	-18.08	AVG
2	2402.106	103.96	-2.95	101.01	-	-	AVG



Report No.: T180627D11-RP1

Page: 50 / 87  
Rev.: 02

Test Mode:	8DPSK_EDR-3Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

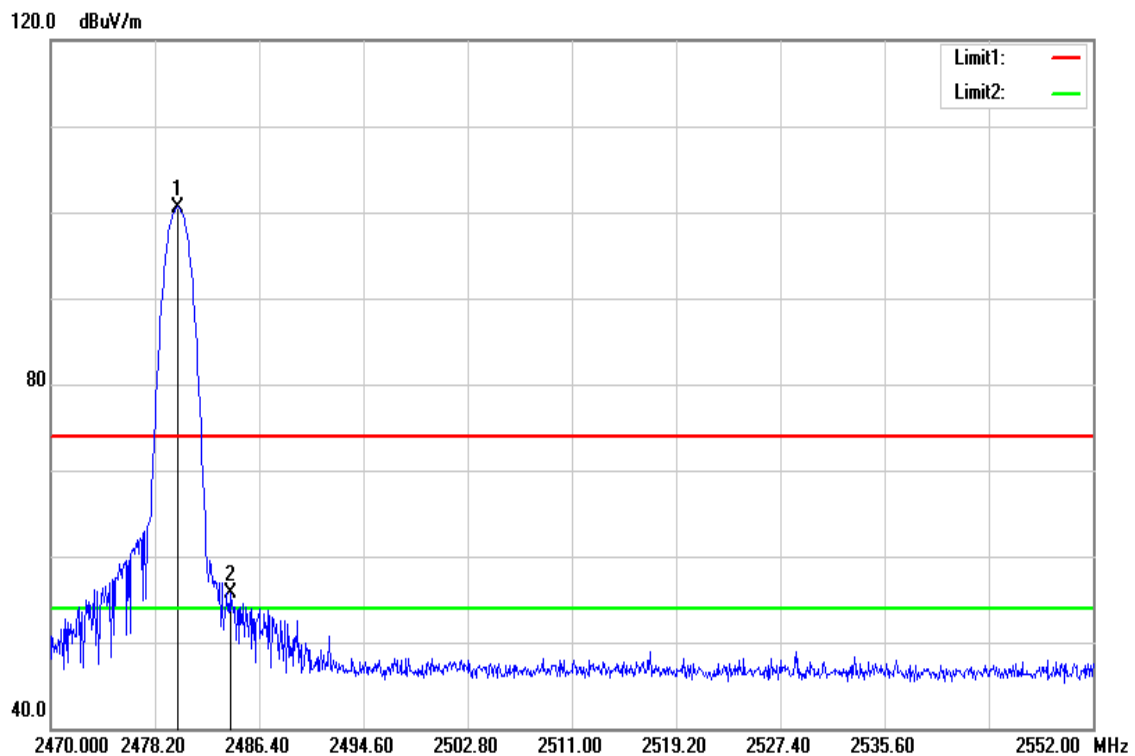


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.004	103.30	-2.70	100.60	-	-	peak
2	2484.104	58.37	-2.69	55.68	74.00	-18.32	peak



Report No.: T180627D11-RP1

Page: 51 / 87  
Rev.: 02

Test Mode:	8DPSK_EDR-3Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

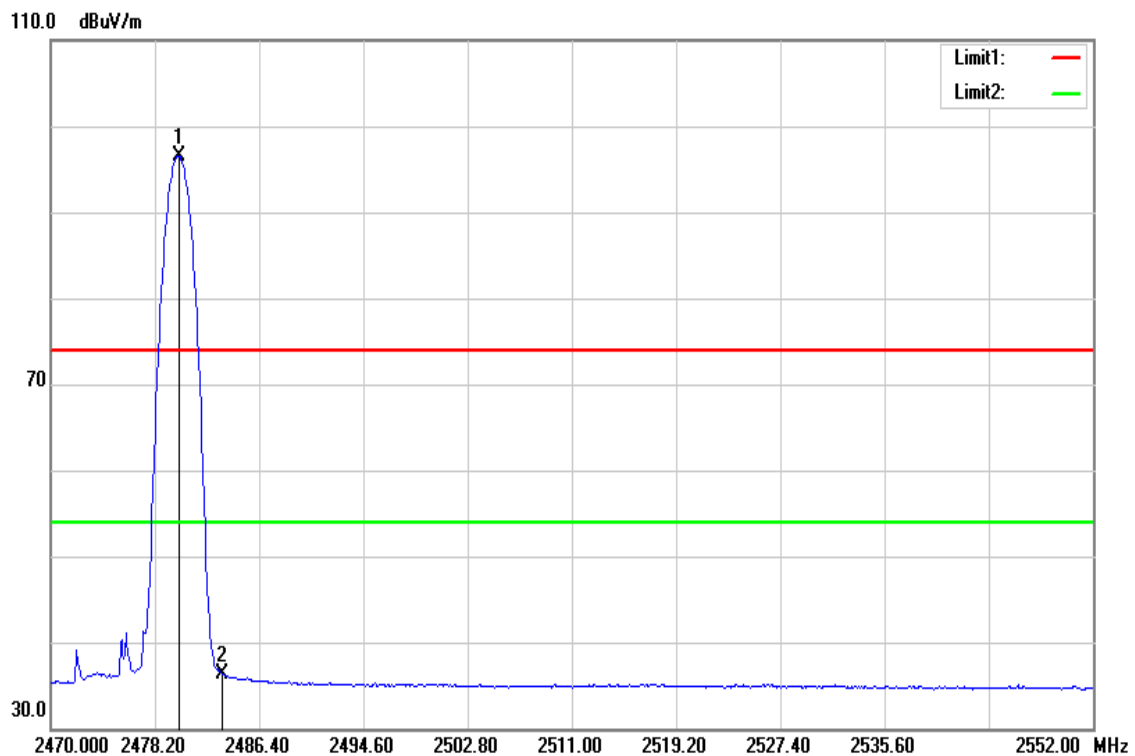

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.086	99.21	-2.70	96.51	-	-	AVG
2	2483.500	38.95	-2.69	36.26	54.00	-17.74	AVG




Report No.: T180627D11-RP1

Page: 52 / 87  
Rev.: 02

### For Dipole Antenna

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

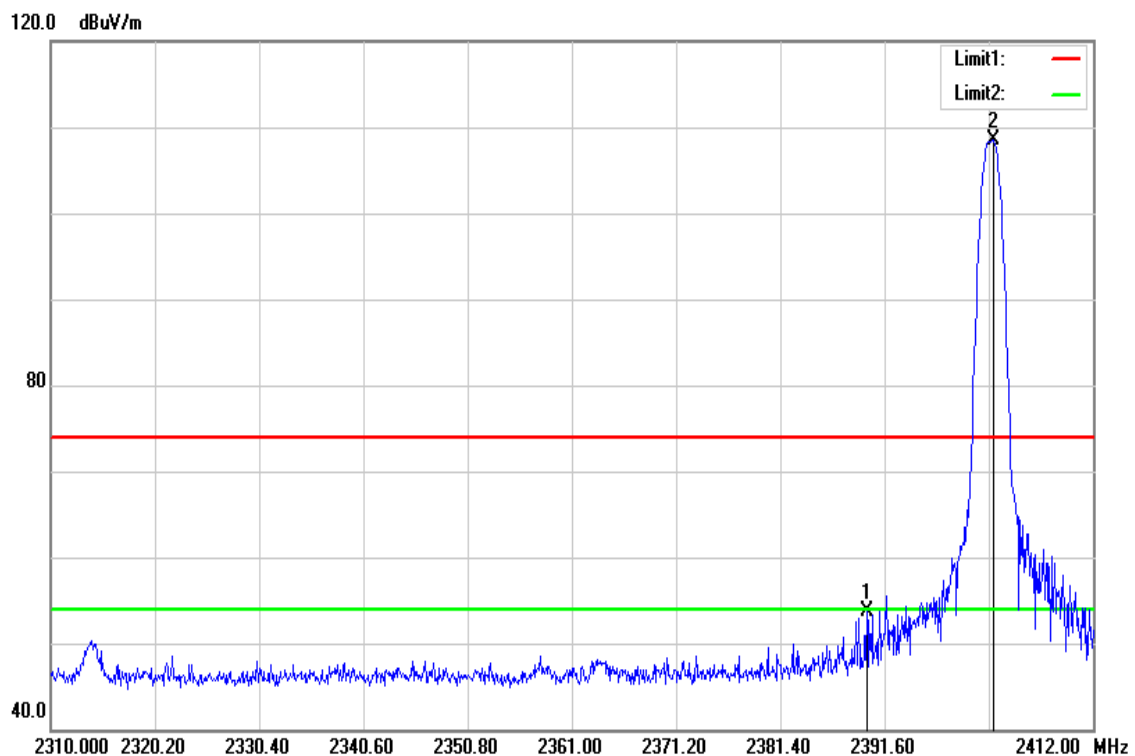


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.866	56.60	-2.98	53.62	74.00	-20.38	peak
2	2402.208	111.38	-2.95	108.43	-	-	peak



Report No.: T180627D11-RP1

Page: 53 / 87  
Rev.: 02

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	22(°C) / 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

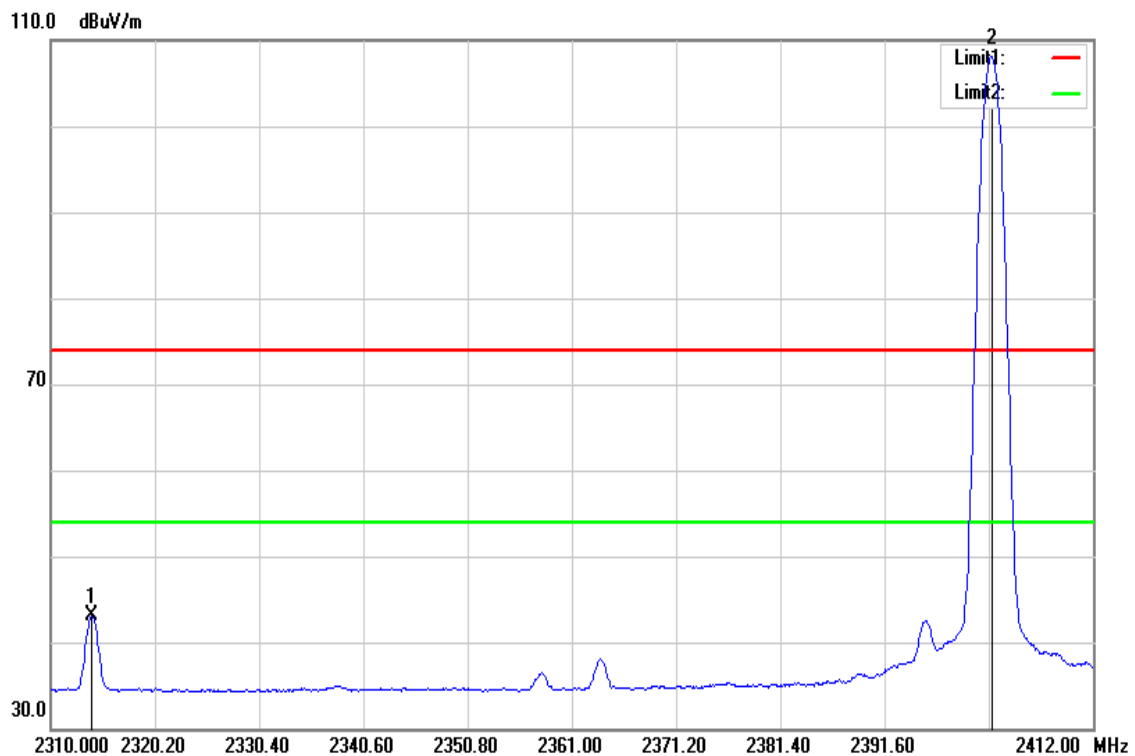


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2313.978	46.23	-3.22	43.01	54.00	-10.99	AVG
2	2402.106	111.01	-2.95	108.06	-	-	AVG



Report No.: T180627D11-RP1

Page: 54 / 87  
Rev.: 02

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

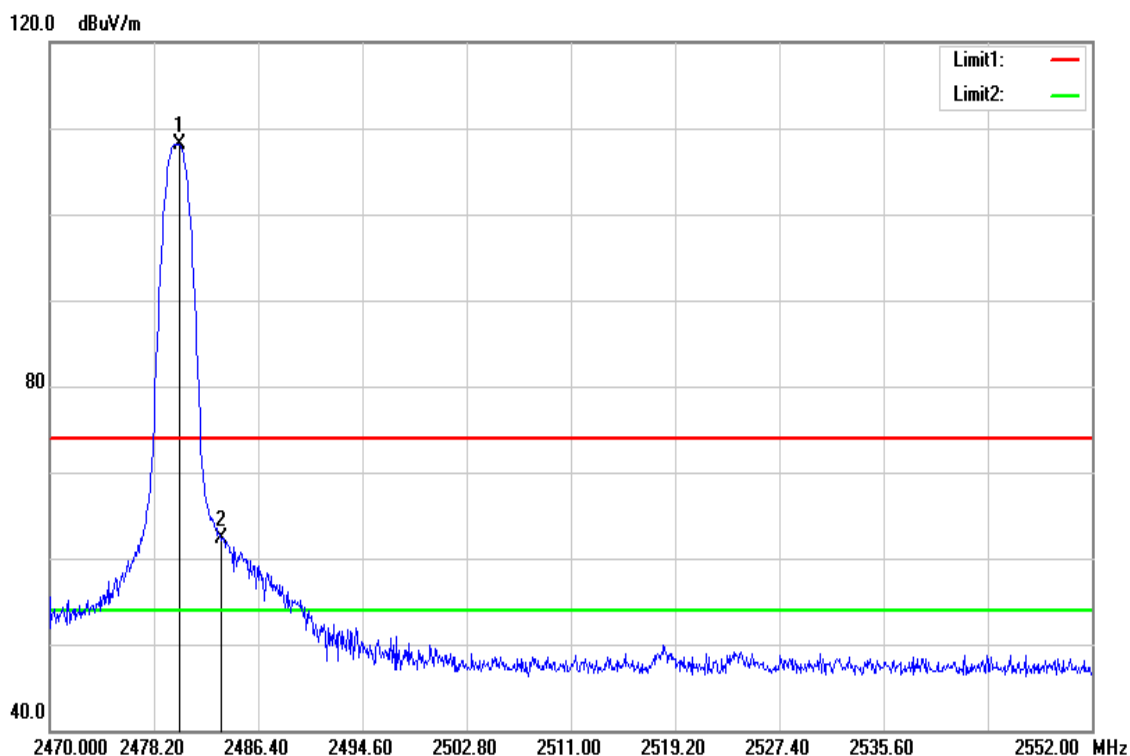


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.168	110.76	-2.70	108.06	-	-	peak
2	2483.500	65.05	-2.69	62.36	74.00	-11.64	peak



Report No.: T180627D11-RP1

Page: 55 / 87  
Rev.: 02

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

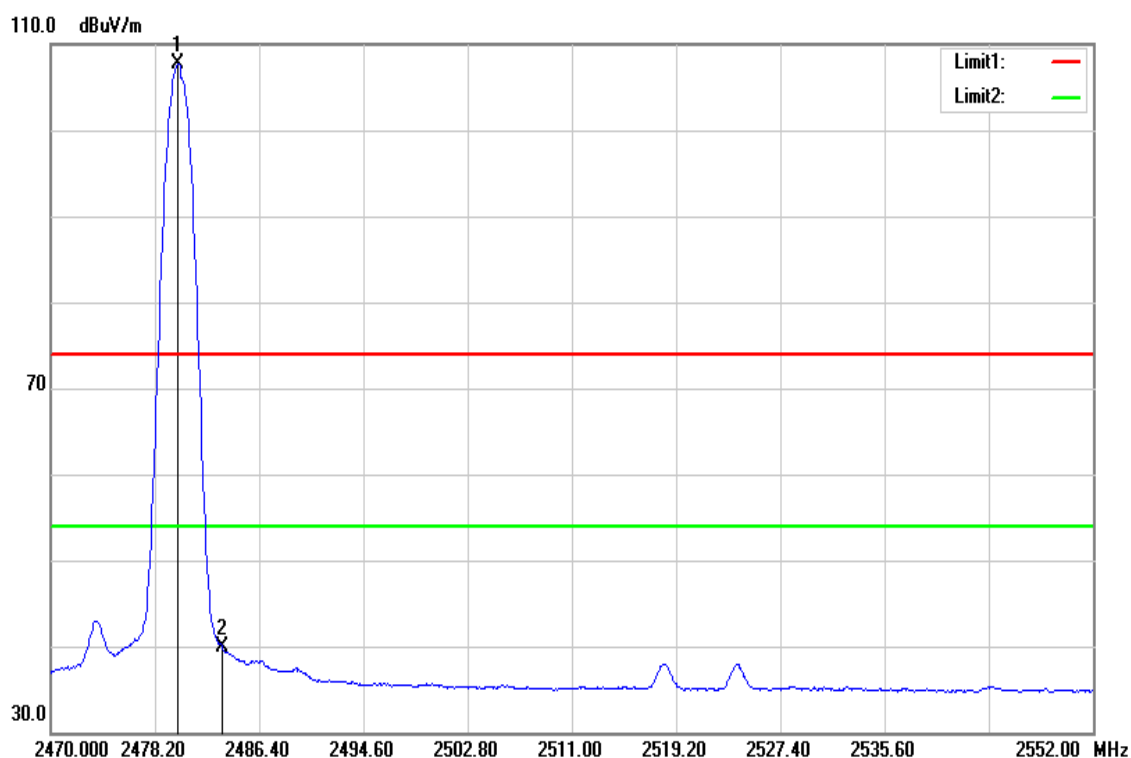

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.004	110.38	-2.70	107.68	-	-	AVG
2	2483.500	42.59	-2.69	39.90	54.00	-14.10	AVG






Report No.: T180627D11-RP1

Page: 56 / 87  
Rev.: 02

Test Mode:	8DPSK_EDR-3Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

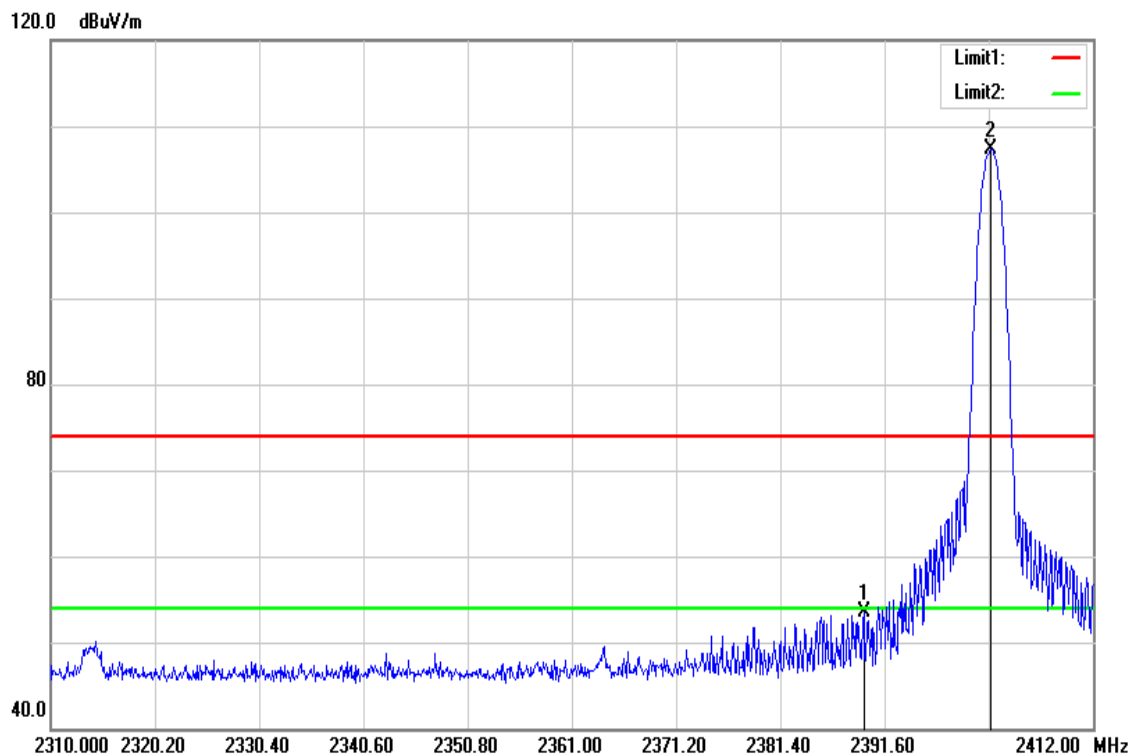


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.560	56.54	-2.98	53.56	74.00	-20.44	peak
2	2402.004	110.22	-2.95	107.27	-	-	peak



Report No.: T180627D11-RP1

Page: 57 / 87  
Rev.: 02

Test Mode:	8DPSK_EDR-3Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

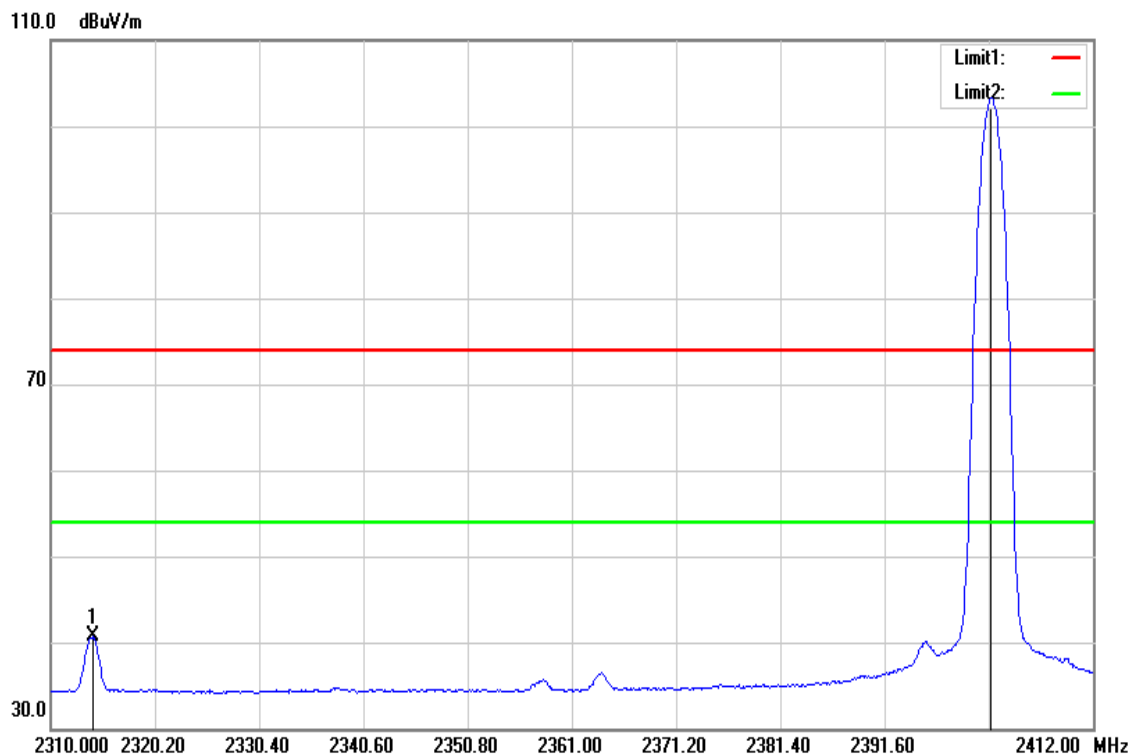


No.	Freque cy (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2314.080	43.91	-3.22	40.69	54.00	-13.31	AVG
2	2402.004	106.16	-2.95	103.21	-	-	AVG



Report No.: T180627D11-RP1

Page: 58 / 87  
Rev.: 02

Test Mode:	8DPSK_EDR-3Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

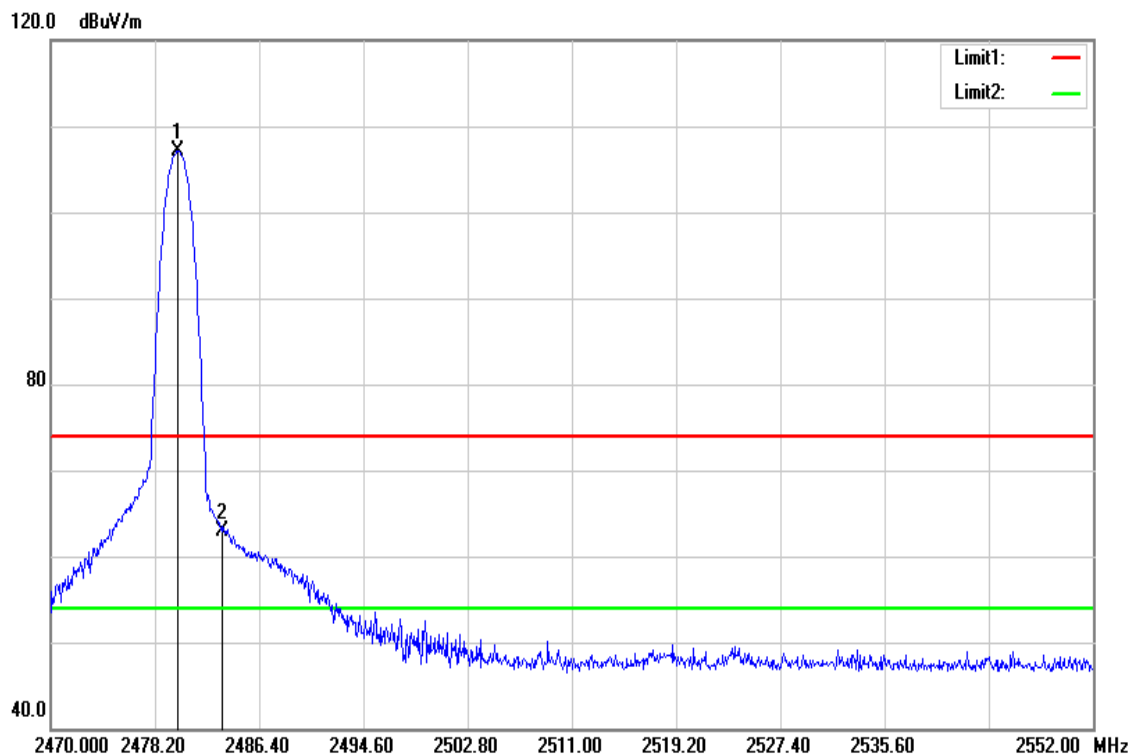


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.004	109.81	-2.70	107.11	-	-	peak
2	2483.500	65.68	-2.69	62.99	74.00	-11.01	peak



Report No.: T180627D11-RP1

Page: 59 / 87  
Rev.: 02

Test Mode:	8DPSK_EDR-3Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	July 16, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average		

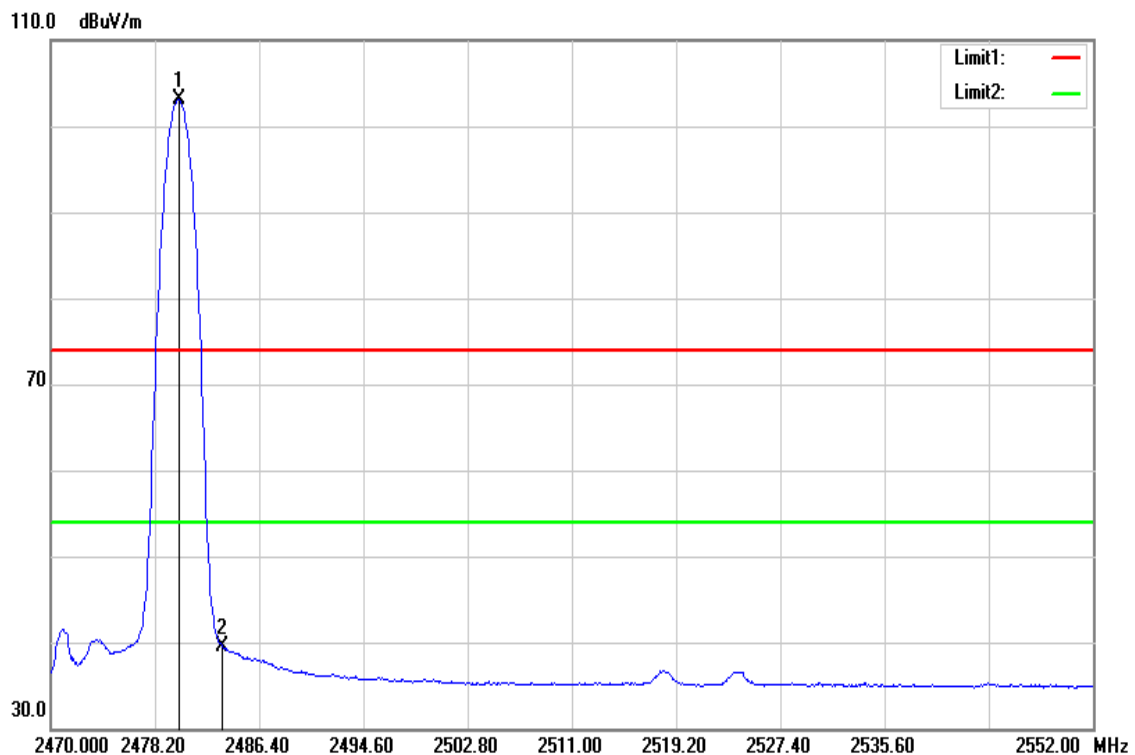


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.086	105.75	-2.70	103.05	-	-	AVG
2	2483.500	42.22	-2.69	39.53	54.00	-14.47	AVG

### Below 1G Test Data

#### For PIFA Antenna

Test Mode:	BT Mode	Temp/Hum	22(°C)/ 34%RH
Test Item	30MHz-1GHz	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

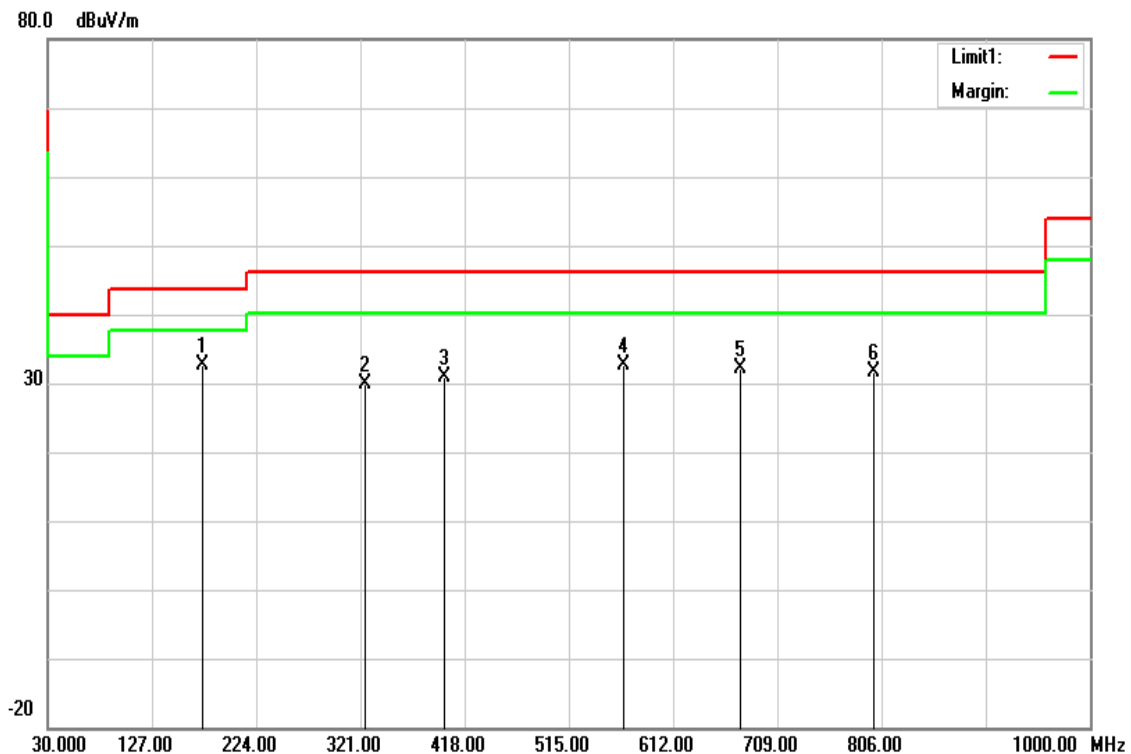


No.	requency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	174.5300	43.35	-10.78	32.57	43.52	-10.95	peak
2	324.8800	37.32	-7.38	29.94	46.02	-16.08	peak
3	399.5700	36.19	-5.30	30.89	46.02	-15.13	peak
4	565.4400	34.14	-1.56	32.58	46.02	-13.44	peak
5	675.0500	31.43	0.68	32.11	46.02	-13.91	peak
6	798.2400	28.97	2.68	31.65	46.02	-14.37	peak



Report No.: T180627D11-RP1

Page: 61 / 87  
Rev.: 02


Test Mode:	BT Mode	Temp/Hum	22(°C) / 34%RH
Test Item	30MHz-1GHz	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

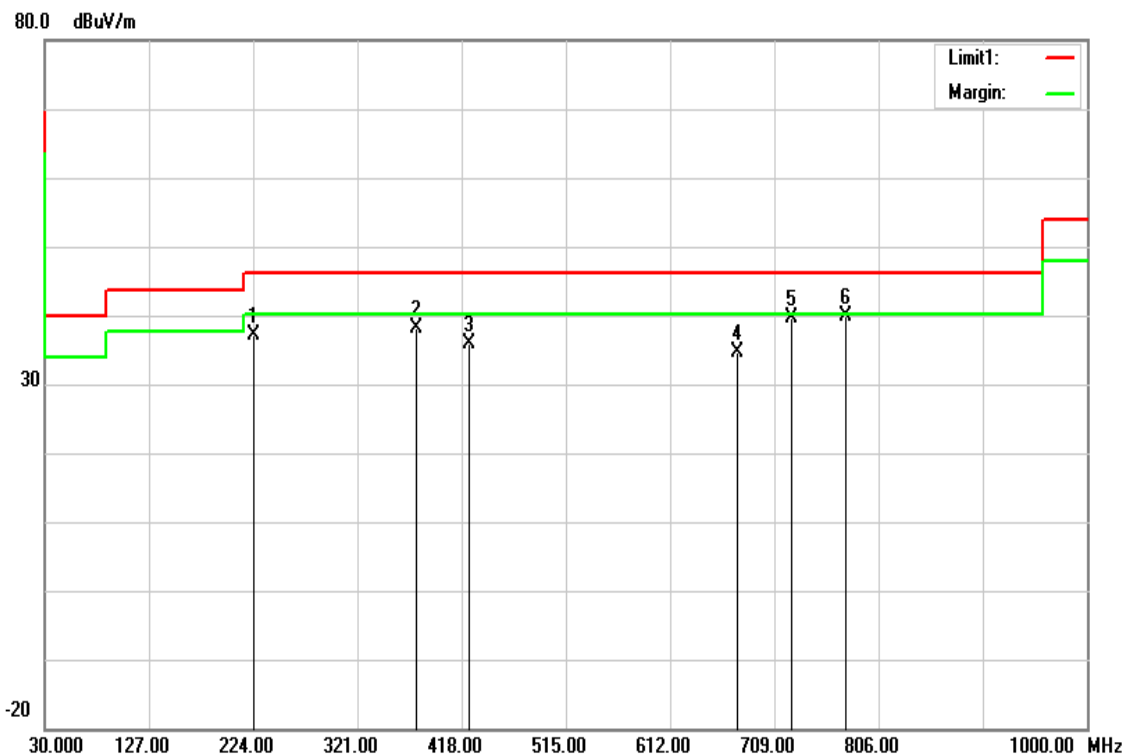

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	224.9700	48.22	-10.97	37.25	46.02	-8.77	peak
2	375.3200	44.05	-6.02	38.03	46.02	-7.99	peak
3	424.7900	40.51	-4.51	36.00	46.02	-10.02	peak
4	675.0500	33.92	0.68	34.60	46.02	-11.42	peak
5	725.4900	38.15	1.37	39.52	46.02	-6.50	peak
6	774.9600	37.64	2.21	39.85	46.02	-6.17	QP

### For Dipole Antenna


Test Mode:	BT Mode	Temp/Hum	22(°C)/ 34%RH
Test Item	30MHz-1GHz	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak		

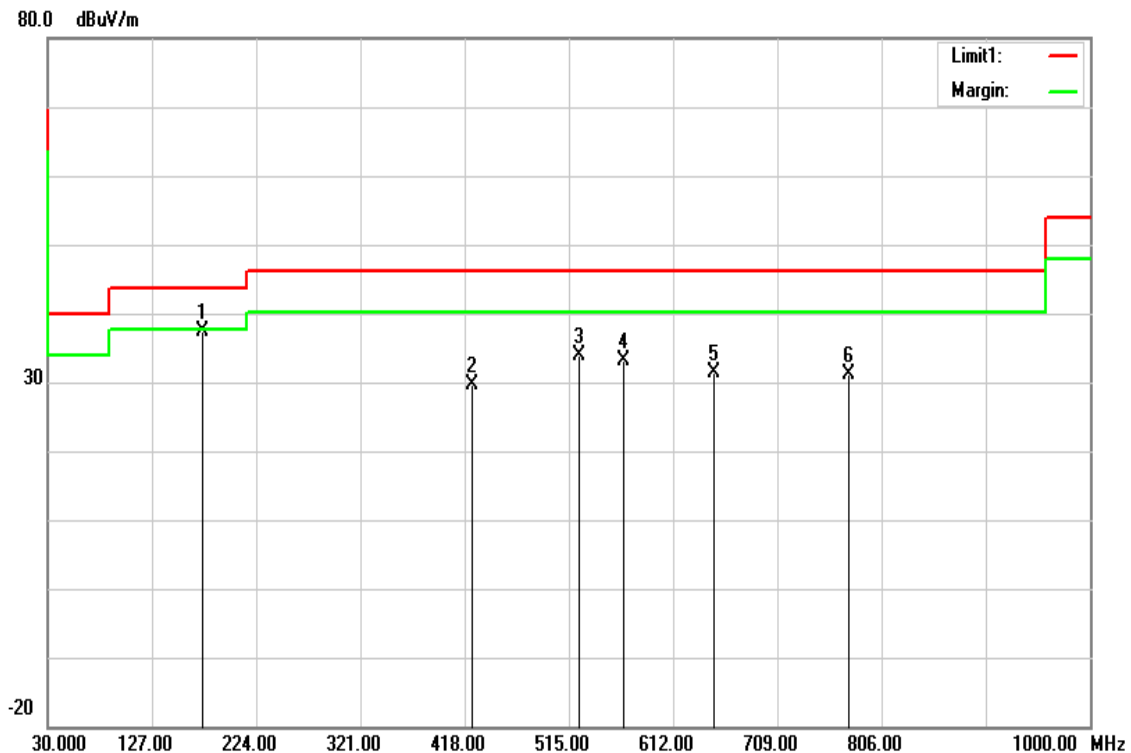

No.	requency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	174.5300	48.13	-10.78	37.35	43.52	-6.17	peak
2	424.7900	34.10	-4.51	29.59	46.02	-16.43	peak
3	524.7000	36.05	-2.18	33.87	46.02	-12.15	peak
4	565.4400	34.71	-1.56	33.15	46.02	-12.87	peak
5	649.8300	31.13	0.35	31.48	46.02	-14.54	peak
6	774.9600	28.94	2.21	31.15	46.02	-14.87	peak



Test Mode:	BT Mode	Temp/Hum	22(°C) / 34%RH
Test Item	30MHz-1GHz	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

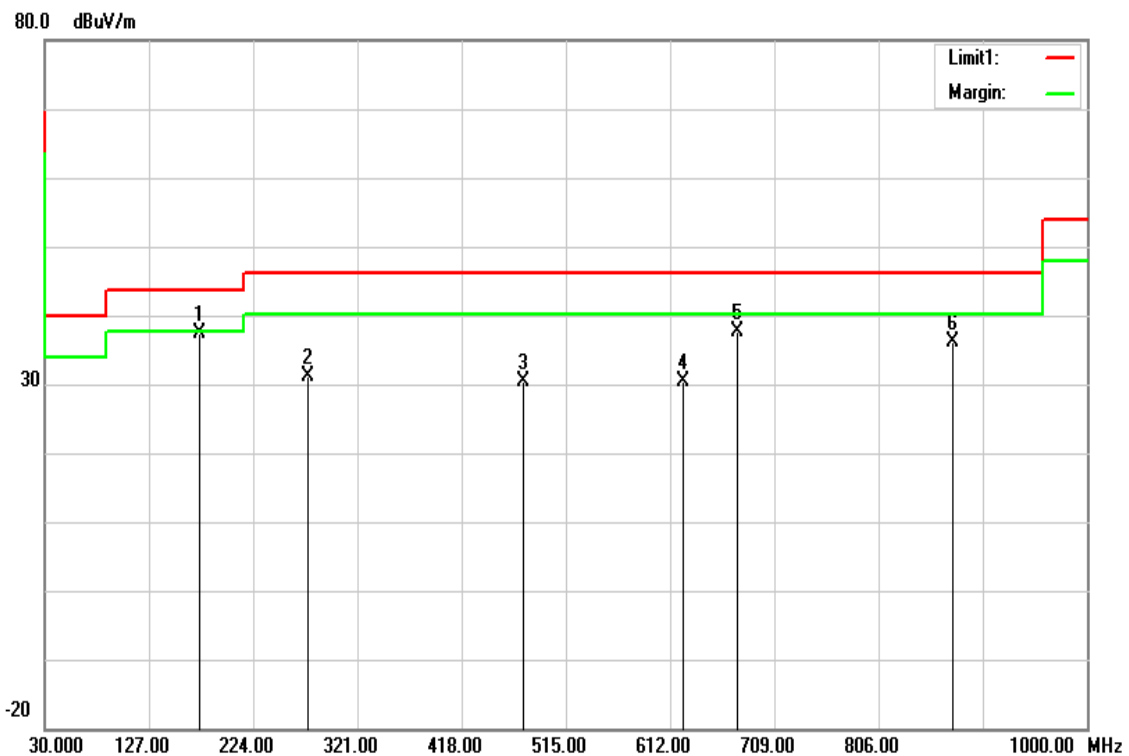


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	174.5300	48.10	-10.78	37.32	43.52	-6.20	peak
2	275.4100	39.57	-8.49	31.08	46.02	-14.94	peak
3	475.2300	33.46	-3.14	30.32	46.02	-15.70	peak
4	624.6100	30.76	-0.40	30.36	46.02	-15.66	peak
5	675.0500	37.05	0.68	37.73	46.02	-8.29	peak
6	874.8700	32.28	3.91	36.19	46.02	-9.83	peak

### Above 1G Test Data

#### For PIFA Antenna

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

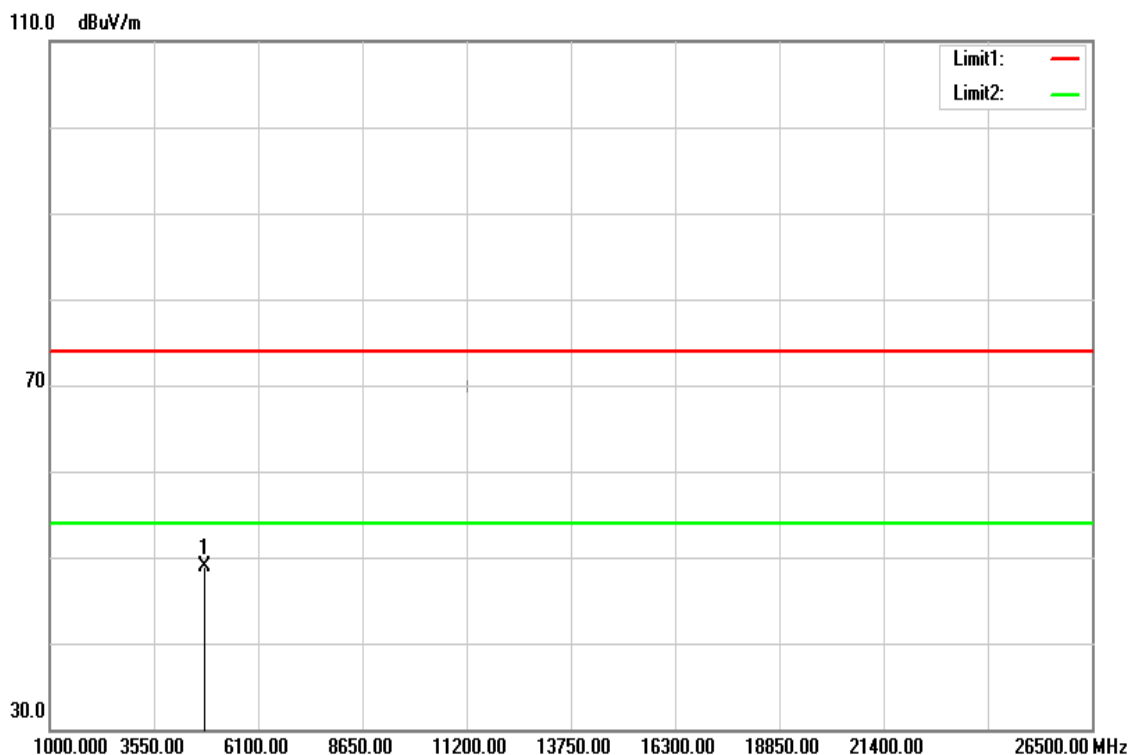


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4806.000	44.58	4.35	48.93	74.00	-25.07	peak

#### **Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

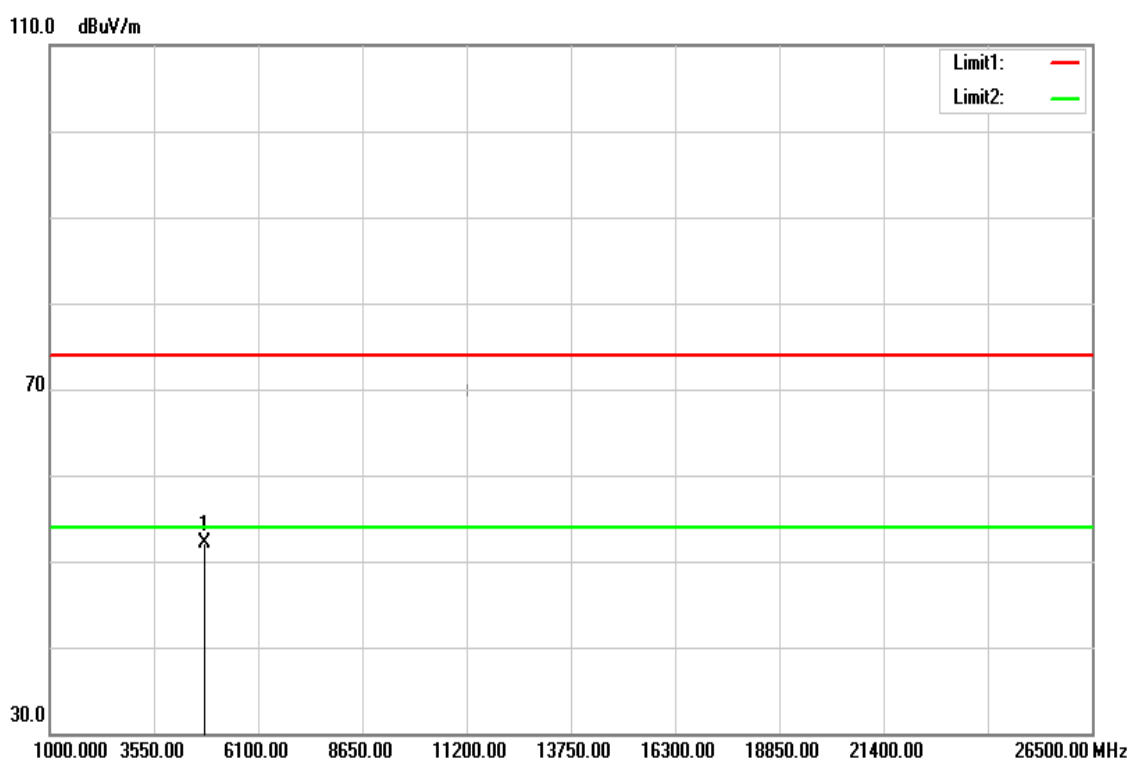


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4806.000	47.82	4.35	52.17	74.00	-21.83	peak

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

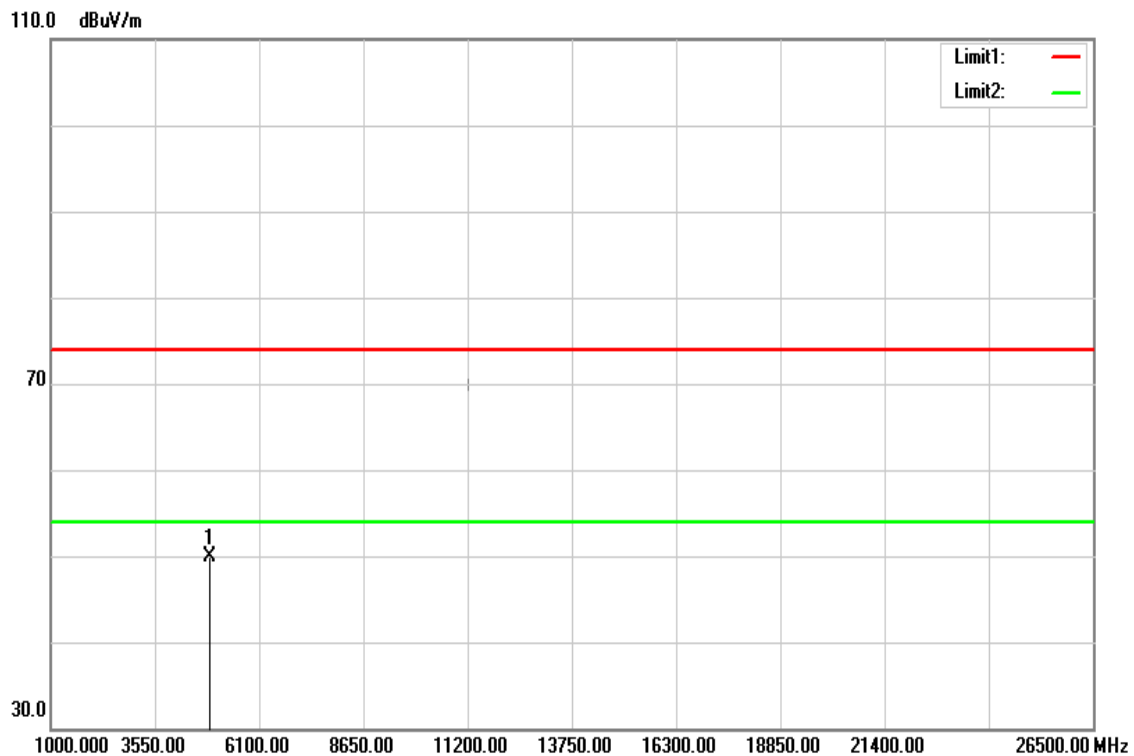

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4883.000	45.40	4.49	49.89	74.00	-24.11	peak

**Remark:**


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T180627D11-RP1

Page: 67 / 87  
Rev.: 02

Test Mode:	GFSK_BR-1Mbps Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

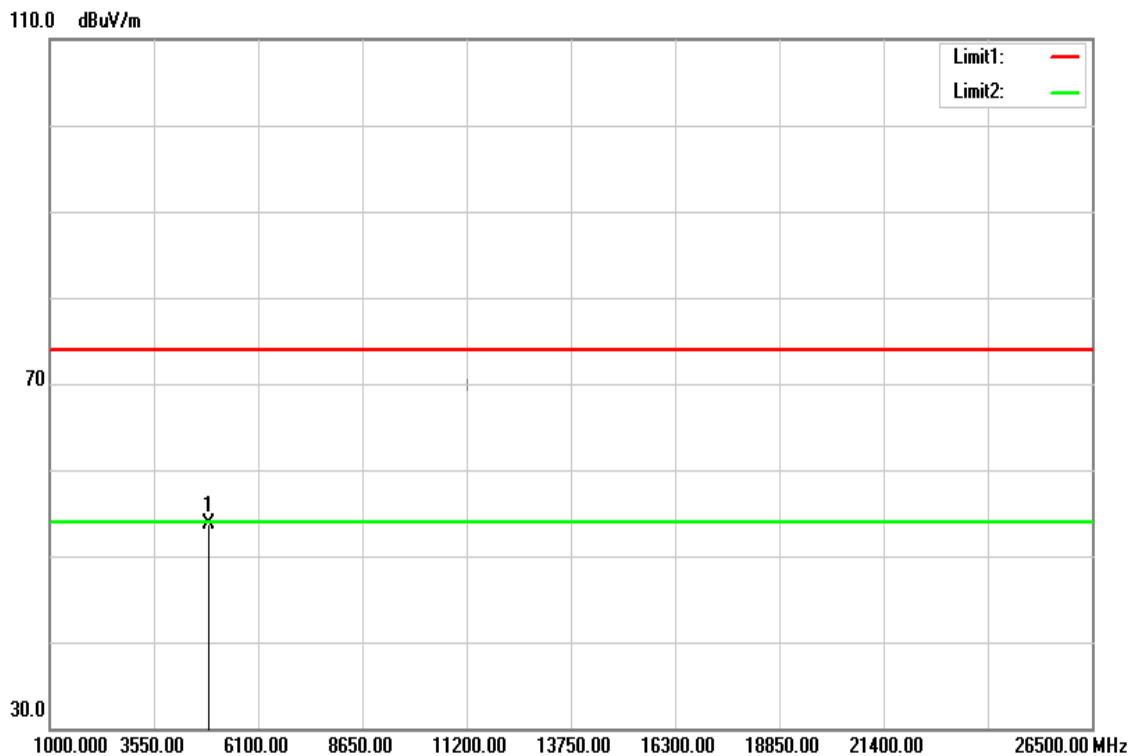


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4883.000	49.30	4.49	53.79	74.00	-20.21	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

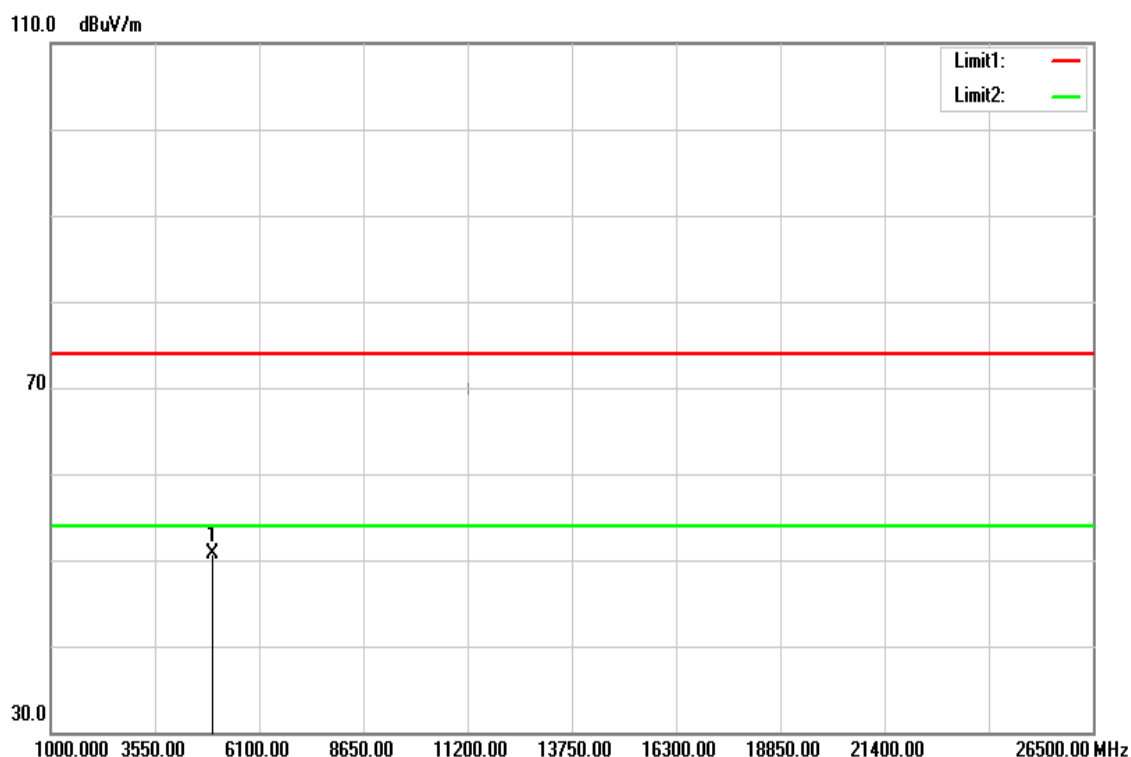


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	46.09	4.61	50.70	74.00	-23.30	peak

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

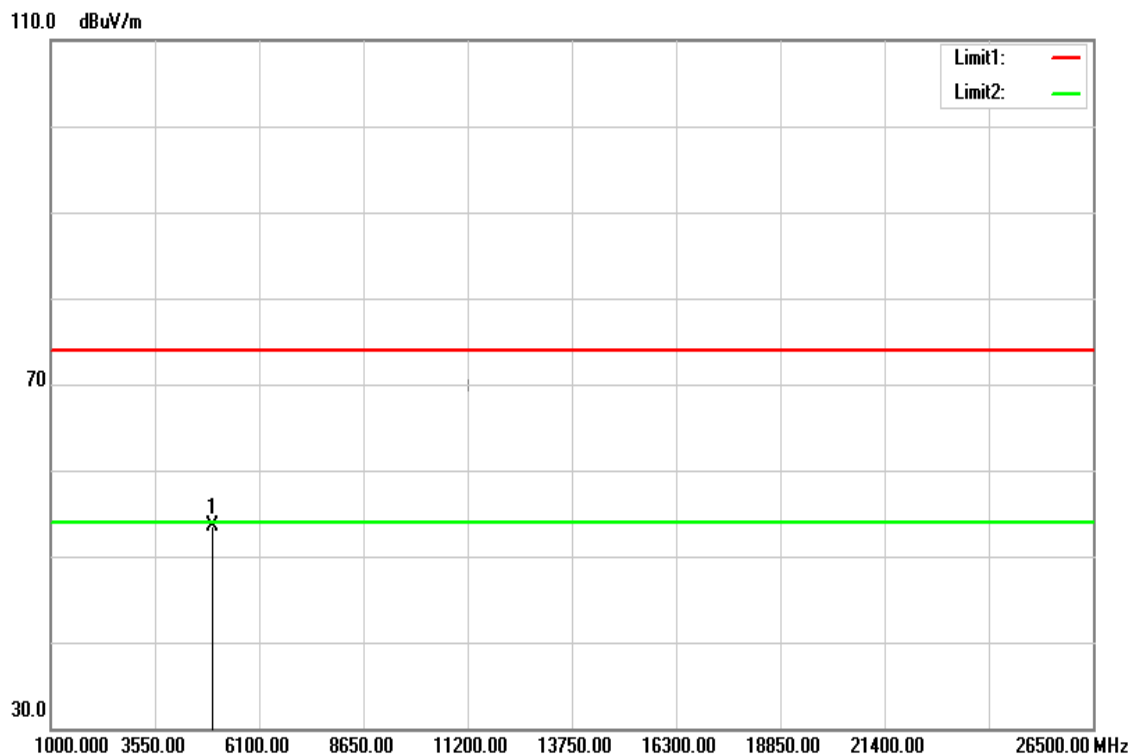


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	48.89	4.61	53.50	74.00	-20.50	peak

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Test Mode	8DPSK_EDR-3Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

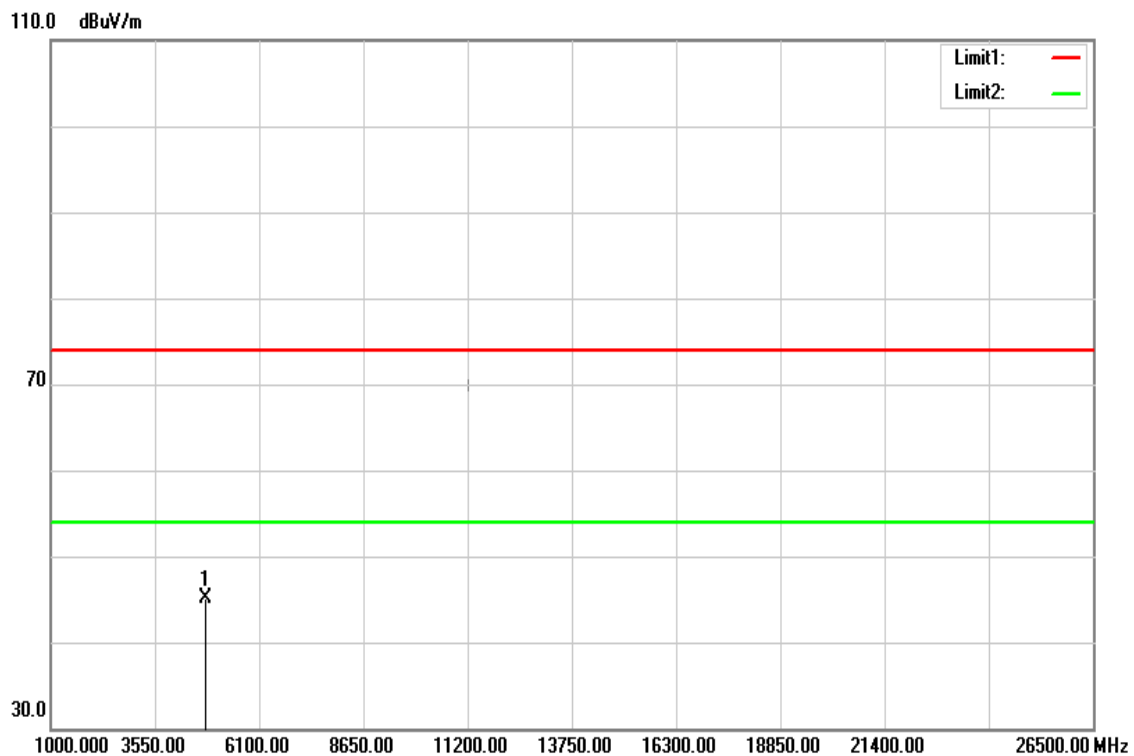


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	40.85	4.34	45.19	74.00	-28.81	peak

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

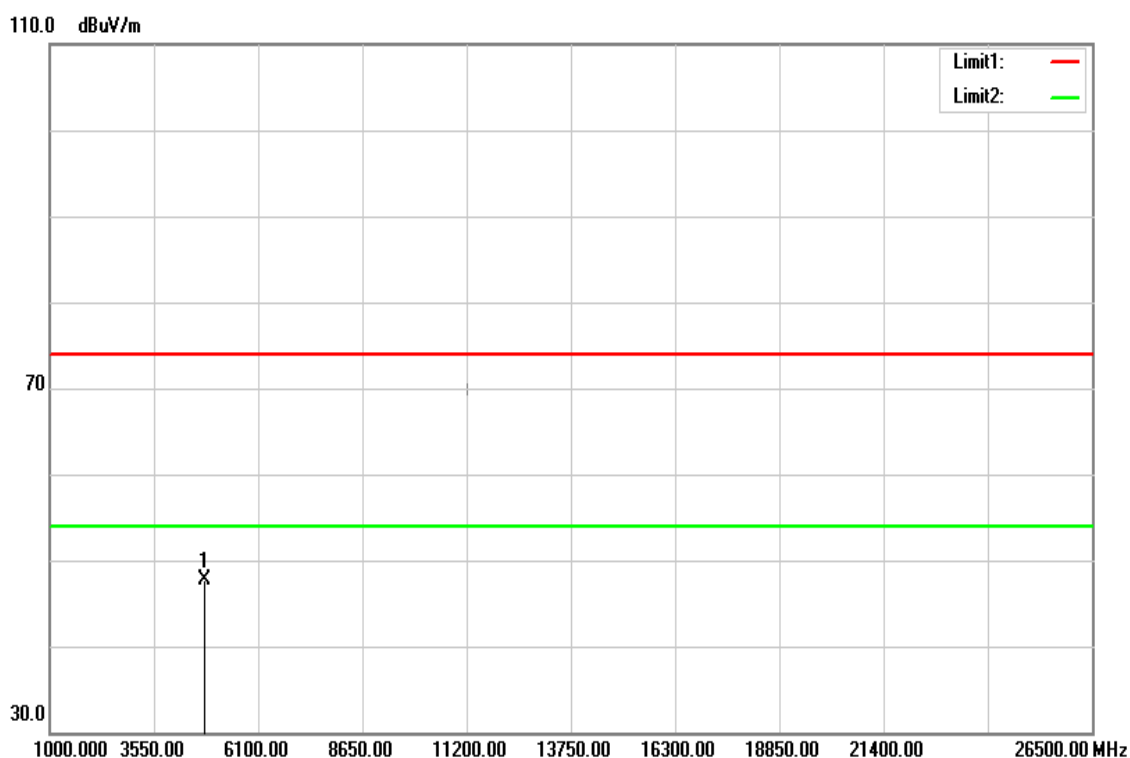

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4806.000	43.36	4.35	47.71	74.00	-26.29	peak

**Remark:**


- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T180627D11-RP1

Page: 72 / 87  
Rev.: 02

Test Mode	8DPSK_EDR-3Mbps Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

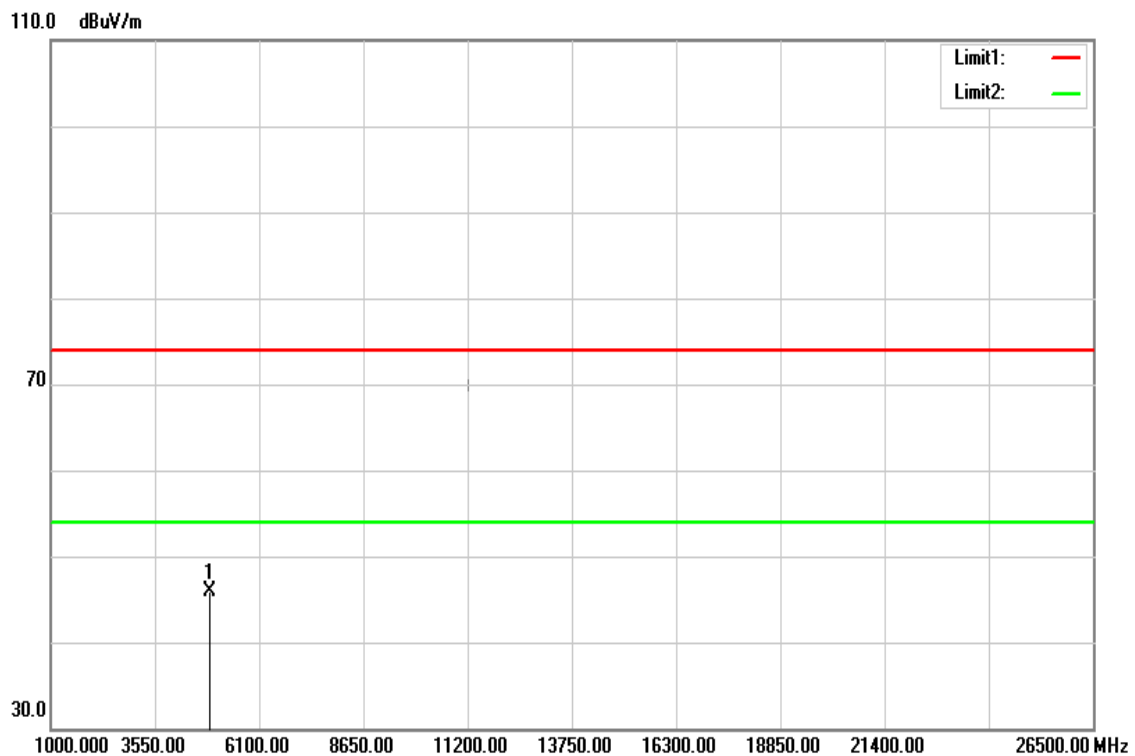

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4883.000	41.45	4.49	45.94	74.00	-28.06	peak

**Remark:**


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T180627D11-RP1

Page: 73 / 87  
Rev.: 02

Test Mode	8DPSK_EDR-3Mbps Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

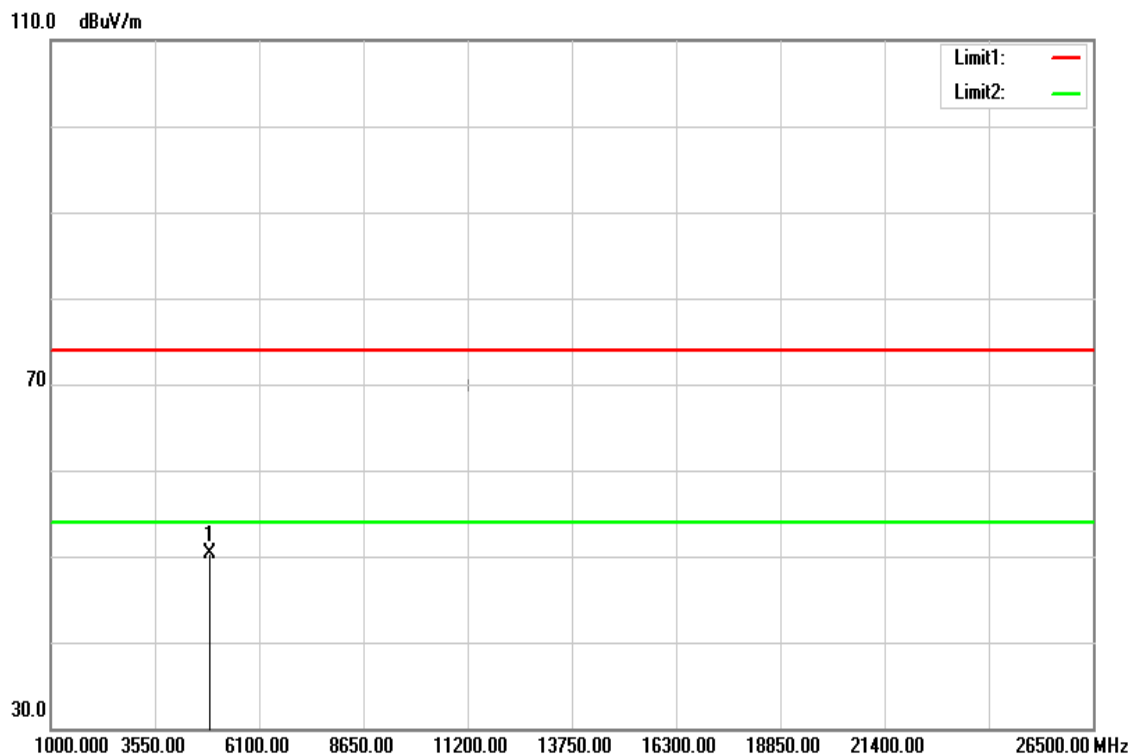

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4883.000	45.82	4.49	50.31	74.00	-23.69	peak

**Remark:**


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T180627D11-RP1

Page: 74 / 87  
Rev.: 02

Test Mode	8DPSK_EDR-3Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

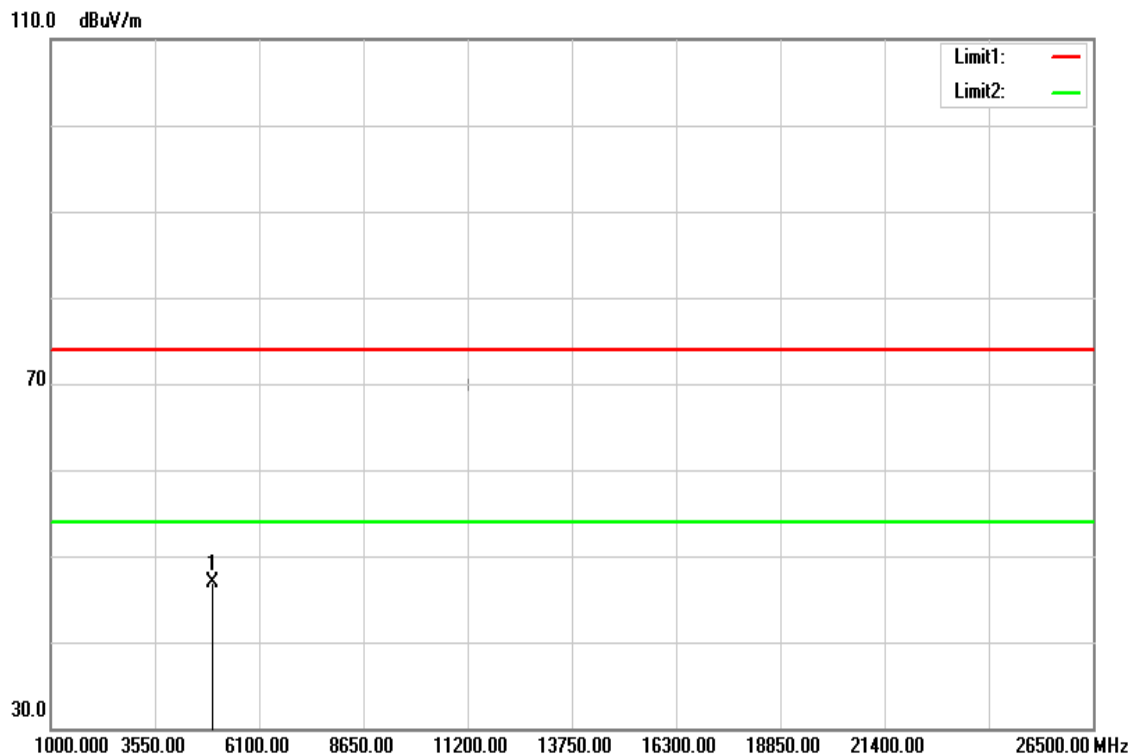


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	42.25	4.61	46.86	74.00	-27.14	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

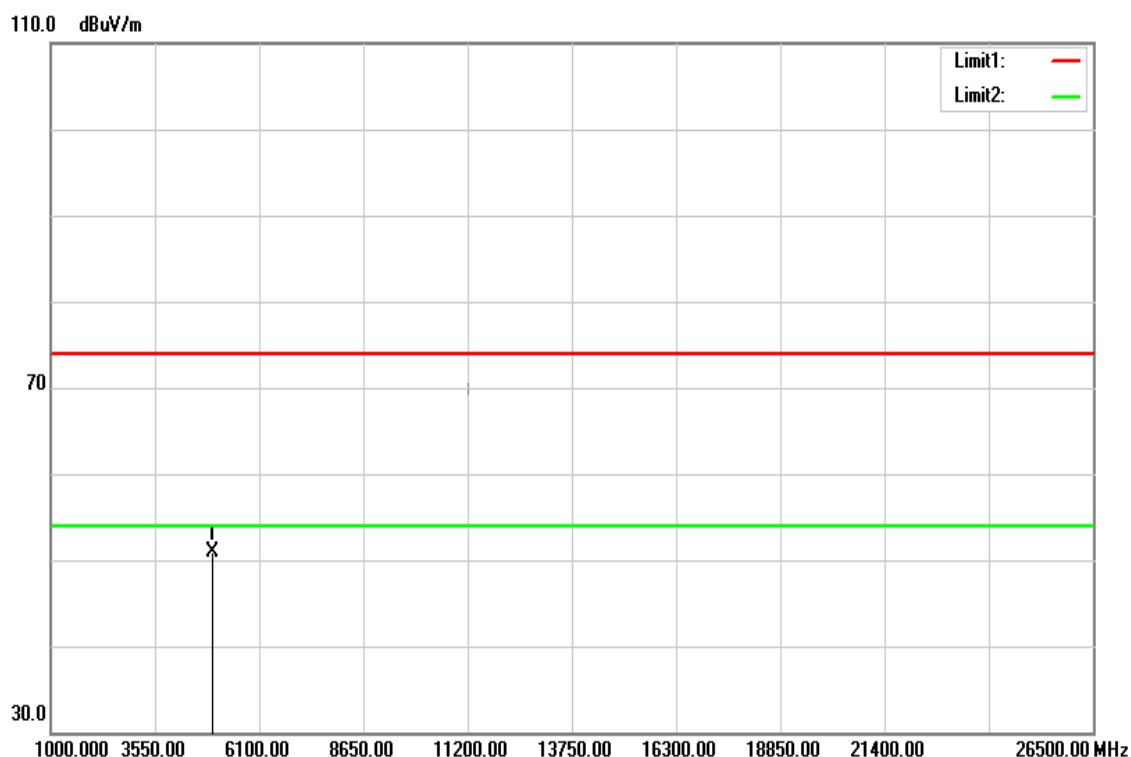

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	46.20	4.61	50.81	74.00	-23.19	peak

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit




Report No.: T180627D11-RP1

Page: 76 / 87  
Rev.: 02

### For Dipole Antenna

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	22(°C) / 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

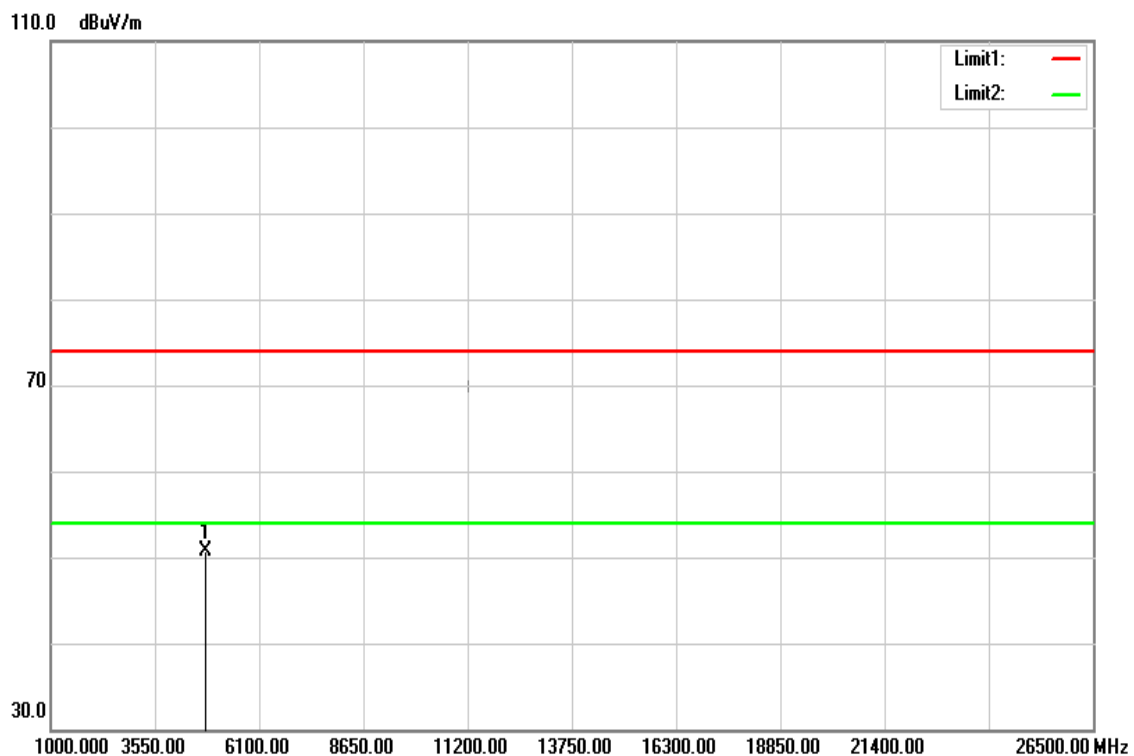

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4806.000	46.35	4.35	50.70	74.00	-23.30	peak

### **Remark:**


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T180627D11-RP1

Page: 77 / 87  
Rev.: 02

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

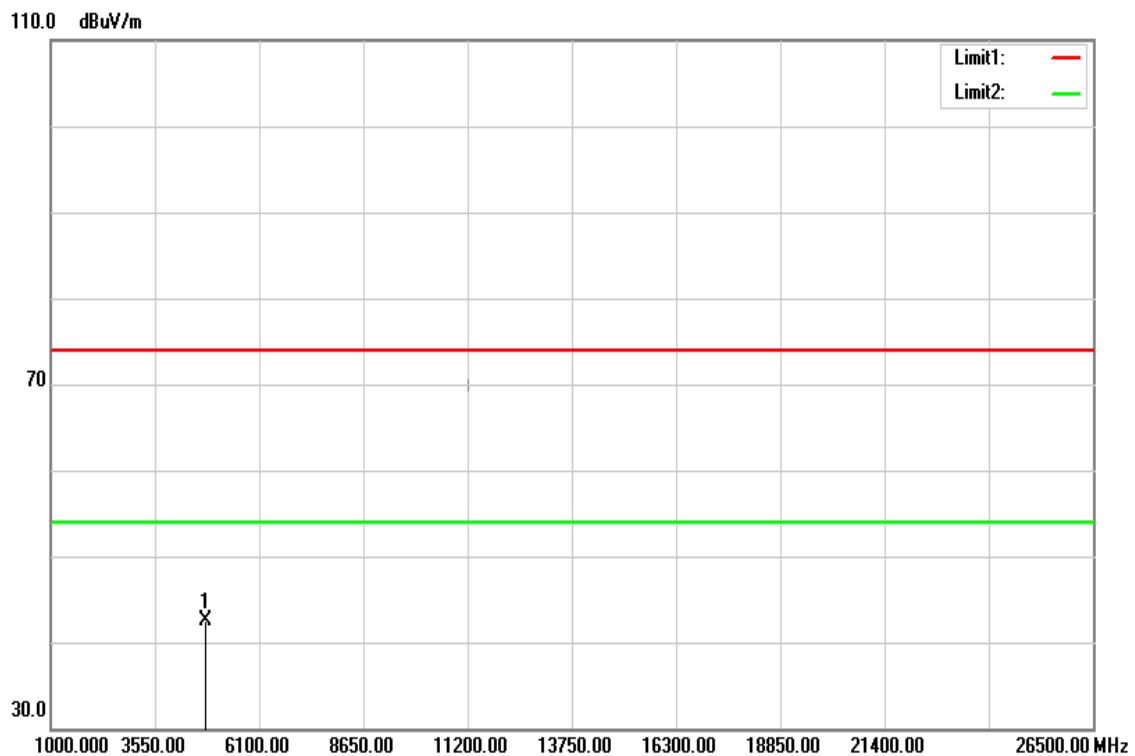

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	38.15	4.34	42.49	74.00	-31.51	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit






Report No.: T180627D11-RP1

Page: 78 / 87  
Rev.: 02

Test Mode:	GFSK_BR-1Mbps Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

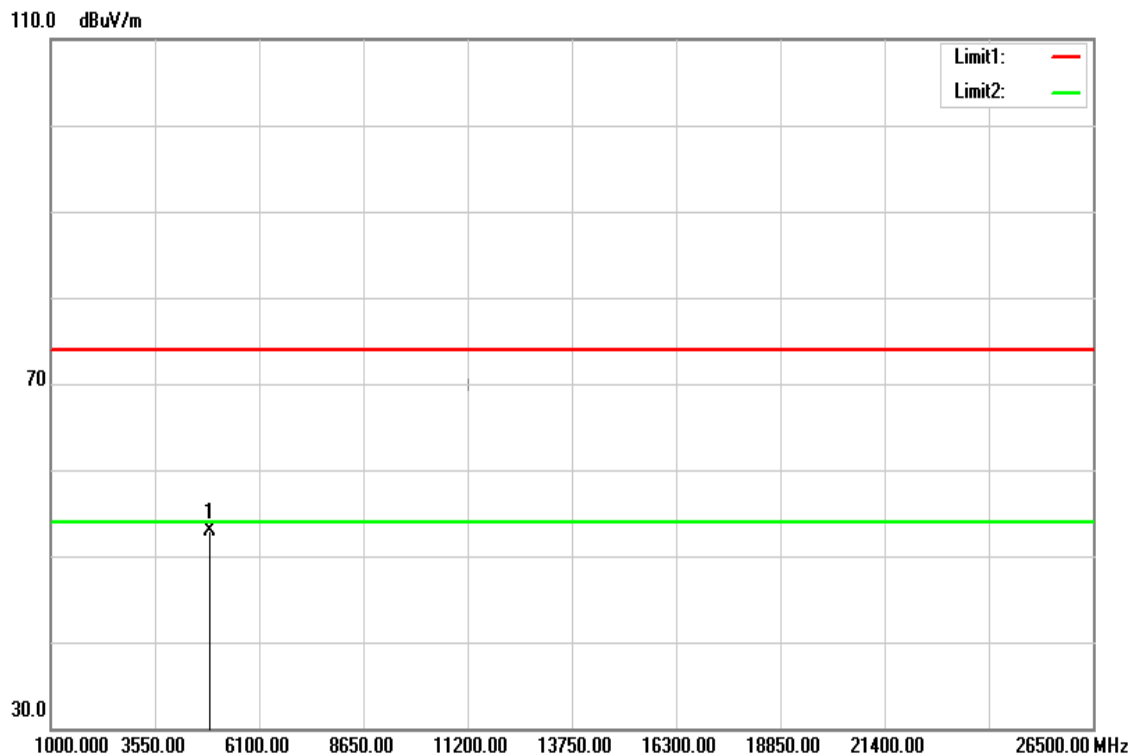


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4883.000	48.33	4.49	52.82	74.00	-21.18	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

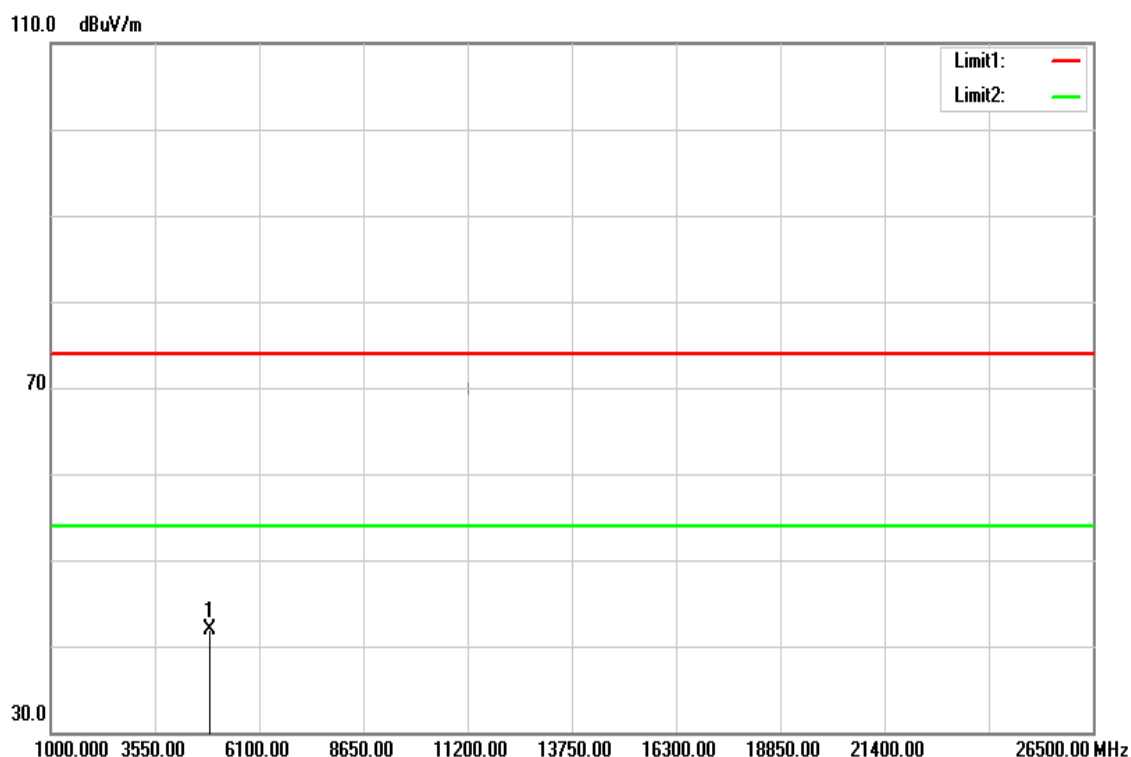


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	37.49	4.49	41.98	74.00	-32.02	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

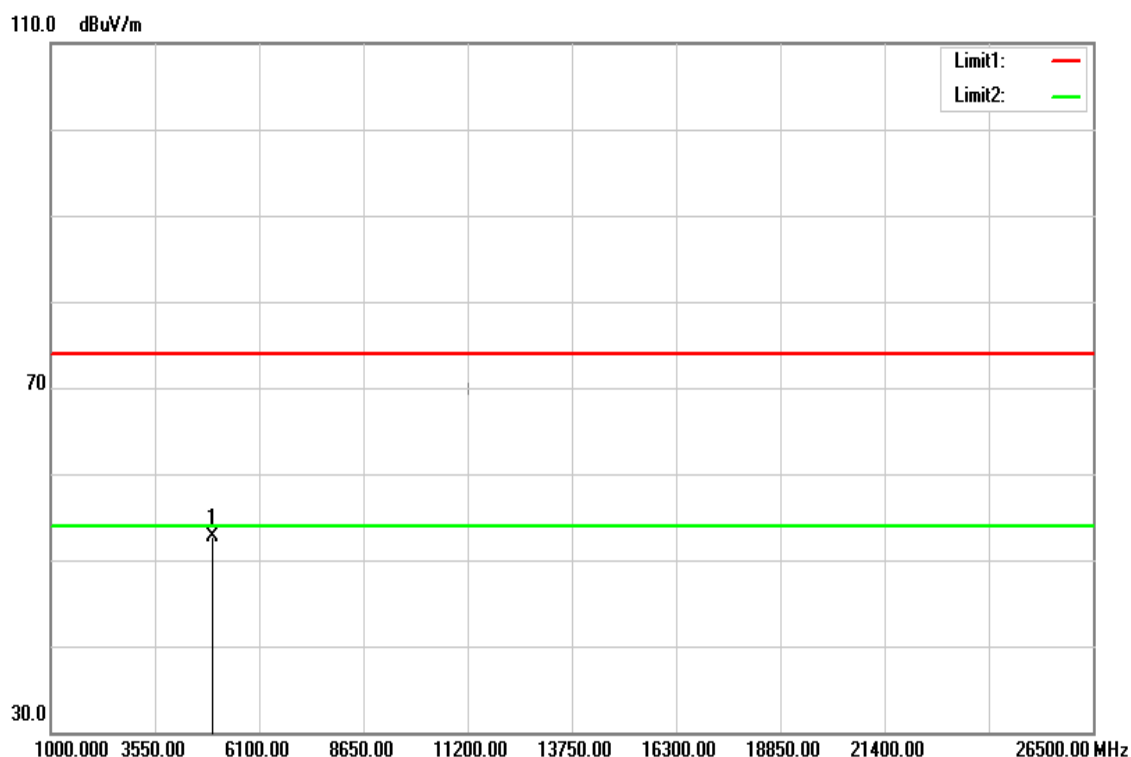


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	48.17	4.61	52.78	74.00	-21.22	peak

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

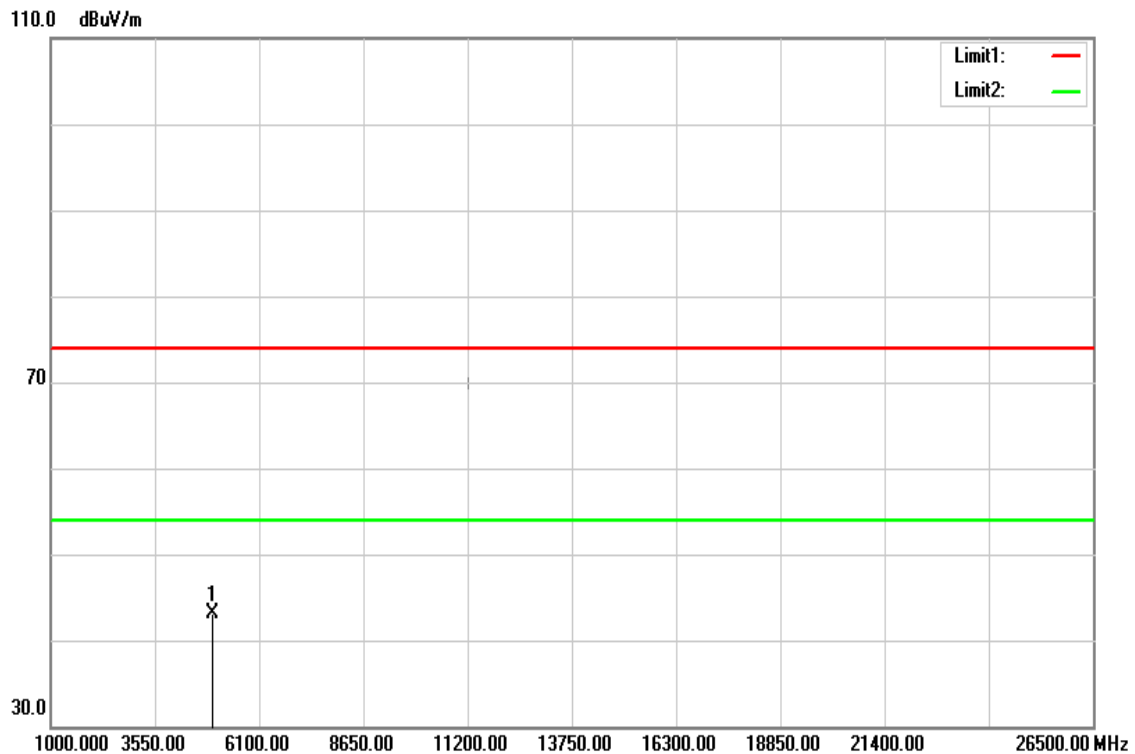


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	38.55	4.61	43.16	74.00	-30.84	peak

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

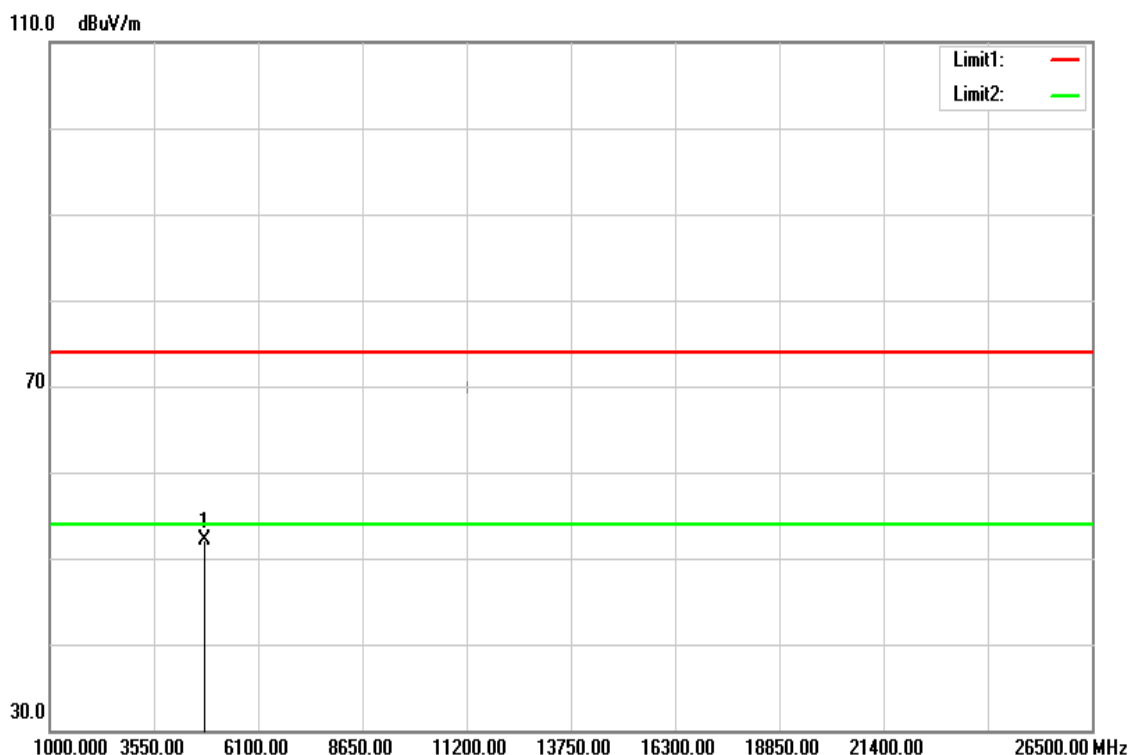


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4806.000	47.69	4.35	52.04	74.00	-21.96	peak

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

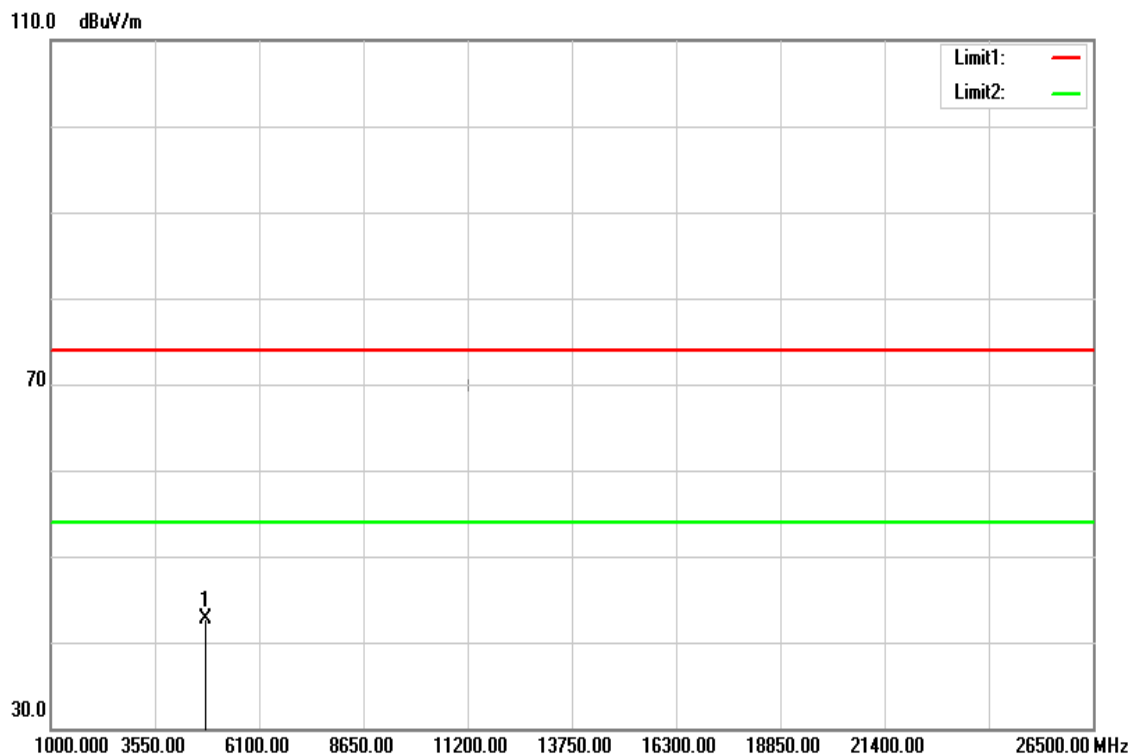


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	38.33	4.34	42.67	74.00	-31.33	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

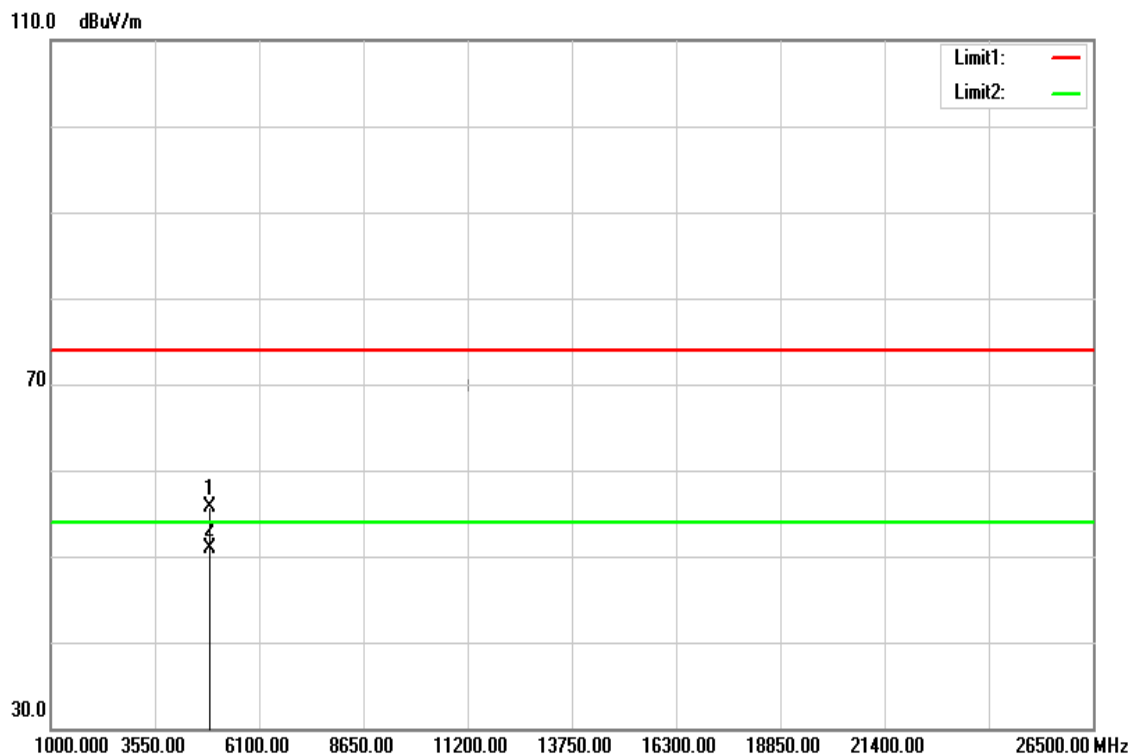


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4883.000	51.20	4.49	55.69	74.00	-18.31	peak
2	4883.000	46.36	4.49	50.85	54.00	-3.15	AVG

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

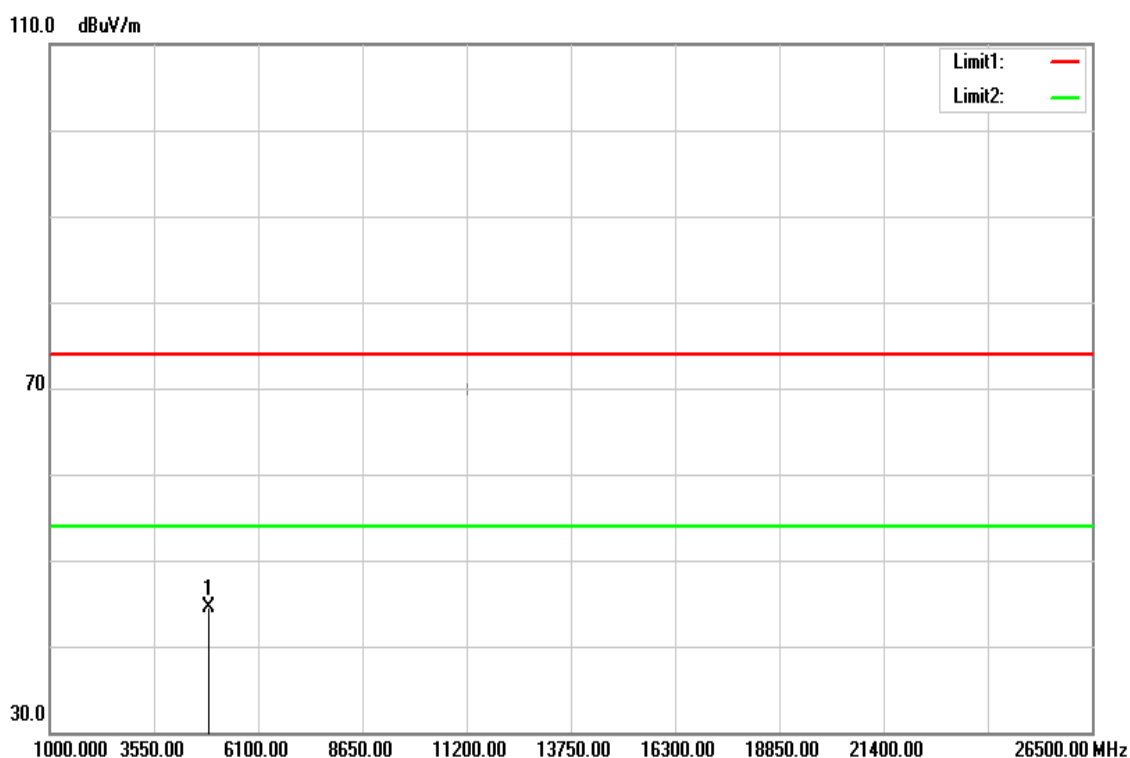


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4883.000	39.96	4.49	44.45	74.00	-29.55	peak

**Remark:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Test Mode	8DPSK_EDR-3Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

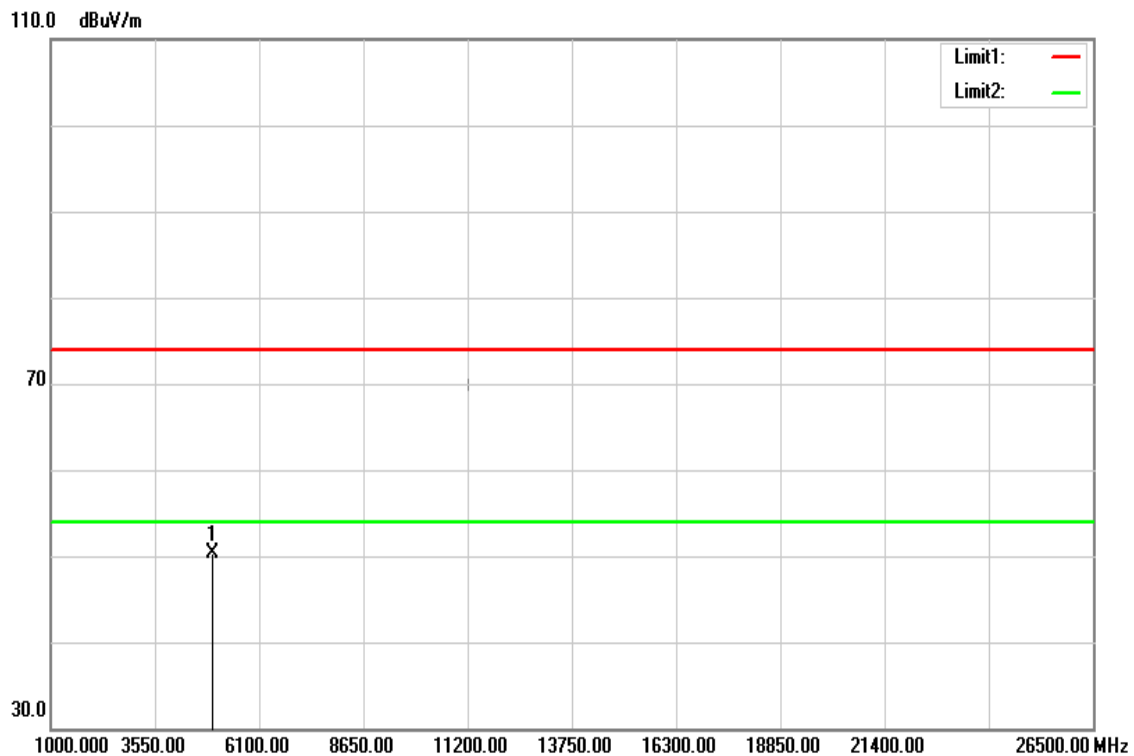

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	45.69	4.61	50.30	74.00	-23.70	peak

**Remark:**


- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit



Report No.: T180627D11-RP1

Page: 87 / 87  
Rev.: 02

Test Mode	8DPSK_EDR-3Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	July 30, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

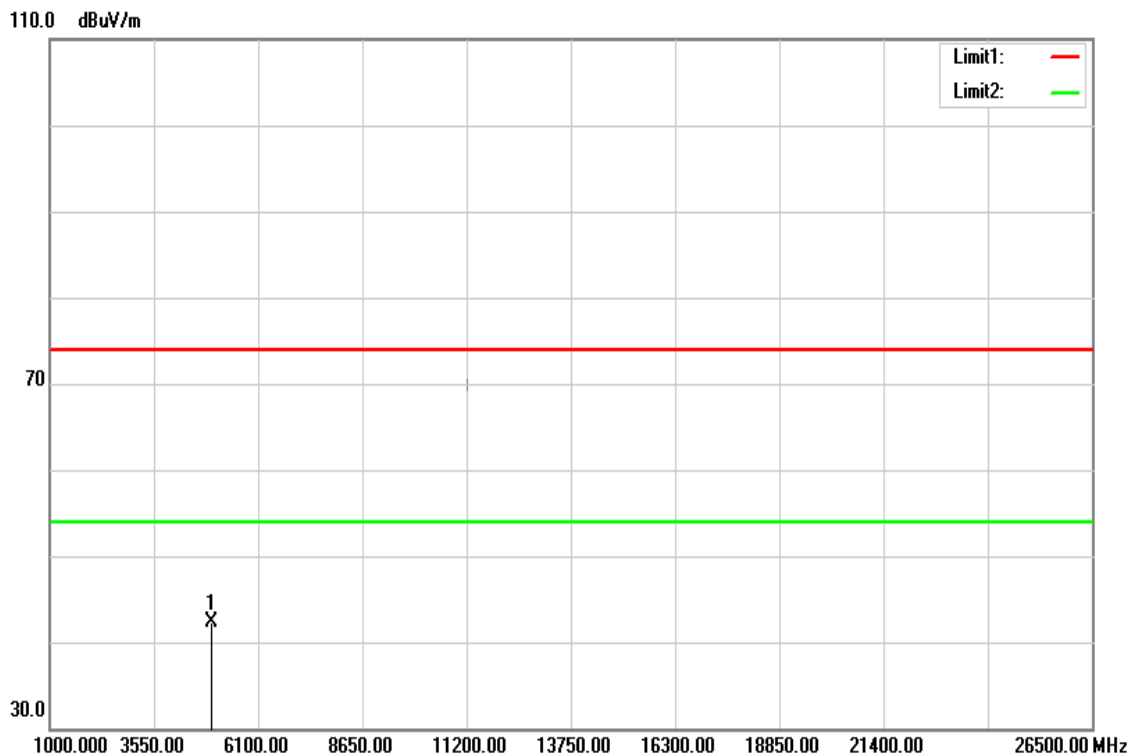

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	37.75	4.61	42.36	74.00	-31.64	peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

**--End of Report--**