

## Head Tissue Simulating Liquids

Head Tissue	Parameters according to IEEE Std 1528-2013 / IEC 62209 / FCC KDB 865664 D01		
<b>Narrow-Band Solutions (±5% tolerance)</b>	<b>Product</b>	<b>Test Frequency (MHz)</b>	<b>Main Ingredients</b>
	HSL300V2	300	Water, Sugar
	HSL450V2	450	Water, Sugar
	HSL750V2	750	Water, Sugar
	HSL900V2	835, 900	Water, Sugar
	HSL1450V2	1450, 1500, 1640	Water, DGBE
	HSL1750V2	1750	Water, DGBE
	HSL1800V2	1800, 1900	Water, DGBE
	HSL1900V2	1900	Water, DGBE
	HSL1950V2	1950, 2000	Water, DGBE
	HSL2450V2	2450, 2600	Water, DGBE
<b>Broad-Band Solutions (±5% tolerance)</b>	<b>Product</b>	<b>Test Frequency (MHz)</b>	<b>Main Ingredients</b>
	HBBL30-250V3	30-250	Water, Tween
	HBBL1350-1850V3	1400-1800	Water, Tween
	HBBL1550-1950V3	1750-1900	Water, Tween
	HBBL1900-3800V3	1950-3000	Water, Tween
	HBBL3500-5800V5	3500-5800	Water, Oil

## Body Tissue Simulating Liquids

Body Tissue (Muscle)	Parameters according to FCC KDB 865664 D01		
<b>Narrow-Band Solutions (±5% tolerance)</b>	<b>Product</b>	<b>Test Frequency (MHz)</b>	<b>Main Ingredients</b>
	MSL300V2	300	Water, Sugar
	MSL450V2	400, 450	Water, Sugar
	MSL750V2	750	Water, Sugar
	MSL900V2	835, 900	Water, Sugar
	MSL1450V2	1450, 1500, 1640	Water, DGBE
	MSL1750V2	1750	Water, DGBE
	MSL1800V2	1800, 1900	Water, DGBE
	MSL1900V2	1900	Water, DGBE
	MSL1950V2	1950, 2100	Water, DGBE
	MSL2450V2	2450, 2600	Water, DGBE
<b>Broad-Band Solutions (±5% tolerance)</b>	<b>Product</b>	<b>Test Frequency (MHz)</b>	<b>Main Ingredients</b>
	MBBL130-250V3	130-250	Water, Tween
	MBBL1350-1850V3	1350-1800	Water, Tween
	MBBL1550-1950V3	1550-1850	Water, Tween
	MBBL1900-3800V3	1950-3800	Water, Tween
	MBBL3500-5800V5	3500-5800	Water, Oil

Zeughausstrasse 43, 8004 Zurich, Switzerland  
 Phone +41 44 245 9700, Fax +41 44 245 9779  
 info@speag.com, http://www.speag.com

## Measurement Certificate / Material Test

Item Name **Body Tissue Simulating Liquid (MSL900V2)**  
 Product No. SL AAM 090 CA (Charge: 140710-1)  
 Manufacturer SPEAG

### Measurement Method

TSL dielectric parameters measured using calibrated OCP probe.

### Setup Validation

Validation results were within  $\pm 2.5\%$  towards the target values of Methanol.

### Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.



### Test Condition

Ambient Environment temperatur ( $22 \pm 3$ )°C and humidity < 70%.  
 TSL Temperature 22°C  
 Test Date 16-Jul-14  
 Operator IEN

### Additional Information

TSL Density 1.208 g/cm<sup>3</sup>  
 TSL Heat-capacity 3.113 kJ/(kg·K)

f [MHz]	Measured			Target		Diff.to Target [%]	
	HP-e'	HP-e''	sigma	eps	sigma	Δ-eps	Δ-sigma
700	56.6	22.41	0.87	55.7	0.96	1.6	-9.0
725	56.4	22.23	0.90	55.6	0.96	1.3	-6.8
750	56.1	22.04	0.92	55.5	0.96	1.1	-4.5
775	55.9	21.88	0.94	55.4	0.97	0.8	-2.3
800	55.6	21.72	0.97	55.3	0.97	0.5	-0.1
825	55.4	21.59	0.99	55.2	0.98	0.3	1.3
838	55.3	21.52	1.00	55.2	0.98	0.2	2.0
850	55.2	21.46	1.01	55.2	0.99	0.0	2.6
875	54.9	21.35	1.04	55.1	1.02	-0.2	2.0
900	54.7	21.25	1.06	55.0	1.05	-0.5	1.3
925	54.5	21.17	1.09	55.0	1.06	-0.9	2.5
950	54.3	21.08	1.11	54.9	1.08	-1.2	3.6
975	54.1	21.01	1.14	54.9	1.09	-1.5	4.9
1000	53.8	20.95	1.17	54.8	1.10	-1.8	6.1
1025	53.6	20.88	1.19	54.8	1.11	-2.1	7.3
1050	53.4	20.81	1.22	54.7	1.12	-2.4	8.5
1075	53.2	20.79	1.24	54.7	1.13	-2.7	9.8
1100	53.0	20.76	1.27	54.7	1.14	-3.0	11.2
1125	52.8	20.71	1.30	54.6	1.15	-3.3	12.3
1150	52.6	20.66	1.32	54.6	1.17	-3.7	13.4
1175	52.4	20.64	1.35	54.5	1.18	-3.9	14.7
1200	52.2	20.63	1.38	54.5	1.19	-4.2	15.9

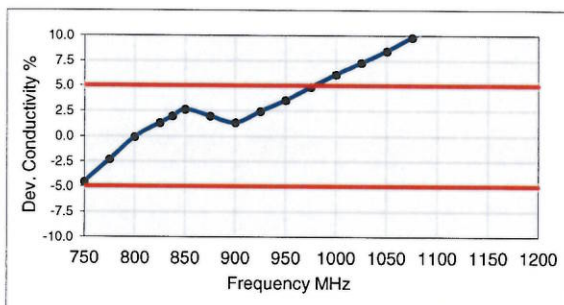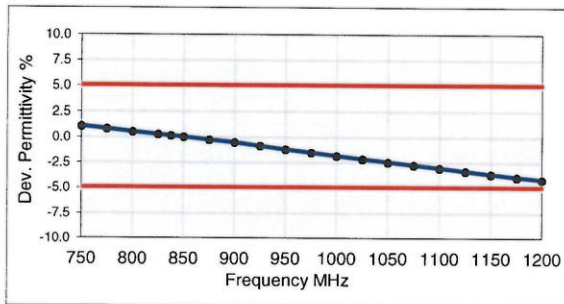

Zeughausstrasse 43, 8004 Zurich, Switzerland  
 Phone +41 44 245 9700, Fax +41 44 245 9779  
 info@speag.com, http://www.speag.com

## Measurement Certificate / Material Test

Item Name **Body Tissue Simulating Liquid (MBBL1550-1950V3)**  
 Product No. SL AAM 181 AA (Charge: 140826-1)  
 Manufacturer SPEAG

### Measurement Method

TSL dielectric parameters measured using calibrated OCP probe.

### Setup Validation

Validation results were within  $\pm 2.5\%$  towards the target values of Methanol.

### Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

### Test Condition

Ambient Environment temperatur ( $22 \pm 3$ )°C and humidity < 70%.  
 TSL Temperature 22°C  
 Test Date 27-Aug-14  
 Operator IEN

### Additional Information

TSL Density 1.042 g/cm<sup>3</sup>  
 TSL Heat-capacity 3.475 kJ/(kg\*K)

f [MHz]	Measured			Target		Diff.to Target [%]	
	HP-e'	HP-e''	sigma	eps	sigma	$\Delta$ -eps	$\Delta$ -sigma
1500	53.6	14.84	1.24	53.9	1.33	-0.7	-7.0
1525	53.5	14.85	1.26	53.9	1.35	-0.8	-6.5
1550	53.4	14.85	1.28	53.9	1.36	-0.9	-6.0
1575	53.3	14.85	1.30	53.8	1.38	-1.0	-5.6
1600	53.2	14.85	1.32	53.8	1.39	-1.1	-5.1
1625	53.2	14.86	1.34	53.8	1.41	-1.1	-4.7
1650	53.1	14.87	1.36	53.7	1.43	-1.1	-4.2
1675	53.0	14.88	1.39	53.6	1.44	-1.2	-3.8
1700	52.9	14.89	1.41	53.6	1.46	-1.2	-3.3
1725	52.9	14.91	1.43	53.5	1.47	-1.2	-2.8
1750	52.8	14.93	1.45	53.4	1.49	-1.2	-2.3
1775	52.7	14.94	1.48	53.4	1.50	-1.2	-1.9
1800	52.6	14.96	1.50	53.3	1.52	-1.2	-1.5
1825	52.6	14.98	1.52	53.3	1.52	-1.4	0.1
1850	52.5	15.01	1.54	53.3	1.52	-1.5	1.6
1875	52.4	15.02	1.57	53.3	1.52	-1.6	3.1
1900	52.4	15.03	1.59	53.3	1.52	-1.8	4.5
1925	52.3	15.06	1.61	53.3	1.52	-1.9	6.1
1950	52.2	15.09	1.64	53.3	1.52	-2.0	7.7
1975	52.2	15.11	1.66	53.3	1.52	-2.1	9.2
2000	52.1	15.13	1.68	53.3	1.52	-2.2	10.7

