

Produkte
Products



Prüfbericht - Nr.: 14048288 001 <i>Test Report No.:</i>		Seite 1 von 15 <i>Page 1 of 15</i>	
Auftraggeber: <i>Client:</i>		SHANTOU SKYTECH TECHNOLOGY INDUSTRIAL INC. Laimei Industrial Park Chenghai District Shantou City Guangdong China	
Gegenstand der Prüfung: Short Range Device - Radio Control Toy Transmitter (2.4GHz) <i>Test Item:</i>			
Bezeichnung: <i>Identification:</i>	Please refer "Models" on page 4	Serien-Nr.: <i>Serial No.:</i>	Engineering sample
Wareneingangs-Nr.: <i>Receipt No.:</i>	A000552428-003	Eingangsdatum: <i>Date of Receipt:</i>	21.04.2017
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of test item at delivery:</i>		Test sample is not damaged and suitable for testing.	
Prüfört: <i>Testing Location:</i>		TÜV Rheinland Hong Kong Ltd. 3/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Hong Kong Global United Technology Services Co., Ltd. 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, China	
Prüfgrundlage: <i>Test Specification:</i>		FCC Part 15 Subpart C ANSI C63.10-2013	
Prüfergebnis: <i>Test Results:</i>		Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage. The above mentioned product was tested and passed .	
Prüflaboratorium: <i>Testing Laboratory:</i>		TÜV Rheinland Hong Kong Ltd. 3-4, 11/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Hong Kong	
geprüft/ tested by:		kontrolliert/ reviewed by:	
25.05.2017 Datum <i>Date</i>	Kevin Wong Project Manager Name/Stellung <i>Name/Position</i>	25.05.2017 Datum <i>Date</i>	Mika Chan Project Manager Name/Stellung <i>Name/Position</i>
	 Unterschrift <i>Signature</i>		 Unterschrift <i>Signature</i>
Sonstiges: Other Aspects			
FCC ID: 2AL75-TK20170522			
Abkürzungen:		Abbreviations:	
P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet		P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested	
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>			

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information.....	4
Manufacturers declarations	4
Product function and intended use	4
Submitted documents.....	4
Independent Operation Modes	4
Related Submittal(s) Grants	5
Remark	5
Test Set-up and Operation Mode.....	6
Principle of Configuration Selection	6
Test Operation and Test Software	6
Special Accessories and Auxiliary Equipment.....	6
Countermeasures to achieve EMC Compliance.....	6
Test Methodology	7
Radiated Emission	7
Field Strength Calculation.....	7
Test Setup Diagram	8
List of Test and Measurement Instruments.....	9
Measurement Uncertainty	10
Results FCC Part 15 – Subpart C	11
FCC 15.203 – Antenna Requirement 1.....	Pass 11
FCC 15.204 – Antenna Requirement 2.....	Pass 11
FCC 15.207 – Conducted Emission on AC Mains	N/A 11
Subclause 15.215 (c) – 20 dB Bandwidth.....	Pass 11
Subclause 15.249 (a) – Field Strength of Fundamental and Harmonics.....	Pass 12
Subclause 15.249 (d), 15.205 – Out Of Band Radiated Emission	Pass 14

Appendix 1 – Test protocols	3 pages
Appendix 2 – Test setup	2 pages
Appendix 3 – EUT External Photos	3 pages
Appendix 4 – EUT Internal Photos	7 pages
Appendix 5 – RF exposure information	2 pages

Product information

Manufacturers declarations

	Transmitter
Operating frequency range	2405 - 2475MHz
Type of modulation	GFSK
Number of channels	71
Type of antenna	Wire Antenna
Power level	fix
Connection to public utility power line	No
Nominal voltage	V _{nor} : 6.0 V

Product function and intended use

The equipment under test (EUT) is a radio control toy transceiver operating at 2.4GHz. It is powered by battery only.

The manufacturer declares that the models as listed below table are all identical in electrical, PCB layout and components used except the model number and packaging only.

FCC ID: 2AL75-TK20170522

Models	Product description
H100, H101, H102, H103, H105, H106, H107, H108, H109, H110, H111, H112, H113, H115, H116, H117, H118, H119, H120, M61S, M61R, M62, M62R, M66, M67, M68, M68R, M69, M70, M71, M72, M72R, TK101, TK102, TK103, TK106, TK106HW, TK106RHW, TK107, TK107W, TK108, TK108HW, TK109, TK109W, TK110, TK110W, TK111, TK111W, TK112, TK112W, TK113, TK113W, TK115, TK115W, TK116, TK116W, TK117, TK117W, TK118, TK118W, TK119, TK119W	Short Range Device - Radio Control Toy Transmitter (2.4GHz)

Submitted documents

Circuit Diagram
 PCB Layout
 Block Diagram
 Bill of material
 User manual
 Declaration Of Equivalence

Independent Operation Modes

The basic operation modes are:

- Transmitting mode.

For further information refer to User Manual

Related Submittal(s) Grants

This is a single application for certification of the transmitter.

Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

Test Set-up and Operation Mode

Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Test Operation and Test Software

Test operation should refer to test methodology.

- A test mode sample which can transmit continuously in the lowest, middle and highest frequency channels at its maximum power was provided by the applicant..

Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

- None

Countermeasures to achieve EMC Compliance

- None

Test Methodology

Radiated Emission

The radiated emission measurements of the transmitter part were performed according to the procedures in ANSI C63.10-2013.

For measurement below 1GHz - the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz - the EUT was placed at the middle of the 1.5 m height turntable and RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:


$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.
R = Reading of Spectrum Analyzer in dBuV.
AF = Antenna Factor in dB.
CF = Cable Attenuation Factor in dB.
FA = Filter Attenuation Factor in dB.
PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.


Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

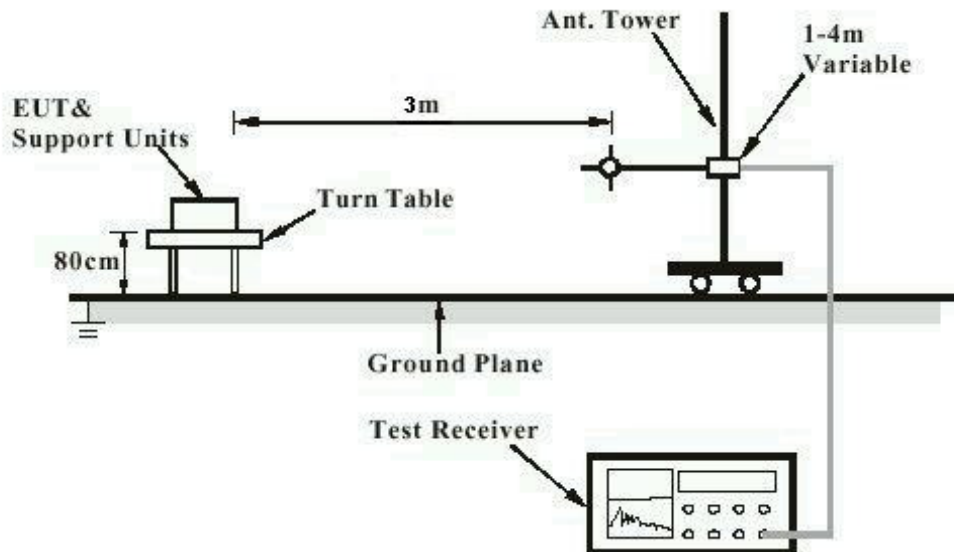

Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

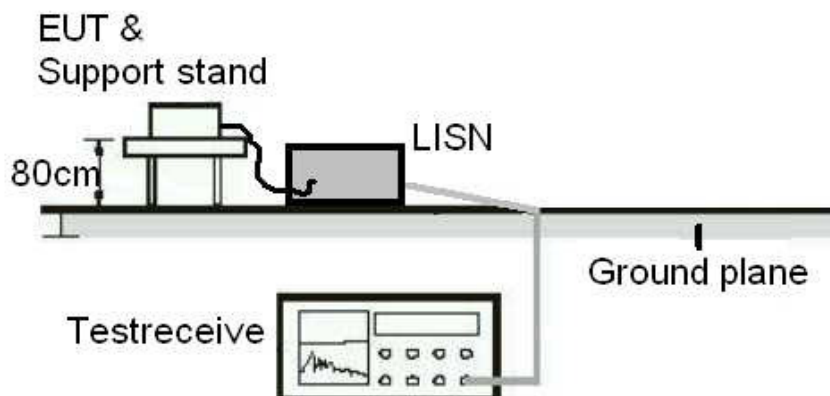

List of Test and Measurement Instruments

Global United Technology Services Co., Ltd. (Registration number: 600491)

Radiated Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)*6.0(H)	03 Jul 2015	02 Jul 2018
Control Room	ZhongYu Electron	6.2(L)*2.5(W)*2.4(H)	N/A	N/A
ESU EMI Test Receiver	R&S	ESU26	29 Jun 2016	28 Jun 2017
Bi-log Hybrid Antenna	SCHWARZBECK	VULB9163	29 Jun 2016	28 Jun 2017
Double-ridged horn antenna	SCHWARZBECK	9120D	29 Jun 2016	28 Jun 2017
RF Amplifier	HP	8347A	29 Jun 2016	28 Jun 2017
EMI Test Software	AUDIX	E3	N/A	N/A
Coaxial Cable	GTS	N/A	N/A	N/A
Thermo meter	N/A	N/A	29 Jun 2016	28 Jun 2017

TÜV Rheinland Hong Kong Ltd

Radio Test

Equipment	Manufacturer	Type	Cal. Date	Due Date
Spectrum Analyzer	R & S	FSP30	15-Oct-16	15-Oct-2017

Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions measurements is $\pm 3.70\text{dB}$ (9kHz to 30MHz) and $\pm 4.64\text{dB}$ (30MHz to 1000MHz) and is $\pm 4.83\text{dB}$ (1GHz to 18GHz) and $\pm 5.20\text{dB}$ (18GHz to 25GHz)

The estimated combined standard uncertainty for antenna conducted emission is $\pm 2.1\text{dB}$

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for the level of confidence is approximately 95%.

Results FCC Part 15 – Subpart C

FCC 15.203 – Antenna Requirement 1		Pass
FCC Requirement: No antenna other than that furnished by the responsible party shall be used with the device		
Results:	a) Antenna type: Fixed Integral antenna b) Manufacturer and model no: N/A c) Peak Gain: N/A	
Verdict:	Pass	

FCC 15.204 – Antenna Requirement 2		Pass
FCC Requirement: An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.		
Results:	Only one integral antenna can be used.	
Verdict:	N/A	

FCC 15.207 – Conducted Emission on AC Mains		N/A
There is no AC power input or output ports on the EUT.		

Subclause 15.215 (c) – 20 dB Bandwidth		Pass		
Test Specification : ANSI C63.10 – 2013 Mode of operation : Tx mode Port of testing : Enclosure Supply voltage : 6.0VDC, 4 x 1.5V AA size new battery Temperature : 23°C Humidity : 50%				
Requirement:	The intentional radiators must be designed to ensure that the 20dB bandwidth of the emission, is contained within the frequency band designated in the rule section under which the equipment is operated.			
Results:	Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. For test protocols refer to Appendix 1.			
Frequency (MHz)	20 dB left (MHz)	Limit (MHz)	20 dB right (MHz)	Limit (MHz)
2405	2404.448	> 2400	2405.660	< 2483.5
2445	2444.464	> 2400	2445.660	< 2483.5
2475	2474.488	> 2400	2475.840	< 2483.5

Subclause 15.249 (a) – Field Strength of Fundamental and Harmonics		Pass
Test Specification : ANSI C63.10 – 2013 Mode of operation : Tx mode Port of testing : Enclosure Frequency range : 9kHz – 25GHz Supply voltage : 6.0VDC, 4 x 1.5V AA size new battery Temperature : 23°C Humidity : 50%		
Requirement: The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following limit.		
Results: PASS.		
Fundamental Frequency 2405MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2405.340	79.50	114.0 / PK
2405.340	45.86	94.0 / AV
Fundamental Frequency 2405MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2405.390	75.97	114.0 / PK
2405.390	41.26	94.0 / AV
Harmonics 2405MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	---	74.0 / PK
No peak found	---	54.0 / AV
Harmonics 2405MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	---	74.0 / PK
No peak found	---	54.0 / AV
Fundamental Frequency 2445MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2445.104	79.97	114.0 / PK
2445.104	46.13	94.0 / AV
Fundamental Frequency 2445MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2445.095	75.57	114.0 / PK
2445.095	42.16	94.0 / AV

Harmonics 2445MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
No peak found	---	74.0 / PK	
No peak found	---	54.0 / AV	
Harmonics 2445MHz		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
No peak found	---	74.0 / PK	
No peak found	---	54.0 / AV	
Fundamental Frequency 2475MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2475.005	82.50	114.0 / PK	
2475.005	48.47	94.0 / AV	
Fundamental Frequency 2475MHz		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2475.213	73.71	114.0 / PK	
2475.213	43.33	94.0 / AV	
Harmonics 2475MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
No peak found	---	74.0 / PK	
No peak found	---	54.0 / AV	
Harmonics 2475MHz		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
No peak found	---	74.0 / PK	
No peak found	---	54.0 / AV	

Subclause 15.249 (d), 15.205 – Out Of Band Radiated Emission		Pass
Test Specification : ANSI C63.10 – 2013 Mode of operation : Tx mode Port of testing : Enclosure Detector : Peak Frequency range : 9kHz – 25GHz Supply voltage : 6.0VDC, 4 x 1.5V AA size new battery Temperature : 23°C Humidity : 50%		
Requirement: Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.		
Results: All three transmit frequency modes comply with the field strength limit of section 15.209. There is no spurious found below 30MHz.		
Tx frequency 2405MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
158.668	20.77	43.5 / QP
432.546	27.72	46.0 / QP
447.982	29.78	46.0 / QP
2400.000	48.69	74.0 / PK
2400.000	33.95	54.0 / AV
Tx frequency 2405MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
126.772	14.04	43.5 / QP
158.668	13.49	43.5 / QP
174.424	10.03	43.5 / QP
2400.000	45.91	74.0 / PK
2400.000	31.17	54.0 / AV
Tx frequency 2445MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
158.668	20.40	43.5 / QP
432.546	29.43	46.0 / QP
447.982	29.40	46.0 / QP
Tx frequency 2445MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
126.772	14.76	43.5 / QP
158.668	14.15	43.5 / QP
181.920	10.07	43.5 / QP

Tx frequency 2475MHz			Vertical Polarization		
Freq MHz		Level dBuV/m	Limit/ Detector dBuV/m		
158.668		20.59	43.5 / QP		
432.546		28.55	46.0 / QP		
447.982		29.40	46.0 / QP		
2483.500		49.27	74.0 / PK		
2483.500		36.49	54.0 / AV		
Tx frequency 2475MHz			Horizontal Polarization		
Freq MHz		Level dBuV/m	Limit/ Detector dBuV/m		
126.772		15.04	43.5 / QP		
158.668		14.88	43.5 / QP		
190.405		11.23	43.5 / QP		
2483.500		40.16	74.0 / PK		
2483.500		29.38	54.0 / AV		