



Frequency Stability

Test Conditions		LTE Band 2 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0061	PASS
40	Normal Voltage	0.0049	
30	Normal Voltage	0.0021	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0016	
0	Normal Voltage	0.0053	
-10	Normal Voltage	0.0018	
-20	Normal Voltage	0.0011	
-30	Normal Voltage	0.0013	
20	Maximum Voltage	0.0001	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0023	

Note:


1. Normal Voltage =3.85 V. ; Battery End Point (BEP) =3.5 V. ; Maximum Voltage =4.4 V.
2. Note: The frequency fundamental emissions stay within the authorized frequency block.




LTE Band 4

Peak-to-Average Ratio


Mode	LTE Band 4 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.23	4.87	5.13	5.83	PASS
Middle CH	4.41	4.72	5.07	5.86	
Highest CH	4.38	4.55	5.28	5.59	

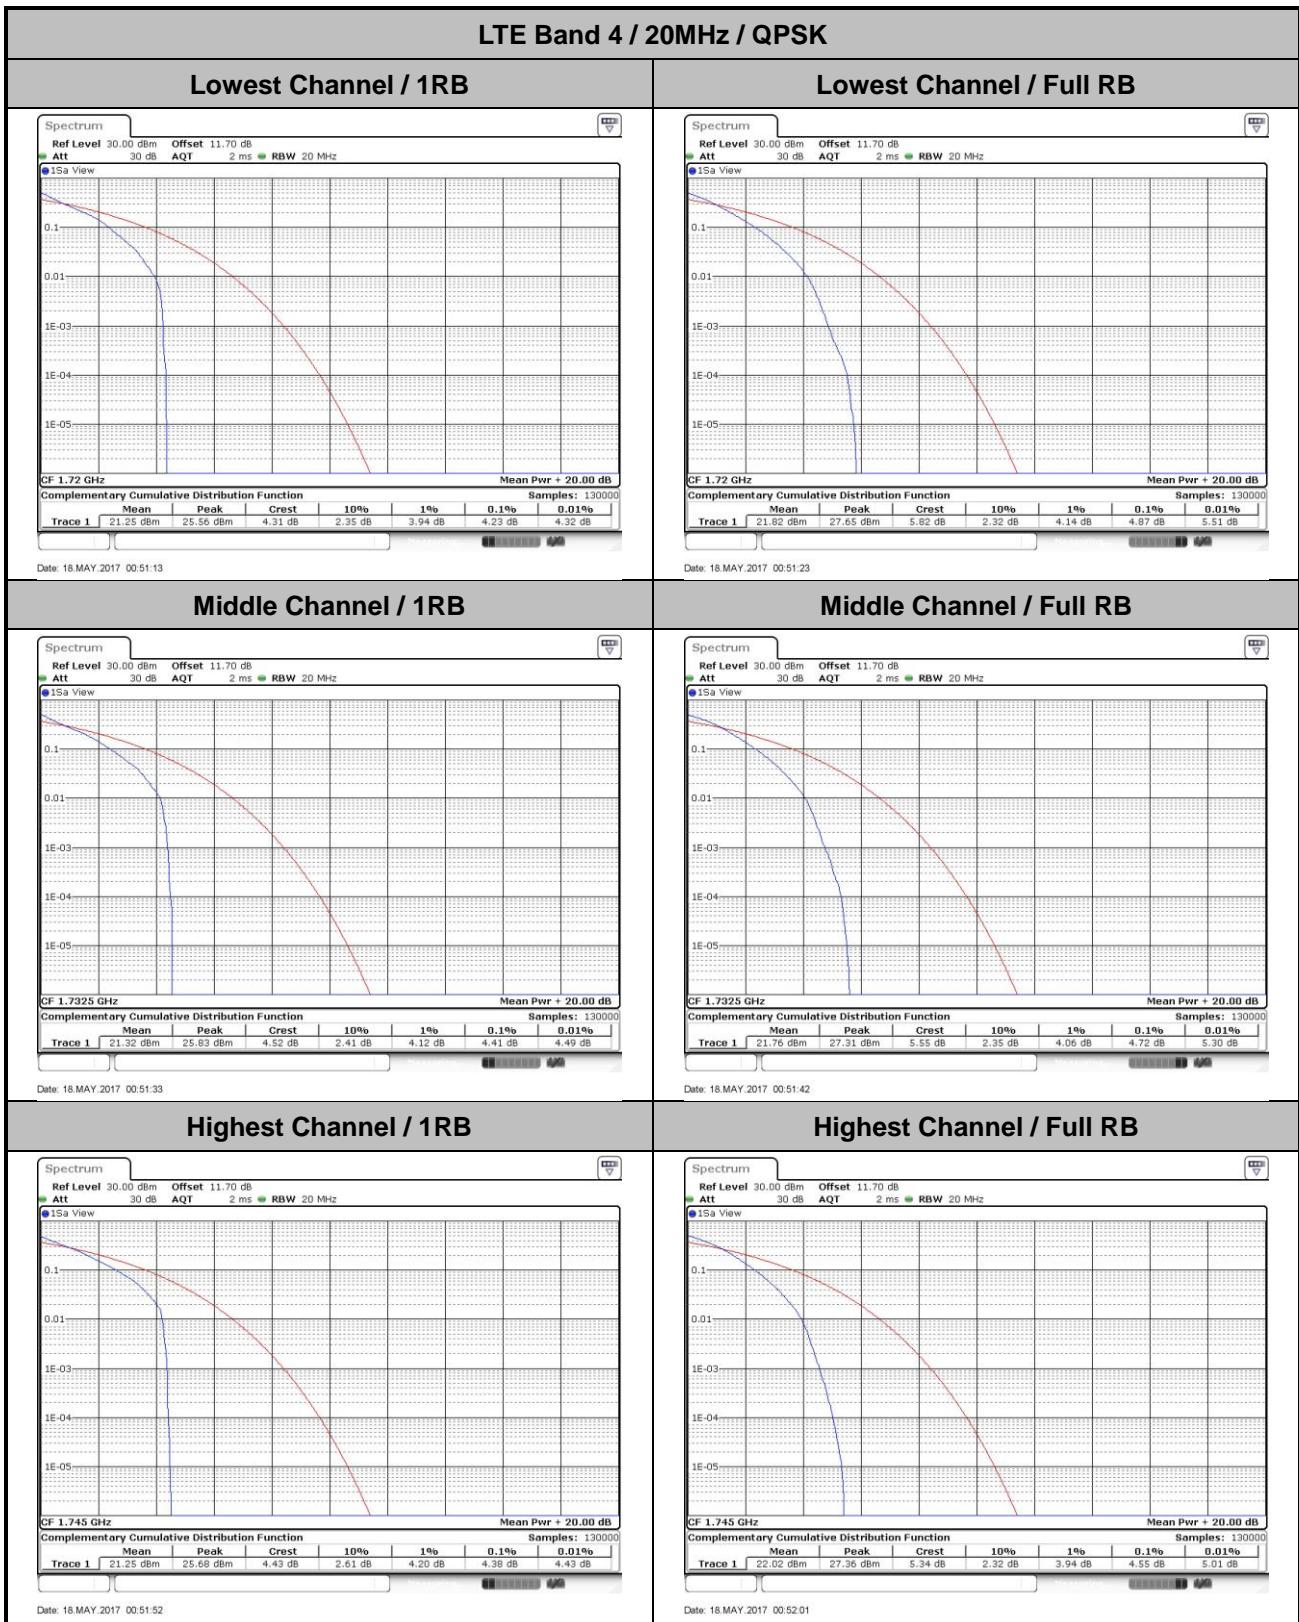


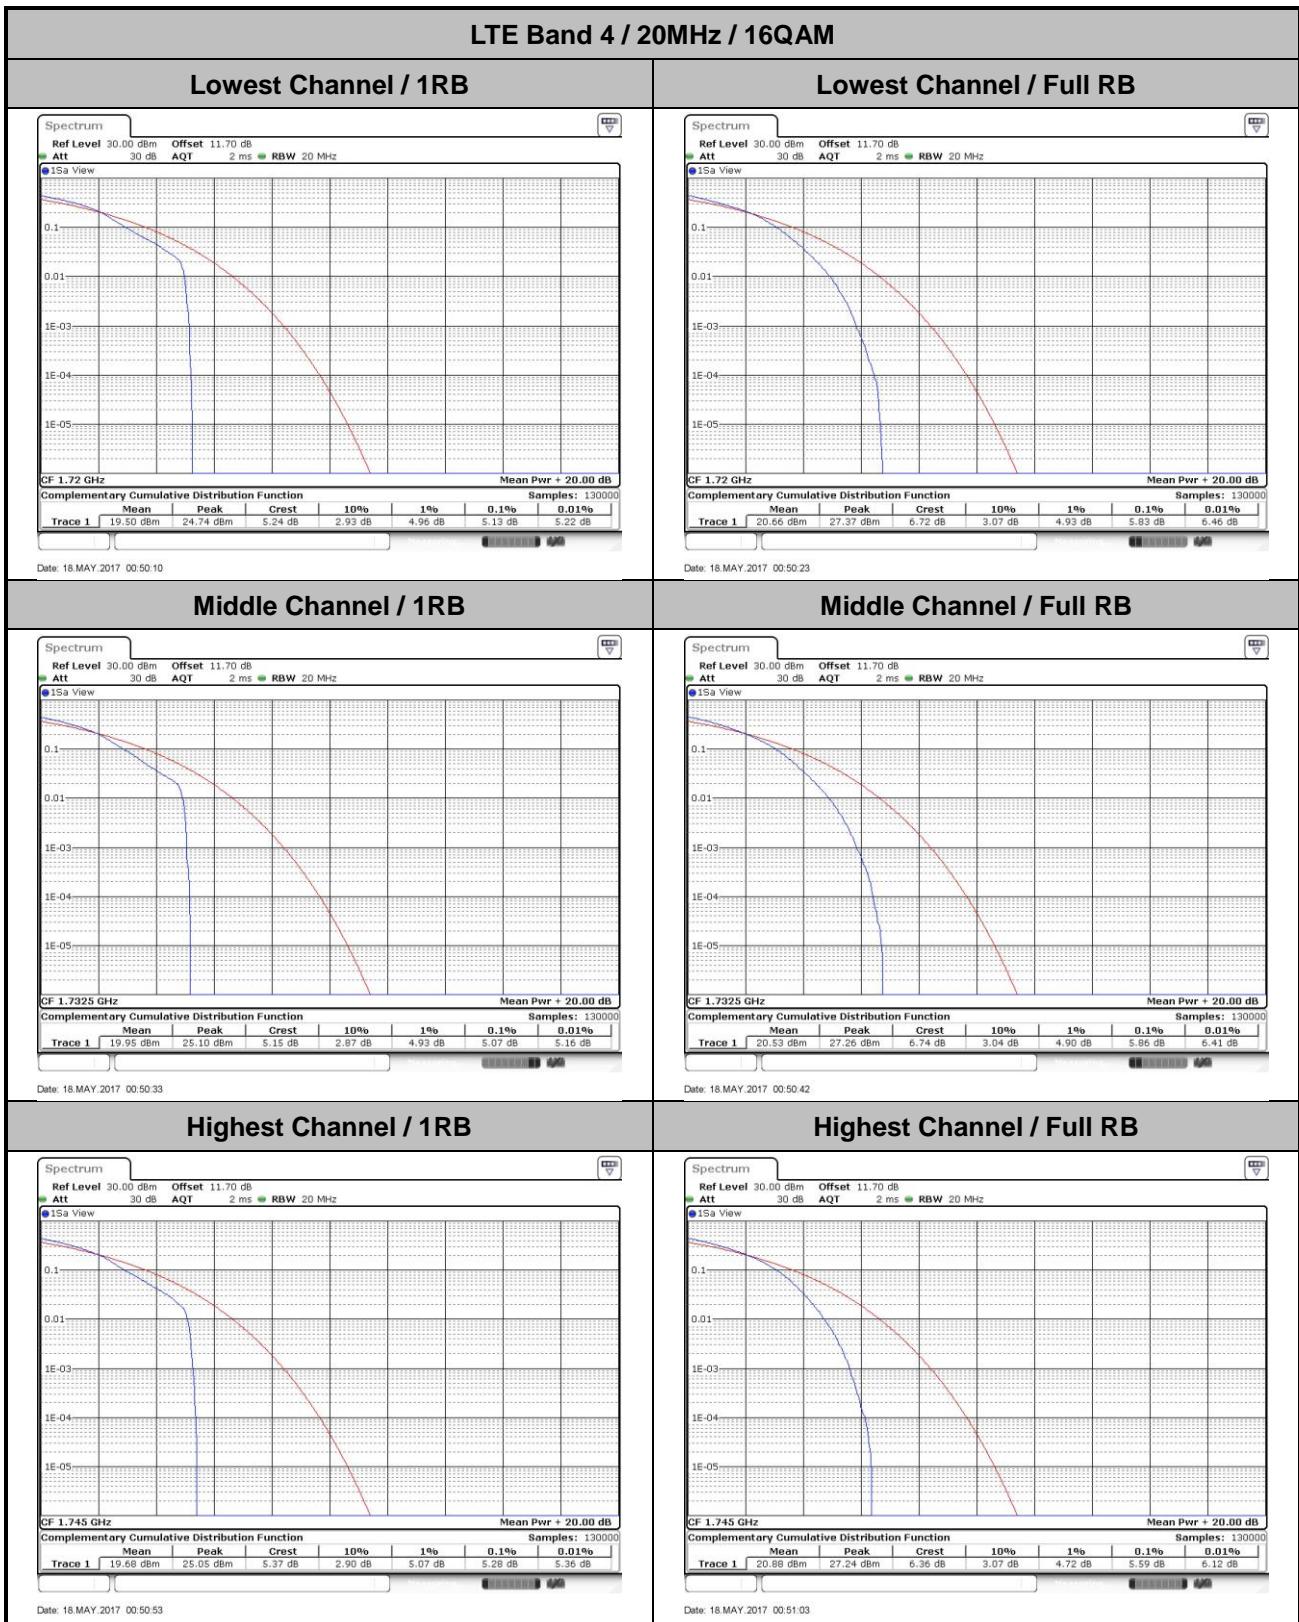



**26dB Bandwidth**


Mode	LTE Band 4 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.267	1.301	3.057	3.021	4.985	4.905	9.77	9.97	14.326	14.356	20.18	20.1
Middle CH	1.287	1.301	3.033	3.051	4.915	4.935	9.65	9.79	14.535	14.565	20.26	20.34
Highest CH	1.278	1.317	3.003	3.063	4.925	4.945	9.91	9.73	14.266	14.476	20.1	20.14

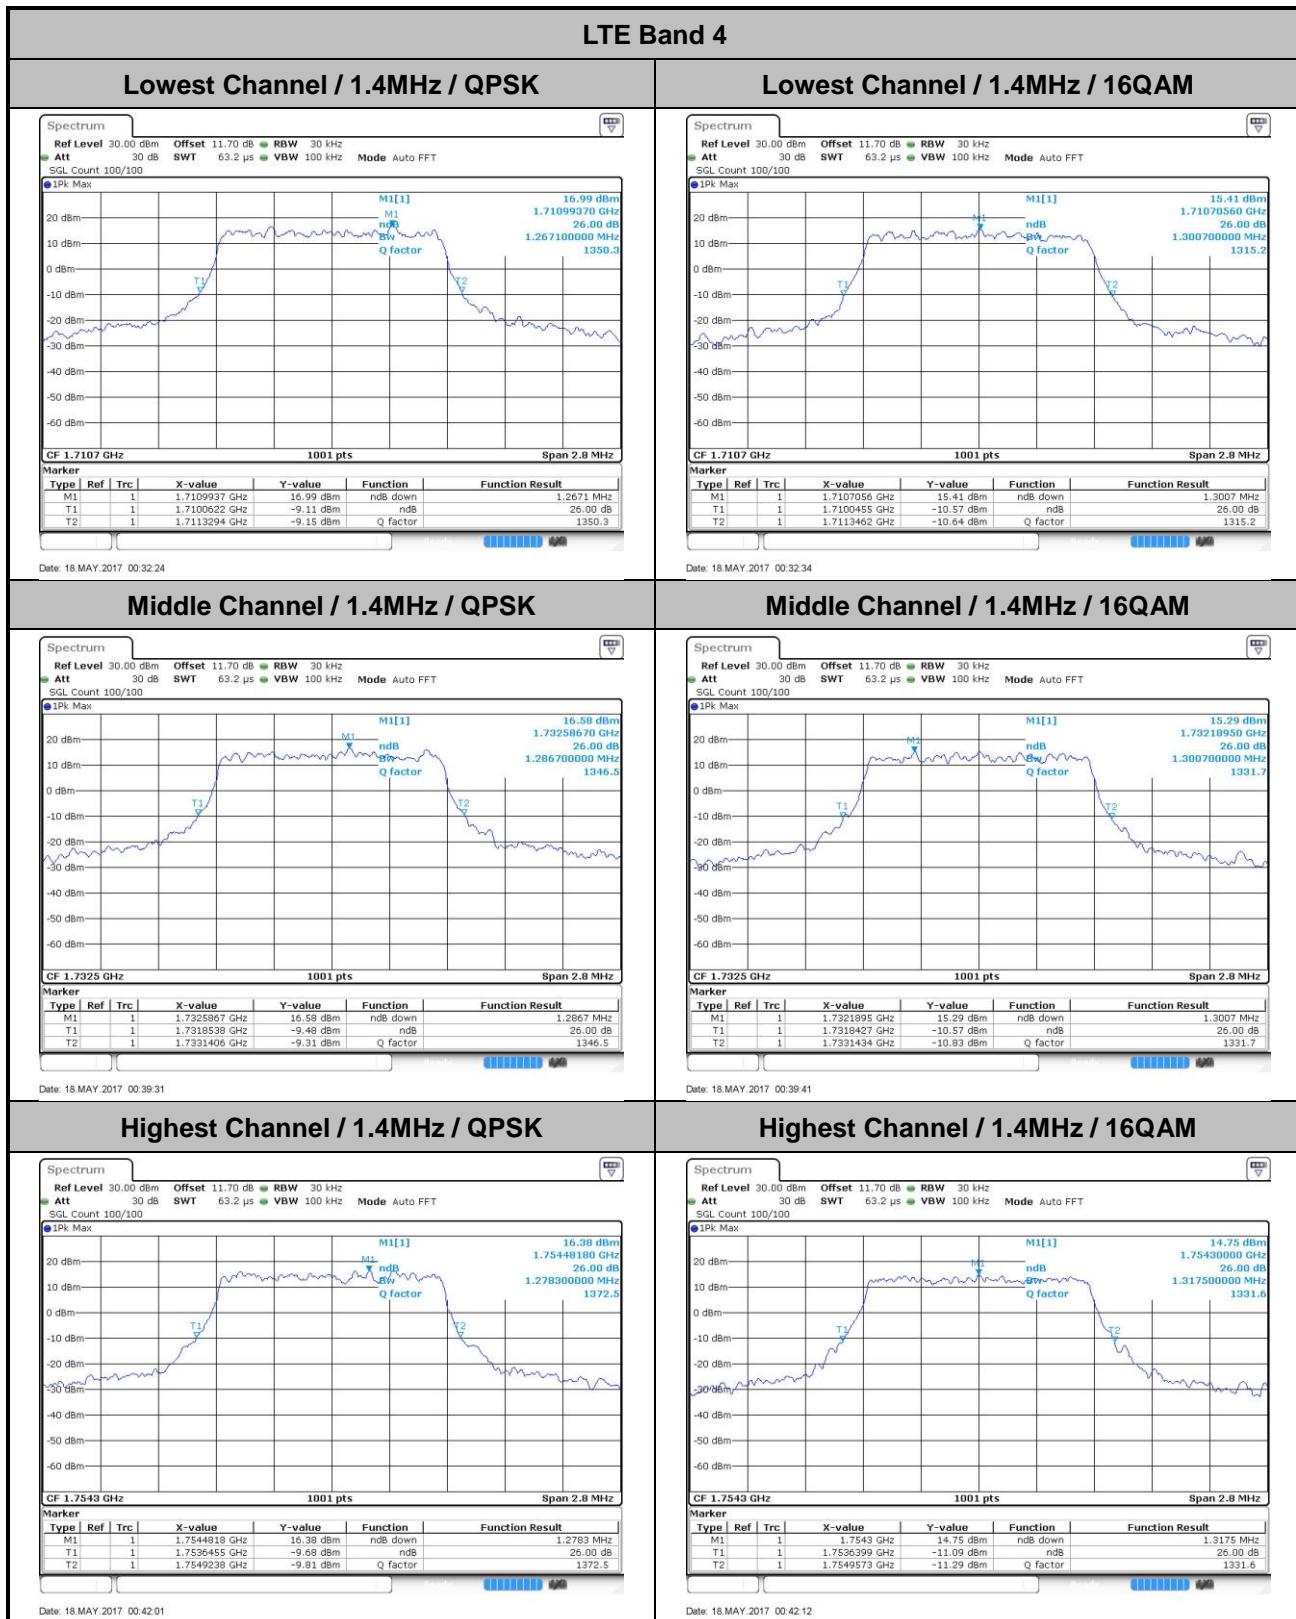


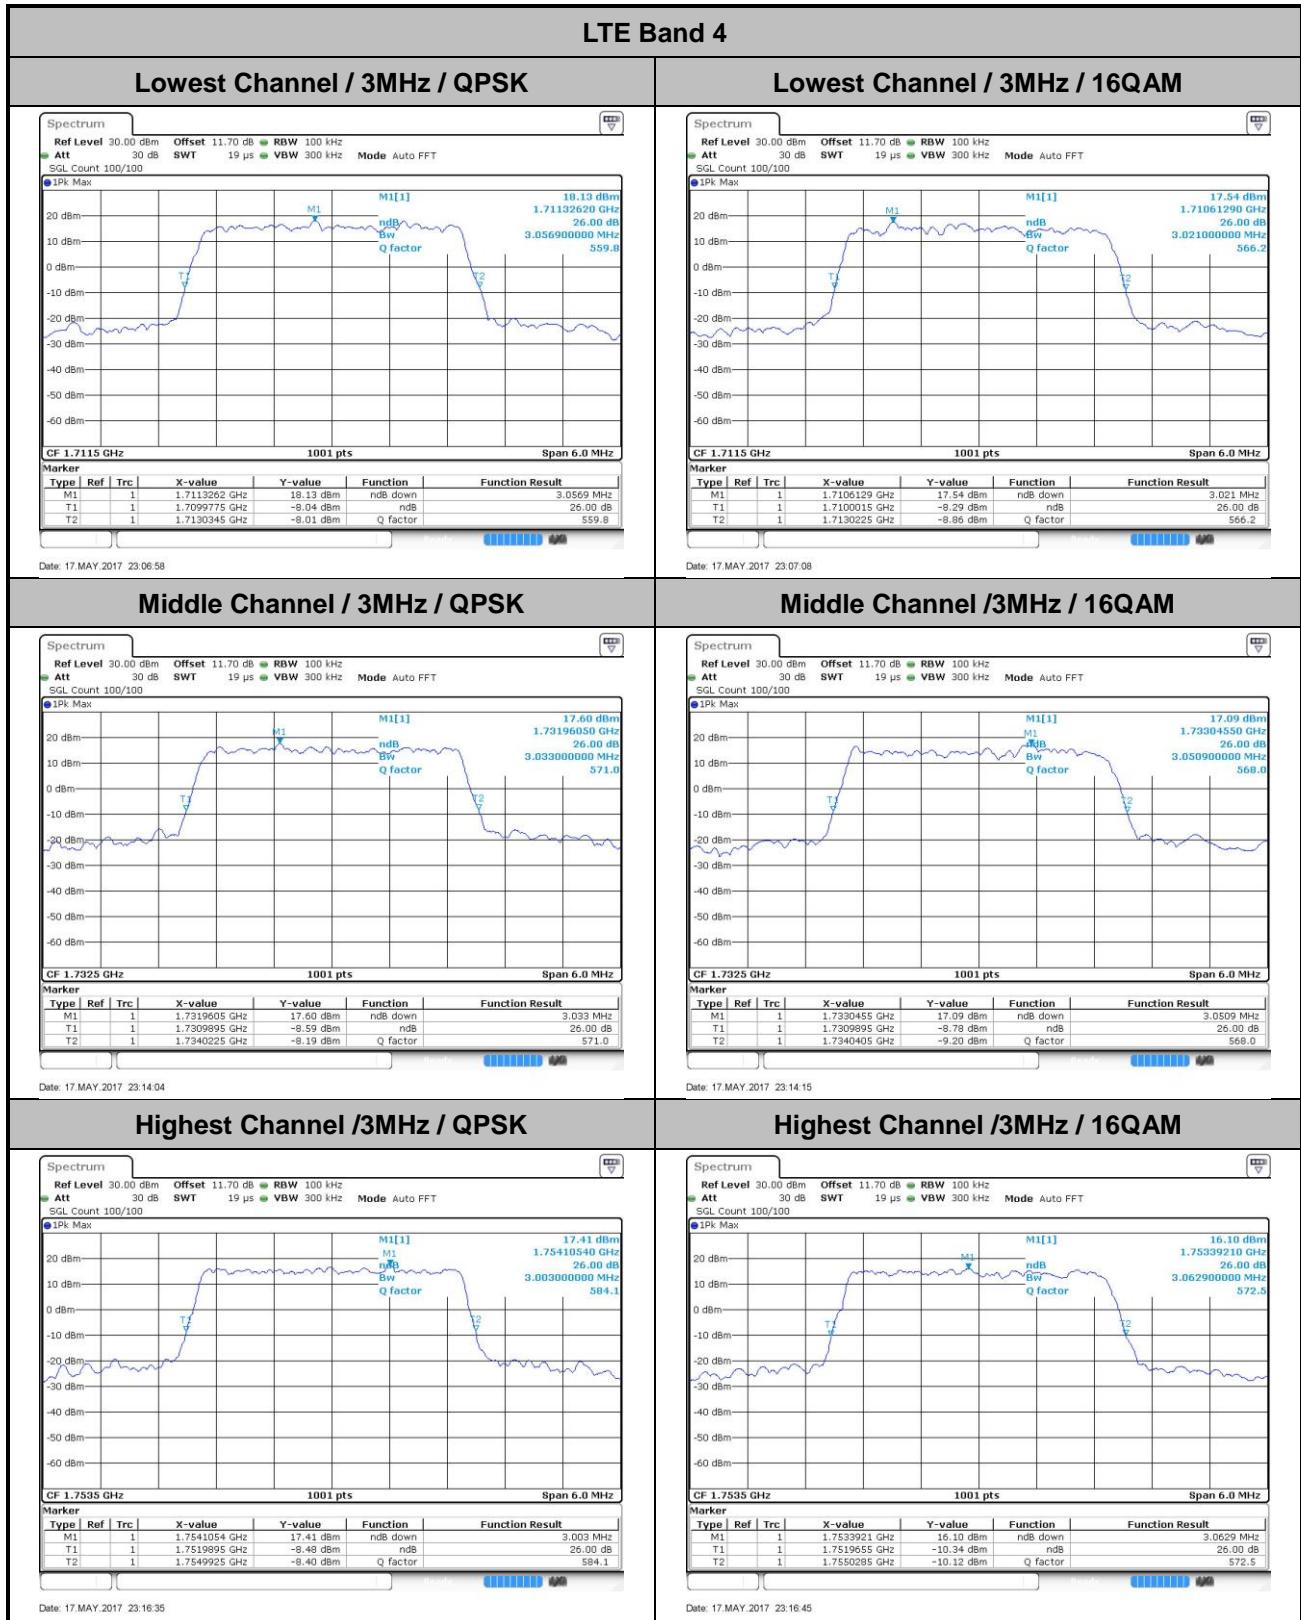

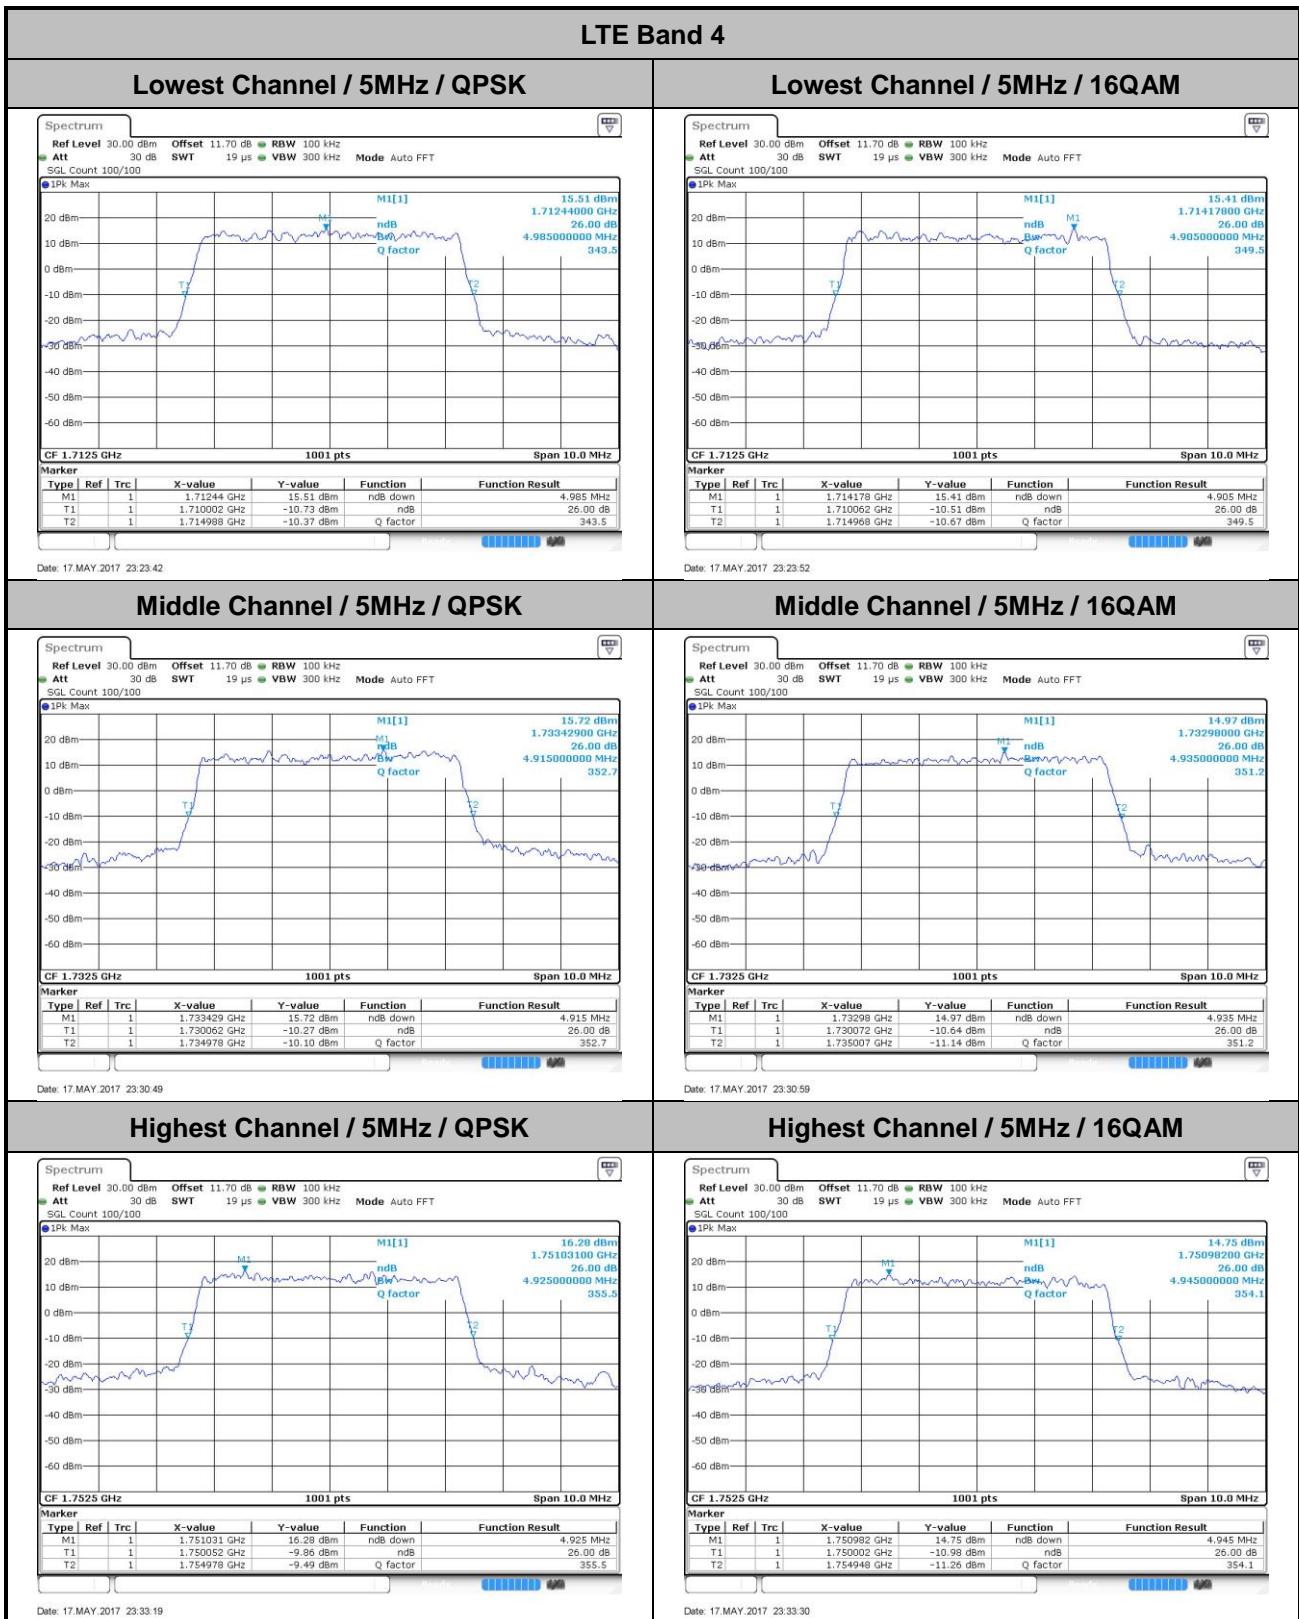

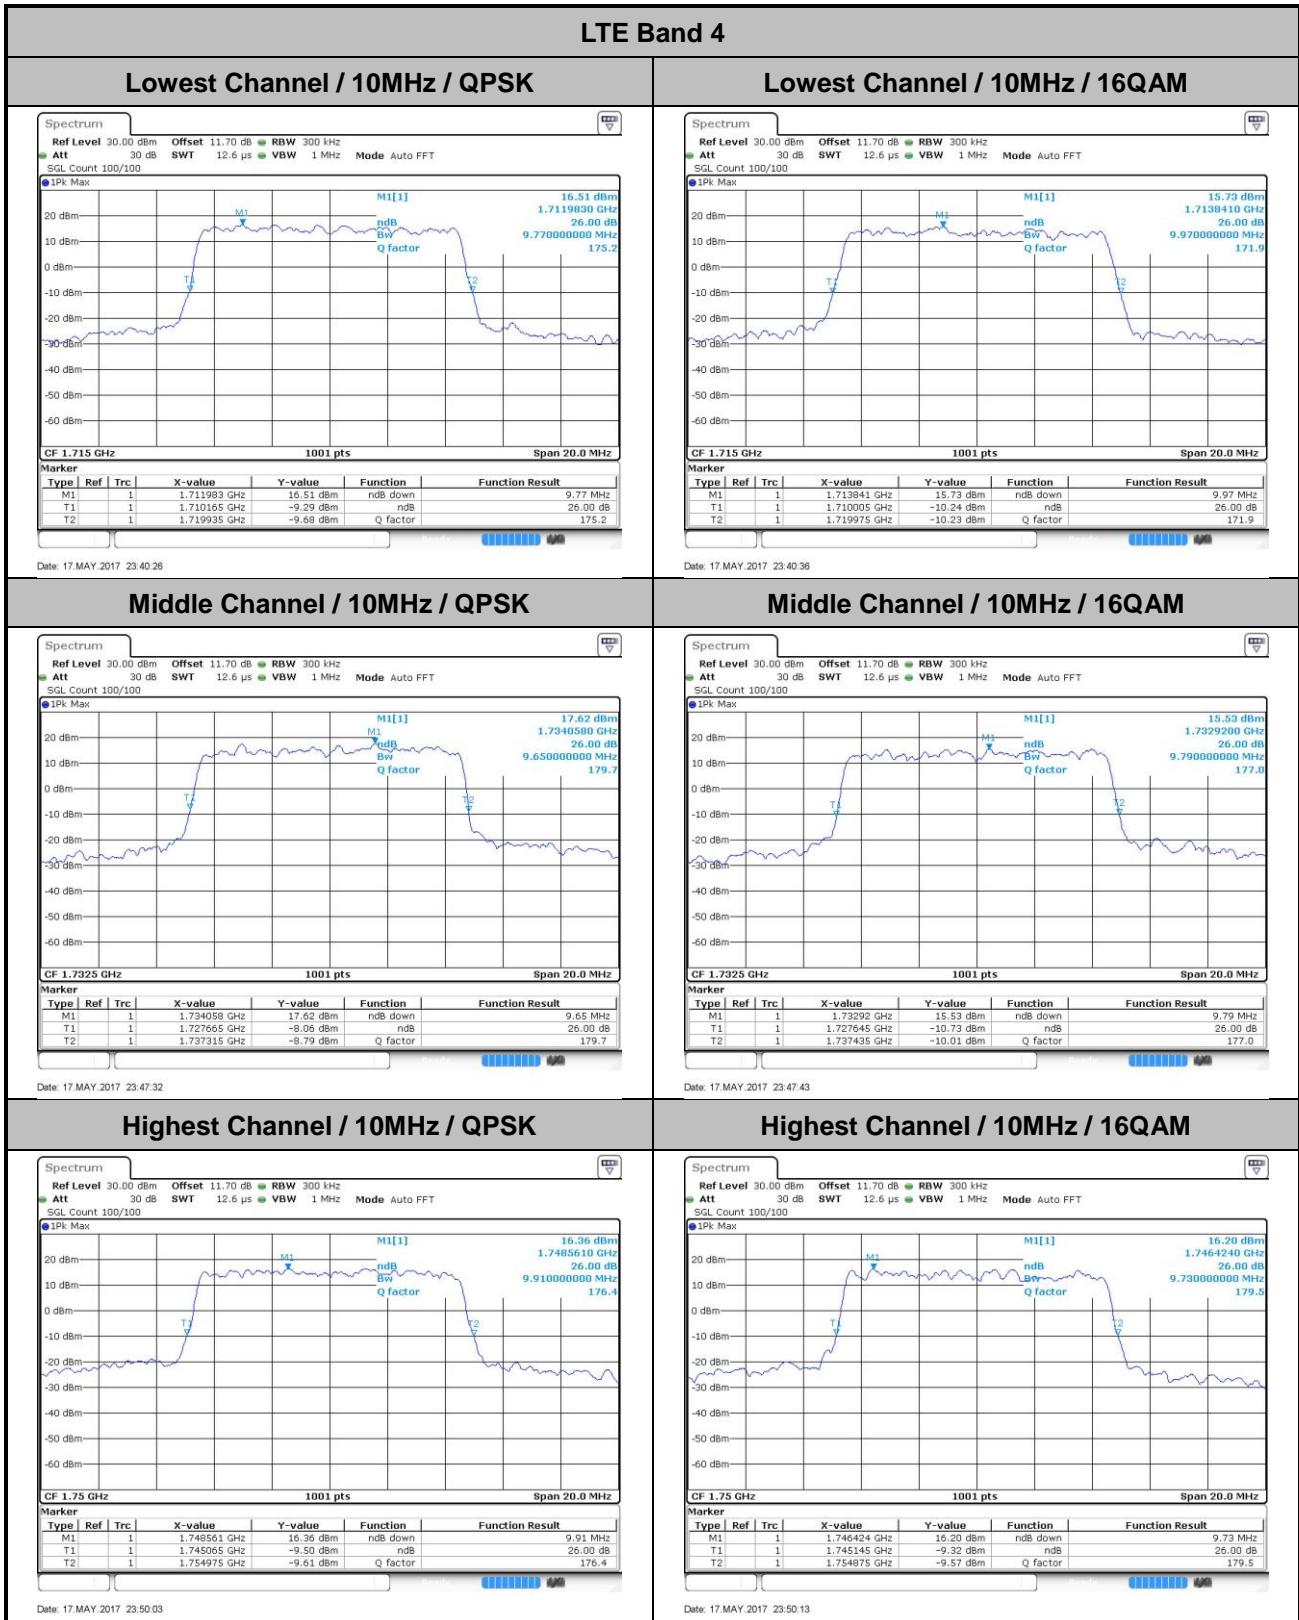

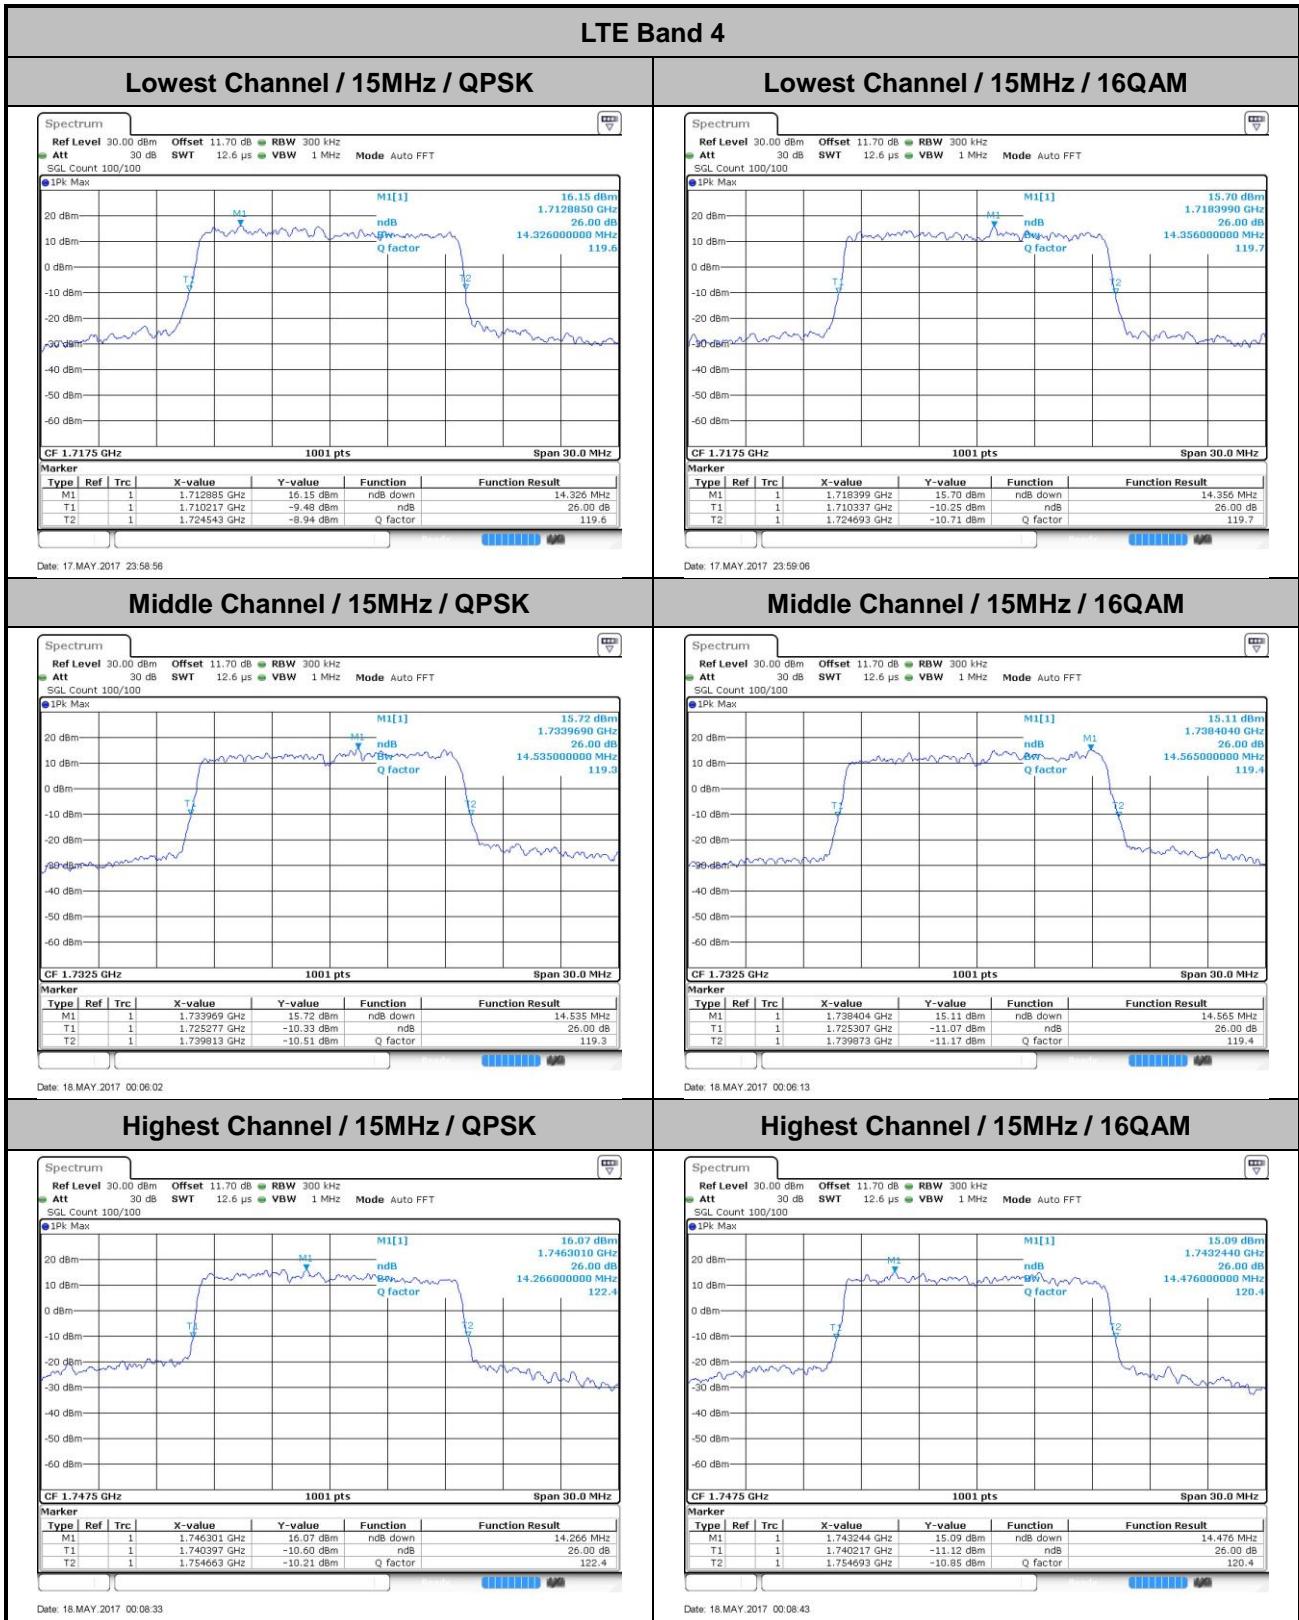

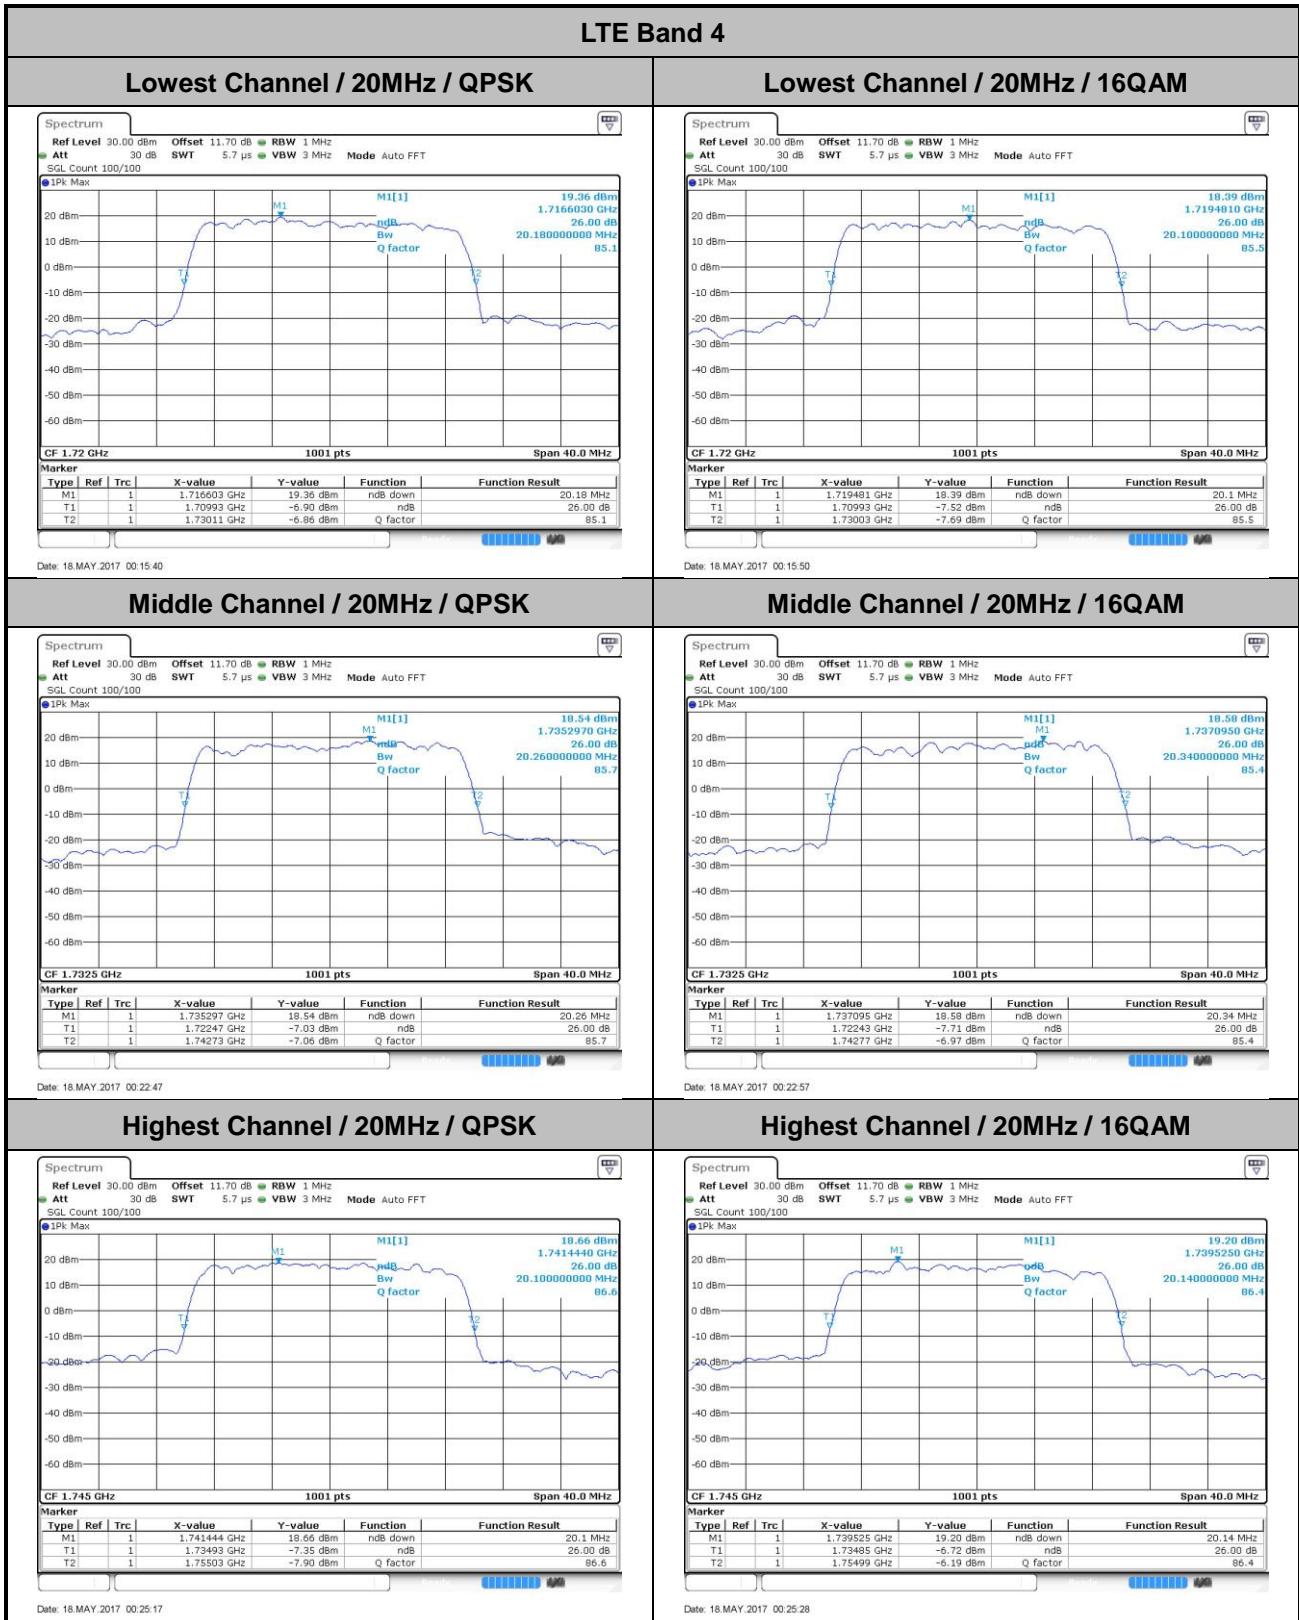

**Occupied Bandwidth**

Mode	LTE Band 4 : 99%OBW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.09	2.72	2.7	4.53	4.49	9.05	9.03	13.4	13.49	18.38	18.3
Middle CH	1.09	1.09	2.73	2.7	4.48	4.48	9.03	8.97	13.46	13.4	18.38	18.38
Highest CH	1.1	1.09	2.72	2.7	4.5	4.47	8.95	8.99	13.49	13.4	18.1	18.26

