

DFS Test Report

Report No.: RF170323D03A-2

FCC ID: 2ALJ3AP23X

Test Model: AP231, AP231e

Received Date: Mar. 23, 2017

Test Date: Oct. 2, 2017

Issued Date: Oct. 2, 2017

Applicant: HAN Networks Co., Ltd.

Address: 5/F, Building 37, No.8 Dongbeiwang West Road, HaiDian District, Beijing,

China

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

(R.O.C.)





This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Report No.: RF170323D03A-2 Page No. 1 / 110 Report Format Version: 6.1.2 Reference No.: 170323D07



Table of Contents

Relea	ase Control Record	3
1	Certificate of Conformity	4
2	EUT Information	5
2.1 2.2 2.3 2.4 2.5 2.6 2.7	Description of Available Antennas to The EUT EUT Maximum and Minimum Conducted Power EUT Maximum and Minimum EIRP Power Transmit Power Control (TPC)	5 6 8 10
3.	U-NII DFS Rule Requirements	11
3.1 3.2	Working Modes and Required Test Items Test Limits And Radar Signal Parameters	
4.	Test & Support Equipment List	. 15
4.1 4.2	Test Instruments Description of Support Units	_
5.	Test Procedure	. 16
5.1 5.2 5.3 5.4	Deviation From Test Standard	17 17
6.	Test Results	. 19
6.2 6.2	.1 Test Mode: Device Operating In Master Mode2 U-NII Detection Bandwidth .3 Channel Availability Check Time .4 Channel Closing Transmission and Channel Move Time .5 Non- Occupancy Period	20 25 31 33
7.	Information on The Testing Laboratories	. 65
8.	Appendix-A	. 66



Release Control Record

Issue No.	Description	Date Issued
RF170323D03A-2	Original release.	Oct. 2, 2017

Report No.: RF170323D03A-2 Page No. 3 / 110 Report Format Version: 6.1.2



1 Certificate of Conformity

Product: HAN Access Point

Brand: HAN

Test Model: AP231, AP231e

Sample Status: Engineering sample

Applicant: HAN Networks Co., Ltd.

Test Date: Oct. 2, 2017

Standards: FCC Part 15, Subpart E (Section 15.407)

KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by: Annie Chang, Date: Oct. 2, 2017

Annie Chang / Senior Specialist

Approved by: , **Date:** Oct. 2, 2017

Rex Lai / Assistant Manager



2 EUT Information

2.1 Operating Frequency Bands and Mode of EUT

TABLE 1: Operating Frequency Bands And Mode Of EUT

Operational Mode	Operating	Frequency Range
Operational Mode	5250~5350MHz	5470~5725MHz
Master	✓	✓

2.2 EUT Software and Firmware Version

Table 2: The EUT Software/Firmware Version

No.	Product	Model No.	Software/Firmware Version
1	HAN Access Point	AP231	3.0.2.4905
2	HAN Access Point	AP231e	3.0.2.4905

Note: From the above models, **model: AP231** was selected as representative model for the test and its data was recorded in this report.

2.3 Description of Available Antennas to The EUT

Table 3: Antenna List

-	_			
Antenna	Chain No.	Antenna Type	Antenna Gain (dBi)	Connector Type
	Chain 0	PIFA	4.39	I-PEX
Internal	Chain 1	PIFA	4.38	I-PEX
Internal	Chain 2	PIFA	4.19	I-PEX
	Chain 3	PIFA	4.45	I-PEX
External	Chain 0	Dipole	6	R-SMA
	Chain 1	Dipole	6	R-SMA
	Chain 2	Dipole	6	R-SMA
	Chain 3	Dipole	6	R-SMA

Note: From the above antennas, Internal antenna was selected as representative antenna for the test, its data was recorded in this report.



2.4 EUT Maximum and Minimum Conducted Power

Table 4: The Measured Conducted Output Power

4Tx CDD Mode

802.11a

Frequency Band (MHz)	MAX.	MAX. Power		Power
	Output	Output	Output	Output
	Power(dBm)	Power(mW)	Power(dBm)	Power(mW)
5250~5350	18.48	70.48	12.48	17.701
5470~5725	19.57	90.495	13.57	22.751

802.11ac (20MHz)

Frequency Band (MHz)	MAX.	Power	MIN.	Power
	Output	Output	Output	Output
	Power(dBm)	Power(mW)	Power(dBm)	Power(mW)
5250~5350	18.48	70.48	12.48	17.701
5470~5725	19.64	92.045	13.64	23.121

802.11ac (40MHz)

Frequency Band (MHz)	MAX. Power		MIN. Power	
	Output	Output	Output	Output
	Power(dBm)	Power(mW)	Power(dBm)	Power(mW)
5250~5350	18.48	70.469	12.48	17.701
5470~5725	22.65	184.077	16.65	46.238

802.11ac (80MHz)

Frequency Band (MHz)	MAX. Power		MIN. Power	
	Output	Output	Output	Output
	Power(dBm)	Power(mW)	Power(dBm)	Power(mW)
5250~5350	18.49	70.617	12.49	17.742
5470~5725	23.61	229.615	17.61	57.677

Report No.: RF170323D03A-2 Page No. 6 / 110 Report Format Version: 6.1.2

Reference No.: 170323D03A-



4Tx Beamforming Mode MCS0NSS1

802.11ac (20MHz)

Frequency Band (MHz)	MAX. Power		MIN. Power	
	Output	Output	Output	Output
	Power(dBm)	Power(mW)	Power(dBm)	Power(mW)
5250~5350	12.49	17.742	6.49	4.457
5470~5725	19.16	82.414	13.16	20.701

802.11ac (40MHz)

Frequency Band (MHz)	MAX. Power		MIN. Power	
	Output	Output	Output	Output
	Power(dBm)	Power(mW)	Power(dBm)	Power(mW)
5250~5350	12.54	17.947	6.54	4.508
5470~5725	19.16	82.414	13.16	20.701

802.11ac (80MHz)

Frequency Band (MHz)	MAX. Power		MIN. Power	
	Output Power(dBm)	Output Power(mW)	Output Power(dBm)	Output Power(mW)
5250~5350	12.52	17.865	6.52	4.487
5470~5725	19.10	81.283	13.10	20.417



2.5 **EUT Maximum and Minimum EIRP Power**

Table 5: The EIRP Output Power List

4Tx CDD Mode

802.11a

Frequency Band	MAX. EIRP Power				MIN. EIR	RP Power
(MHz)	Output	Output	Output	Output		
	Power(dBm)	Power(mW)	Power(dBm)	Power(mW)		
5250~5350	22.93	196.336	16.93	49.317		
5470~5725	24.02	252.348	18.02	63.387		

802.11ac (20MHz)

Frequency Band	MAX. EIRP Power		MIN. EIR	RP Power
(MHz)	Output	Output	Output	Output
	Power(dBm)	Power(mW)	Power(dBm)	Power(mW)
5250~5350	22.93	196.336	16.93	49.317
5470~5725	24.09	256.448	18.09	64.417

802.11ac (40MHz)

Frequency Band	MAX. EIRP Power		MIN. EIR	P Power
(MHz)	Output	Output	Output	Output
	Power(dBm)	Power(mW)	Power(dBm)	Power(mW)
5250~5350	22.93	196.336	16.93	49.317
5470~5725	27.10	512.861	21.10	128.825

802.11ac (80MHz)

Frequency Band	MAX. EIRP Power		MIN. EIRP Power	
(MHz)	Output	Output	Output	Output
	Power(dBm)	Power(mW)	Power(dBm)	Power(mW)
5250~5350	22.94	196.789	16.94	49.431
5470~5725	28.06	639.735	22.06	160.694

Report No.: RF170323D03A-2 Reference No.: 170323D07 Page No. 8 / 110 Report Format Version: 6.1.2



4Tx Beamforming Mode MCS0NSS1

802.11ac (20MHz)

Frequency Band	MAX. EIRP Power				MIN. EIR	RP Power
(MHz)	Output Output		Output	Output		
	Power(dBm)	Power(mW)	Power(dBm)	Power(mW)		
5250~5350	22.86	193.197	16.86	48.529		
5470~5725	29.53	897.429	23.53	225.424		

802.11ac (40MHz)

Frequency Band	MAX. EIRP Power Output Output		MIN. EIR	RP Power
(MHz)			Output	Output
	Power(dBm)	Power(mW)	Power(dBm)	Power(mW)
5250~5350	22.91	195.434	16.91	49.091
5470~5725	29.53	897.429	23.53	225.424

802.11ac (80MHz)

Frequency Band	MAX. EIRP Power		MIN. EIR	RP Power
(MHz)	Output	Output	Output	Output
	Power(dBm)	Power(mW)	Power(dBm)	Power(mW)
5250~5350	22.89	194.536	16.89	48.865
5470~5725	29.47	885.116	23.47	222.331



2.6 Transmit Power Control (TPC)

U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

Applicable	E.I.R.P	FCC 15.407 (h)(1)
√	>500mW	The TPC mechanism is required for system with an E.I.R.P of above 500Mw
	<500mW	The TPC mechanism is not required for system with an E.I.R.P of less 500mW

The UUT can adjust a transmitter's output power based on the signal level present at the receiver.TPC is auto controlled by software

2.7 Statement of Manufacturer

Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.



3. U-NII DFS Rule Requirements

3.1 Working Modes and Required Test Items

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables 6 and 7 for the applicability of DFS requirements for each of the operational modes.

Table 6: Applicability of DFS Requirements Prior To Use a Channel

	Operational Mode		
Requirement	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	✓	✓ note	✓
DFS Detection Threshold	✓	Not required	✓
Channel Availability Check Time	✓	Not required	Not required
U-NII Detection Bandwidth	✓	Not required	✓

Note: Per KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02 section (b)(5/6), If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear. An analyzer plot that contains a single 30-minute sweep on the original channel.

Table 7: Applicability of DFS Requirements During Normal Operation.

	Operational Mode		
Requirement	Master or Client with radar detection	Client without radar detection	
DFS Detection Threshold	✓	Not required	
Channel Closing Transmission Time	✓	✓	
Channel Move Time	✓	✓	
U-NII Detection Bandwidth	✓	Not required	

Additional requirements for devices with multiple bandwidth modes	Master or Client with radar detection	Client without radar detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

Report No.: RF170323D03A-2 Page No. 11 / 110 Report Format Version: 6.1.2

Reference No.: 170323D07



3.2 Test Limits And Radar Signal Parameters

Detection Threshold Values

Table 8: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP ≥ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and	00 dD
power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the	CA dDas
power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

Table 9: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

Report No.: RF170323D03A-2 Page No. 12 / 110 Report Format Version: 6.1.2

Reference No.: 170323D07



Parameters of DFS Test Signals

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 10: Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066µsec, with a minimum increment of 1µsec, excluding PRI values selected in Test A	Roundup $ \begin{bmatrix} \frac{1}{360} \\ \frac{19 \cdot 10^6}{PRI_{\mu_{Sec}}} \end{bmatrix} $	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
N. J. A. O.		regate (Radar Types 1	-4)	80%	120

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.



Table 11: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number Of Pulses Per Burst		Minimum Percentage Of Successful Detection	Minimum Number Of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Three subsets of trials will be performed with a minimum of ten trials per subset. The subset of trials differ in where the Long Pulse Type 5 Signal is tuned in frequency.

- a) the Channel center frequency
- b) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the low edge of the UUT Occupied Bandwidth
- c) tuned frequencies such that 90% of the Long Pulse Type 5 frequency modulation is within the high edge of the UUT Occupied Bandwidth

It include 10 trails for every subset, the formula as below,

For subset case 1: the center frequency of the signal generator will remain fixed at the center of the UUT Channel.

For subset case 2: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 2. The center frequency of the signal generator for each trial is calculated by:

 $FL+(0.4*Chirp\ Width\ [in\ MHz])$

For subset case 3: to retain 90% frequency overlap between the radar signal and the UUT Occupied Bandwidth, the center frequency of the signal generator will vary for each of the ten trials in subset case 3. The center frequency of the signal generator for each trial is calculated by:

 $FH-(0.4*Chirp\ Width\ [in\ MHz])$

Table 12: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage Of Successful Detection	Minimum Number Of Trials
6	1	333	9	0.333	300	70%	30

Report No.: RF170323D03A-2 Page No. 14 / 110 Report Format Version: 6.1.2

Reference No.: 170323D07



4. Test & Support Equipment List

4.1 Test Instruments

Table 13: Test Instruments List

Description & Manufacturer	Model No.	Serial No	Date Of Calibration	Due Date Of Calibration
Spectrum Analyzer R&S	FSV40	100964	Jul. 01, 2017	Jun. 30, 2018
Vector Signal Generator Agilent	N5182B	MY53052700	July 17, 2017	July 16, 2018
Horn_Antenna EMCO	1018G	0001	Dec. 15, 2016	Dec. 14, 2017
DFS Control Box	BV-DFS-CB	001	Sep. 18, 2017	Sep. 17, 2018

4.2 Description of Support Units

Table 14: Support Unit Information.

No.	Product	Brand	Model No.	FCC ID	Spec
1	AC1200 WiFi USB Adapter	NETGEAR	A6210	PY313400249	

NOTE: This device was functioned as a \square Master \boxtimes Slave device during the DFS test.

Table 15: Software/Firmware Information.

No.	Product	Model No.	Software/Firmware Version
1	AC1200 WiFi USB Adapter	A6210	1.0.0.34




5. Test Procedure

5.1 DFS Measurement System

A complete DFS Measurement System consists of two subsystems: (1) the Radar Signal Generating system and (2) the Traffic Monitoring system. The control PC is necessary for generating the Radar waveforms in Table 10, 11 and 12. The traffic monitoring subsystem is specified to the type of unit under test (UUT).

Radiated Setup Configuration of DFS Measurement System

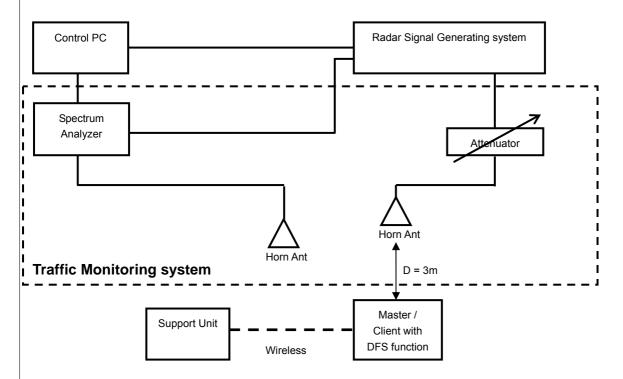

Channel Loading

System testing will be performed with channel-loading using means appropriate to the data types that are used by the unlicensed device. The following requirements apply:

a)	The data file must be of a type that is typical for the device (i.e., MPEG-2, MPEG-4, WAV, MP3, MP4, AVI, etc.) and must generally be transmitting in a streaming mode.	
b)	Software to ping the client is permitted to simulate data transfer but must have random ping intervals.	
c)	Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater.	✓
d)	Unicast or Multicast protocols are preferable but other protocols may be used. The appropriate protocol used must be described in the test procedures.	




5.2 Calibration of DFS Detection Threshold Level

The measured channel is 5500MHz and 5510MHz and 5530MHz. The radar signal was the same as transmitted channels, and injected into the antenna of AP (master) or Client Device with Radar Detection, measured the channel closing transmission time and channel move time.

Radiated setup configuration of Calibration of DFS Detection Threshold Level

The calibrated conducted detection threshold level is set to -64dBm. The tested level is lower than required level hence it provides margin to the limit.

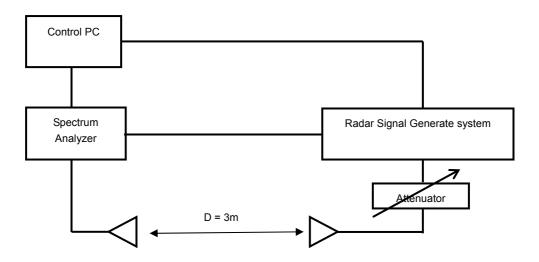

5.3 Deviation From Test Standard


No deviation.



5.4 Radiated Test Setup Configuration

Master mode

The EUT is a U-NII Device operating in Master mode. The radar test signals are injected into the Master Device.

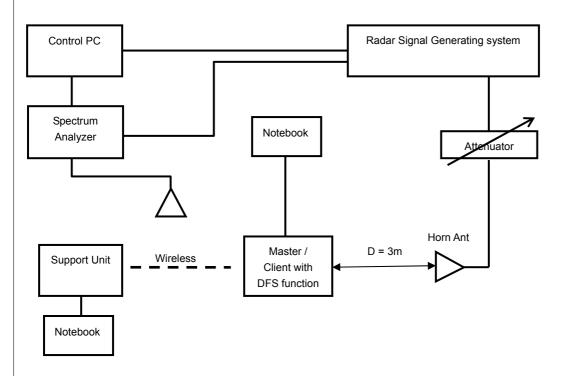



6. Test Results

6.1 Summary of Test Results

Clause	Test Parameter	Remarks	Pass/Fail
15.407	DFS Detection Threshold	Applicable	Pass
15.407	Channel Availability Check Time	Applicable	Pass
15.407	Channel Move Time	Applicable	Pass
15.407	Channel Closing Transmission Time	Applicable	Pass
15.407	Non- Occupancy Period	Applicable	Pass
15.407	U-NII Detection Bandwidth	Applicable	Pass



6.2 Test Results

6.2.1 Test Mode: Device Operating In Master Mode.


The radar test waveforms are injected into the Master.

This test was investigated for different bandwidth (20MHz \ 40MHz and 80MHz).

The following plots was done on 80MHz as a representative


DFS Detection Threshold

For detection threshold level of -64dBm, the tested level is lower than required level for 1dB, hence it provides margin to the limit.

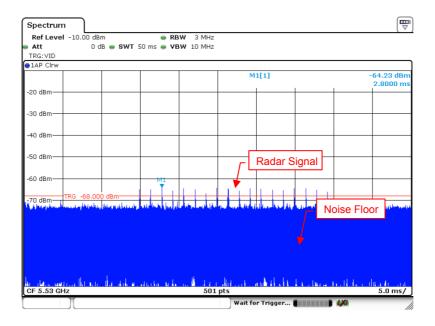


Radar Signal 0



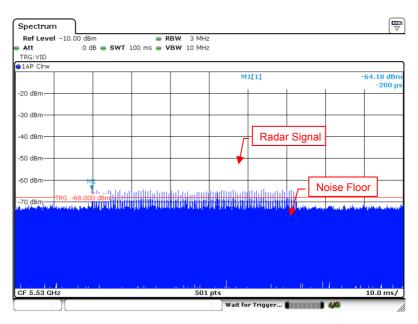


Radar Signal 1 (Test A)

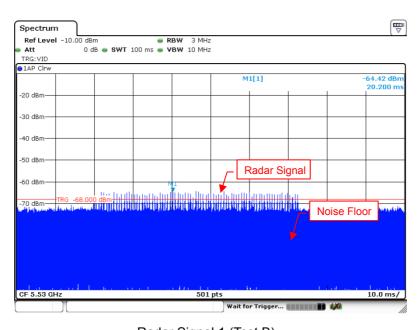


Radar Signal 1 (Test B)



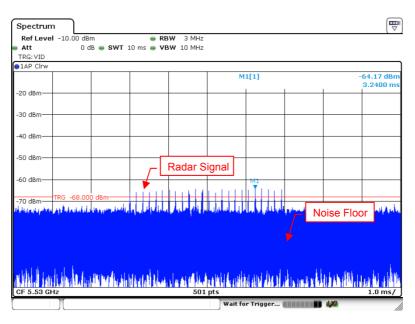


Radar Signal 2

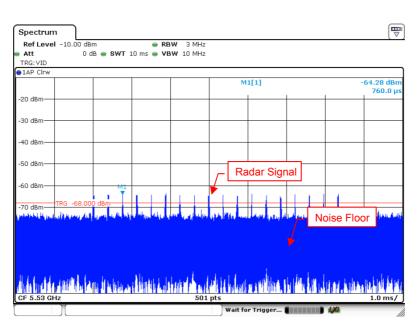


Radar Signal 3



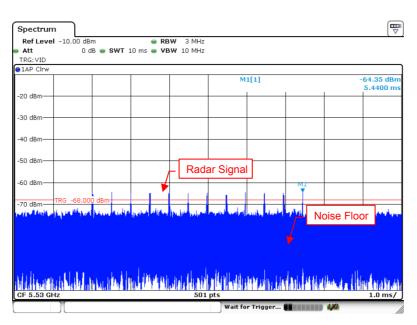


Single Burst of Radar Signal 4

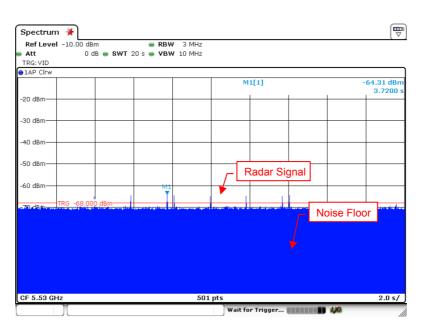


Radar Signal 5



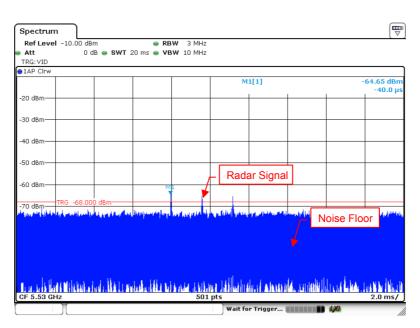


Single Burst of Radar Signal 5

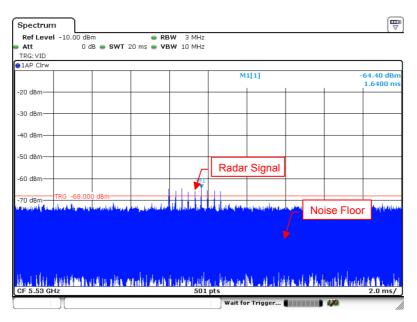


Radar Signal 6



6.2.2 U-NII Detection Bandwidth

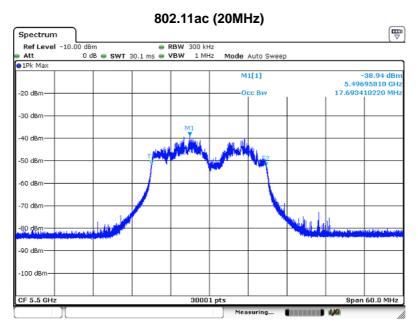


U-NII 99% Channel bandwidth

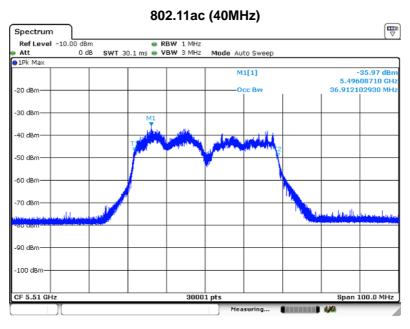

U-NII 99% Channel bandwidth



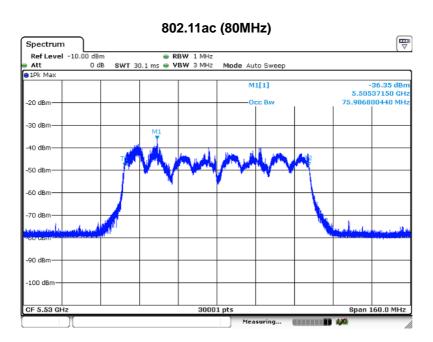

U-NII 99% Channel bandwidth



U-NII 99% Channel bandwidth

Detection Bandwidth Test - 802.11ac (20MHz)

Radar Type 0

EUT Frequency: 5500MHz

EUT 99% Power bandwidth: 17.693MHz

Detection bandwidth limit (100% of EUT 99% Power bandwidth): 17.693MHz

Detection bandwidth (5509(FH) – 5491(FL)): 18MHz

Test Result : PASS

TEST INESUIT . F AGG											
Radar Frequency				Trial I	Numbe	r / Det	ection				Detection Rate (%)
(MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5491(FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5492	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5493	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5494	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5496	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5497	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5498	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5499	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5501	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5502	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5503	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5504	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5506	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5507	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5508	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5509(FH)	Yes	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	90

Report No.: RF170323D03A-2 Page No. 27 / 110 Report Format Version: 6.1.2

Reference No.: 170323D07



Detection Bandwidth Test - 802.11ac (40MHz)

Radar Type 0

EUT Frequency: 5510MHz

EUT 99% Power bandwidth: 36.912MHz

Detection bandwidth limit (100% of EUT 99% Power bandwidth): 36.912MHz

Detection bandwidth (5529(FH) – 5491(FL)): 38MHz

Test Result : PASS

5491(FL) Yes Ye	8 Yes Yes Yes Yes Yes Yes Yes Yes	9 Yes Yes Yes Yes	10 Yes Yes Yes Yes	Detection Rate (% 100 100 100
5492 Yes	Yes Yes Yes Yes Yes	Yes Yes Yes	Yes Yes	100
5493 Yes Yes Yes Yes Yes Yes Yes Y	Yes Yes Yes Yes	Yes Yes	Yes	
	Yes Yes Yes	Yes		100
F404	Yes Yes		Yes	
5494 Yes Yes Yes Yes Yes Yes Yes Yes Yes	Yes	Yes		100
5495 Yes Yes Yes Yes Yes Yes Yes Y			Yes	100
5496 Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5497 Yes Yes Yes Yes Yes Yes Yes Yes Y	. 00	Yes	Yes	100
5498 Yes Yes Yes Yes Yes Yes Yes Yes Yes	Yes	Yes	Yes	100
5499 Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5500 Yes Yes Yes Yes Yes Yes N	No	Yes	Yes	90
5501 Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5502 Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5503 Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5504 Yes Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5505 Yes Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5506 Yes Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5507 Yes Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
	Yes	Yes	Yes	100
5509 Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5510 Yes Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5511 Yes Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5512 Yes Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
	Yes	Yes	Yes	100
5514 Yes Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5515 Yes Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5516 Yes Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5517 Yes Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5518 Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5519 Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5520 Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5521 Yes Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5522 Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5523 Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
5524 Yes Yes Yes Yes Yes Yes Yes Yes Y	Yes	Yes	Yes	100
	Yes	Yes	Yes	100
	Yes	Yes	Yes	100
	Yes	Yes	Yes	100
	Yes	Yes	Yes	100
	Yes	No	Yes	90



Detection Bandwidth Test - 802.11ac (80MHz)

Radar Type 0

EUT Frequency: 5530MHz

EUT 99% Power bandwidth: 75.986MHz

Detection bandwidth limit (100% of EUT 99% Power bandwidth): 75.986MHz

Detection bandwidth (5568(FH) – 5492(FL)) : 76MHz

Test Result : PASS

Radar Frequency				Trial I	Numbe	r / Det	ection				
(MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5492(FL)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5493	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5494	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5495	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5496	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5497	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5498	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5499	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5500	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes	90
5501	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5502	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5503	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5504	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5505	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5506	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5507	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5508	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5509	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5510	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5511	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5512	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5513	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5514	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5515	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5516	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5517	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5518	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5519	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5520	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5521	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5522	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5523	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5524	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5525	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5526	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5527	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5528	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5529	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100
5530	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	100



	1	1	1	1	ı	1	1	1		1	T
5531	Yes	100									
5532	Yes	100									
5533	Yes	100									
5534	Yes	100									
5535	Yes	100									
5536	Yes	100									
5537	Yes	100									
5538	Yes	100									
5539	Yes	100									
5540	Yes	100									
5541	Yes	100									
5542	Yes	100									
5543	Yes	100									
5544	Yes	100									
5545	Yes	100									
5546	Yes	100									
5547	Yes	100									
5548	Yes	100									
5549	Yes	100									
5550	Yes	100									
5551	Yes	100									
5552	Yes	100									
5553	Yes	100									
5554	Yes	100									
5555	Yes	100									
5556	Yes	100									
5557	Yes	100									
5558	Yes	100									
5559	Yes	100									
5560	Yes	No	Yes	Yes	90						
5561	Yes	100									
5562	Yes	100									
5563	Yes	100									
5564	Yes	100									
5565	Yes	100									
5566	Yes	100									
5567	Yes	100									
5568(FH)	Yes	No	Yes	90							




6.2.3 Channel Availability Check Time

If the EUT successfully detected the radar burst, it should be observed as the EUT has no transmissions occurred until the EUT starts transmitting on another channel.

	Observation				
Timing of Radar Signal	EUT	Spectrum Analyzer			
Within 1 to 6 second	Detected	No transmissions			
Within 54 to 60 second	Detected	No transmissions			


Initial Channel Availability Check Time

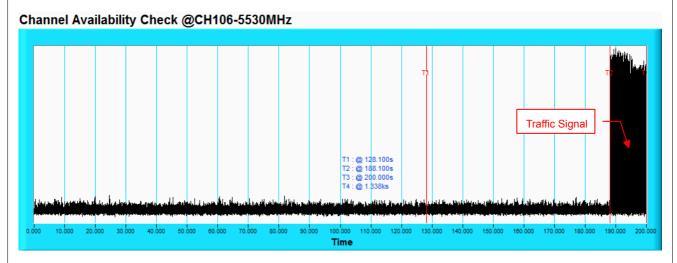

NOTE: T1 denotes the end of power-up time period is 128.1th second. T2 denotes the end of Channel Availability Check time is 188.1th second. Channel Availability Check time is equal to (T2 – T1) 60 seconds.




Radar Burst at the Beginning of the Channel Availability Check Time

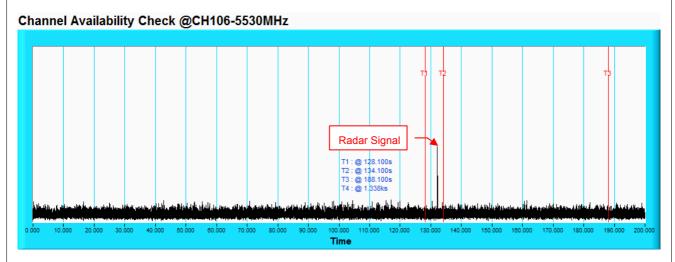

NOTE: T1 denotes the end of power up time period is 128.1th second. T2 denotes 134.1th second and the radar burst was commenced within a 6 second window starting from the end of power-up sequence. T3 denotes the 188.1th second.

Radar Burst at the End of the Channel Availability Check Time

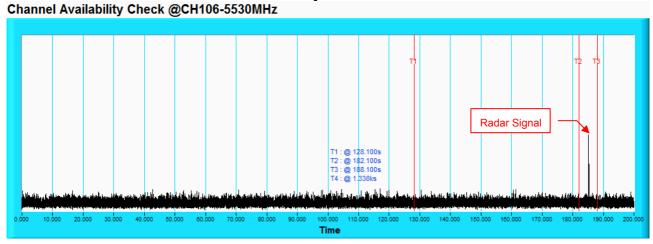


NOTE: T2 denotes the end of power up time period is 182.1th second.T3 denotes 188.1th second and the radar burst was commenced within 182.1th second to 188.1th second window starting from the end of power-up sequence. T1 denotes the 128.1th second.




6.2.4 Channel Closing Transmission and Channel Move Time

Wireless Traffic Loading


802.11ac (20MHz)

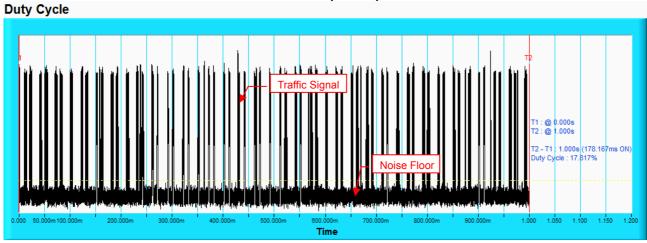

802.11ac (40MHz)

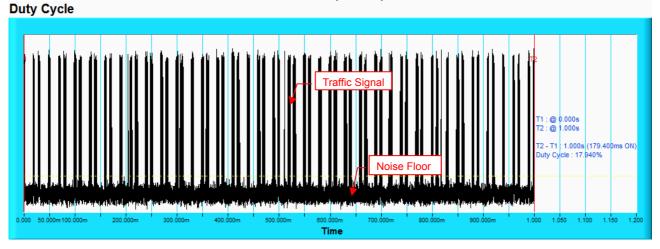

802.11ac (80MHz)

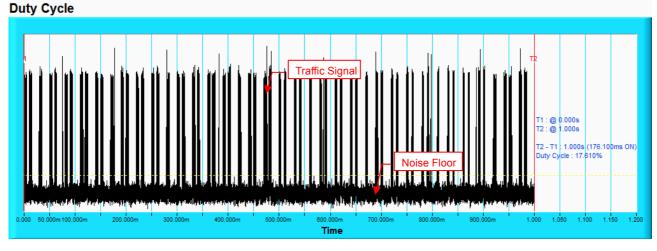

Report Format Version: 6.1.2



802.11ac (20MHz)

Table 1: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Number of Trials(Times)	Percentage of Successful Detection (%)
1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A	Roundup $ \begin{bmatrix} \frac{1}{360} \\ \frac{19 \cdot 10^6}{PRI_{\#} sec} \end{bmatrix} $	18	30	83.3
2	1-5	150-230	23-29	30	90
3	6-10	200-500	16-18	30	93.3
4	11-20	200-500	12-16	30	93.3
	Aggregate (Radar	Types 1-4)		120	90

Table 2: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per Burst	Number of Bursts	Number of Trials(Times)	Percentage of Successful Detection (%)
5	50-100	5-20	1000-2000	1-3	8-20	30	86.7

Table 3: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Number of Trials(Times)	Percentage of Successful Detection (%)
6	1	333	9	0.333	300	30	93.3

Report No.: RF170323D03A-2 Reference No.: 170323D07 Page No. 34 / 110 Report Format Version: 6.1.2



802.11ac (40MHz)

Table 1: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Number of Trials(Times)	Percentage of Successful Detection (%)
1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A	Roundup $ \left\{ \begin{array}{c} \frac{1}{360} \\ \\ 19 \cdot 10^6 \\ \\ PRI_{\musec} \end{array} \right\} $	18	30	86.7
2	1-5	150-230	23-29	30	90
3	6-10	200-500	16-18	30	93.3
4	11-20	200-500	12-16	30	83.3
	Aggregate (Radar	Types 1-4)		120	88.3

Table 2: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per Burst	Number of Bursts	Number of Trials(Times)	Percentage of Successful Detection (%)
5	50-100	5-20	1000-2000	1-3	8-20	30	83.3

Table 3: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Number of Trials(Times)	Percentage of Successful Detection (%)
6	1	333	9	0.333	300	30	93.3

Report No.: RF170323D03A-2 Reference No.: 170323D07 Page No. 35 / 110 Report Format Version: 6.1.2



802.11ac (80MHz)

Table 1: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Number of Trials(Times)	Percentage of Successful Detection (%)
1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A	Roundup $ \begin{cases} $	18	30	90
2	1-5	150-230	23-29	30	93.3
3	6-10	200-500	16-18	30	86.7
4	11-20	200-500	12-16	30	83.3
	Aggregate (Radar	Types 1-4)		120	88.3

Table 2: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per Burst	Number of Bursts	Number of Trials(Times)	Percentage of Successful Detection (%)
5	50-100	5-20	1000-2000	1-3	8-20	30	83.3


Table 3: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Number of Trials(Times)	Percentage of Successful Detection (%)
6	1	333	9	0.333	300	30	90


Report No.: RF170323D03A-2 Reference No.: 170323D07 Page No. 36 / 110 Report Format Version: 6.1.2



802.11ac (80MHz)

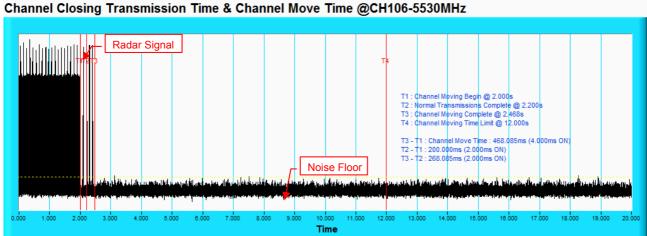


NOTE: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

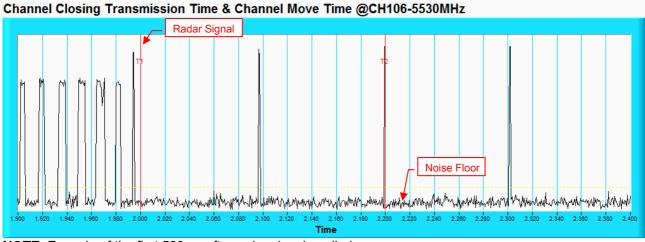




802.11ac (80MHz)

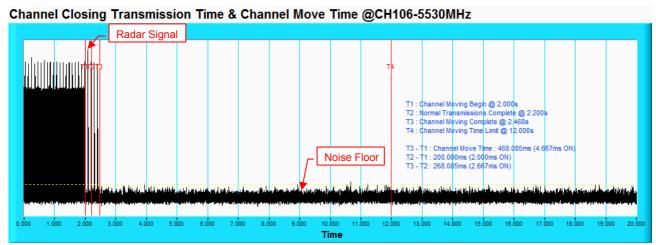


NOTE: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

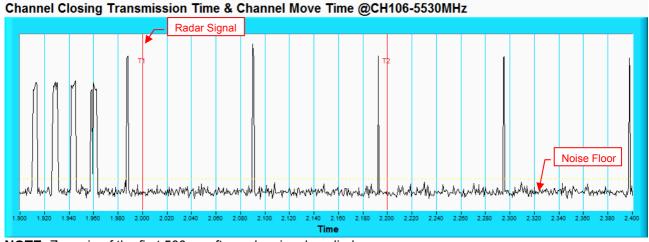





802.11ac (80MHz)

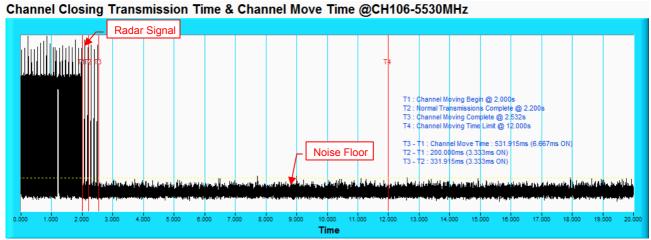


NOTE: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

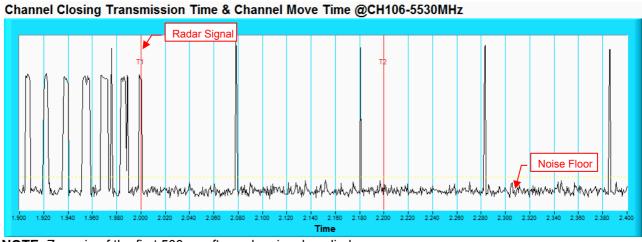



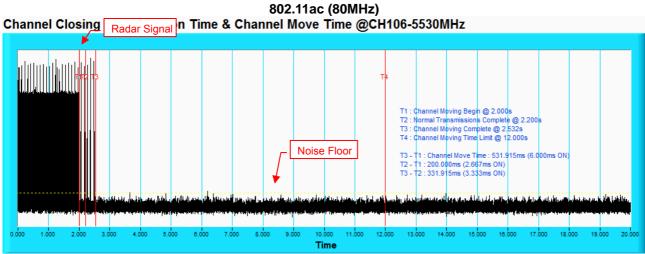


NOTE: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

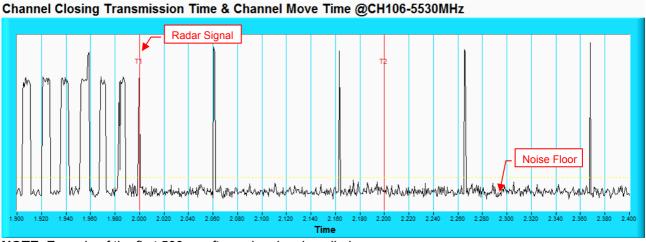




802.11ac (80MHz)

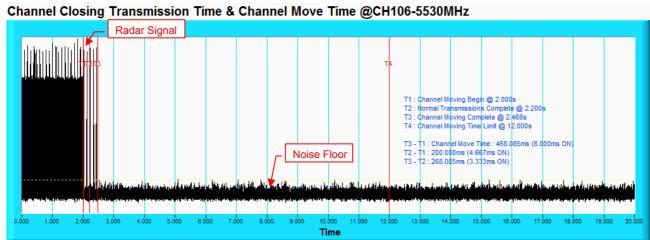

NOTE: T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time. T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

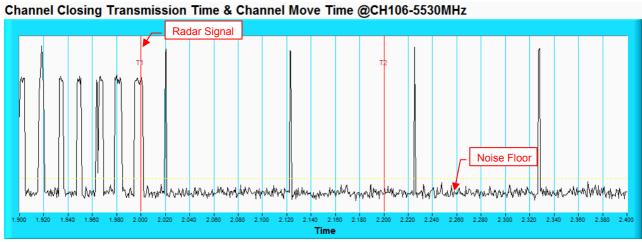



Type	1 Radar Statis	stical Performances				
Trial #	Test Frequency (MHz)	Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulse per seconds)	Pulses per Burst	Pulse Repetition Interval (microseconds)	Detection
1	5500	15	1253	67	798	No
2	5504	16	1223	65	818	Yes
3	5501	4	1730	92	578	Yes
4	5492	11	1393	74	718	Yes
5	5498	22	1066	57	938	Yes
6	5491	7	1567	83	638	Yes
7	5505	2	1859	99	538	Yes
8	5507	8	1520	81	658	No
9	5499	1	1931	102	518	Yes
10	5503	19	1139	61	878	Yes
11	5508	21	1089	58	918	Yes
12	5494	23	326.2	18	3066	Yes
13	5499	9	1475	78	678	Yes
14	5497	5	1672	89	598	Yes
15	5491	6	1618	86	618	No
16	5492		1111	59	900	Yes
17	5508		1024	55	977	No
18	5501		625.8	34	1598	Yes
19	5494		730.5	39	1369	Yes
20	5504		1181	63	847	Yes
21	5496		400.6	22	2496	Yes
22	5502		529.4	28	1889	Yes
23	5503		347.6	19	2877	Yes
24	5505		641.4	34	1559	Yes
25	5495		508.9	27	1965	Yes
26	5501		345.4	19	2895	Yes
27	5496		580.7	31	1722	Yes
28	5504		786.8	42	1271	Yes
29	5506		808.4	43	1237	Yes
30	5509		517.1	28	1934	Yes
					Detection Ra	ate: 86.7 %



Trial #	Test Frequency (MHz)	Pulses per Burst	Pulse Width(us)	PRI(us)	Detection
1	5500	24	1.7	174	Yes
2	5493	27	3.8	176	Yes
3	5501	28	4	161	No
4	5500	28	4.3	226	Yes
5	5502	24	1.9	193	Yes
6	5504	23	1.1	230	No
7	5500	29	4.5	198	No
8	5505	26	2.9	227	Yes
9	5502	26	2.8	171	Yes
10	5503	27	3.6	221	Yes
11	5492	23	1.1	180	Yes
12	5497	23	1.3	189	Yes
13	5495	25	2.5	204	Yes
14	5494	29	4.5	203	Yes
15	5505	29	5	170	Yes
16	5492	26	3.1	201	Yes
17	5504	24	2.1	218	Yes
18	5505	25	2.6	208	Yes
19	5503	24	1.8	223	Yes
20	5493	23	1.2	220	Yes
21	5496	26	2.9	224	Yes
22	5494	28	4	160	Yes
23	5506	25	2.5	209	Yes
24	5499	23	1	205	Yes
25	5494	27	3.7	151	Yes
26	5498	25	2.5	186	Yes
27	5509	23	1.5	190	Yes
28	5495	23	1.3	185	Yes
29	5502	23	1.2	175	Yes
30	5496	24	1.7	216	Yes



Trial #	Test Frequency (MHz)	Pulses per Burst	Pulse Width(us)	PRI(us)	Detection
1	5500	16	6.7	467	Yes
2	5496	18	8.8	304	Yes
3	5496	18	9	316	Yes
4	5502	18	9.3	439	Yes
5	5492	16	6.9	420	Yes
6	5500	16	6.1	249	Yes
7	5495	18	9.5	463	No
8	5501	17	7.9	258	No
9	5491	17	7.8	212	Yes
10	5495	17	8.6	236	Yes
11	5502	16	6.1	474	Yes
12	5496	16	6.3	461	Yes
13	5507	17	7.5	437	Yes
14	5496	18	9.5	287	Yes
15	5494	18	10	395	Yes
16	5501	17	8.1	322	Yes
17	5501	16	7.1	468	Yes
18	5501	17	7.6	255	Yes
19	5509	16	6.8	423	Yes
20	5509	16	6.2	456	Yes
21	5504	17	7.9	351	Yes
22	5494	18	9	411	Yes
23	5499	17	7.5	279	Yes
24	5506	16	6	431	Yes
25	5494	17	8.7	324	Yes
26	5498	17	7.5	419	Yes
27	5502	16	6.5	447	Yes
28	5498	16	6.3	481	Yes
29	5504	16	6.2	438	No
30	5499	16	6.7	270	Yes

Report No.: RF170323D03A-2 Reference No.: 170323D07

Page No. 44 / 110



Trial #	Test Frequency (MHz)	Pulses per Burst	Pulse Width(us)	PRI(us)	Detection
1	5500	12	12.5	467	Yes
2	5501	15	17.2	304	No
3	5503	15	17.8	316	Yes
4	5501	16	18.5	439	Yes
5	5494	13	13.1	420	Yes
6	5499	12	11.3	249	Yes
7	5492	16	18.8	463	Yes
8	5493	14	15.3	258	Yes
9	5505	14	15.1	212	No
10	5491	15	16.9	236	No
11	5500	12	11.2	474	No
12	5506	12	11.7	461	Yes
13	5492	13	14.4	437	Yes
14	5504	16	18.9	287	Yes
15	5494	16	19.9	395	Yes
16	5504	14	15.7	322	Yes
17	5491	13	13.4	468	Yes
18	5506	13	14.5	255	Yes
19	5496	13	12.9	423	Yes
20	5499	12	11.5	456	No
21	5505	14	15.3	351	No
22	5494	15	17.8	411	Yes
23	5499	13	14.3	279	Yes
24	5496	12	11.1	431	Yes
25	5503	15	17	324	Yes
26	5501	13	14.5	419	Yes
27	5500	12	12.1	447	Yes
28	5507	12	11.7	481	Yes
29	5495	12	11.6	438	Yes
30	5507	12	12.7	270	Yes



rial#	Minimum	Chirp Center	Test Signal Name	Detection
	Chirp Width(MHz)	Frequency(MHz)	rest Signal Name	Detection
1	7	5500	LP_Signal_01	Yes
2	15	5500	LP_Signal_02	Yes
3	16	5500	LP_Signal_03	Yes
4	18	5500	LP_Signal_04	Yes
5	8	5500	LP_Signal_05	Yes
6	5	5500	LP_Signal_06	Yes
7	18	5500	LP_Signal_07	Yes
8	12	5500	LP_Signal_08	Yes
9	12	5500	LP_Signal_09	No
10	15	5500	LP_Signal_10	No
11	5	5493	LP_Signal_11	Yes
12	6	5493	LP_Signal_12	No
13	11	5495	LP_Signal_13	Yes
14	18	5498	LP_Signal_14	Yes
15	20	5499	LP_Signal_15	Yes
16	13	5496	LP_Signal_16	Yes
17	9	5495	LP_Signal_17	Yes
18	11	5495	LP_Signal_18	Yes
19	8	5494	LP_Signal_19	Yes
20	5	5493	LP_Signal_20	Yes
21	12	5504	LP_Signal_21	Yes
22	17	5502	LP_Signal_22	Yes
23	10	5505	LP_Signal_23	Yes
24	5	5507	LP_Signal_24	Yes
25	15	5503	LP_Signal_25	Yes
26	11	5505	LP_Signal_26	Yes
27	7	5506	LP_Signal_27	Yes
28	6	5507	LP_Signal_28	Yes
29	6	5507	LP_Signal_29	Yes
30	8	5506	LP_Signal_30	Yes

The Long Pulse Radar pattern shown in Appendix A.1



Trial #	Pulses per Burst	Pulse Width(us)	PRI(us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	Yes
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	No
12	9	1	333.3	Yes
13	0	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	No
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes



Trial #	Hopping Frequency Sequence Name	Detection
1	HOP_FREQ_SEQ_01	Yes
2	HOP_FREQ_SEQ_02	Yes
3	HOP_FREQ_SEQ_03	Yes
4	HOP_FREQ_SEQ_04	Yes
5	HOP_FREQ_SEQ_05	No
6	HOP_FREQ_SEQ_06	Yes
7	HOP_FREQ_SEQ_07	Yes
8	HOP_FREQ_SEQ_08	Yes
9	HOP_FREQ_SEQ_09	Yes
10	HOP_FREQ_SEQ_10	Yes
11	HOP_FREQ_SEQ_11	Yes
12	HOP_FREQ_SEQ_12	Yes
13	HOP_FREQ_SEQ_13	Yes
14	HOP_FREQ_SEQ_14	Yes
15	HOP_FREQ_SEQ_15	Yes
16	HOP_FREQ_SEQ_16	Yes
17	HOP_FREQ_SEQ_17	Yes
18	HOP_FREQ_SEQ_18	Yes
19	HOP_FREQ_SEQ_19	Yes
20	HOP_FREQ_SEQ_20	No
21	HOP_FREQ_SEQ_21	No
22	HOP_FREQ_SEQ_22	No
23	HOP_FREQ_SEQ_23	Yes
24	HOP_FREQ_SEQ_24	Yes
25	HOP_FREQ_SEQ_25	Yes
26	HOP_FREQ_SEQ_26	Yes
27	HOP_FREQ_SEQ_27	Yes
28	HOP_FREQ_SEQ_28	Yes
29	HOP_FREQ_SEQ_29	Yes
30	HOP FREQ SEQ 30	No

The Frequency Hopping Radar pattern shown in Appendix A.2



Type		stical Performances		T		1
Trial #	Test Frequency (MHz)	Pulse Repetition Frequency Number (1 to 23)	Pulse Repetition Frequency (Pulse per seconds)	Burst	Pulse Repetition Interval (microseconds)	Detection
1	5510	15	1253	67	798	Yes
2	5520	16	1223	65	818	Yes
3	5500	4	1730	92	578	No
4	5515	11	1393	74	718	Yes
5	5497	22	1066	57	938	Yes
6	5522	7	1567	83	638	Yes
7	5522	2	1859	99	538	Yes
8	5527	8	1520	81	658	Yes
9	5523	1	1931	102	518	Yes
10	5501	19	1139	61	878	Yes
11	5523	21	1089	58	918	Yes
12	5493	23	326.2	18	3066	Yes
13	5525	9	1475	78	678	Yes
14	5506	5	1672	89	598	Yes
15	5518	6	1618	86	618	Yes
16	5512		1111	59	900	Yes
17	5523		1024	55	977	Yes
18	5503		625.8	34	1598	Yes
19	5521		730.5	39	1369	No
20	5513		1181	63	847	Yes
21	5515		400.6	22	2496	Yes
22	5525		529.4	28	1889	Yes
23	5529		347.6	19	2877	Yes
24	5498		641.4	34	1559	Yes
25	5506		508.9	27	1965	Yes
26	5521		345.4	19	2895	Yes
27	5506		580.7	31	1722	Yes
28	5508		786.8	42	1271	No
29	5505		808.4	43	1237	Yes
30	5512		517.1	28	1934	Yes
					Detection I	Rate: 90 %



	dar Statistical Perfor Test Frequency				
Trial #	(MHz)	Pulses per Burst	Pulse Width(us)	PRI(us)	Detection
1	5510	24	1.7	174	Yes
2	5520	27	3.8	176	Yes
3	5500	28	4	161	Yes
4	5503	28	4.3	226	Yes
5	5491	24	1.9	193	Yes
6	5494	23	1.1	230	Yes
7	5511	29	4.5	198	Yes
8	5508	26	2.9	227	Yes
9	5518	26	2.8	171	Yes
10	5512	27	3.6	221	No
11	5501	23	1.1	180	Yes
12	5492	23	1.3	189	Yes
13	5501	25	2.5	204	Yes
14	5525	29	4.5	203	Yes
15	5522	29	5	170	Yes
16	5523	26	3.1	201	Yes
17	5506	24	2.1	218	Yes
18	5528	25	2.6	208	Yes
19	5495	24	1.8	223	Yes
20	5495	23	1.2	220	Yes
21	5517	26	2.9	224	Yes
22	5514	28	4	160	Yes
23	5523	25	2.5	209	No
24	5499	23	1	205	No
25	5501	27	3.7	151	Yes
26	5503	25	2.5	186	Yes
27	5503	23	1.5	190	Yes
28	5529	23	1.3	185	Yes
29	5523	23	1.2	175	Yes
30	5528	24	1.7	216	Yes



	dar Statistical Perfor Test Frequency				
Trial #	(MHz)	Pulses per Burst	Pulse Width(us)	PRI(us)	Detection
1	5510	16	6.7	467	Yes
2	5520	18	8.8	304	Yes
3	5500	18	9	316	No
4	5513	18	9.3	439	Yes
5	5522	16	6.9	420	Yes
6	5516	16	6.1	249	Yes
7	5529	18	9.5	463	Yes
8	5496	17	7.9	258	Yes
9	5526	17	7.8	212	No
10	5510	17	8.6	236	Yes
11	5496	16	6.1	474	No
12	5527	16	6.3	461	Yes
13	5520	17	7.5	437	Yes
14	5525	18	9.5	287	Yes
15	5527	18	10	395	No
16	5500	17	8.1	322	Yes
17	5512	16	7.1	468	Yes
18	5491	17	7.6	255	Yes
19	5516	16	6.8	423	Yes
20	5528	16	6.2	456	Yes
21	5507	17	7.9	351	No
22	5499	18	9	411	Yes
23	5499	17	7.5	279	Yes
24	5491	16	6	431	Yes
25	5522	17	8.7	324	No
26	5511	17	7.5	419	Yes
27	5518	16	6.5	447	Yes
28	5527	16	6.3	481	Yes
29	5502	16	6.2	438	Yes
30	5522	16	6.7	270	Yes

Report No.: RF170323D03A-2 Page No. 51 / 110 Report Format Version: 6.1.2 Reference No.: 170323D07



	dar Statistical Perfor Test Frequency				
Trial #	(MHz)	Pulses per Burst	Pulse Width(us)	PRI(us)	Detection
1	5510	12	12.5	467	Yes
2	5520	15	17.2	304	Yes
3	5500	15	17.8	316	Yes
4	5526	16	18.5	439	Yes
5	5499	13	13.1	420	Yes
6	5522	12	11.3	249	Yes
7	5497	16	18.8	463	Yes
8	5505	14	15.3	258	No
9	5500	14	15.1	212	Yes
10	5513	15	16.9	236	Yes
11	5513	12	11.2	474	Yes
12	5514	12	11.7	461	Yes
13	5499	13	14.4	437	Yes
14	5526	16	18.9	287	Yes
15	5520	16	19.9	395	Yes
16	5508	14	15.7	322	Yes
17	5518	13	13.4	468	No
18	5519	13	14.5	255	Yes
19	5491	13	12.9	423	Yes
20	5515	12	11.5	456	Yes
21	5510	14	15.3	351	Yes
22	5526	15	17.8	411	Yes
23	5504	13	14.3	279	Yes
24	5527	12	11.1	431	Yes
25	5505	15	17	324	No
26	5494	13	14.5	419	Yes
27	5492	12	12.1	447	No
28	5527	12	11.7	481	Yes
29	5506	12	11.6	438	No
30	5516	12	12.7	270	Yes



	adar Statistical Performances Minimum Chirp Center			
rial #	Chirp Width(MHz)	Frequency(MHz)	Test Signal Name	Detection
1	7	5510	LP_Signal_01	Yes
2	15	5510	LP_Signal_02	Yes
3	16	5510	LP_Signal_03	Yes
4	18	5510	LP_Signal_04	Yes
5	8	5510	LP_Signal_05	No
6	5	5510	LP_Signal_06	Yes
7	18	5510	LP_Signal_07	Yes
8	12	5510	LP_Signal_08	Yes
9	12	5510	LP_Signal_09	Yes
10	15	5510	LP_Signal_10	Yes
11	5	5493	LP_Signal_11	Yes
12	6	5493	LP_Signal_12	Yes
13	11	5495	LP_Signal_13	Yes
14	18	5498	LP_Signal_14	Yes
15	20	5499	LP_Signal_15	Yes
16	13	5496	LP_Signal_16	No
17	9	5495	LP_Signal_17	Yes
18	11	5495	LP_Signal_18	Yes
19	8	5494	LP_Signal_19	Yes
20	5	5493	LP_Signal_20	No
21	12	5524	LP_Signal_21	Yes
22	17	5522	LP_Signal_22	Yes
23	10	5525	LP_Signal_23	Yes
24	5	5527	LP_Signal_24	Yes
25	15	5523	LP_Signal_25	Yes
26	11	5525	LP_Signal_26	Yes
27	7	5526	LP_Signal_27	Yes
28	6	5527	LP_Signal_28	Yes
29	6	5527	LP_Signal_29	Yes
30	8	5526	LP_Signal_30	No

The Long Pulse Radar pattern shown in Appendix A.1



Trial #	Pulses per Burst	Pulse Width(us)	PRI(us)	Detection
1	9	1	333.3	Yes
2	9	1	333.3	Yes
3	9	1	333.3	Yes
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	No
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	No
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	No
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	Yes
26	9	1	333.3	Yes
27	9	1	333.3	Yes
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes



Trial #	Hopping Frequency Sequence Name	Detection
1	HOP_FREQ_SEQ_01	Yes
2	HOP_FREQ_SEQ_02	Yes
3	HOP_FREQ_SEQ_03	Yes
4	HOP_FREQ_SEQ_04	Yes
5	HOP_FREQ_SEQ_05	Yes
6	HOP_FREQ_SEQ_06	No
7	HOP_FREQ_SEQ_07	Yes
8	HOP_FREQ_SEQ_08	Yes
9	HOP_FREQ_SEQ_09	Yes
10	HOP_FREQ_SEQ_10	Yes
11	HOP_FREQ_SEQ_11	Yes
12	HOP_FREQ_SEQ_12	Yes
13	HOP_FREQ_SEQ_13	Yes
14	HOP_FREQ_SEQ_14	No
15	HOP_FREQ_SEQ_15	Yes
16	HOP_FREQ_SEQ_16	Yes
17	HOP_FREQ_SEQ_17	Yes
18	HOP_FREQ_SEQ_18	No
19	HOP_FREQ_SEQ_19	Yes
20	HOP_FREQ_SEQ_20	Yes
21	HOP_FREQ_SEQ_21	Yes
22	HOP_FREQ_SEQ_22	Yes
23	HOP_FREQ_SEQ_23	Yes
24	HOP_FREQ_SEQ_24	Yes
25	HOP_FREQ_SEQ_25	Yes
26	HOP_FREQ_SEQ_26	Yes
27	HOP_FREQ_SEQ_27	Yes
28	HOP_FREQ_SEQ_28	Yes
29	HOP_FREQ_SEQ_29	Yes
30	HOP FREQ SEQ 30	Yes

The Frequency Hopping Radar pattern shown in Appendix A.2



Туре		stical Performances		1		
Trial	Test	Pulse Repetition	Pulse Repetition Frequency	Pulses per	Pulse Repetition	
#	Frequency	Frequency	(Pulse per seconds)	Burst	Interval	Detection
	(MHz)	Number (1 to 23)	` '		(microseconds)	
1	5530	15	1253	67	798	Yes
2	5540	16	1223	65	818	Yes
3	5560	4	1730	92	578	Yes
4	5520	11	1393	74	718	Yes
5	5500	22	1066	57	938	Yes
6	5500	7	1567	83	638	Yes
7	5530	2	1859	99	538	Yes
8	5502	8	1520	81	658	Yes
9	5546	1	1931	102	518	Yes
10	5553	19	1139	61	878	Yes
11	5507	21	1089	58	918	Yes
12	5564	23	326.2	18	3066	Yes
13	5540	9	1475	78	678	Yes
14	5548	5	1672	89	598	Yes
15	5537	6	1618	86	618	Yes
16	5499		1111	59	900	Yes
17	5544		1024	55	977	No
18	5561		625.8	34	1598	Yes
19	5550		730.5	39	1369	Yes
20	5556		1181	63	847	Yes
21	5496		400.6	22	2496	Yes
22	5563		529.4	28	1889	Yes
23	5520		347.6	19	2877	Yes
24	5500		641.4	34	1559	Yes
25	5520		508.9	27	1965	Yes
26	5540		345.4	19	2895	No
27	5525		580.7	31	1722	Yes
28	5503		786.8	42	1271	Yes
29	5516		808.4	43	1237	Yes
30	5545		517.1	28	1934	No
		<u> </u>			Detection	



po =a.	dar Statistical Perfor				
Trial #	Test Frequency (MHz)	Pulses per Burst	Pulse Width(us)	PRI(us)	Detection
1	5530	24	1.7	174	Yes
2	5540	27	3.8	176	Yes
3	5560	28	4	161	Yes
4	5520	28	4.3	226	Yes
5	5500	24	1.9	193	Yes
6	5531	23	1.1	230	Yes
7	5566	29	4.5	198	Yes
8	5537	26	2.9	227	Yes
9	5559	26	2.8	171	Yes
10	5516	27	3.6	221	Yes
11	5546	23	1.1	180	Yes
12	5545	23	1.3	189	Yes
13	5544	25	2.5	204	No
14	5553	29	4.5	203	Yes
15	5495	29	5	170	Yes
16	5548	26	3.1	201	Yes
17	5565	24	2.1	218	Yes
18	5511	25	2.6	208	Yes
19	5541	24	1.8	223	Yes
20	5539	23	1.2	220	Yes
21	5563	26	2.9	224	No
22	5521	28	4	160	No
23	5550	25	2.5	209	Yes
24	5534	23	1	205	No
25	5498	27	3.7	151	Yes
26	5506	25	2.5	186	Yes
27	5514	23	1.5	190	Yes
28	5560	23	1.3	185	Yes
29	5542	23	1.2	175	No
30	5557	24	1.7	216	Yes



p	dar Statistical Perfor	Indirece			
Trial #	Test Frequency (MHz)	Pulses per Burst	Pulse Width(us)	PRI(us)	Detection
1	5530	16	6.7	467	Yes
2	5540	18	8.8	304	Yes
3	5560	18	9	316	No
4	5520	18	9.3	439	No
5	5500	16	6.9	420	Yes
6	5566	16	6.1	249	Yes
7	5552	18	9.5	463	Yes
8	5505	17	7.9	258	Yes
9	5530	17	7.8	212	Yes
10	5499	17	8.6	236	Yes
11	5506	16	6.1	474	No
12	5555	16	6.3	461	Yes
13	5547	17	7.5	437	Yes
14	5549	18	9.5	287	No
15	5509	18	10	395	Yes
16	5567	17	8.1	322	Yes
17	5568	16	7.1	468	Yes
18	5524	17	7.6	255	Yes
19	5518	16	6.8	423	Yes
20	5550	16	6.2	456	Yes
21	5518	17	7.9	351	Yes
22	5533	18	9	411	No
23	5532	17	7.5	279	Yes
24	5521	16	6	431	Yes
25	5513	17	8.7	324	Yes
26	5501	17	7.5	419	Yes
27	5503	16	6.5	447	Yes
28	5567	16	6.3	481	Yes
29	5530	16	6.2	438	Yes
30	5516	16	6.7	270	Yes



•	dar Statistical Perfor Test Frequency				
Trial #	(MHz)	Pulses per Burst	Pulse Width(us)	PRI(us)	Detection
1	5530	12	12.5	467	No
2	5540	15	17.2	304	Yes
3	5560	15	17.8	316	Yes
4	5520	16	18.5	439	Yes
5	5500	13	13.1	420	Yes
6	5515	12	11.3	249	No
7	5538	16	18.8	463	Yes
8	5535	14	15.3	258	Yes
9	5554	14	15.1	212	Yes
10	5497	15	16.9	236	Yes
11	5514	12	11.2	474	Yes
12	5511	12	11.7	461	Yes
13	5566	13	14.4	437	Yes
14	5546	16	18.9	287	No
15	5536	16	19.9	395	Yes
16	5503	14	15.7	322	Yes
17	5560	13	13.4	468	Yes
18	5557	13	14.5	255	Yes
19	5542	13	12.9	423	Yes
20	5543	12	11.5	456	Yes
21	5496	14	15.3	351	Yes
22	5518	15	17.8	411	No
23	5528	13	14.3	279	Yes
24	5520	12	11.1	431	Yes
25	5528	15	17	324	Yes
26	5511	13	14.5	419	Yes
27	5494	12	12.1	447	Yes
28	5506	12	11.7	481	Yes
29	5528	12	11.6	438	Yes
30	5495	12	12.7	270	Yes



pe 5 Rac	dar Statistical Performance		1	
Trial #	Minimum	Chirp Center	Test Signal Name	Detection
	Chirp Width(MHz)	Frequency(MHz)		
1	7	5530	LP_Signal_01	Yes
2	15	5530	LP_Signal_02	Yes
3	16	5530	LP_Signal_03	No
4	18	5530	LP_Signal_04	Yes
5	8	5530	LP_Signal_05	Yes
6	5	5530	LP_Signal_06	Yes
7	18	5530	LP_Signal_07	Yes
8	12	5530	LP_Signal_08	Yes
9	12	5530	LP_Signal_09	Yes
10	15	5530	LP_Signal_10	No
11	5	5494	LP_Signal_11	Yes
12	6	5494	LP_Signal_12	Yes
13	11	5496	LP_Signal_13	Yes
14	18	5499	LP_Signal_14	Yes
15	20	5500	LP_Signal_15	Yes
16	13	5497	LP_Signal_16	Yes
17	9	5496	LP_Signal_17	Yes
18	11	5496	LP_Signal_18	Yes
19	8	5495	LP_Signal_19	Yes
20	5	5494	LP_Signal_20	Yes
21	12	5563	LP_Signal_21	No
22	17	5561	LP_Signal_22	No
23	10	5564	LP_Signal_23	Yes
24	5	5566	LP_Signal_24	Yes
25	15	5562	LP_Signal_25	No
26	11	5564	LP_Signal_26	Yes
27	7	5565	LP_Signal_27	No
28	6	5566	LP_Signal_28	Yes
29	6	5566	LP_Signal_29	Yes
30	8	5565	LP_Signal_30	Yes
				Detection Rate: 80

The Long Pulse Radar pattern shown in Appendix A.1



Trial #	Pulses per Burst	Pulse Width(us)	PRI(us)	Detection
1	9	1	333.3	No
2	9	1	333.3	Yes
3	9	1	333.3	No
4	9	1	333.3	Yes
5	9	1	333.3	Yes
6	9	1	333.3	No
7	9	1	333.3	Yes
8	9	1	333.3	Yes
9	9	1	333.3	Yes
10	9	1	333.3	Yes
11	9	1	333.3	Yes
12	9	1	333.3	Yes
13	9	1	333.3	Yes
14	9	1	333.3	Yes
15	9	1	333.3	Yes
16	9	1	333.3	Yes
17	9	1	333.3	Yes
18	9	1	333.3	Yes
19	9	1	333.3	Yes
20	9	1	333.3	Yes
21	9	1	333.3	Yes
22	9	1	333.3	Yes
23	9	1	333.3	Yes
24	9	1	333.3	Yes
25	9	1	333.3	No
26	9	1	333.3	Yes
27	9	1	333.3	No
28	9	1	333.3	Yes
29	9	1	333.3	Yes
30	9	1	333.3	Yes




Trial #	Hopping Frequency Sequence Name	Detection
1	HOP FREQ SEQ 01	No
2	HOP FREQ SEQ 02	Yes
3	HOP_FREQ_SEQ_03	No
4	HOP FREQ SEQ 04	Yes
5	HOP FREQ SEQ 05	Yes
6	HOP_FREQ_SEQ_06	No
7	HOP_FREQ_SEQ_07	Yes
8	HOP_FREQ_SEQ_08	Yes
9	HOP_FREQ_SEQ_09	Yes
10	HOP_FREQ_SEQ_10	Yes
11	HOP_FREQ_SEQ_11	Yes
12	HOP_FREQ_SEQ_12	Yes
13	HOP_FREQ_SEQ_13	Yes
14	HOP_FREQ_SEQ_14	Yes
15	HOP_FREQ_SEQ_15	Yes
16	HOP_FREQ_SEQ_16	Yes
17	HOP_FREQ_SEQ_17	Yes
18	HOP_FREQ_SEQ_18	Yes
19	HOP_FREQ_SEQ_19	Yes
20	HOP_FREQ_SEQ_20	Yes
21	HOP_FREQ_SEQ_21	Yes
22	HOP_FREQ_SEQ_22	Yes
23	HOP_FREQ_SEQ_23	Yes
24	HOP_FREQ_SEQ_24	Yes
25	HOP_FREQ_SEQ_25	No
26	HOP_FREQ_SEQ_26	Yes
27	HOP_FREQ_SEQ_27	No
28	HOP_FREQ_SEQ_28	Yes
29	HOP_FREQ_SEQ_29	Yes
30	HOP_FREQ_SEQ_30	Yes

The Frequency Hopping Radar pattern shown in Appendix A.2




6.2.5 Non-Occupancy Period

 Test results demonstrating an associated client link is established with the master on a test frequency.

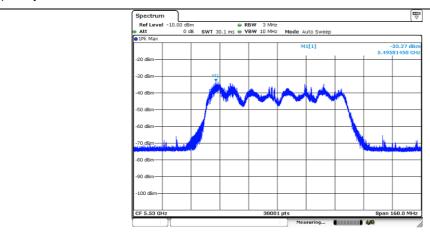


EUT (master) links with Client on <mark>5530</mark>MHz

2) The master and DFS-certified client device are associated, and system testing will be performed with channel-loading for a non-occupancy period test.

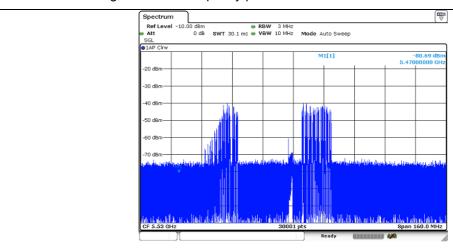

Client performed with channel-loading via master.




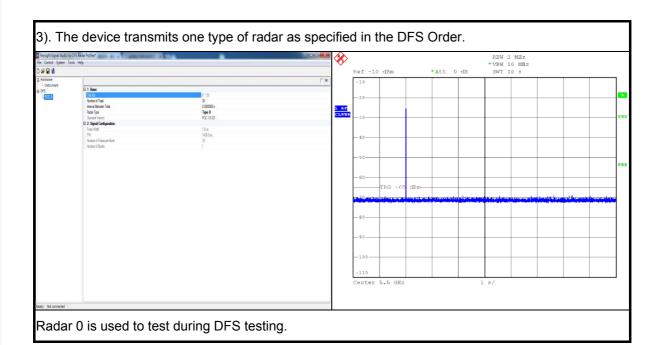

4) The test frequency has been monitored to ensure no transmission of any type has occurred for 30 minutes;

Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear;

5)An analyzer plot that contains a single 30-minute sweep on the original test frequency.

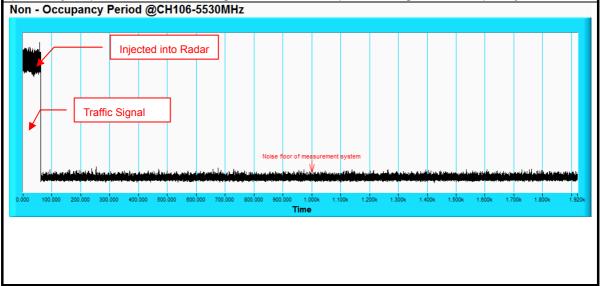



7. Information on The Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab: Hsin Chu EMC/RF/Telecom Lab:

Tel: 886-2-26052180 Tel: 886-3-6668565 Fax: 886-2-26051924 Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab:

Tel: 886-3-3183232 Fax: 886-3-3270892

Email: <u>service.adt@tw.bureauveritas.com</u> **Web Site:** <u>www.bureauveritas-adt.com</u>

The address and road map of all our labs can be found in our web site also.

Report No.: RF170323D03A-2 Page No. 65 / 110 Report Format Version: 6.1.2

Reference No.: 170323D07



8. Appendix-A

RADAR TEST SIGNAL

A.1 The Long Pulse Radar Pattern

Long Pulse Radar Test Signal
Test Signal Name: LP_Signal_01
Number of Bursts in Trial: 10

Number	Number of Bursts in That. To							
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)		
1	1	7	58.7	1765	-	-		
2	3	7	84.3	1452	1398	1571		
3	3	7	87.4	1358	1377	1111		
4	3	7	91.4	1554	1036	1662		
5	1	7	61.8	1828	-	-		
6	1	7	51.8	1621	-	-		
7	3	7	93.4	1063	1317	1923		
8	2	7	73.8	1804	1156	-		
9	2	7	72.6	1935	1079	-		
10	2	7	82.5	1049	1478	-		
11								
12								
13								
14								
15								
16								
17				·				
18								
19								
20								



Test Signal Name: LP_Signal_02 Number of Bursts in Trial: 16

Tarribor	Of Duists III Tha	. 10			Τ	
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	15	51.3	1713	-	ı
2	1	15	54	1485	-	-
3	2	15	69.1	1043	1750	-
4	3	15	93.8	1665	1844	1155
5	3	15	99.1	1505	1825	1538
6	2	15	76	1866	1508	-
7	1	15	63.5	1889	-	-
8	2	15	69.8	1024	1578	1
9	1	15	60.9	1067	-	-
10	1	15	52.9	1162	-	-
11	2	15	73.7	1211	1581	ı
12	3	15	87.8	1516	1753	1473
13	2	15	68.6	1029	1730	-
14	1	15	50.9	1930	-	-
15	2	15	83	1675	1303	-
16	2	15	69.5	1296	1410	-
17						
18						
19						
20						



Test Signal Name: LP_Signal_03
Number of Bursts in Trial: 17

. tarriber	Of Duists III Tha	1. 1 <i>1</i>	Т		1	
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	16	56.4	1603	-	-
2	1	16	53.9	1545	-	-
3	1	16	53.5	1943	-	-
4	1	16	59.4	1206	-	-
5	2	16	78.5	1305	1969	1
6	3	16	86.1	1355	1823	1948
7	2	16	67	1788	1958	-
8	2	16	74.5	1213	1124	-
9	2	16	81.3	1215	1366	-
10	2	16	81.5	1429	1293	-
11	2	16	79.9	1345	1990	-
12	1	16	50.5	1996	-	-
13	3	16	88.4	1871	1121	1723
14	1	16	65.7	1964	-	-
15	3	16	93	1962	1265	1267
16	1	16	63.6	1020	-	-
17	2	16	78.1	1737	1422	-
18						
19						
20						



Long Pulse Radar Test Signal
Test Signal Name: LP_Signal_04

Number of Bursts in Trial: 18

I	OI Buists III Tha	I. 10	1		T	
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	18	76.8	1105	1462	-
2	2	18	72.6	1668	1188	-
3	2	18	70.4	1321	1820	-
4	1	18	57	1683	-	-
5	3	18	88.6	1721	1611	1967
6	1	18	55	1594	-	-
7	3	18	93.3	1624	1678	1625
8	3	18	86.7	1720	1540	1349
9	3	18	86.7	1816	1617	1754
10	1	18	57.7	1382	-	-
11	2	18	78.1	1561	1416	-
12	1	18	59.9	1734	-	-
13	2	18	71	1677	1220	-
14	1	18	65.7	1497	-	-
15	3	18	86.4	1957	1088	1054
16	1	18	58.3	1104	-	-
17	3	18	92.3	1589	1800	1189
18	3	18	95.4	1147	1801	1748
19						
20						



Test Signal Name: LP_Signal_05 Number of Bursts in Trial: 11

	0. 20.000					
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	8	89.4	1574	1736	1023
2	2	8	70.2	1655	1500	-
3	1	8	63.2	1445	-	-
4	1	8	53.9	1098	-	-
5	1	8	65.2	1918	-	-
6	3	8	87.1	1453	1658	1236
7	3	8	94.6	1896	1154	1456
8	1	8	62.4	1646	-	-
9	2	8	67.6	1600	1439	-
10	3	8	96.2	1629	1909	1879
11	1	8	62.9	1793	-	-
12						
13						
14						
15						
16						
17						
18						
19						
20						



Test Signal Name: LP_Signal_06

Number of Bursts in Trial: 8

Number	OI BUISIS III TIIA	I. O	Г		1	Т
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	81.4	1413	1565	-
2	3	5	95.3	1774	1131	1995
3	1	5	60	1160	-	-
4	1	5	60.1	1922	-	-
5	1	5	59.6	1069	-	-
6	3	5	91.8	1259	1810	1477
7	2	5	78.4	1763	1487	-
8	1	5	62.6	1122	-	-
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						



Test Signal Name: LP_Signal_07 Number of Bursts in Trial: 19

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	18	62.4	1000	-	-
2	2	18	67.9	1925	1039	-
3	3	18	99	1890	1228	1326
4	1	18	60.3	1210	-	-
5	2	18	72.7	1688	1548	-
6	3	18	91.9	1988	1503	1201
7	2	18	78.3	1309	1198	-
8	3	18	88.9	1080	1399	1115
9	1	18	64.5	1087	-	-
10	1	18	60.3	1133	-	-
11	1	18	65.8	1579	-	-
12	3	18	93.5	1619	1682	1758
13	3	18	92.2	1533	1842	1979
14	3	18	96.2	1672	1744	1971
15	2	18	70.3	1414	1692	-
16	1	18	53.5	1706	-	-
17	3	18	93.4	1870	1242	1395
18	1	18	64.9	1438	-	-
19	2	18	72.9	1239	1817	-
20						



Test Signal Name: LP_Signal_08
Number of Bursts in Trial: 14

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	12	57.3	1698	-	-
2	2	12	83.3	1700	1427	-
3	1	12	62.5	1952	-	-
4	2	12	76.1	1612	1397	-
5	3	12	87.5	1139	1901	1400
6	3	12	97.1	1352	1798	1636
7	2	12	73.8	1496	1536	-
8	1	12	55.2	1357	-	-
9	1	12	62.5	1811	-	-
10	2	12	68.1	1251	1843	-
11	3	12	99.9	1819	1057	1017
12	1	12	61.3	1342	-	-
13	2	12	73.9	1725	1872	-
14	1	12	58	1747	-	-
15						
16						
17						
18						
19						
20						



Test Signal Name: LP_Signal_09 Number of Bursts in Trial: 13

Burst	Pulses per	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	Burst 3	12	95.8	1465	1975	1904
						1904
2	2	12	79.9	1764	1174	-
3	2	12	77.4	1235	1584	-
4	3	12	90.4	1114	1974	1027
5	1	12	59.9	1126	-	-
6	3	12	90.5	1275	1985	1845
7	1	12	62	1062	-	-
8	3	12	87	1463	1587	1887
9	3	12	98.3	1586	1187	1651
10	2	12	80.1	1277	1881	-
11	1	12	52.1	1330	-	-
12	1	12	51.7	1333	-	-
13	1	12	52.7	1867	-	-
14						
15						
16						
17						
18						
19						
20						



Test Signal Name: LP_Signal_10
Number of Bursts in Trial: 16

	Pulses per					
Burst	Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	15	70.7	1934	1731	-
2	3	15	85.3	1179	1751	1711
3	2	15	75	1034	1261	-
4	1	15	56.4	1954	-	-
5	2	15	66.7	1243	1090	-
6	3	15	94.8	1224	1970	1214
7	2	15	68.8	1701	1280	-
8	2	15	71	1563	1537	-
9	2	15	79.4	1525	1389	-
10	3	15	100	1717	1498	1740
11	3	15	91.9	1295	1037	1829
12	1	15	61.5	1949	-	-
13	1	15	63.2	1596	-	-
14	3	15	99	1254	1919	1073
15	3	15	86.6	1606	1849	1202
16	1	15	65.8	1635	-	-
17						
18						
19						
20						



Test Signal Name: LP_Signal_11

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	70.7	1897	1749	-
2	1	5	64.6	1965	-	-
3	3	5	99	1012	1045	1772
4	3	5	91.9	1583	1466	1549
5	3	5	85.5	1420	1780	1459
6	3	5	96.5	1530	1924	1835
7	1	5	66.2	1550	-	-
8	3	5	92.9	1929	1335	1883
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						



Test Signal Name: LP_Signal_12

	Dulasa nar	i. 5				
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	6	63.1	1642	-	-
2	3	6	83.5	1005	1981	1250
3	2	6	74.5	1914	1474	-
4	1	6	60.9	1430	-	-
5	2	6	70.4	1680	1542	-
6	3	6	85.1	1048	1127	1393
7	2	6	82.4	1605	1282	-
8	2	6	74	1108	1691	-
9	3	6	85.7	1486	1976	1212
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						



Test Signal Name: LP_Signal_13
Number of Bursts in Trial: 12

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	94.4	1385	1336	1376
2	1	11	53	1805	-	-
3	2	11	70	1248	1558	-
4	3	11	87.6	1403	1170	1315
5	1	11	61.7	1042	-	-
6	2	11	83.2	1100	1535	-
7	1	11	66.6	1038	-	-
8	1	11	55.1	1423	-	-
9	3	11	87	1789	1306	1643
10	1	11	66.4	1409	-	-
11	2	11	80	1319	1094	-
12	3	11	85.6	1891	1291	1529
13						
14						
15			-	·		
16						
17						
18			-	·		
19						
20						



Test Signal Name: LP_Signal_14 Number of Bursts in Trial: 19

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	18	78.9	1613	1263	-
2	3	18	96.7	1627	1432	1986
3	3	18	91.5	1472	1759	1784
4	2	18	75.4	1274	1795	-
5	2	18	71.1	1968	1444	-
6	2	18	77.5	1588	1441	-
7	1	18	65.4	1710	-	-
8	1	18	53.1	1419	-	-
9	1	18	59.9	1518	-	-
10	2	18	67.3	1195	1168	-
11	2	18	74.2	1386	1216	-
12	2	18	69	1557	1132	-
13	2	18	82.1	1987	1186	-
14	3	18	93.3	1365	1032	1728
15	2	18	83.3	1103	1568	-
16	2	18	70.3	1699	1281	-
17	1	18	57.9	1285	-	-
18	1	18	50.6	1850	-	-
19	3	18	94.3	1479	1218	1733
20						



Test Signal Name: LP_Signal_15 Number of Bursts in Trial: 20

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	20	67.5	1434	1117	-
2	2	20	67.8	1567	1773	-
3	2	20	75.9	1846	1362	-
4	2	20	68.9	1237	1818	-
5	3	20	96	1339	1796	1852
6	1	20	66.6	1289	-	-
7	2	20	78.3	1862	1856	-
8	1	20	58.9	1412	-	-
9	2	20	81.5	1113	1591	-
10	2	20	82.4	1059	1861	-
11	3	20	86.8	1797	1163	1320
12	3	20	98.5	1268	1300	1868
13	2	20	80.1	1086	1482	1
14	3	20	86.3	1860	1407	1998
15	1	20	57.2	1241	-	-
16	3	20	84.3	1808	1873	1628
17	3	20	86.8	1258	1302	1978
18	2	20	83	1690	1378	-
19	3	20	85.6	1327	1956	1311
20	3	20	99.4	1112	1815	1262



Test Signal Name: LP_Signal_16
Number of Bursts in Trial: 14

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	13	57.5	1379	-	-
2	2	13	67	1551	1620	-
3	2	13	70.9	1939	1083	-
4	2	13	75.7	1332	1476	-
5	2	13	77.1	1840	1010	-
6	2	13	78.8	1371	1618	-
7	1	13	51	1494	-	-
8	1	13	55.4	1794	ı	-
9	2	13	68.5	1590	1266	-
10	3	13	100	1484	1314	1428
11	3	13	96.4	1363	1361	1292
12	3	13	97.2	1694	1480	1446
13	3	13	86.4	1447	1227	1102
14	2	13	72.1	1184	1638	-
15						
16						
17						
18						
19						
20						



Test Signal Name: LP_Signal_17
Number of Bursts in Trial: 11

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	9	62.4	1329	-	-
2	2	9	67.8	1364	1937	-
3	1	9	53	1790	-	-
4	2	9	77.8	1546	1906	-
5	3	9	95.6	1145	1743	1499
6	1	9	58.8	1199	-	-
7	3	9	92.8	1424	1408	1381
8	2	9	68.5	1340	1972	-
9	3	9	84	1607	1663	1270
10	2	9	70.8	1468	1760	-
11	2	9	73.1	1869	1515	-
12						
13						
14						
15						
16						
17						
18						
19						
20						



Test Signal Name: LP_Signal_18
Number of Bursts in Trial: 13

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	11	68.8	1504	1973	-
2	3	11	94.2	1920	1299	1467
3	2	11	82.7	1003	1351	-
4	2	11	74.8	1597	1457	-
5	1	11	58.9	1874	-	-
6	3	11	96.5	1838	1708	1328
7	3	11	87.3	1405	1271	1687
8	2	11	72.4	1200	1433	-
9	1	11	51.3	1475	-	-
10	3	11	86.8	1159	1652	1942
11	1	11	50.4	1056	-	-
12	3	11	97	1884	1876	1415
13	1	11	50.1	1519	-	-
14						
15						
16						
17						
18						
19						
20						



Test Signal Name: LP_Signal_19
Number of Bursts in Trial: 10

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	8	91.9	1301	1337	1645
2	2	8	67.2	1983	1040	-
3	1	8	65.5	1671	-	-
4	2	8	72.8	1489	1016	-
5	3	8	90.5	1552	1180	1064
6	2	8	81.6	1807	1853	-
7	3	8	86	1312	1905	1278
8	3	8	89.6	1152	1068	1832
9	1	8	62.1	1119	-	-
10	1	8	58	1234	-	-
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						



Test Signal Name: LP_Signal_20

	Dulege por					
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	73.8	1071	1915	-
2	3	5	89.5	1294	1450	1025
3	2	5	81.2	1144	1146	-
4	1	5	59	1041	-	-
5	3	5	87.5	1096	1941	1018
6	2	5	76.7	1667	1947	-
7	1	5	56.5	1573	-	-
8	3	5	89	1033	1391	1304
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						



Test Signal Name: LP_Signal_21
Number of Bursts in Trial: 14

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	12	83.1	1762	1058	-
2	1	12	50	1739	-	-
3	1	12	52.6	1055	-	-
4	1	12	58.2	1704	-	-
5	3	12	84.6	1226	1177	1886
6	2	12	68.3	1269	1851	-
7	2	12	80.6	1814	1074	-
8	1	12	59.5	1009	-	-
9	1	12	53.4	1417	-	-
10	1	12	59.1	1431	-	-
11	2	12	74.8	1002	1394	-
12	3	12	85	1670	1755	1158
13	3	12	85.3	1307	1560	1078
14	1	12	61.9	1197	-	-
15						
16						
17						
18						
19						
20						



Test Signal Name: LP_Signal_22

Number	of	Bursts	in	Trial:	17
--------	----	---------------	----	--------	----

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	17	70.8	1022	1015	-
2	1	17	52.9	1483	-	-
3	3	17	86	1524	1308	1287
4	2	17	78.4	1821	1406	-
5	3	17	93.3	1991	1966	1290
6	2	17	70	1858	1471	-
7	2	17	78.1	1507	1705	-
8	1	17	52.4	1060	-	-
9	3	17	84.8	1859	1839	1993
10	3	17	83.5	1150	1492	1443
11	1	17	56.7	1208	-	-
12	3	17	86.2	1674	1125	1053
13	1	17	58.8	1436	-	-
14	3	17	85.4	1686	1509	1577
15	2	17	77.7	1297	1298	-
16	3	17	87.4	1649	1894	1075
17	3	17	99.8	1185	1167	1616
18						
19						
20						



Test Signal Name: LP_Signal_23
Number of Bursts in Trial: 12

TTGITTBOT	Number of Bursts in That. 12								
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)			
1	3	10	95.7	1353	1813	1028			
2	3	10	94.9	1735	1994	1084			
3	3	10	97.9	1354	1792	1418			
4	2	10	67.4	1348	1008	-			
5	3	10	96.9	1916	1425	1283			
6	3	10	97.6	1384	1050	1569			
7	3	10	83.6	1231	1219	1194			
8	2	10	82.6	1128	1346	-			
9	3	10	97.2	1142	1769	1173			
10	3	10	92.3	1181	1164	1458			
11	2	10	80.9	1222	1756	-			
12	2	10	78.1	1190	1999	-			
13									
14									
15									
16									
17									
18									
19									
20									



Test Signal Name: LP_Signal_24

Number	of Bursts in Tria	I. O	T T		T	T
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	5	76.9	1564	1767	-
2	1	5	64.7	1437	-	-
3	2	5	77.1	1046	1944	-
4	2	5	72.7	1440	1374	-
5	1	5	61.9	1035	-	-
6	2	5	68.6	1205	1892	-
7	2	5	78.3	1047	1273	-
8	2	5	73.1	1426	1863	-
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						



Test Signal Name: LP_Signal_25
Number of Bursts in Trial: 16

11001	- ·	I. 10	<u> </u>		I	
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	15	59.1	1718	-	-
2	3	15	83.5	1070	1129	1318
3	3	15	86.5	1176	1253	1442
4	1	15	60.8	1209	-	-
5	2	15	80.7	2000	1360	-
6	1	15	65.2	1101	-	-
7	2	15	69.1	1511	1030	-
8	1	15	51.5	1161	-	-
9	3	15	98.5	1061	1951	1812
10	1	15	59.5	1325	-	-
11	3	15	95.3	1284	1650	1169
12	2	15	81.8	1460	1077	-
13	1	15	66	1149	-	-
14	1	15	59.3	1373	-	-
15	2	15	79.2	1836	1534	-
16	3	15	90.2	1455	1738	1490
17						
18						
19						
20						



Test Signal Name: LP_Signal_26
Number of Bursts in Trial: 13

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	11	87.5	1343	1331	1313
2	3	11	94.6	1448	1543	1803
3	2	11	73.9	1722	1514	-
4	1	11	55.4	1506	-	-
5	1	11	52.3	1960	-	-
6	3	11	95.8	1240	1380	1252
7	3	11	96.1	1372	1411	1908
8	2	11	77.8	1885	1593	-
9	3	11	97.2	1021	1614	1633
10	2	11	74.3	1582	1097	-
11	1	11	57.9	1031	-	-
12	2	11	68.8	1927	1936	-
13	2	11	79.6	1857	1470	-
14						
15						
16						
17						
18						
19						
20						



Test Signal Name: LP_Signal_27

Itambei	UI BUISIS III TIIA	i. 5				
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	1	7	63.4	1595	-	-
2	3	7	97	1451	1660	1562
3	2	7	66.7	1116	1544	-
4	3	7	99.5	1553	1526	1768
5	1	7	64.3	1107	-	-
6	3	7	90.7	1992	1626	1899
7	1	7	62.1	1630	-	-
8	1	7	58.3	1676	-	-
9	3	7	87	1726	1696	1464
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						



Test Signal Name: LP_Signal_28

INGITIDE	OI BUISIS III TIIA	i. J	1		T	
Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	3	6	86.8	1673	1383	1653
2	2	6	81.7	1841	1911	-
3	2	6	78.4	1900	1229	-
4	2	6	82.1	1527	1072	-
5	3	6	84.1	1893	1742	1491
6	3	6	87.7	1247	1341	1955
7	3	6	97	1559	1685	1572
8	3	6	99.1	1641	1727	1848
9	1	6	62	1245	-	-
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						



Test Signal Name: LP_Signal_29

Burst	Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
1	2	6	67.5	1193	1182	-
2	3	6	85.6	1221	1741	1338
3	3	6	86.9	1580	1775	1809
4	3	6	85.3	1082	1854	1095
5	2	6	67.3	1898	1977	-
6	3	6	94.8	1791	1350	1230
7	2	6	72.9	1681	1323	-
8	2	6	70.7	1709	1123	ı
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						



Test Signal Name: LP_Signal_30 Number of Bursts in Trial: 10

Pulses per Burst	Chirp (MHz)	Pulse Width(us)	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)		
1	8	63.3	1044	-	-		
3	8	87.4	1945	1602	1203		
1	8	58.7	1556	-	-		
1	8	63.6	1598	-	-		
1	8	56.3	1110	-	-		
1	8	57.2	1878	-	-		
1	8	50.3	1659	-	-		
2	8	71.9	1143	1724	-		
3	8	85.1	1404	1715	1449		
1	8	62.5	1276	-	-		
	_			_			
	Burst 1 3 1 1 1 1 2 3	Burst Chilip (Miriz) 1 8 3 8 1 8 1 8 1 8 1 8 1 8 1 8 1 8 2 8 3 8	Burst	Burst Chilip (MHZ) Pulse Width(us) PRI-1 (us) 1 8 63.3 1044 3 8 87.4 1945 1 8 58.7 1556 1 8 63.6 1598 1 8 56.3 1110 1 8 57.2 1878 1 8 50.3 1659 2 8 71.9 1143 3 8 85.1 1404	Burst Chilip (MHZ) Pulse Width(ds) PRI-1 (ds) PRI-2 (ds) 1 8 63.3 1044 - 3 8 87.4 1945 1602 1 8 58.7 1556 - 1 8 63.6 1598 - 1 8 56.3 1110 - 1 8 57.2 1878 - 1 8 50.3 1659 - 2 8 71.9 1143 1724 3 8 85.1 1404 1715		



A.2 The Frequency Hopping Radar pattern

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_01							
Frequency (MHz)	0	1	2	3	4		
0	5684	5647	5388	5528	5616		
5	5491	5605	5502	5588	5683		
10	5313	5430	5420	5521	5622		
15	5292	5485	5489	5387	5265		
20	5419	5271	5508	5386	5410		
25	5494	5600	5471	5711	5584		
30	5719	5342	5361	5308	5639		
35	5397	5580	5664	5667	5349		
40	5290	5541	5665	5322	5585		
45	5501	5330	5264	5350	5718		
50	5447	5378	5340	5445	5285		
55	5389	5252	5368	5469	5713		
60	5384	5516	5254	5689	5318		
65	5416	5459	5607	5475	5514		
70	5630	5542	5263	5379	5455		
75	5411	5550	5617	5554	5708		
80	5688	5619	5604	5258	5695		
85	5559	5301	5690	5596	5537		
90	5701	5448	5611	5658	5338		
95	5525	5327	5413	5555	5546		

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_02								
Frequency (MHz)	0	1	2	3	4			
0	5464	5411	5324	5689	5458			
5	5630	5530	5577	5276	5415			
10	5719	5316	5461	5619	5643			
15	5380	5612	5592	5432	5554			
20	5427	5340	5449	5475	5383			
25	5382	5549	5674	5437	5618			
30	5286	5706	5318	5523	5595			
35	5264	5293	5460	5442	5263			
40	5604	5624	5603	5562	5582			
45	5430	5310	5347	5311	5296			
50	5712	5254	5516	5496	5374			
55	5687	5574	5556	5423	5331			
60	5581	5487	5379	5723	5285			
65	5650	5298	5463	5666	5337			
70	5541	5548	5538	5668	5260			
75	5526	5677	5586	5376	5669			
80	5299	5277	5289	5255	5462			
85	5384	5361	5407	5588	5474			
90	5681	5395	5482	5396	5670			
95	5355	5580	5700	5295	5658			

Report No.: RF170323D03A-2 Page No. 96 / 110 Report Format Version: 6.1.2

Report No.: RF170323D03A-2 Reference No.: 170323D07



Hopping Frequency Sequence Name: HOP_FREQ_SEQ_03							
Frequency (MHz)	0	1	2	3	4		
0	5719	5650	5260	5278	5678		
5	5672	5552	5652	5439	5622		
10	5580	5502	5339	5664	5371		
15	5264	5695	5477	5271	5338		
20	5506	5487	5467	5356	5648		
25	5401	5402	5541	5425	5692		
30	5275	5263	5565	5415	5306		
35	5384	5256	5595	5540	5707		
40	5327	5579	5359	5668	5430		
45	5369	5252	5599	5605	5547		
50	5560	5510	5518	5269	5280		
55	5521	5400	5458	5512	5544		
60	5305	5555	5586	5596	5499		
65	5412	5689	5607	5344	5620		
70	5524	5293	5636	5697	5422		
75	5551	5337	5405	5441	5352		
80	5610	5365	5701	5324	5429		
85	5542	5722	5272	5498	5419		
90	5304	5372	5635	5723	5598		
95	5274	5286	5564	5281	5589		

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_04							
Frequency (MHz)	0	1	2	3	4		
0	5499	5414	5671	5439	5520		
5	5714	5477	5252	5505	5451		
10	5484	5369	5543	5534	5685		
15	5459	5391	5323	5425	5463		
20	5346	5575	5428	5556	5329		
25	5536	5350	5605	5645	5686		
30	5467	5581	5707	5381	5717		
35	5710	5445	5475	5624	5273		
40	5663	5379	5412	5479	5470		
45	5673	5666	5648	5513	5427		
50	5305	5389	5481	5393	5598		
55	5649	5711	5365	5457	5709		
60	5694	5332	5641	5250	5387		
65	5509	5542	5700	5361	5424		
70	5622	5314	5510	5296	5336		
75	5478	5595	5342	5565	5631		
80	5328	5447	5661	5508	5415		
85	5724	5330	5640	5287	5297		
90	5593	5495	5567	5504	5453		
95	5635	5316	5486	5690	5376		



Hopping Frequency Sequence Name: HOP_FREQ_SEQ_05							
Frequency (MHz)	0	1	2	3	4		
0	5657	5653	5607	5600	5265		
5	5378	5499	5327	5668	5658		
10	5415	5633	5681	5254	5706		
15	5547	5421	5329	5470	5655		
20	5354	5266	5369	5645	5302		
25	5677	5333	5274	5720	5509		
30	5664	5596	5491	5433	5584		
35	5566	5420	5426	5577	5693		
40	5495	5320	5710	5670	5595		
45	5628	5388	5358	5276	5260		
50	5569	5649	5263	5534	5309		
55	5663	5513	5303	5295	5399		
60	5316	5335	5488	5523	5310		
65	5256	5294	5425	5386	5496		
70	5299	5660	5454	5554	5462		
75	5708	5612	5580	5460	5442		
80	5672	5478	5624	5525	5268		
85	5482	5347	5411	5262	5646		
90	5290	5701	5510	5390	5503		
95	5270	5313	5610	5492	5485		

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_06							
Frequency (MHz)	0	1	2	3	4		
0	5437	5417	5543	5286	5582		
5	5420	5424	5402	5356	5390		
10	5346	5422	5722	5449	5252		
15	5635	5548	5432	5515	5372		
20	5265	5335	5407	5637	5275		
25	5690	5529	5439	5475	5279		
30	5551	5456	5621	5336	5643		
35	5253	5626	5657	5691	5676		
40	5491	5532	5578	5258	5667		
45	5427	5608	5301	5446	5411		
50	5541	5611	5270	5700	5352		
55	5357	5631	5358	5617	5616		
60	5710	5274	5327	5564	5712		
65	5623	5636	5531	5724	5259		
70	5466	5661	5606	5555	5579		
75	5399	5509	5333	5513	5268		
80	5485	5570	5698	5361	5638		
85	5342	5646	5324	5310	5506		
90	5605	5598	5419	5585	5391		
95	5516	5302	5534	5520	5325		



Hopping Frequency Sequence Name: HOP_FREQ_SEQ_07							
Frequency (MHz)	0	1	2	3	4		
0	5692	5656	5479	5447	5327		
5	5462	5446	5477	5519	5694		
10	5655	5308	5288	5547	5273		
15	5723	5675	5535	5560	5564		
20	5501	5348	5251	5578	5478		
25	5642	5579	5313	5690	5345		
30	5551	5417	5451	5290	5370		
35	5487	5354	5502	5468	5283		
40	5671	5618	5664	5356	5588		
45	5384	5504	5464	5428	5276		
50	5441	5575	5449	5571	5331		
55	5529	5720	5456	5254	5657		
60	5455	5559	5683	5652	5298		
65	5409	5627	5565	5402	5358		
70	5309	5472	5615	5605	5422		
75	5609	5680	5525	5701	5537		
80	5646	5263	5698	5473	5552		
85	5667	5556	5619	5361	5562		
90	5546	5380	5281	5287	5471		
95	5503	5649	5548	5607	5467		

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_08							
Frequency (MHz)	0	1	2	3	4		
0	5472	5420	5415	5608	5644		
5	5504	5371	5552	5585	5426		
10	5586	5572	5329	5267	5294		
15	5714	5327	5638	5508	5281		
20	5667	5289	5718	5696	5369		
25	5330	5370	5683	5347	5257		
30	5709	5535	5669	5569	5271		
35	5429	5461	5380	5507	5416		
40	5307	5366	5609	5383	5661		
45	5285	5568	5467	5465	5517		
50	5693	5266	5622	5627	5381		
55	5422	5637	5525	5521	5348		
60	5594	5419	5602	5287	5385		
65	5423	5273	5632	5688	5251		
70	5687	5699	5551	5502	5431		
75	5584	5250	5468	5652	5260		
80	5592	5615	5549	5580	5333		
85	5438	5506	5440	5603	5721		
90	5625	5395	5444	5655	5651		
95	5435	5362	5660	5353	5326		



Hopping Frequency Sequence Name: HOP_FREQ_SEQ_09							
Frequency (MHz)	0	1	2	3	4		
0	5252	5659	5351	5294	5389		
5	5643	5393	5627	5273	5633		
10	5517	5361	5370	5462	5315		
15	5327	5454	5266	5553	5473		
20	5667	5261	5332	5669	5257		
25	5279	5573	5312	5381	5299		
30	5695	5492	5409	5343	5469		
35	5568	5552	5651	5282	5330		
40	5621	5449	5547	5623	5280		
45	5592	5451	5550	5523	5580		
50	5617	5323	5378	5716	5679		
55	5366	5350	5479	5614	5545		
60	5565	5714	5584	5594	5308		
65	5466	5571	5581	5340	5618		
70	5490	5537	5505	5434	5390		
75	5611	5541	5328	5516	5281		
80	5612	5452	5519	5510	5306		
85	5557	5688	5326	5411	5631		
90	5704	5289	5668	5346	5558		
95	5429	5521	5657	5436	5339		

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_10							
Frequency (MHz)	0	1	2	3	4		
0	5410	5423	5287	5358	5706		
5	5685	5318	5702	5436	5462		
10	5351	5625	5411	5657	5336		
15	5415	5484	5272	5598	5675		
20	5427	5268	5324	5642	5523		
25	5606	5301	5513	5438	5584		
30	5449	5624	5495	5289	5610		
35	5643	5447	5435	5341	5460		
40	5532	5485	5388	5277	5521		
45	5431	5633	5581	5526	5370		
50	5493	5499	5429	5330	5502		
55	5688	5538	5433	5329	5364		
60	5536	5368	5274	5589	5609		
65	5412	5297	5530	5663	5550		
70	5413	5293	5465	5620	5605		
75	5283	5712	5349	5425	5490		
80	5614	5445	5512	5269	5452		
85	5361	5356	5271	5511	5461		
90	5621	5576	5637	5366	5586		
95	5545	5553	5689	5719	5648		



Hopping Frequency Sequence Name: HOP_FREQ_SEQ_11							
Frequency (MHz)	0	1	2	3	4		
0	5665	5662	5698	5519	5451		
5	5252	5340	5302	5599	5669		
10	5282	5414	5452	5377	5357		
15	5503	5611	5375	5643	5479		
20	5683	5496	5684	5413	5615		
25	5411	5458	5407	5617	5449		
30	5480	5473	5406	5364	5269		
35	5584	5274	5259	5588	5255		
40	5299	5712	5423	5531	5353		
45	5716	5542	5579	5257	5369		
50	5675	5419	5325	5632	5251		
55	5387	5658	5507	5400	5439		
60	5534	5355	5435	5358	5498		
65	5602	5382	5305	5474	5634		
70	5606	5608	5607	5688	5308		
75	5394	5513	5595	5570	5553		
80	5609	5575	5509	5464	5678		
85	5416	5614	5562	5709	5344		
90	5266	5468	5410	5702	5600		
95	5668	5635	5442	5372	5385		

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_12							
Frequency (MHz)	0	1	2	3	4		
0	5445	5523	5634	5680	5293		
5	5294	5265	5377	5665	5401		
10	5591	5300	5493	5475	5378		
15	5494	5263	5478	5671	5594		
20	5662	5722	5405	5588	5677		
25	5407	5610	5721	5483	5522		
30	5459	5363	5482	5421	5307		
35	5413	5447	5611	5644	5710		
40	5320	5361	5296	5271	5282		
45	5391	5324	5600	5632	5623		
50	5376	5531	5605	5479	5439		
55	5341	5709	5477	5381	5529		
60	5604	5358	5304	5321	5428		
65	5638	5689	5575	5277	5706		
70	5592	5708	5456	5567	5267		
75	5266	5633	5371	5576	5347		
80	5561	5334	5676	5506	5659		
85	5258	5617	5379	5514	5579		
90	5516	5542	5431	5337	5253		
95	5519	5655	5395	5349	5647		



Hopping Frequency Sequence Name: HOP_FREQ_SEQ_13							
Frequency (MHz)	0	1	2	3	4		
0	5700	5287	5570	5366	5513		
5	5433	5452	5353	5705	5522		
10	5564	5631	5670	5399	5582		
15	5390	5581	5636	5388	5602		
20	5256	5663	5494	5561	5565		
25	5259	5338	5350	5517	5661		
30	5348	5320	5697	5552	5538		
35	5407	5516	5655	5549	5403		
40	5677	5536	5268	5686	5371		
45	5658	5685	5409	5499	5455		
50	5694	5349	5423	5530	5295		
55	5424	5674	5352	5294	5659		
60	5347	5377	5370	5555	5400		
65	5675	5711	5683	5543	5701		
70	5710	5278	5514	5557	5502		
75	5671	5590	5365	5323	5503		
80	5379	5258	5459	5439	5706		
85	5447	5567	5633	5362	5596		
90	5277	5610	5531	5358	5722		
95	5529	5460	5465	5334	5319		

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_14								
Frequency (MHz)	0	1	2	3	4			
0	5383	5526	5506	5527	5355			
5	5475	5687	5516	5437	5453			
10	5353	5672	5390	5420	5670			
15	5517	5684	5681	5580	5610			
20	5422	5604	5486	5534	5356			
25	5683	5541	5551	5703	5334			
30	5277	5347	5325	5594	5629			
35	5678	5669	5569	5388	5583			
40	5615	5301	5362	5518	5351			
45	5490	5619	5263	5674	5375			
50	5631	5633	5308	5647	5270			
55	5718	5724	5614	5493	5323			
60	5312	5459	5466	5423	5485			
65	5293	5345	5326	5613	5256			
70	5262	5358	5472	5661	5714			
75	5532	5519	5660	5582	5398			
80	5657	5538	5279	5371	5529			
85	5386	5500	5574	5636	5402			
90	5412	5521	5406	5560	5286			
95	5283	5395	5640	5290	5363			

Report No.: RF170323D03A-2 Page No. 102 / 110 Report Format Version: 6.1.2

Report No.: RF170323D03A-2 Reference No.: 170323D07



Hopping Frequency Sequence Name: HOP_FREQ_SEQ_15							
Frequency (MHz)	0	1	2	3	4		
0	5638	5290	5442	5688	5575		
5	5517	5709	5602	5679	5644		
10	5287	5617	5713	5585	5441		
15	5283	5547	5690	5629	5297		
20	5521	5491	5545	5507	5719		
25	5535	5269	5655	5270	5698		
30	5652	5596	5620	5258	5720		
35	5571	5444	5483	5702	5666		
40	5553	5359	5447	5331	5573		
45	5677	5316	5561	5251	5332		
50	5684	5397	5470	5689	5431		
55	5581	5329	5312	5294	5624		
60	5411	5255	5408	5714	5546		
65	5275	5649	5466	5532	5636		
70	5641	5647	5339	5381	5495		
75	5619	5551	5421	5703	5616		
80	5531	5319	5627	5693	5449		
85	5497	5391	5539	5715	5462		
90	5518	5280	5572	5654	5380		
95	5451	5289	5342	5277	5274		

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_16								
Frequency (MHz)	0	1	2	3	4			
0	5418	5529	5378	5374	5417			
5	5559	5634	5677	5270	5473			
10	5693	5406	5279	5305	5462			
15	5274	5674	5318	5489	5657			
20	5583	5567	5480	5607	5387			
25	5375	5284	5619	5409	5587			
30	5666	5295	5273	5343	5397			
35	5336	5367	5597	5638	5491			
40	5684	5356	5689	5656	5260			
45	5272	5351	5505	5508	5293			
50	5536	5535	5422	5509	5643			
55	5314	5562	5709	5282	5369			
60	5699	5588	5298	5424	5342			
65	5713	5633	5705	5471	5578			
70	5520	5541	5371	5308	5332			
75	5408	5285	5512	5586	5539			
80	5557	5425	5710	5720	5526			
85	5427	5616	5392	5286	5400			
90	5428	5513	5675	5676	5653			
95	5495	5304	5724	5315	5698			



Hopping Frequency Sequence Name: HOP_FREQ_SEQ_17							
Frequency (MHz)	0	1	2	3	4		
0	5673	5293	5314	5535	5637		
5	5698	5656	5277	5433	5680		
10	5624	5292	5320	5403	5483		
15	5362	5326	5421	5719	5681		
20	5537	5251	5524	5453	5398		
25	5336	5578	5388	5556	5451		
30	5573	5623	5510	5522	5638		
35	5439	5427	5275	5408	5477		
40	5357	5429	5449	5353	5683		
45	5669	5264	5696	5325	5713		
50	5381	5684	5311	5672	5494		
55	5480	5332	5489	5612	5328		
60	5614	5602	5479	5301	5394		
65	5632	5703	5570	5648	5508		
70	5694	5620	5310	5716	5442		
75	5457	5350	5392	5661	5417		
80	5560	5664	5306	5496	5485		
85	5330	5588	5577	5675	5313		
90	5419	5395	5523	5455	5412		
95	5411	5303	5399	5273	5707		

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_18							
Frequency (MHz)	0	1	2	3	4		
0	5453	5532	5250	5599	5479		
5	5265	5581	5352	5596	5412		
10	5458	5556	5361	5598	5504		
15	5450	5524	5289	5495	5448		
20	5417	5465	5648	5426	5286		
25	5663	5306	5492	5590	5493		
30	5462	5580	5296	5578	5615		
35	5531	5525	5322	5316	5537		
40	5367	5592	5350	5612	5649		
45	5347	5279	5378	5503	5257		
50	5385	5362	5317	5327	5520		
55	5443	5622	5585	5256	5644		
60	5343	5701	5393	5597	5660		
65	5340	5586	5423	5702	5445		
70	5326	5496	5560	5559	5337		
75	5552	5613	5260	5391	5501		
80	5345	5338	5522	5553	5374		
85	5404	5301	5407	5540	5510		
90	5309	5705	5406	5368	5444		
95	5294	5313	5275	5519	5654		



Hopping Frequency Sequence Name: HOP_FREQ_SEQ_19							
Frequency (MHz)	0	1	2	3	4		
0	5611	5296	5661	5285	5699		
5	5307	5603	5427	5284	5619		
10	5389	5345	5402	5318	5525		
15	5538	5580	5627	5712	5687		
20	5456	5583	5503	5262	5399		
25	5552	5612	5509	5693	5624		
30	5535	5351	5537	5368	5448		
35	5656	5717	5706	5327	5678		
40	5711	5630	5620	5305	5357		
45	5444	5629	5430	5337	5431		
50	5390	5608	5561	5413	5375		
55	5615	5271	5708	5397	5517		
60	5441	5556	5385	5334	5288		
65	5595	5594	5546	5599	5550		
70	5381	5701	5551	5688	5545		
75	5302	5455	5426	5606	5540		
80	5492	5565	5323	5388	5696		
85	5655	5411	5617	5421	5582		
90	5416	5539	5410	5516	5557		
95	5477	5682	5587	5417	5366		

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_20								
Frequency (MHz)	0	1	2	3	4			
0	5391	5535	5597	5446	5444			
5	5349	5625	5502	5447	5448			
10	5698	5609	5540	5513	5546			
15	5529	5610	5633	5282	5404			
20	5464	5652	5254	5372	5440			
25	5712	5322	5658	5674	5337			
30	5494	5583	5697	5476	5381			
35	5598	5356	5722	5469	5703			
40	5621	5441	5373	5395	5484			
45	5655	5387	5262	5438	5593			
50	5324	5351	5707	5638	5430			
55	5514	5596	5708	5462	5682			
60	5320	5495	5635	5382	5651			
65	5504	5720	5548	5479	5278			
70	5414	5677	5449	5274	5521			
75	5269	5675	5482	5369	5483			
80	5385	5723	5594	5471	5334			
85	5386	5536	5614	5704	5416			
90	5318	5443	5574	5620	5461			
95	5580	5566	5612	5615	5393			

Report No.: RF170323D03A-2 Page No. 105 / 110 Report Format Version: 6.1.2 Reference No.: 170323D07



Hopping Frequency Sequence Name: HOP_FREQ_SEQ_21							
Frequency (MHz)	0	1	2	3	4		
0	5646	5299	5533	5607	5286		
5	5488	5550	5577	5513	5655		
10	5629	5398	5581	5708	5567		
15	5617	5262	5261	5327	5596		
20	5375	5343	5385	5345	5706		
25	5316	5426	5692	5716	5701		
30	5451	5323	5374	5674	5423		
35	5413	5394	5606	5636	5405		
40	5408	5559	5362	5438	5680		
45	5589	5356	5537	5542	5263		
50	5515	5650	5639	5512	5305		
55	5422	5457	5401	5643	5275		
60	5294	5508	5584	5618	5444		
65	5574	5592	5543	5685	5317		
70	5282	5551	5328	5254	5373		
75	5549	5569	5320	5502	5521		
80	5310	5546	5285	5626	5436		
85	5434	5526	5490	5620	5519		
90	5255	5325	5637	5688	5675		
95	5478	5448	5338	5556	5605		

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_22							
Frequency (MHz)	0	1	2	3	4		
0	5426	5538	5469	5293	5506		
5	5530	5572	5652	5676	5387		
10	5560	5662	5622	5331	5588		
15	5705	5389	5364	5372	5313		
20	5383	5412	5423	5335	5318		
25	5594	5265	5546	5251	5283		
30	5590	5408	5623	5494	5562		
35	5504	5287	5284	5550	5719		
40	5491	5497	5505	5435	5609		
45	5472	5679	5414	5493	5332		
50	5614	5566	5264	5462	5384		
55	5700	5259	5612	5276	5675		
60	5451	5695	5601	5431	5344		
65	5393	5610	5424	5338	5488		
70	5486	5268	5651	5555	5518		
75	5689	5463	5483	5298	5323		
80	5519	5697	5282	5428	5626		
85	5278	5621	5694	5541	5632		
90	5559	5525	5289	5585	5271		
95	5255	5526	5376	5427	5721		



Hopping Frequency Sequence Name: HOP_FREQ_SEQ_23							
Frequency (MHz)	0	1	2	3	4		
0	5584	5302	5405	5454	5348		
5	5572	5497	5252	5364	5691		
10	5394	5548	5663	5526	5609		
15	5318	5516	5467	5320	5505		
20	5391	5578	5424	5291	5482		
25	5592	5274	5256	5285	5422		
30	5576	5365	5656	5300	5692		
35	5701	5558	5437	5561	5574		
40	5435	5270	5432	5538	5452		
45	5287	5472	5546	5694	5393		
50	5315	5617	5353	5328	5413		
55	5688	5705	5473	5721	5329		
60	5616	5640	5433	5257	5573		
65	5642	5342	5646	5634	5254		
70	5654	5404	5390	5334	5606		
75	5464	5550	5386	5672	5279		
80	5623	5529	5457	5338	5562		
85	5495	5641	5355	5724	5531		
90	5380	5722	5310	5510	5371		
95	5406	5349	5356	5649	5554		

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_24							
Frequency (MHz)	0	1	2	3	4		
0	5364	5541	5341	5615	5568		
5	5614	5519	5327	5527	5423		
10	5325	5337	5704	5721	5630		
15	5309	5643	5570	5365	5697		
20	5302	5647	5305	5416	5264		
25	5273	5477	5360	5319	5464		
30	5465	5322	5396	5549	5512		
35	5268	5308	5354	5687	5475		
40	5397	5657	5373	5510	5526		
45	5370	5432	5433	5599	5484		
50	5269	5491	5668	5442	5583		
55	5650	5601	5642	5420	5292		
60	5692	5458	5306	5585	5362		
65	5558	5368	5291	5466	5500		
70	5569	5252	5715	5279	5253		
75	5560	5250	5359	5357	5652		
80	5542	5705	5543	5556	5453		
85	5276	5440	5534	5517	5546		
90	5414	5537	5260	5392	5591		
95	5288	5452	5554	5408	5660		



Hopping Frequency Sequence Name: HOP_FREQ_SEQ_25						
Frequency (MHz)	0	1	2	3	4	
0	5619	5305	5277	5679	5410	
5	5278	5444	5402	5593	5630	
10	5256	5601	5270	5441	5651	
15	5397	5673	5576	5511	5310	
20	5338	5343	5505	5712	5636	
25	5393	5680	5464	5353	5506	
30	5451	5279	5611	5701	5710	
35	5407	5399	5722	5365	5389	
40	5333	5362	5311	5275	5523	
45	5299	5412	5453	5491	5652	
50	5371	5620	5667	5719	5628	
55	5309	5594	5314	5596	5610	
60	5586	5663	5587	5471	5627	
65	5669	5481	5465	5666	5715	
70	5621	5676	5295	5372	5324	
75	5323	5282	5577	5536	5684	
80	5328	5477	5320	5482	5556	
85	5337	5617	5420	5273	5635	
90	5432	5376	5480	5625	5395	
95	5500	5662	5373	5579	5640	

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_26						
Frequency (MHz)	0	1	2	3	4	
0	5399	5544	5688	5365	5630	
5	5320	5466	5477	5281	5459	
10	5565	5390	5311	5636	5672	
15	5485	5325	5679	5455	5703	
20	5318	5407	5284	5497	5685	
25	5427	5720	5408	5568	5387	
30	5645	5340	5711	5351	5475	
35	5530	5546	5490	5518	5400	
40	5647	5445	5724	5418	5520	
45	5606	5392	5536	5549	5705	
50	5496	5368	5295	5717	5607	
55	5441	5405	5550	5634	5716	
60	5572	5501	5307	5411	5286	
65	5657	5508	5662	5553	5493	
70	5309	5382	5329	5512	5643	
75	5675	5597	5366	5504	5259	
80	5666	5593	5306	5483	5648	
85	5355	5335	5315	5540	5342	
90	5360	5551	5435	5668	5269	
95	5646	5706	5394	5610	5395	



Hopping Frequency Sequence Name: HOP_FREQ_SEQ_27						
Frequency (MHz)	0	1	2	3	4	
0	5557	5405	5624	5526	5472	
5	5362	5391	5552	5444	5666	
10	5496	5654	5352	5259	5693	
15	5573	5452	5307	5403	5420	
20	5704	5700	5586	5658	5315	
25	5669	5514	5294	5421	5687	
30	5668	5469	5627	5350	5685	
35	5581	5314	5293	5486	5528	
40	5662	5517	5535	5372	5619	
45	5510	5283	5523	5275	5544	
50	5346	5331	5430	5385	5593	
55	5407	5515	5602	5508	5273	
60	5326	5333	5608	5454	5710	
65	5596	5718	5457	5356	5565	
70	5295	5653	5488	5505	5644	
75	5717	5509	5485	5511	5679	
80	5374	5470	5643	5645	5550	
85	5713	5632	5503	5437	5703	
90	5683	5434	5652	5276	5622	
95	5412	5530	5640	5438	5603	

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_28						
Frequency (MHz)	0	1	2	3	4	
0	5337	5644	5560	5687	5692	
5	5501	5413	5627	5607	5398	
10	5427	5540	5490	5454	5714	
15	5564	5579	5410	5448	5612	
20	5712	5264	5641	5578	5631	
25	5581	5521	5717	5455	5254	
30	5690	5625	5684	5401	5548	
35	5252	5672	5585	5446	5703	
40	5325	5611	5503	5423	5514	
45	5367	5255	5702	5568	5313	
50	5626	5720	5397	5420	5253	
55	5707	5306	5361	5705	5421	
60	5479	5402	5491	5462	5262	
65	5531	5400	5416	5659	5632	
70	5550	5349	5634	5637	5378	
75	5485	5502	5464	5516	5362	
80	5555	5466	5288	5314	5630	
85	5706	5642	5270	5713	5571	
90	5563	5629	5556	5359	5686	
95	5599	5658	5677	5633	5256	



Hopping Frequency Sequence Name: HOP_FREQ_SEQ_29						
Frequency (MHz)	0	1	2	3	4	
0	5592	5408	5496	5373	5534	
5	5543	5338	5702	5673	5261	
10	5329	5531	5649	5260	5652	
15	5706	5513	5493	5720	5333	
20	5679	5667	5604	5469	5470	
25	5445	5502	5489	5393	5579	
30	5582	5424	5553	5368	5391	
35	5385	5478	5599	5714	5639	
40	5316	5441	5566	5608	5296	
45	5710	5310	5626	5292	5675	
50	5421	5448	5509	5454	5651	
55	5494	5315	5420	5715	5450	
60	5656	5504	5569	5357	5346	
65	5617	5571	5285	5619	5437	
70	5331	5364	5488	5351	5343	
75	5423	5485	5698	5447	5443	
80	5411	5701	5294	5562	5616	
85	5413	5526	5724	5536	5510	
90	5607	5409	5289	5664	5614	
95	5418	5268	5446	5640	5464	

Hopping Frequency Sequence Name: HOP_FREQ_SEQ_30						
Frequency (MHz)	0	1	2	3	4	
0	5372	5647	5432	5534	5279	
5	5585	5360	5302	5361	5434	
10	5667	5593	5572	5369	5281	
15	5265	5261	5519	5441	5521	
20	5631	5499	5620	5659	5577	
25	5357	5322	5648	5606	5523	
30	5435	5468	5539	5639	5327	
35	5566	5530	5476	5274	5374	
40	5628	5575	5399	5379	5331	
45	5605	5700	5690	5393	5587	
50	5345	5465	5378	5597	5695	
55	5277	5498	5682	5269	5513	
60	5437	5421	5660	5346	5449	
65	5401	5280	5389	5440	5557	
70	5607	5592	5414	5715	5403	
75	5350	5491	5675	5319	5382	
80	5505	5366	5428	5390	5636	
85	5282	5255	5586	5404	5561	
90	5380	5704	5454	5292	5300	
95	5377	5560	5689	5595	5511	

--- END ---