Test Report No.50078182 001

Appendix D: Radiated and Mains Spurious Emission Data


(File: 50078182AppendixD)

Contents


Spurious Emissions, Band Edges, 2.35-2.5G	2
Spurious Emissions, TX Mode, 1-18G	6
Spurious Emissions, TX Mode, 18-26G	12
Spurious Emissions, TX Mode, 30M-1G	18
Spurious Emissions, TX Mode, 9K-30M	20
Spurious Emissions, RX Mode, 1-18G	22
Spurious Emissions, RX Mode, 18-26G	24
Spurious Emissions, RX Mode, 30M-1G	26
Spurious Emissions, RX Mode, 9K-30M	28

Radiated Bandedge (GFSK)

Low Channel (Hor)

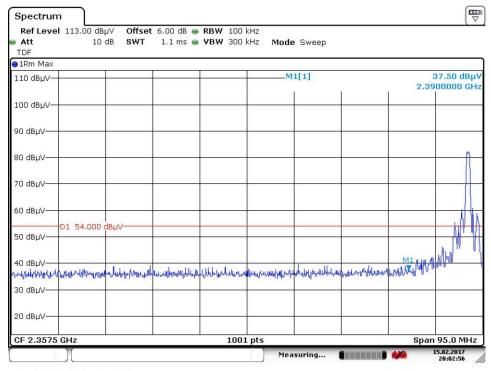


Date: 15.FEB.2017 20:02:56

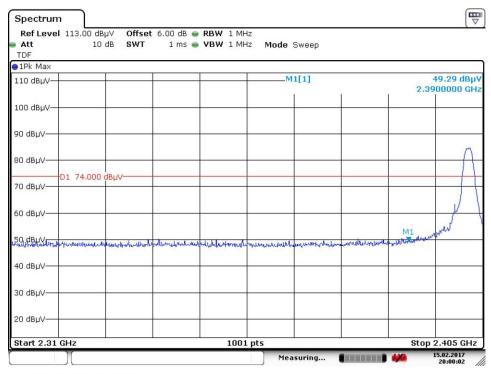


Date: 15.FEB.2017 20:00:02

Low Channel (Ver)

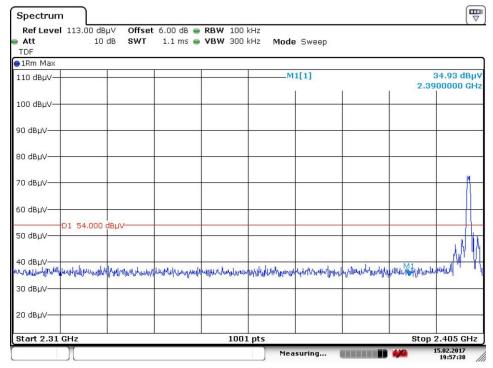


Date: 15.FEB.2017 19:57:38

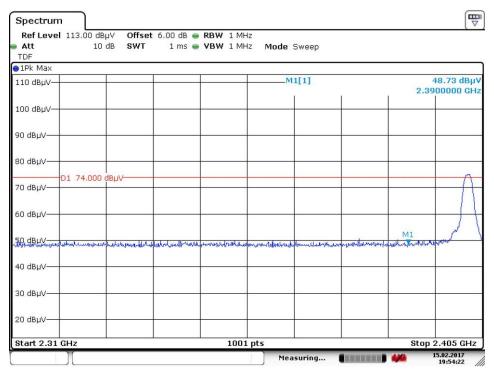


Date: 15.FEB.2017 19:54:22

Radiated Bandedge (GFSK)

High Channel (Hor)

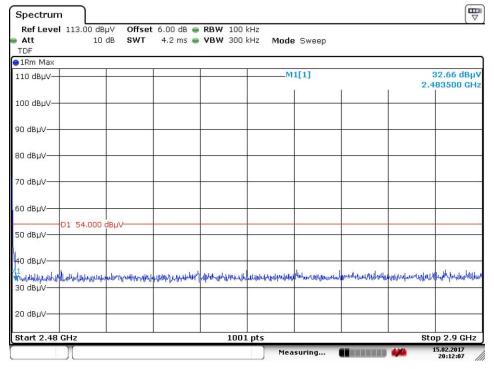


Date: 15.FEB.2017 20:12:07

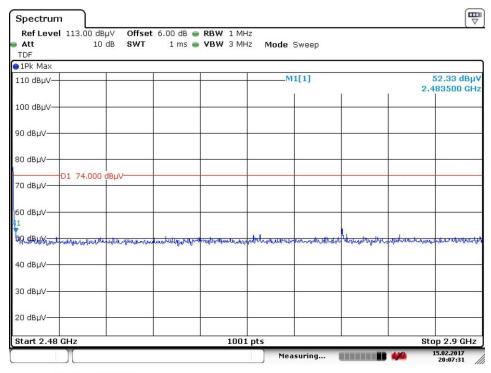


Date: 15.FEB.2017 20:07:31

High Channel (Ver)

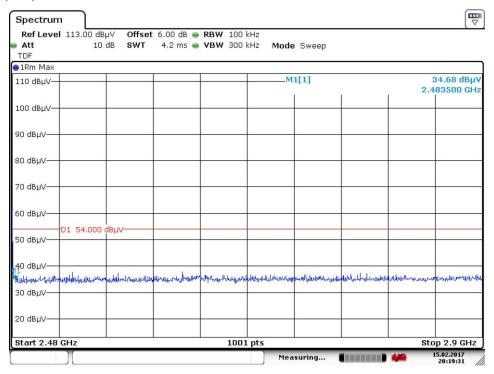

Date: 15.FEB.2017 20:19:31

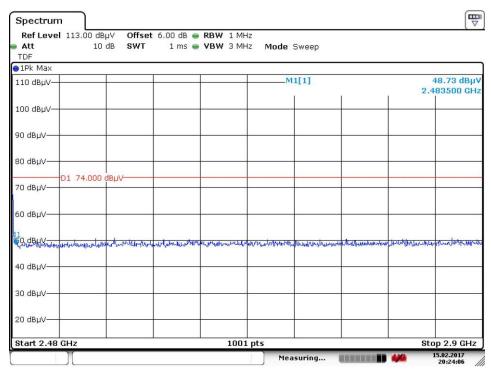

Date: 15.FEB.2017 20:24:06


Spurious Emissions, TX Mode, 1-18G



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

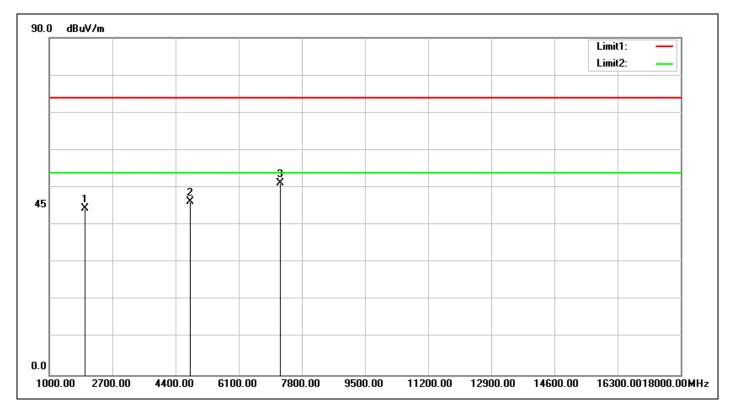

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC Above 1G PEAK Ant. Polarization: Horizontal

Test item: Radiation Emission Test Time: 2017/2/15 20:36:02

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 19.3(℃)/50%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: Freeman Wang


Test Mode: 2402-TX

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	1969.000	-7.35	51.79	44.44	74.00	-29.56	peak	100	210	
2	4804.000	-2.66	48.86	46.20	74.00	-27.80	peak			
3	7206.000	5.58	45.62	51.20	74.00	-22.80	peak			



11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

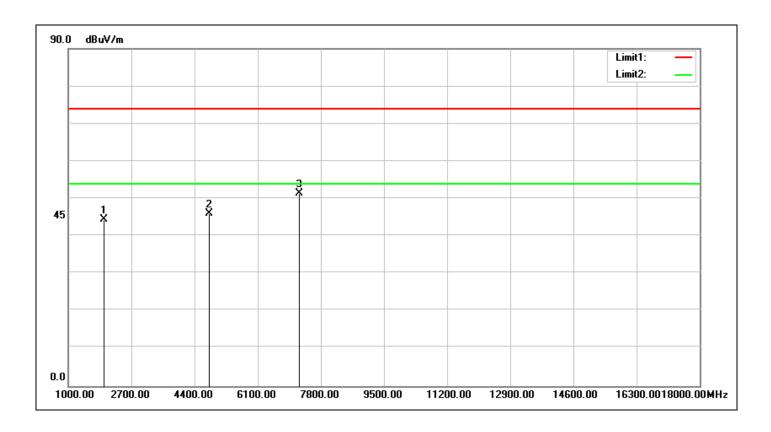

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC Above 1G PEAK Ant. Polarization: Vertical

Test item: Radiation Emission Test Time: 2017/2/15 20:37:04

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 19.3(℃)/50%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: Freeman Wang


Test Mode: 2402-TX

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	1969.000	-7.35	51.68	44.33	74.00	-29.67	peak	100	70	
2	4804.000	-2.66	48.65	45.99	74.00	-28.01	peak			
3	7206.000	5.58	45.88	51.46	74.00	-22.54	peak			



11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

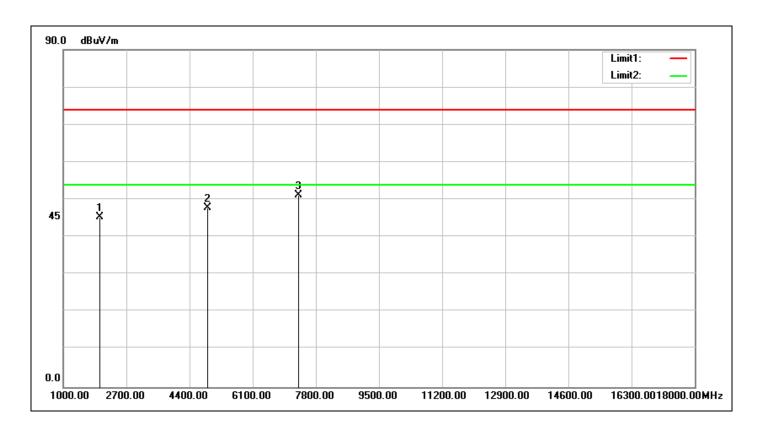

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC Above 1G PEAK Ant. Polarization: Horizontal

Test item: Radiation Emission Test Time: 2017/2/15 20:31:53

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 19.3(℃)/50%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: Freeman Wang


Test Mode: 2440-TX

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	1986.000	-7.23	52.57	45.34	74.00	-28.66	peak	100	360	
2	4880.000	-2.48	50.36	47.88	74.00	-26.12	peak			
3	7320.000	5.93	45.15	51.08	74.00	-22.92	peak			



11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

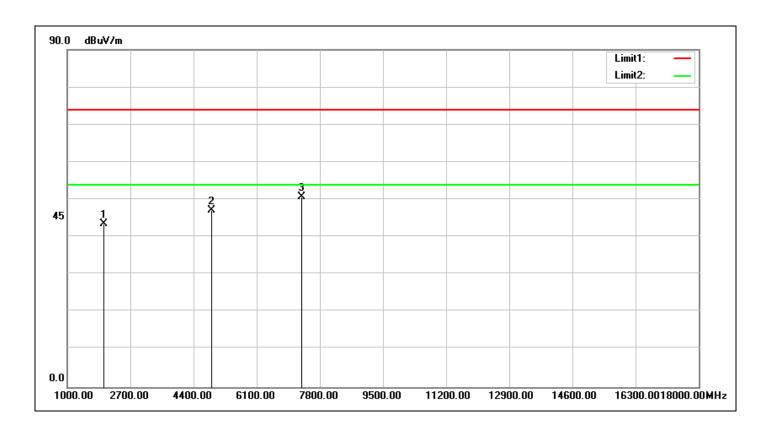

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC Above 1G PEAK Ant. Polarization: Vertical

Test item: Radiation Emission Test Time: 2017/2/15 20:32:55

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 19.3(℃)/50%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: Freeman Wang


Test Mode: 2440-TX

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	1986.000	-7.23	50.86	43.63	74.00	-30.37	peak	100	358	
2	4880.000	-2.48	49.55	47.07	74.00	-26.93	peak			
3	7320.000	5.93	44.71	50.64	74.00	-23.36	peak			



11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

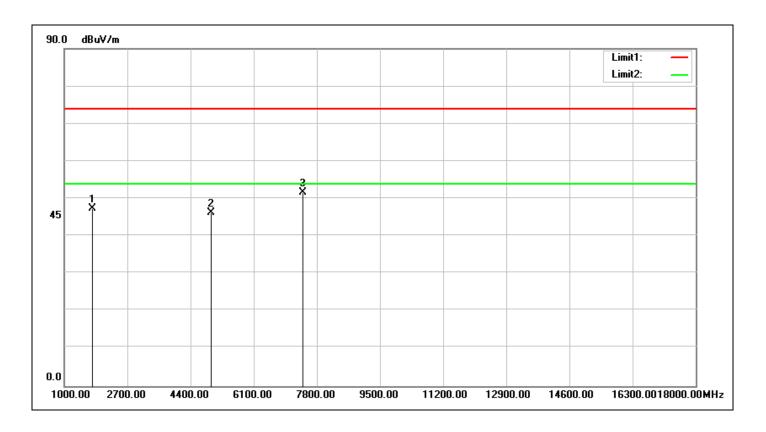

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC Above 1G PEAK Ant. Polarization: Horizontal

Test item: Radiation Emission Test Time: 2017/2/15 20:27:59

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 19.3(℃)/50%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: Freeman Wang


Test Mode: 2480-TX

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	1748.000	-8.75	56.01	47.26	74.00	-26.74	peak	100	207	
2	4960.000	-2.31	48.65	46.34	74.00	-27.66	peak		0	
3	7440.000	6.28	45.38	51.66	74.00	-22.34	peak		0	



11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

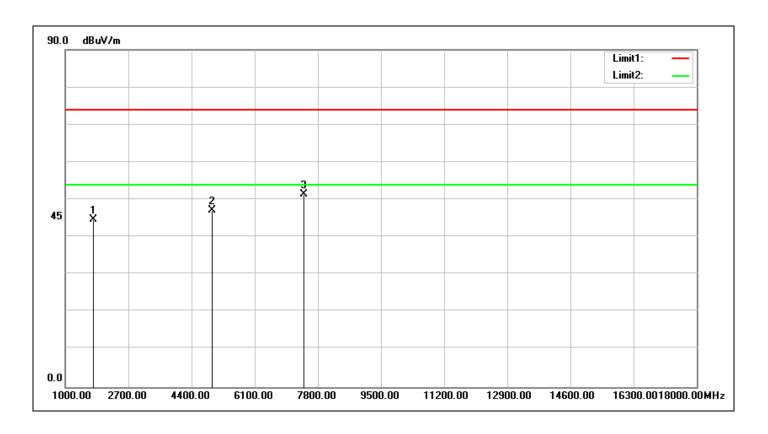

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC Above 1G PEAK Ant. Polarization: Vertical

Test item: Radiation Emission Test Time: 2017/2/15 20:29:01

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 19.3(℃)/50%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: Freeman Wang


Test Mode: 2480-TX

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	1765.000	-8.64	53.22	44.58	74.00	-29.42	peak	100	359	
2	4960.000	-2.31	49.44	47.13	74.00	-26.87	peak			
3	7440.000	6.28	45.24	51.52	74.00	-22.48	peak			



11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

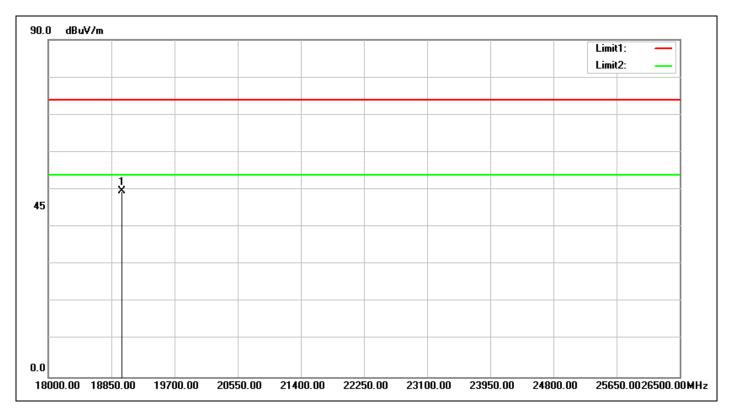

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC Above 1G PEAK Ant. Polarization: Horizontal

Test item: Radiation Emission Test Time: 2017/2/15 20:52:04

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 19.3(℃)/50%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: Freeman Wang


Test Mode: 2402-TX

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	18986.000	30.47	19.08	49.55	74.00	-24.45	peak			



11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

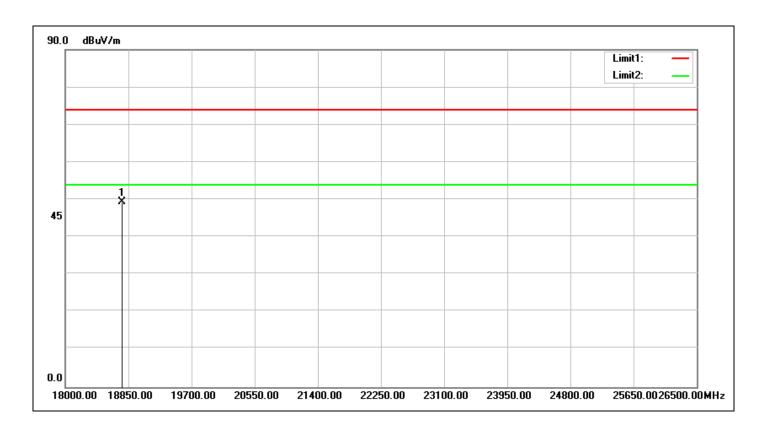

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC Above 1G PEAK Ant. Polarization: Vertical

Test item: Radiation Emission Test Time: 2017/2/15 20:52:23

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 19.3(℃)/50%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: Freeman Wang


Test Mode: 2402-TX

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	18765.000	29.97	19.53	49.50	74.00	-24.50	peak			



11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

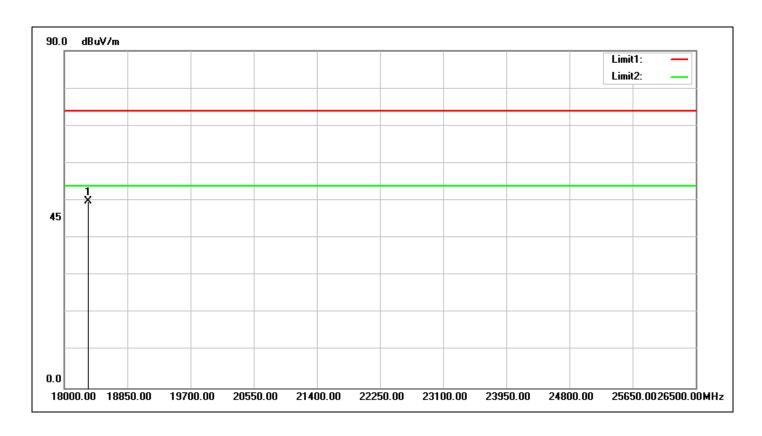

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC Above 1G PEAK Ant. Polarization: Horizontal

Test item: Radiation Emission Test Time: 2017/2/15 20:52:47

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 19.3(℃)/50%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: Freeman Wang


Test Mode: 2440-TX

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	18323.000	29.13	20.60	49.73	74.00	-24.27	peak			



11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

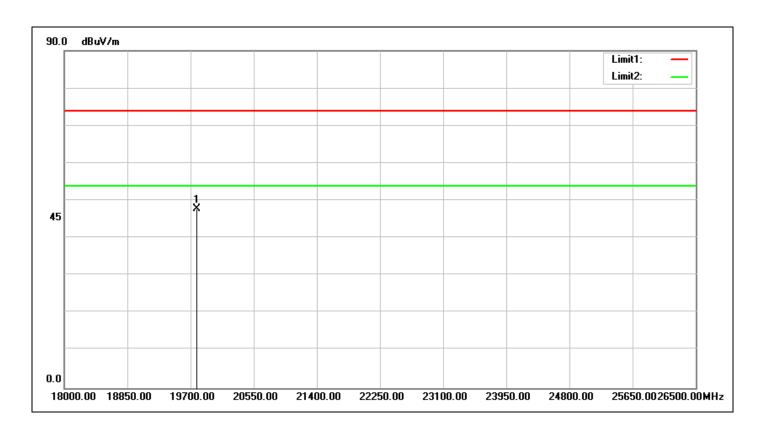

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC Above 1G PEAK Ant. Polarization: Vertical

Test item: Radiation Emission Test Time: 2017/2/15 20:53:04

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 19.3(℃)/50%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: Freeman Wang


Test Mode: 2440-TX

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	19785.000	31.36	16.40	47.76	74.00	-26.24	peak			



11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

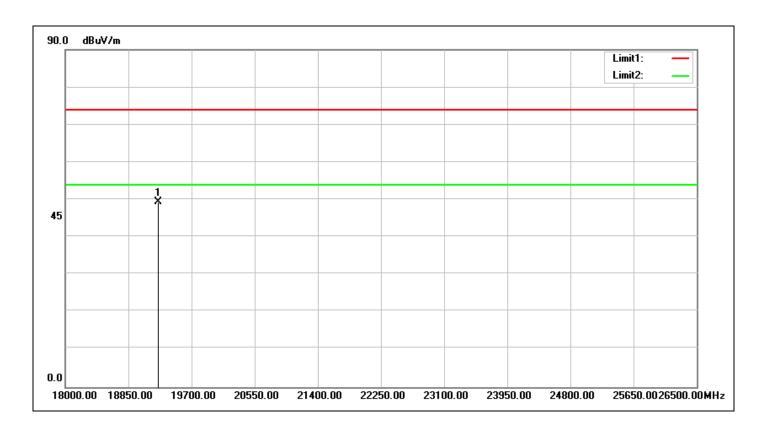

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC Above 1G PEAK Ant. Polarization: Horizontal

Test item: Radiation Emission Test Time: 2017/2/15 20:53:27

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 19.3(℃)/50%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: Freeman Wang


Test Mode: 2480-TX

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	19249.500	30.85	18.47	49.32	74.00	-24.68	peak			



11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

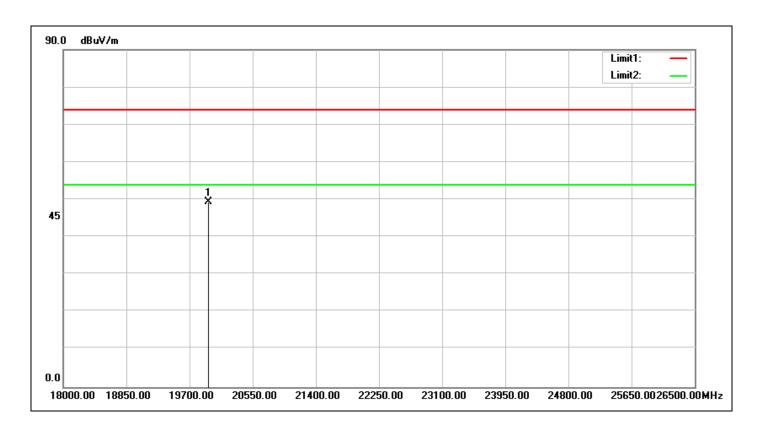

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC Above 1G PEAK Ant. Polarization: Vertical

Test item: Radiation Emission Test Time: 2017/2/15 20:53:44

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 19.3(℃)/50%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: Freeman Wang

Test Mode: 2480-TX

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	19955.000	31.45	17.86	49.31	74.00	-24.69	peak			


Spurious Emissions, TX Mode, 30M-1G



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

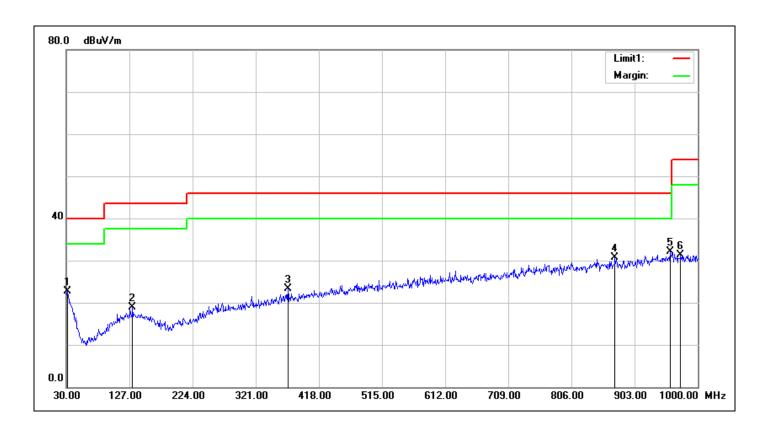

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC Class B 3M Radiation Ant. Polarization: Horizontal

Test item: Radiation Emission Test Time: 2017/2/15 21:04:25

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 19.3(℃)/50%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: Freeman Wang


Test Mode: 2440-TX

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	31.9400	-1.18	23.87	22.69	40.00	-17.31	QP	100	246	
2	131.8499	-6.97	25.91	18.94	43.50	-24.56	QP	100	136	
3	370.4700	-3.13	26.38	23.25	46.00	-22.75	QP	100	318	
4	872.9299	3.90	26.77	30.67	46.00	-15.33	QP	100	271	
5	958.2899	5.45	26.62	32.07	46.00	-13.93	QP	100	91	
6	973.8099	5.60	25.79	31.39	54.00	-22.61	QP	100	86	



11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

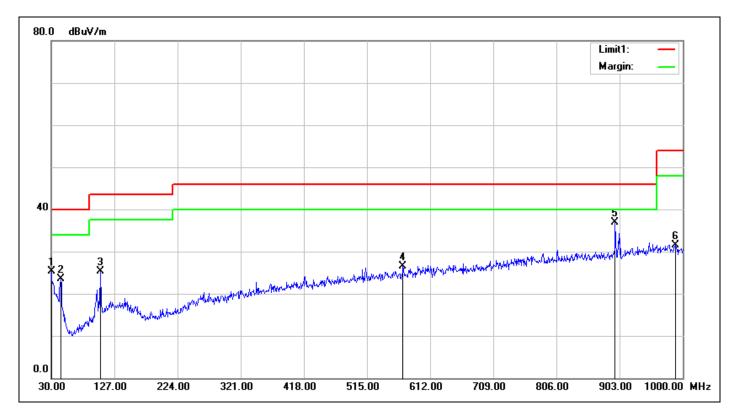

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC Class B 3M Radiation Ant. Polarization: Vertical

Test item: Radiation Emission Test Time: 2017/2/15 21:05:28

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 19.3(℃)/50%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: Freeman Wang

Test Mode: 2440-TX

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	30.0000	-0.07	25.29	25.22	40.00	-14.78	QP	100	0	
2	44.5500	-8.40	31.94	23.54	40.00	-16.46	QP	100	360	
3	105.6600	-8.75	34.11	25.36	43.50	-18.14	QP	100	210	
4	570.2900	-0.46	27.03	26.57	46.00	-19.43	QP	100	1	
5	896.2100	4.12	32.87	36.99	46.00	-9.01	QP	100	319	
6	988.3600	5.73	25.83	31.56	54.00	-22.44	QP	100	277	


Spurious Emissions, TX Mode, 9K-30M



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

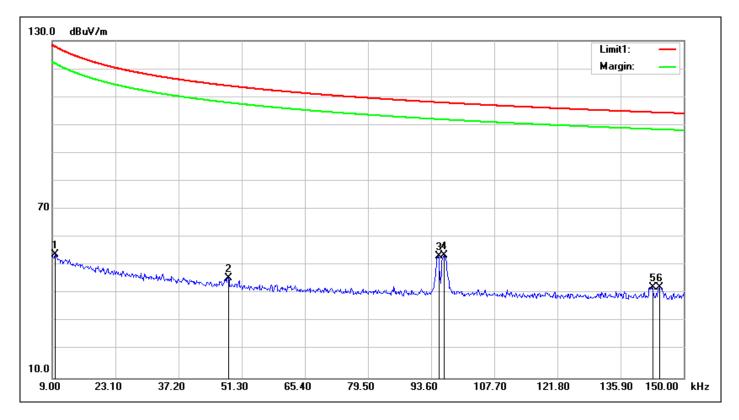

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC15.209_9k-1G_3m Ant. Polarization:

Test item: Radiation Emission Test Time: 2017/4/10 15:14:06

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 21.5(℃)/48%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: George Yang

Test Mode: 2440-TX


Remark:

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	0.0096	20.01	34.02	54.03	127.94	-73.91	QP	100	208	
2	0.0483	19.31	26.24	45.55	113.91	-68.36	QP	100	320	
3	0.0952	18.88	34.40	53.28	108.02	-54.74	QP	100	224	
4	0.0964	18.87	34.78	53.65	107.91	-54.26	QP	100	85	
5	0.1430	18.81	23.38	42.19	104.49	-62.30	QP	100	357	
6	0.1446	18.81	23.51	42.32	104.39	-62.07	QP	100	80	



11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

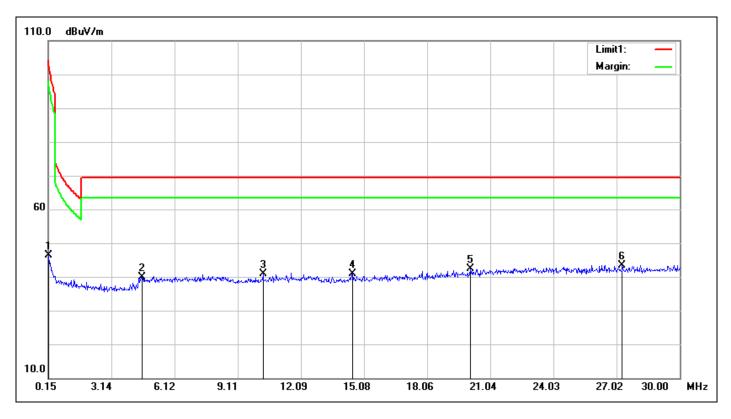

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC15.209_9k-1G_3m Ant. Polarization:

Test item: Radiation Emission Test Time: 2017/4/10 15:10:46

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 21.5(℃)/48%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: George Yang

Test Mode: 2440-TX

Remark:

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	0.1799	18.77	27.63	46.40	102.50	-56.10	QP	100	70	
2	4.5678	19.44	20.51	39.95	69.50	-29.55	QP	100	103	
3	10.2990	20.42	20.51	40.93	69.50	-28.57	QP	100	200	
4	14.5377	20.92	19.97	40.89	69.50	-28.61	QP	100	186	
5	20.0898	21.56	20.77	42.33	69.50	-27.17	QP	100	313	
6	27.2837	22.08	21.33	43.41	69.50	-26.09	QP	100	84	


Spurious Emissions, RX Mode, 1-18G



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

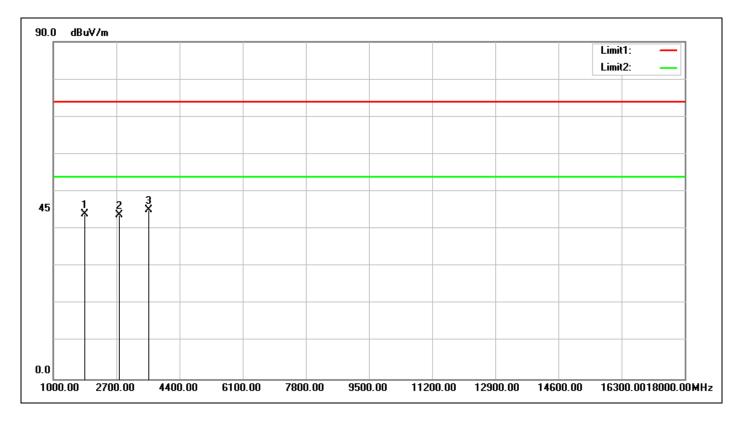

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC Above 1G PEAK Ant. Polarization: Horizontal

Test item: Radiation Emission Test Time: 2017/2/15 20:43:44

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 19.3(℃)/50%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: Freeman Wang


Test Mode: 2440-RX

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	1850.000	-9.06	53.01	43.95	74.00	-30.05	peak	100	1	
2	2785.000	-7.47	51.25	43.78	74.00	-30.22	peak	100	255	
3	3567.000	-6.45	51.62	45.17	74.00	-28.83	peak	100	52	



11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

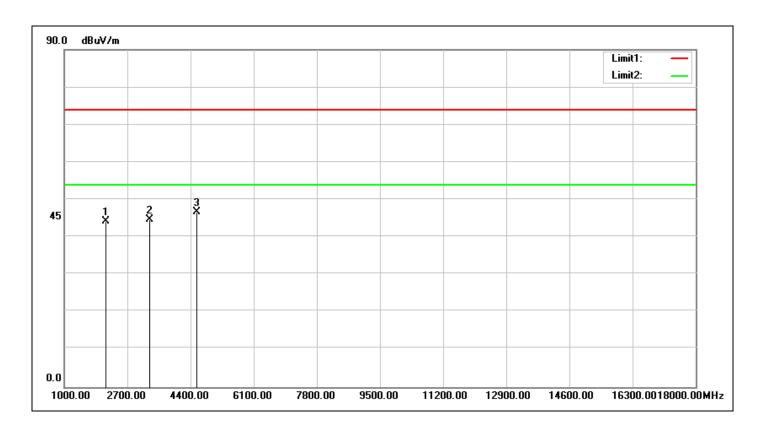

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC Above 1G PEAK Ant. Polarization: Vertical

Test item: Radiation Emission Test Time: 2017/2/15 20:44:46

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 19.3(℃)/50%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: Freeman Wang

Test Mode: 2440-RX

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	2122.000	-8.06	52.32	44.26	74.00	-29.74	peak	100	29	
2	3295.000	-6.81	51.38	44.57	74.00	-29.43	peak	100	39	
3	4570.000	-3.72	50.41	46.69	74.00	-27.31	peak	100	31	


Spurious Emissions, RX Mode, 18-26G



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

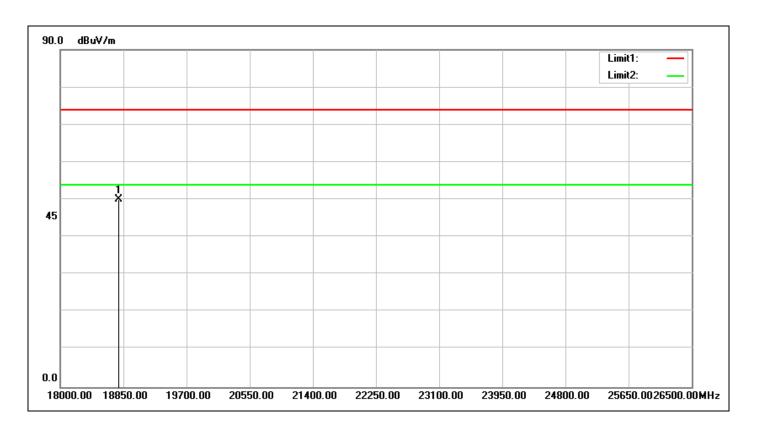

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC Above 1G PEAK Ant. Polarization: Horizontal

Test item: Radiation Emission Test Time: 2017/2/15 20:51:24

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 19.3(℃)/50%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: Freeman Wang


Test Mode: 2440-RX

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	18782.000	30.01	20.10	50.11	74.00	-23.89	peak			



11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

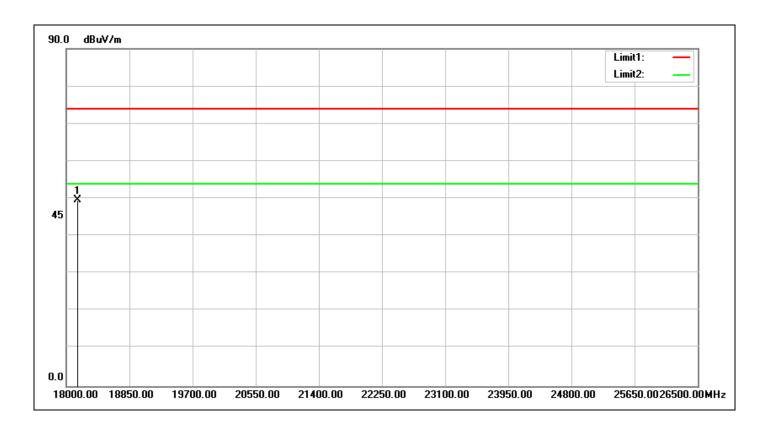

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC Above 1G PEAK Ant. Polarization: Vertical

Test item: Radiation Emission Test Time: 2017/2/15 20:51:38

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 19.3(℃)/50%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: Freeman Wang

Test Mode: 2440-RX

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	18153.000	28.90	20.66	49.56	74.00	-24.44	peak			


Spurious Emissions, RX Mode, 30M-1G



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

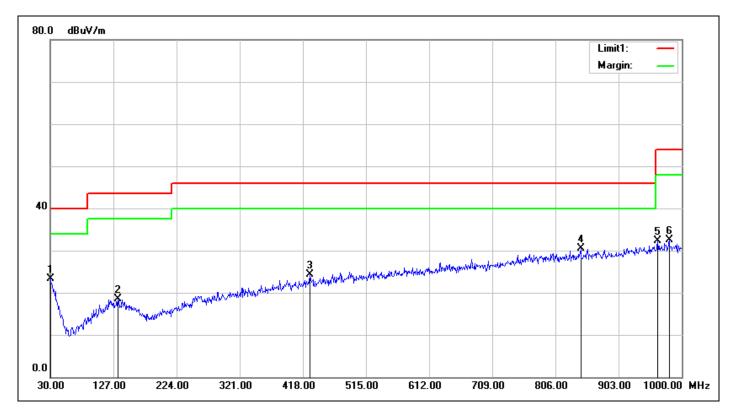

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC Class B 3M Radiation Ant. Polarization: Horizontal

Test item: Radiation Emission Test Time: 2017/2/15 21:07:45

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 19.3(℃)/50%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: Freeman Wang


Test Mode: 2440-RX

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	30.0000	-0.07	23.29	23.22	40.00	-16.78	QP	100	274	
2	133.7899	-6.97	25.45	18.48	43.50	-25.02	QP	100	94	
3	428.6700	-2.28	26.62	24.34	46.00	-21.66	QP	100	85	
4	844.7999	3.60	26.87	30.47	46.00	-15.53	QP	100	5	
5	963.1399	5.50	26.73	32.23	54.00	-21.77	QP	100	0	
6	980.6000	5.65	26.79	32.44	54.00	-21.56	QP	100	246	



11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

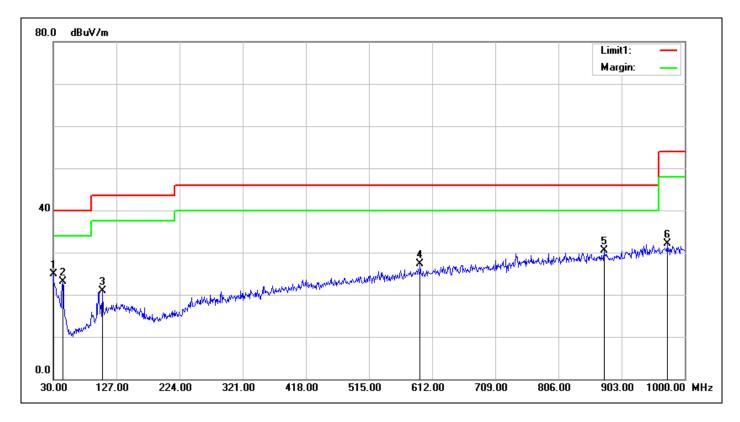

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC Class B 3M Radiation Ant. Polarization: Vertical

Test item: Radiation Emission Test Time: 2017/2/15 21:08:48

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 19.3(℃)/50%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: Freeman Wang

Test Mode: 2440-RX

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	30.0000	-0.07	25.05	24.98	40.00	-15.02	QP	100	23	
2	44.5500	-8.40	31.49	23.09	40.00	-16.91	QP	100	6	
3	105.6600	-8.75	29.60	20.85	43.50	-22.65	QP	100	244	
4	593.5700	-0.09	27.47	27.38	46.00	-18.62	QP	100	316	
5	875.8400	3.93	26.49	30.42	46.00	-15.58	QP	100	73	
6	973.8100	5.60	26.52	32.12	54.00	-21.88	QP	100	31	


Spurious Emissions, RX Mode, 9K-30M



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

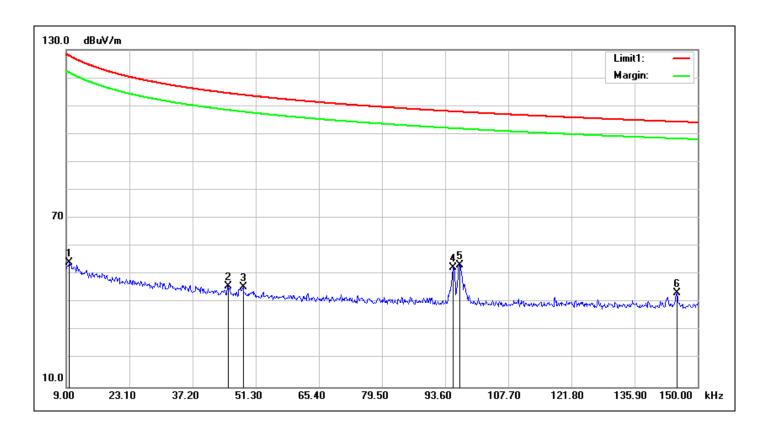

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC15.209_9k-1G_3m Ant. Polarization:

Test item: Radiation Emission Test Time: 2017/4/10 15:15:31

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 21.5(℃)/48%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: George Yang

Test Mode: 2440-RX


Remark:

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	0.0097	20.09	34.19	54.28	127.85	-73.57	QP	100	259	
2	0.0451	19.47	26.31	45.78	114.51	-68.73	QP	100	359	
3	0.0485	19.30	26.21	45.51	113.88	-68.37	QP	100	104	
4	0.0954	18.88	33.70	52.58	108.01	-55.43	QP	100	83	
5	0.0968	18.87	34.52	53.39	107.88	-54.49	QP	100	2	
6	0.1453	18.80	24.57	43.37	104.35	-60.98	QP	100	38	



11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

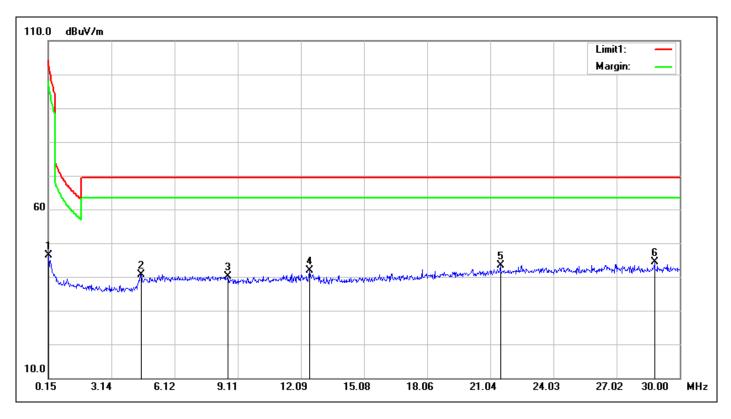

Service No.: 114058234 Test Distance: 3m

Test Standard: FCC15.209_9k-1G_3m Ant. Polarization:

Test item: Radiation Emission Test Time: 2017/4/10 15:12:09

Applicant: H2 Test Rating: DC 3V

Product: 藍牙血糖數據傳輸配件/ Health2Sync Temp.(℃)/Hum.(%): 21.5(℃)/48%

Bluetooth Dongle

Model No.: HB-8301 Test Engineer: George Yang

Test Mode: 2440-RX

Remark:

No.	Frequency	Factor	Reading	Level	Limit	Margin	Det.	Height	Azimuth	Remark
	(MHz)	(dB/m)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		(cm)	(•)	
1	0.1799	18.77	27.51	46.28	102.50	-56.22	QP	100	72	
2	4.5380	19.43	21.23	40.66	69.50	-28.84	QP	100	3	
3	8.6573	20.18	20.06	40.24	69.50	-29.26	QP	100	238	
4	12.5079	20.69	21.11	41.80	69.50	-27.70	QP	100	224	
5	21.5226	21.66	21.74	43.40	69.50	-26.10	QP	100	263	
6	28.8060	22.19	22.08	44.27	69.50	-25.23	QP	100	302	