

FCC Part 15C

Measurement and Test Report

For

SUTA(Xiamen) Smart Technology Co., Ltd

No.999, Dongfu Street, Haicang District, Xiamen, Fujian, China

FCC ID: 2ALLQ-900IRECEIVER

FCC Rule(s): FCC Part 15.249

Product Description: CONTROL BOX

Tested Model: 900i receiver

Report No.: STR17038215I-2

Tested Date: 2017-03-20 to 2017-05-23

Issued Date: 2017-05-23

Tested By: Leo Lee / Engineer

Leo Lee

Reviewed By: Silin Chen / EMC Manager

Silin Chen

Approved & Authorized By: Jandy So / PSQ Manager

Jandy So

Prepared By:

Shenzhen SEM.Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY.....	4
1.5 EUT SETUP AND TEST MODE.....	5
1.6 MEASUREMENT UNCERTAINTY.....	5
1.7 TEST EQUIPMENT LIST AND DETAILS.....	6
2. SUMMARY OF TEST RESULTS.....	7
3. ANTENNA REQUIREMENTS.....	8
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
4. RADIATED EMISSIONS.....	9
4.1 STANDARD APPLICABLE.....	9
4.2 TEST PROCEDURE.....	9
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	11
4.4 ENVIRONMENTAL CONDITIONS.....	11
4.5 SUMMARY OF TEST RESULTS/PLOTS.....	11
5. OUT OF BAND EMISSIONS.....	15
5.1 STANDARD APPLICABLE.....	15
5.2 TEST PROCEDURE.....	15
5.3 ENVIRONMENTAL CONDITIONS.....	15
5.4 SUMMARY OF TEST RESULTS/PLOTS.....	15
6. EMISSION BANDWIDTH.....	18
6.1 STANDARD APPLICABLE.....	18
6.2 TEST PROCEDURE.....	18
6.3 ENVIRONMENTAL CONDITIONS.....	18
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	18
7. CONDUCTED EMISSIONS.....	20
7.1 TEST PROCEDURE.....	20
7.2 BASIC TEST SETUP BLOCK DIAGRAM.....	20
7.3 ENVIRONMENTAL CONDITIONS.....	20
7.4 TEST RECEIVER SETUP.....	21
7.5 SUMMARY OF TEST RESULTS/PLOTS.....	21
7.6 CONDUCTED EMISSIONS TEST DATA.....	21

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: SUTA(Xiamen) Smart Technology Co., Ltd
Address of applicant: No.999, Dongfu Street, Haicang District, Xiamen, Fujian, China

Manufacturer: Shenzhen C&D Electronics Co., Ltd
Address of manufacturer: 9 floor, 9th A building, Baoneng Science and Technology Park, Qing Xiang Road No. 1, Longhua District, Shenzhen, Guangdong, China

General Description of EUT	
Product Name:	CONTROL BOX
Brand Name:	SUTA
Model No.:	900i receiver
Adding Model(s):	/
Rated Voltage:	DC 29V by adapter
Power Adapter:	/
Software Version:	/
Hardware Version:	RF-240B-MAIN-V1.2
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	2434MHz
Max. Field Strength:	89.07dBuV/m(3m)
Modulation:	GFSK
Antenna Type:	PCB Antenna
Antenna Gain:	2.3dBi
Lowest Internal Frequency of EUT:	32.768kHz

1.2 Test Standards

The following report is prepared on behalf of the SUTA(Xiamen) Smart Technology Co., Ltd in accordance with FCC Part 15, Subpart B, Subpart C, and section 15.107, 15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.107, 15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Transmitting	2434MHz

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC cable of EUT	0.06	Unshielded	Without Core
DC cable for deltadrive	0.35	Unshielded	Without Core

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC cable of adapter	0.20	Unshielded	With Core
AC cable of adapter	1.84	Unshielded	Without Core
Cable of deltadrive	0.72	Unshielded	Without Core
Cable of motor	0.93	Unshielded	Without Core

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Adapter	SUTA (Xiamen) Smart	W60RA02-290020A	RBD626607910
Deltadrive*4	SUTA (Xiamen) Smart	B11250/ B11251/ B11370/ B11371	Q17040700001
DC motor*2	SUTA (Xiamen) Smart	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2016-06-04	2017-06-03
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2016-06-04	2017-06-03
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2016-06-04	2017-06-03
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2016-06-04	2017-06-03
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2016-06-04	2017-06-03
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2016-06-04	2017-06-03
SEMT-1042	Horn Antenna	ETS	3117	00086197	2016-06-04	2017-06-03
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2016-06-04	2017-06-03
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2016-06-04	2017-06-03
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2016-06-04	2017-06-03
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2016-06-04	2017-06-03
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2016-06-04	2017-06-03

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.209(a)(f)	Radiated Spurious Emissions	Compliant
§15.249(a)	Field Strength of Emissions	Compliant
§15.249(d)	Out of Band Emission	Compliant
§15.215 (c)	Emission Bandwidth	Compliant

N/A: not applicable

3. Antenna Requirements

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a PCB antenna, fulfill the requirement of this section.

4. Radiated Emissions

4.1 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.



The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.249(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

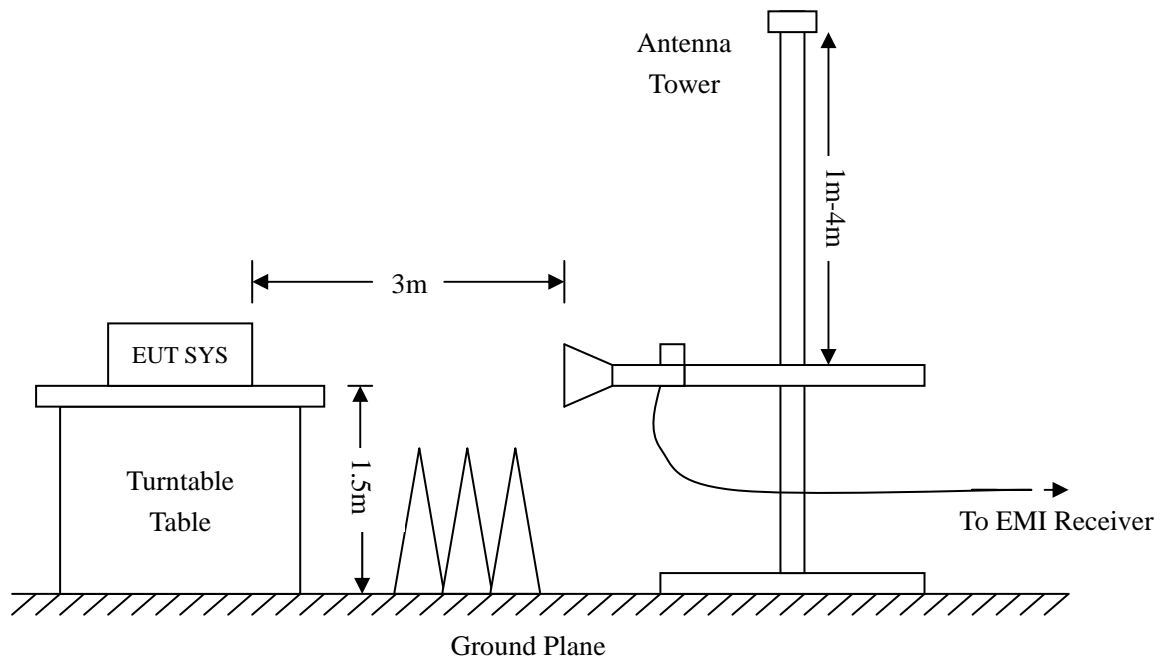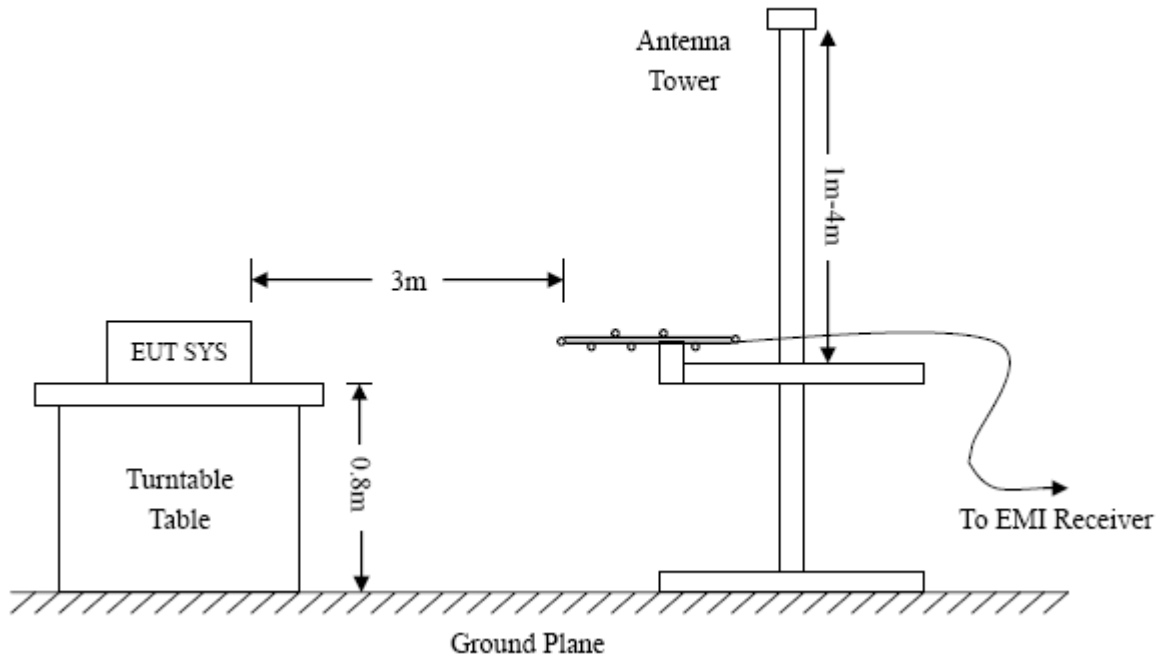

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

4.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar

4.5 Summary of Test Results/Plots

According to the data below, the [FCC Part 15.205](#), [15.209](#) and [15.249](#) standards, and had the worst margin of:


-7.22 dB at 4868MHz in the Horizontal polarization, 9 kHz to 25 GHz, 3Meters

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: CONTROL BOX
Tested Model: 900i receiver
Operating Condition: 2.4G Transmitting (2434MHz)
Comment: AC 120V/60Hz; Adapter DC 29V

Test Specification: Horizontal

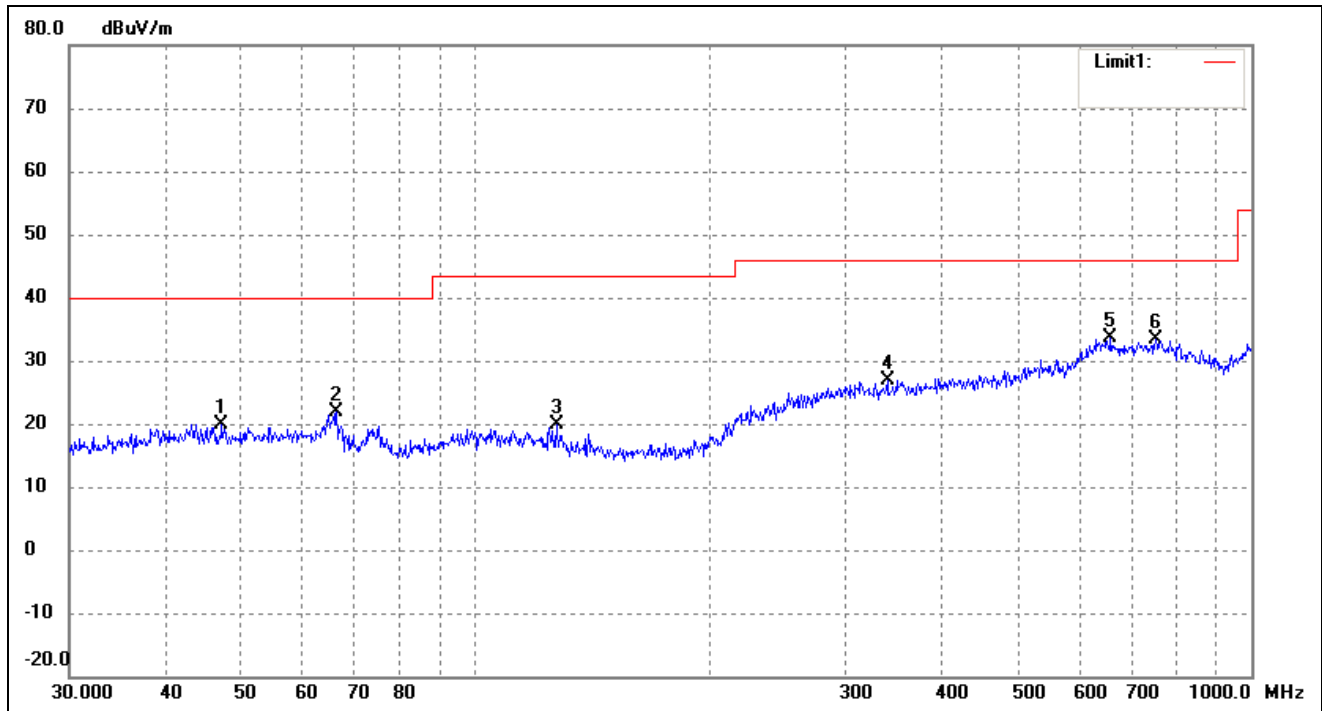

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	47.1599	14.84	4.96	19.80	40.00	-20.20	92	100	peak
2	66.2662	18.29	3.71	22.00	40.00	-18.00	130	100	peak
3	127.2176	15.53	4.23	19.76	43.50	-23.74	107	100	peak
4	339.5888	15.45	11.38	26.83	46.00	-19.17	144	100	peak
5	658.8362	15.94	17.61	33.55	46.00	-12.45	329	100	peak
6	752.7432	15.00	18.47	33.47	46.00	-12.53	91	100	peak

Test Specification: Vertical

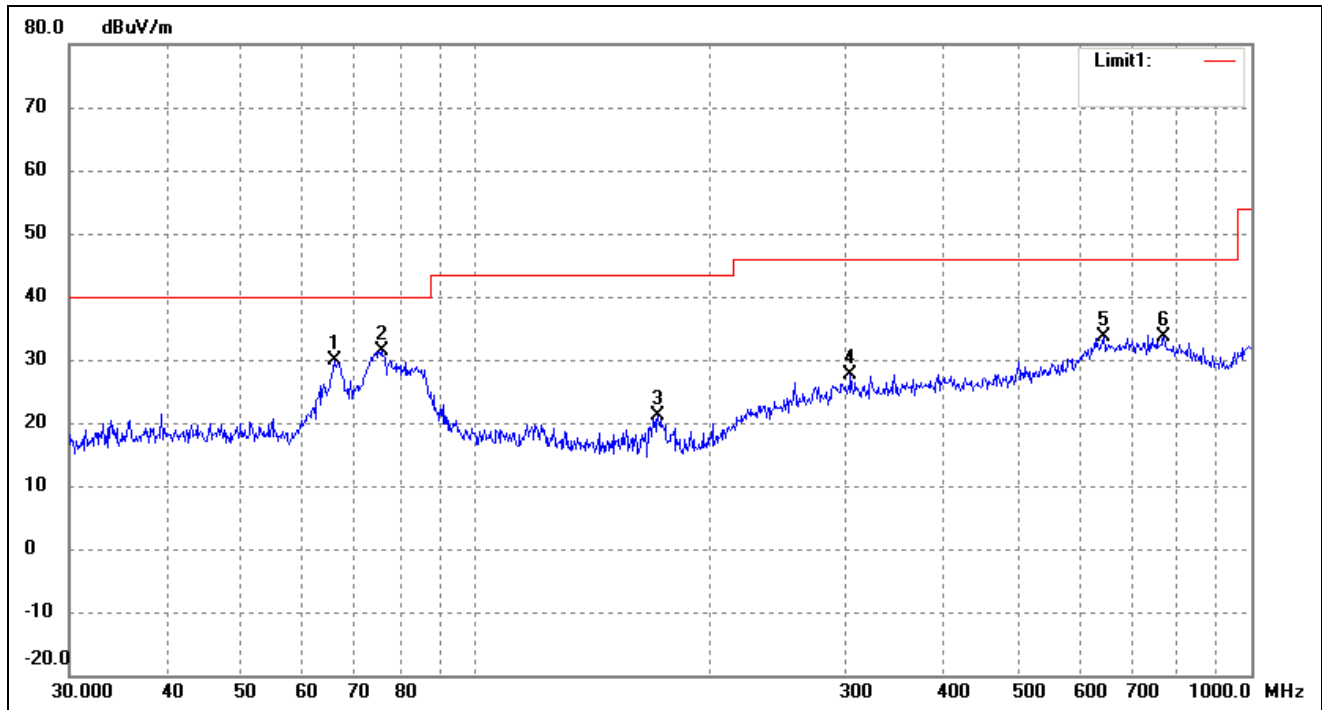

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	65.8031	26.01	3.80	29.81	40.00	-10.19	120	100	peak
2	75.7114	29.18	2.21	31.39	40.00	-8.61	92	100	peak
3	171.9946	18.76	2.46	21.22	43.50	-22.28	137	100	peak
4	304.6100	15.61	11.94	27.55	46.00	-18.45	97	100	peak
5	645.1195	15.65	17.94	33.59	46.00	-12.41	331	100	peak
6	771.4486	16.31	17.39	33.70	46.00	-12.30	216	100	peak

Spurious Emissions Above 1GHz

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Transmitting Channel-2434MHz							
2434	93.49	-4.42	89.07	114	-24.93	H	PK
2434	90.27	-4.42	85.85	94	-8.15	H	AV
4868	51.82	-0.83	50.99	74	-23.01	H	PK
4868	47.61	-0.83	46.78	54	-7.22	H	AV
7302	46.17	1.38	47.55	74	-26.45	H	PK
7302	43.69	1.38	45.07	54	-8.93	H	AV
2434	91.22	-4.42	86.8	114	-27.2	V	PK
2434	87.15	-4.42	82.73	94	-11.27	V	AV
4868	49.57	-0.83	48.74	74	-25.26	V	PK
4868	47.39	-0.83	46.56	54	-7.44	V	AV
7302	46.25	1.38	47.63	74	-26.37	V	PK
7302	42.33	1.38	43.71	54	-10.29	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 3th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9kHz to 30MHz.

5. Out of Band Emissions

5.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2483.5MHz, than mark the higher-level emission for comparing with the FCC rules.

5.3 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar


5.4 Summary of Test Results/Plots

Test mode	Frequency	Limit	Result
	MHz	dBuV / dBc	
Lowest	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2400.00	<54 dBuV	Pass
Highest	2483.50	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass

The edge emissions are below the FCC 15.209 Limits or complies with the 15.249 requirements.


Please refer to the test plots as below.

Lowest Bandedge
Vertical (Worst case)

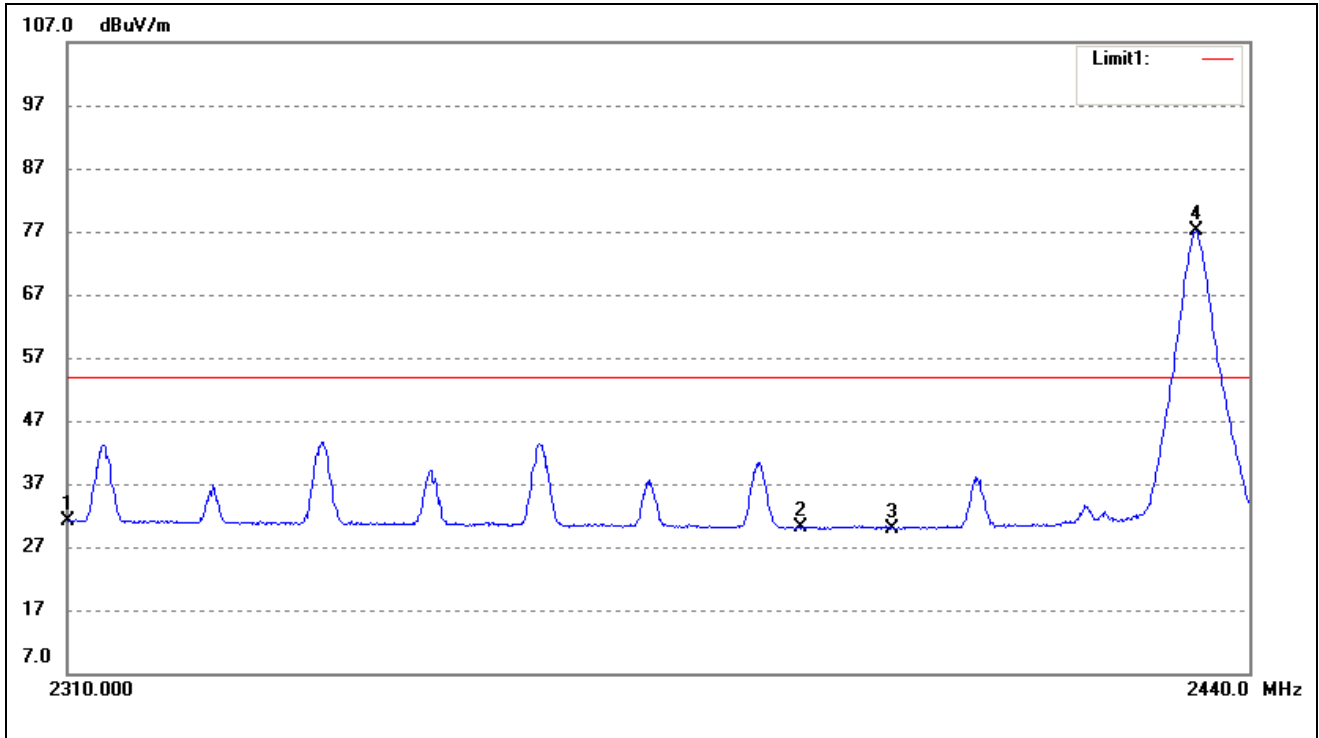

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	34.48	-3.35	31.13	54.00	-22.87	Ave Detector
	2310.000	47.61	-3.35	44.26	74.00	-29.74	Peak Detector
2	2390.000	34.36	-4.29	30.07	54.00	-23.93	Ave Detector
	2390.000	47.17	-4.29	42.88	74.00	-31.12	Peak Detector
3	2400.000	34.35	-4.40	29.95	54.00	-24.05	Ave Detector
	2400.000	49.32	-4.40	44.92	74.00	-29.08	Peak Detector
4	2433.996	81.60	-4.42	77.18	/	/	Ave Detector
	2434.396	103.69	-4.41	99.28	/	/	Peak Detector

Highest Bandedge
Vertical (Worst case)

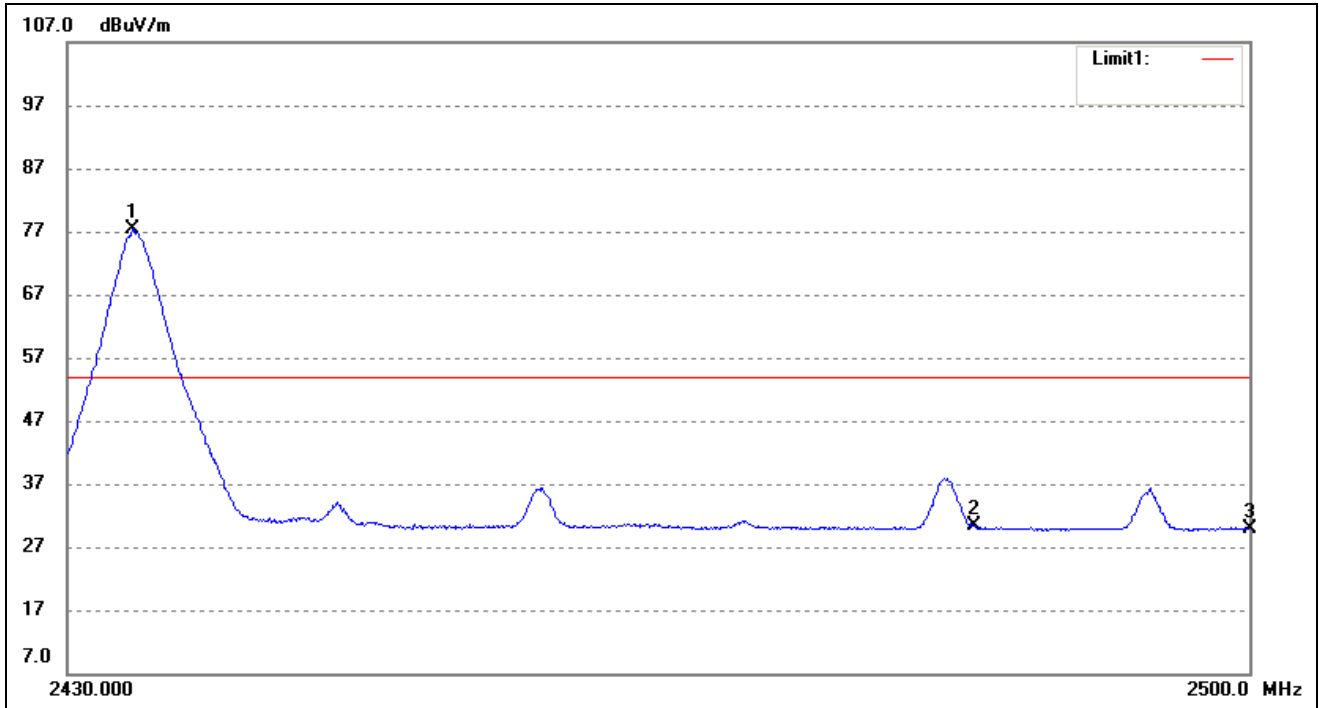

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2433.799	81.72	-4.42	77.30	/	/	Ave Detector
	2434.282	103.80	-4.42	99.38	/	/	Peak Detector
2	2483.500	34.70	-4.36	30.34	54.00	-23.66	Ave Detector
	2483.500	49.04	-4.36	44.68	74.00	-29.32	Peak Detector
3	2500.000	34.23	-4.34	29.89	54.00	-24.11	Ave Detector
	2500.000	46.54	-4.34	42.20	74.00	-31.80	Peak Detector

6. Emission Bandwidth

6.1 Standard Applicable

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

6.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 1MHz, centered on a transmitting channel

RBW \geq 1% 20dB Bandwidth, VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.

6.3 Environmental Conditions


Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.4 Summary of Test Results/Plots

Test Mode	Frequency MHz	20dB Bandwidth kHz	99% Bandwidth kHz
GFSK	2434	1432	2343.1

Please refer to the following test plots

GFSK:

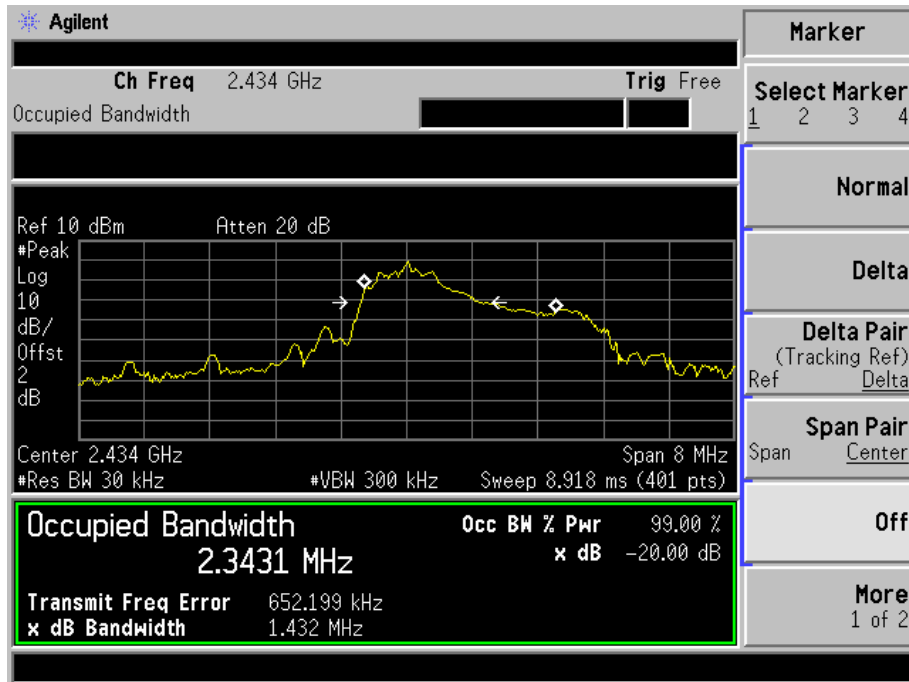


7. Conducted Emissions

7.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

7.2 Basic Test Setup Block Diagram

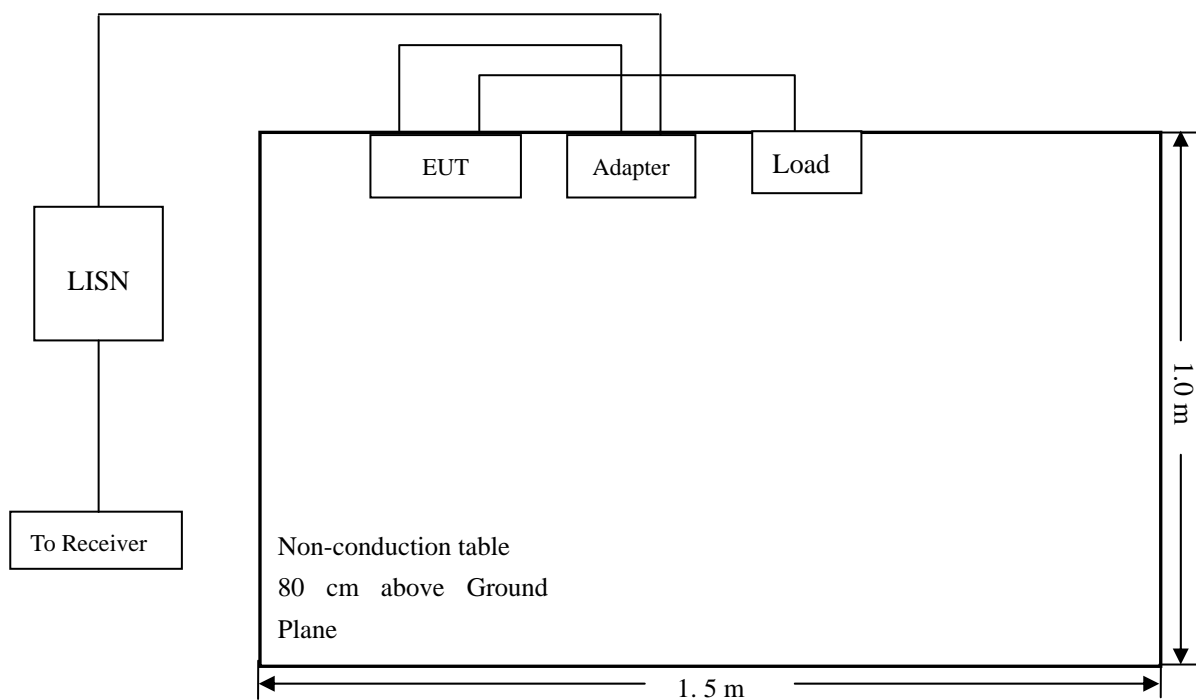

7.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

7.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal

7.5 Summary of Test Results/Plots

According to the data in section 7.6, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:


-6.29 dB at 0.1516 MHz in the Neutral mode, QP detector, 0.15-30MHz

7.6 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: CONTROL BOX
 Tested Model: 900i receiver
 Operating Condition: Transmitting
 Comment: AC 120V/60Hz; Adapter DC 29V

Test Specification: Neutral

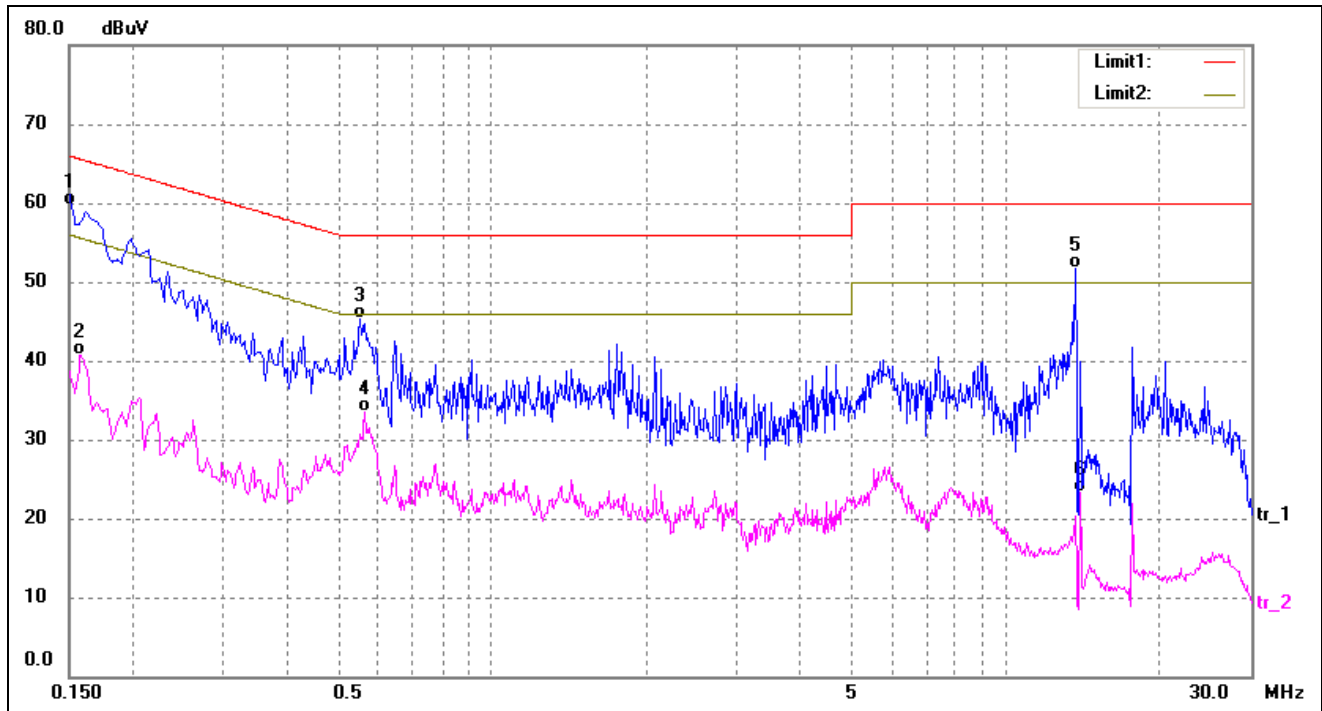

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1516	49.77	9.85	59.62	65.91	-6.29	QP
2	0.1580	30.91	9.84	40.75	55.56	-14.81	AVG
3	0.5540	35.54	9.80	45.34	56.00	-10.66	QP
4	0.5660	23.74	9.79	33.53	46.00	-12.47	AVG
5	13.6500	42.16	9.59	51.75	60.00	-8.25	QP
6	13.9740	13.79	9.59	23.38	50.00	-26.62	AVG

Test Specification: Line

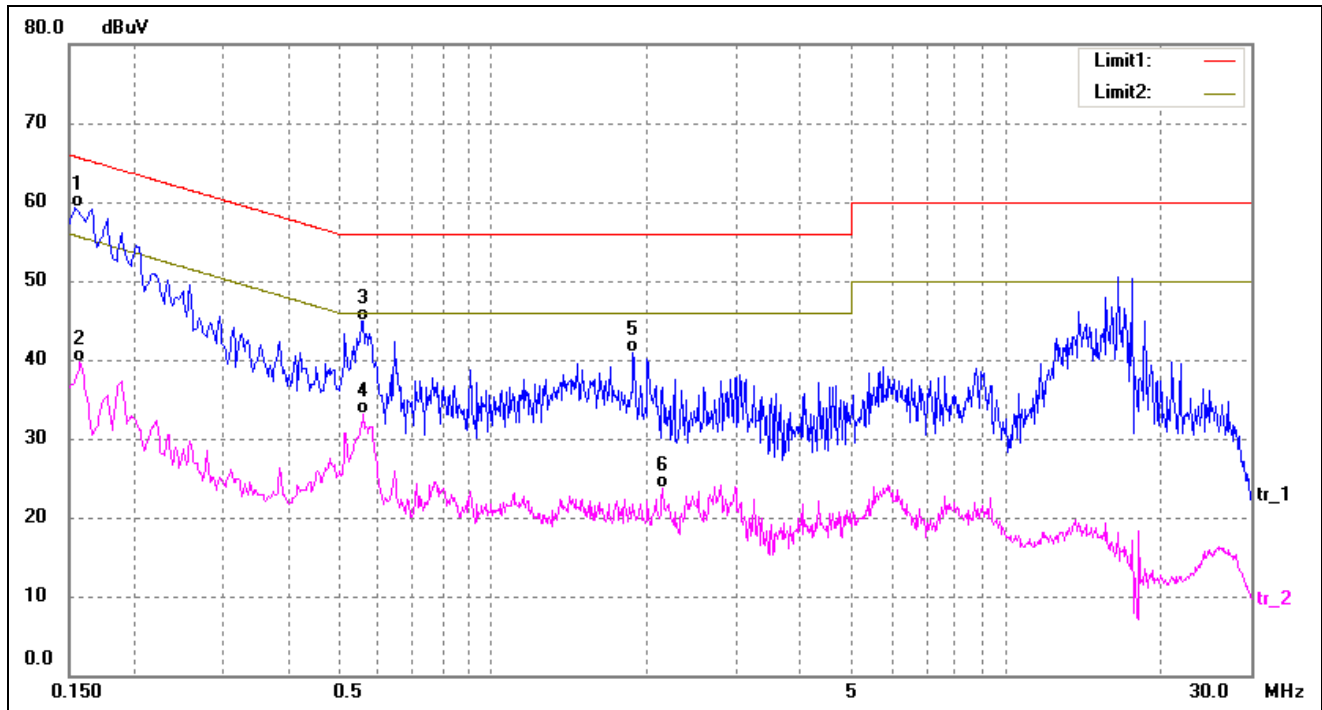

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1539	49.37	9.85	59.22	65.78	-6.56	QP
2	0.1580	29.84	9.84	39.68	55.56	-15.88	AVG
3	0.5580	35.10	9.80	44.90	56.00	-11.10	QP
4	0.5620	23.38	9.80	33.18	46.00	-12.82	AVG
5	1.8820	31.24	9.74	40.98	56.00	-15.02	QP
6	2.1500	13.93	9.73	23.66	46.00	-22.34	AVG

***** END OF REPORT *****