

## TEST REPORT

### FCC Standards : FCC 47 CFR part 15 subpart C

Test Report No. : CTK-2017-00789  
Date of Issue : 2017-04-29  
FCC ID : 2ALVHS07  
Model/Type No. : S07  
Kind of Product : Android Module  
Applicant : CLABSYS Co., Ltd.  
Applicant Address : A-Dong, 2floor., 895-20, Sicheong-ro, Platan-myeon,  
Hwaseong-si, Gyeonggi-do, Republic of Korea  
Manufacturer : CLABSYS Co., Ltd.  
Manufacturer Address : A-Dong, 2floor., 895-20, Sicheong-ro, Platan-myeon,  
Hwaseong-si, Gyeonggi-do, Republic of Korea  
Contact Person : Hakbum LEE  
Telephone : +81-70-7464-5104  
Received Date : 2017-04-07  
Test period : Start : 2017-04-10 End : 2017-04-28  
Test Results : ☒ In Compliance ☐ Not in Compliance

The test results presented in this report relate only to the object tested.

Tested by

Reviewed by



Ji-Hye, Kim  
Test Engineer  
Date: 2017-04-29

Young-Joon, Park  
Technical Manager  
Date: 2017-04-29



CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### REPORT REVISION HISTORY

Date	Revision	Page No
2017-04-29	Issued (CTK-2017-00789)	All

*This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.*



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### TABLE OF CONTENTS

REPORT REVISION HISTORY .....	2
1.0 General Product Description .....	4
1.1 Tested Frequency .....	4
1.2 Tested Mode .....	4
1.3 EUT Operation Test Setup .....	5
1.4 EUT Exercise of Software .....	5
1.5 Device Modifications .....	5
1.6 Peripheral Devices .....	5
1.7 Configuration of System under Test .....	5
1.8 Calibration Details of Equipment Used for Measurement .....	6
1.9 Test Facility .....	6
1.10 Laboratory Accreditations and Listings .....	6
2.0 Summary of tests .....	7
2.1 Requirements .....	8
2.1.1 Carrier Frequency Separation .....	8
2.1.2 Number of Hopping Frequencies .....	10
2.1.3 20 dB bandwidth .....	13
2.1.4 Time of Occupancy (Dwell Time) .....	19
2.1.5 Maximum peak Conducted Output Power .....	25
2.1.6 Band-edge .....	30
2.1.7 Field Strength of Emissions .....	41
2.1.8 AC Conducted Emissions .....	49
APPENDIX A – Test Equipment Used For Tests .....	52

## 1.0 General Product Description

Basic Model/Type No.	S07
Serial number	Prototype
EUT condition	Pre-production, not damaged
Antenna type	PCB antenna      Gain 2 dBi
Frequency Range	2402 MHz - 2480 MHz
RF power	-6.228 dBm Peak Conducted (GFSK) -7.095 dBm Peak Conducted (8-DPSK)
Number of channels	79
Channel Spacing	1 MHz
Channel Access Protocol	Frequency Hopping
Type of Modulation	GFSK(1 Mbps), DQPSK(2 Mbps), 8-DPSK(3 Mbps)
Power Source	DC 12 V
Hardware Rev	V0.3
Software Rev	android-6.0.1
Firmware Rev	r2

## 1.1 Tested Frequency

	LOW	MID	HIGH
Frequency (MHz)	2 402	2 441	2 480

## 1.2 Tested Mode

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports.
- Following channel(s) was (were) selected for the final test as listed below.

Tested Ch	Modulation Technology	Modulation Type	Packet Type
Low, Mid, High	FHSS	GFSK	DH 5
Low, Mid, High	FHSS	8-DPSK	3DH 5

### 1.3 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

### 1.4 EUT Exercise of Software

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. The software is using the android system to internal memory.

### 1.5 Device Modifications


The following modifications was applied by the applicant:

Not applicable

### 1.6 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Note Computer	HP	ProBook 650 G1	5CG5114KD2
AC ADAPTER	HP	PPP012D-S	-
AC / DC ADAPTER	Shenzhen Simskian Electronics Technology CO., LTD	SK02T-1200100K	-

### 1.7 Configuration of System under Test

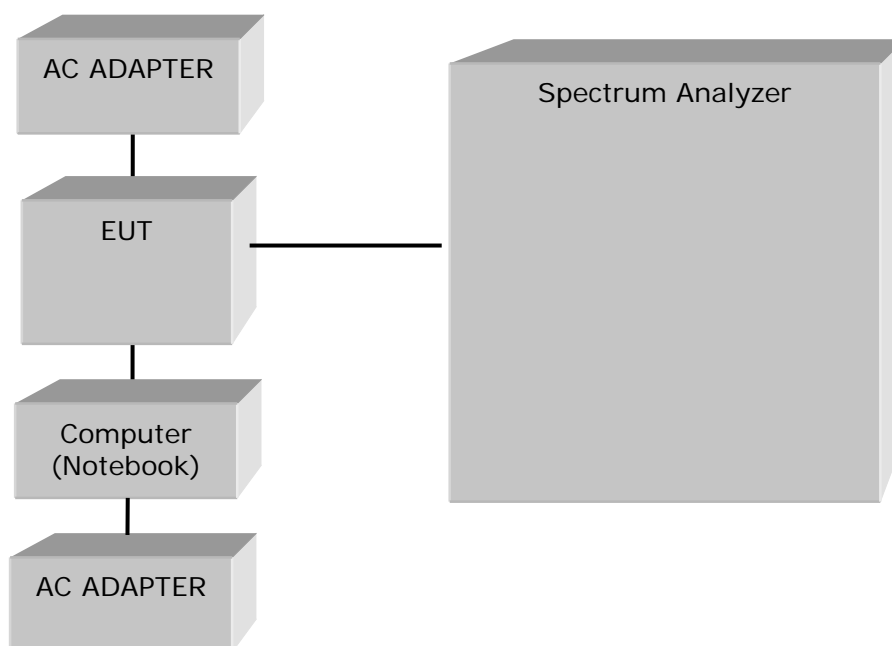





## 1.8 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

## 1.9 Test Facility

The measurement facility is located at (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

## 1.10 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Registration Number	Logo
USA	FCC	FCC Part 15 & 18 EMI (Electromagnetic Interference / Emission)	805871	
CANADA	IC	IC EMI (3/10m test site)	8737A-2	
JAPAN	VCCI	VCCI V-3 EMI (Electromagnetic Interference / Emission)	C-986 T-1843 R-3627 G-387	
KOREA	MSIP	EMI (Electromagnetic Interference / Emission) EMS (Electromagnetic Susceptibility / Immunity)	KR0025	



CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

## 2.0 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	Carrier Frequency Separation	> 25kHz	Conducted	C
15.247(a)	Number of Hopping Frequencies	< 15 Channels		C
15.247(a)	20 dB Bandwidth	N/A		C
15.247	Dwell Time	< 0.4 sec		C
15.247(b)	Transmitter Output Power	< 1 Watt		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.209	Field Strength of Harmonics	15.209(a)	Radiated	C
15.207	AC Conducted Emissions	15.207(a)	Line Conducted	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

- FCC Part 15.247

The tests were performed according to the method of measurements prescribed in DA 00-705 and ANSI C63.10 -2013.

## 2.1 Requirements

### 2.1.1 Carrier Frequency Separation

#### Test Procedures(ANSI C63.10-2013 7.8.2)

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.  
After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

#### Test Settings :

- a) Span = 5 MHz (wide enough to capture the peaks of two adjacent channels)
- b) RBW = 30 kHz (Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel)
- c) VBW = 30 kHz ( $\geq$  RBW)
- d) Sweep = auto
- e) Detector function = peak
- f) Trace = max hold

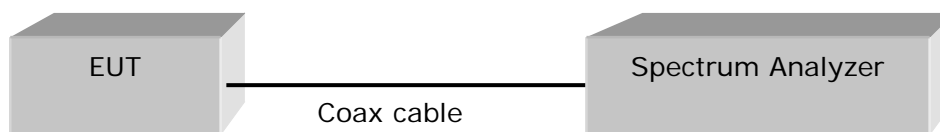


Figure 1 : Measurement setup for the carrier frequency separation

#### Minimum Standard :

Carrier Frequency Separation > 25kHz

#### Test Data :

##### Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Channel	Adjacent Hopping Channel Separation (kHz)	Two-third of 20dB bandwidth (kHz)	Minimum Bandwidth (kHz)	Result
2441MHz	995	676	25	Complies

##### Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Channel	Adjacent Hopping Channel Separation (kHz)	Two-third of 20dB bandwidth (kHz)	Minimum Bandwidth (kHz)	Result
2441MHz	1005	878	25	Complies

See next pages for actual measured spectrum plots.






CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### Carrier Frequency Separation

#### GFSK

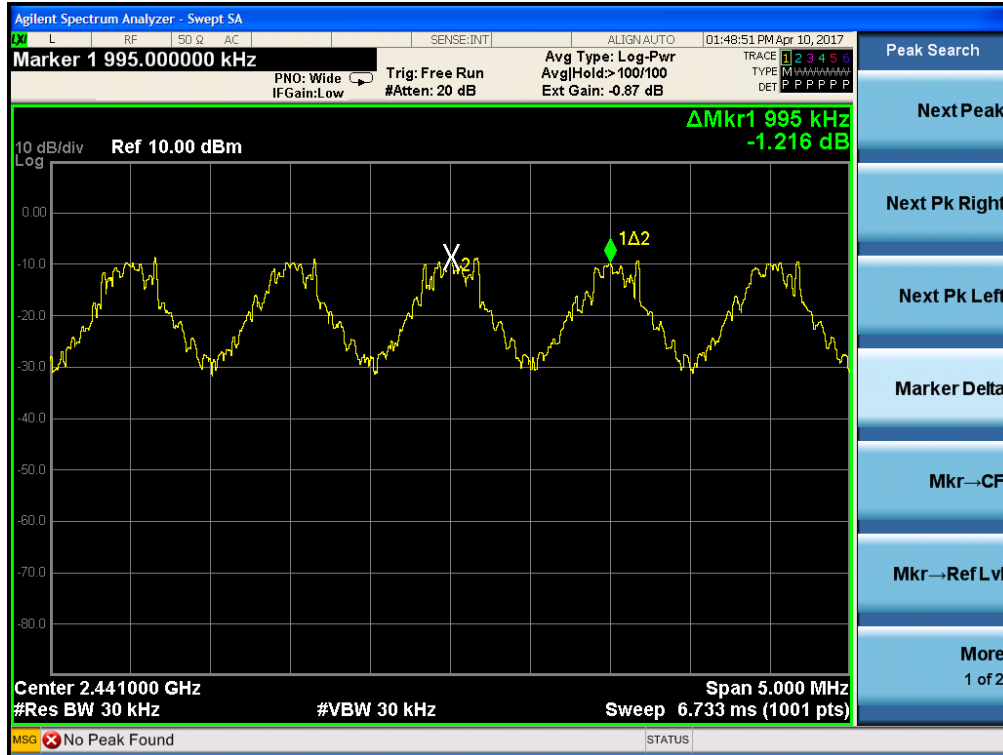

#### 8-DPSK

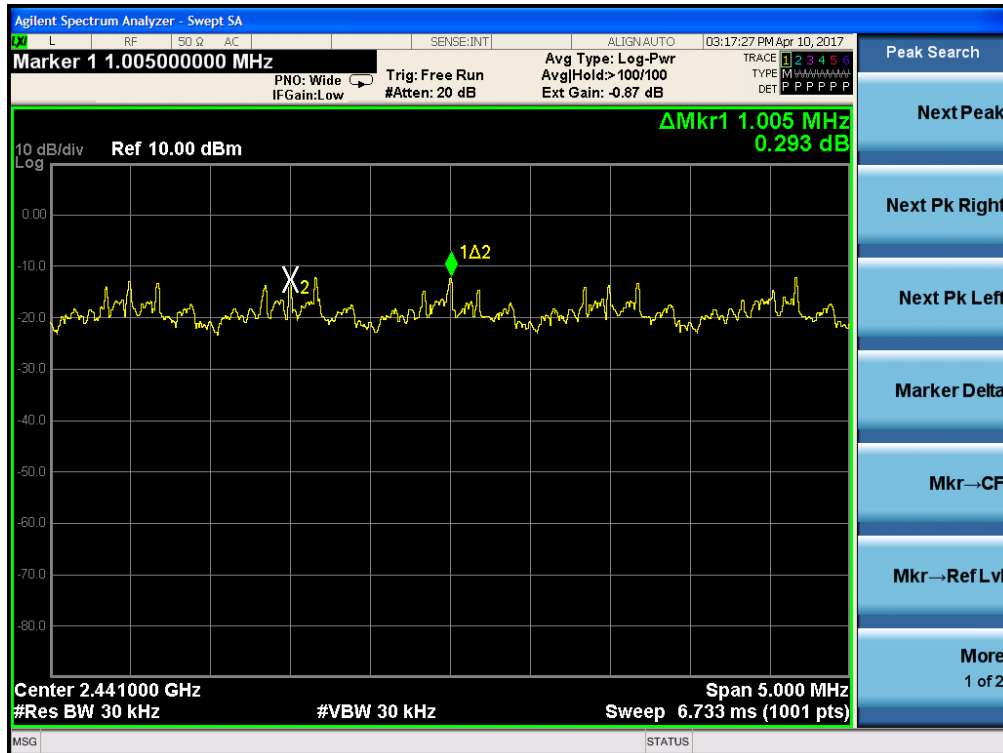







CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### Number of Hopping Frequencies

#### GFSK

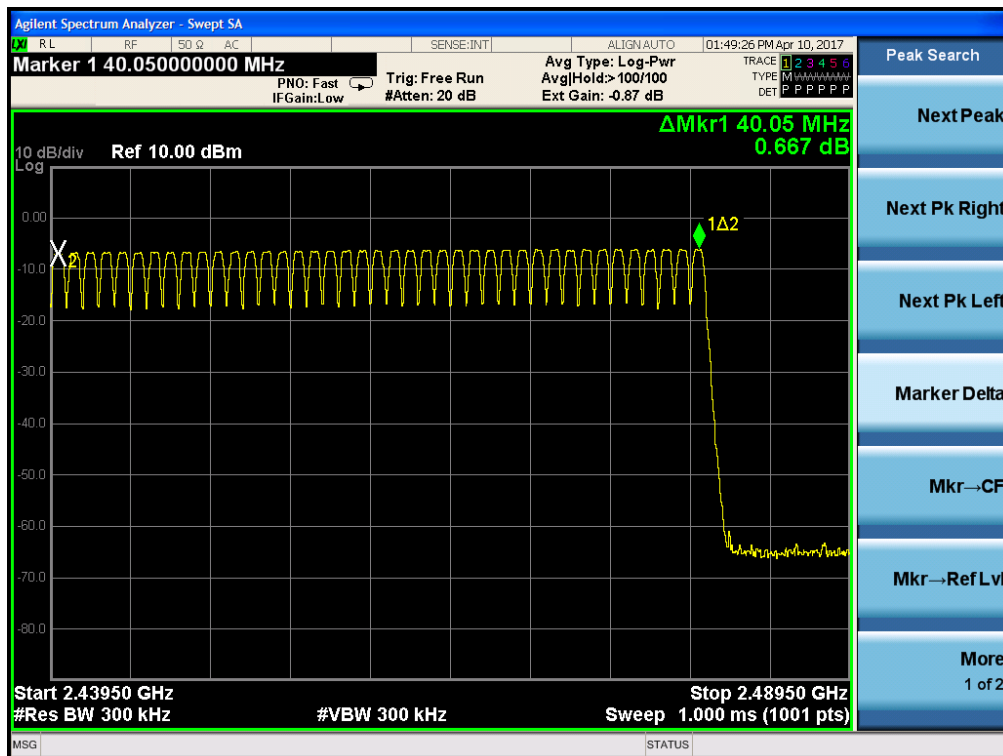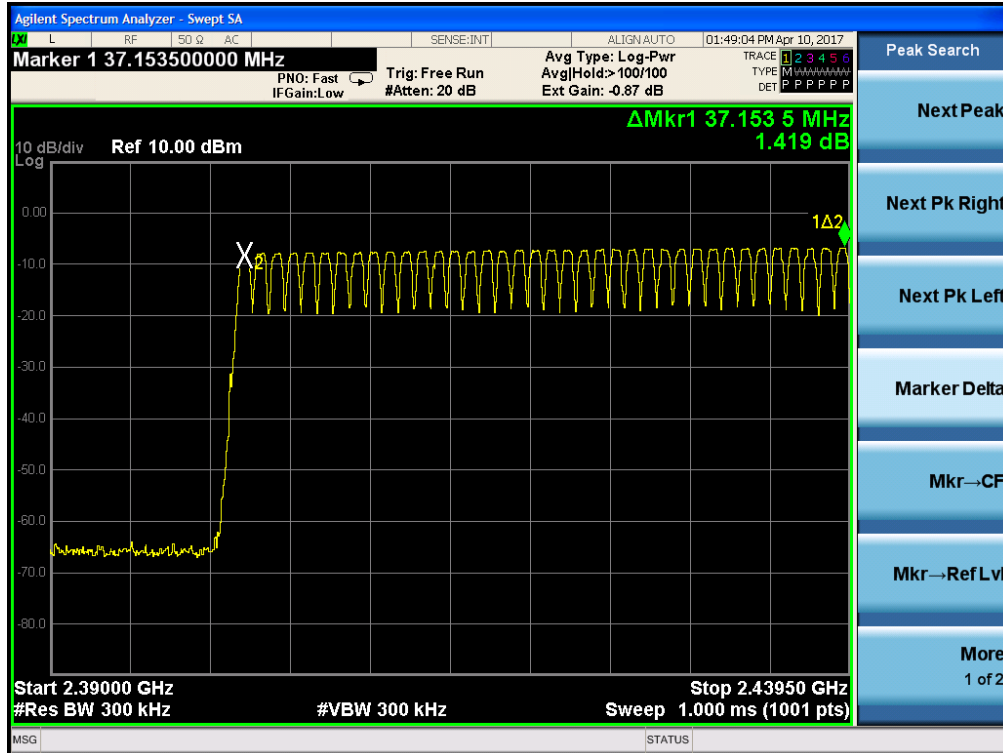





CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### 8-DPSK

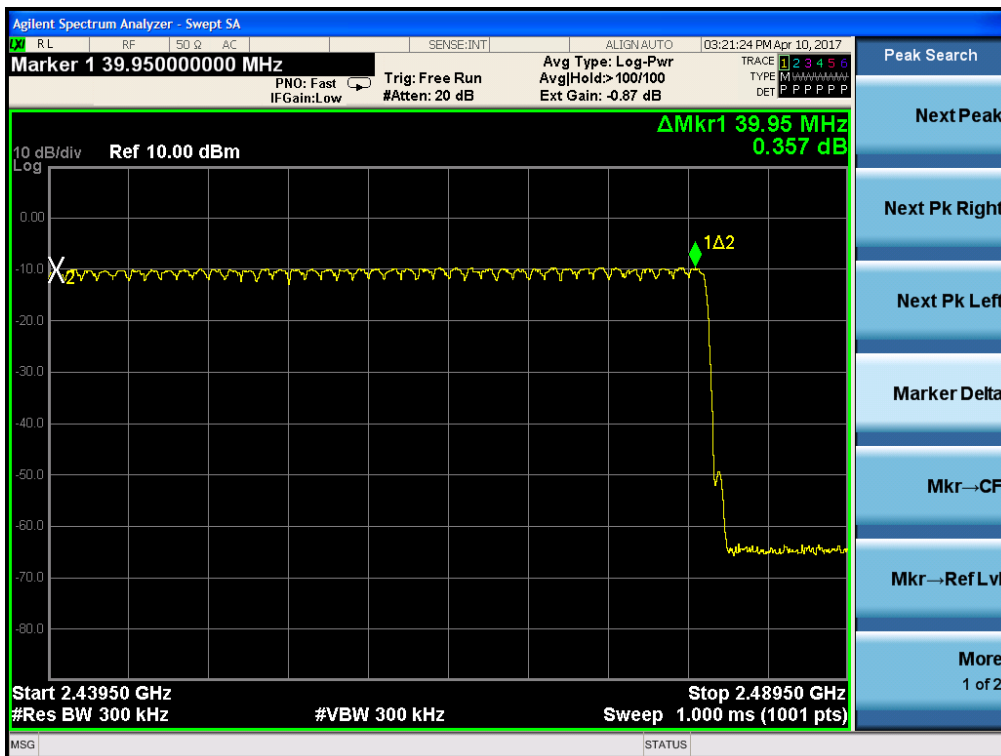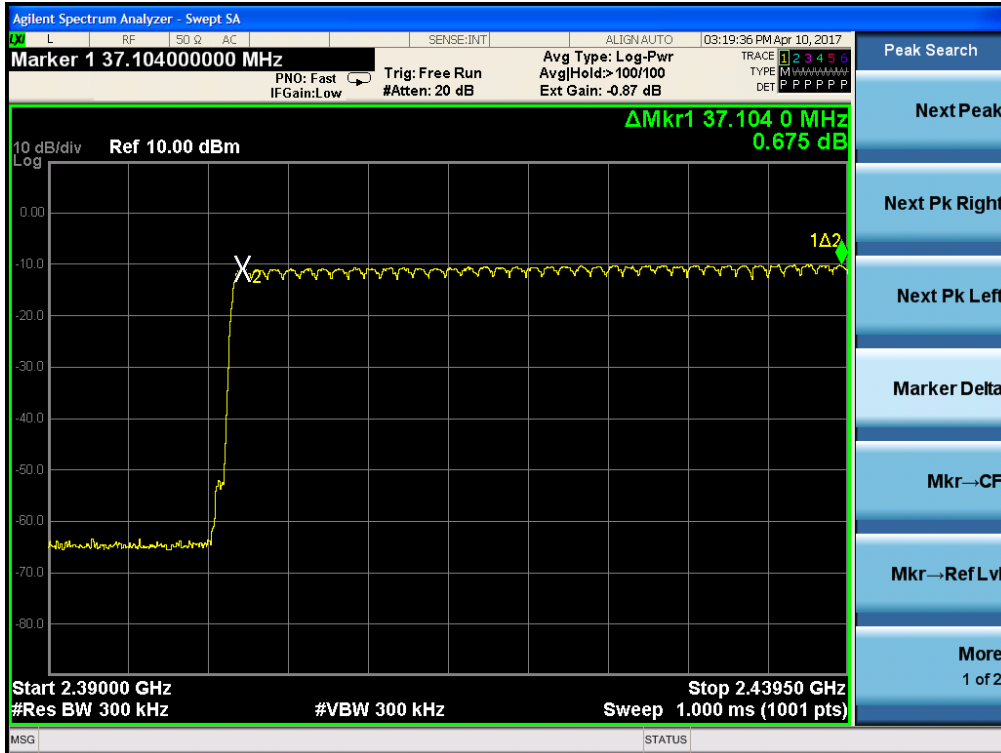

### 2.1.3 20 dB bandwidth

#### Test Procedures(ANSI C63.10-2013 6.9.2)

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

#### Test Procedures(ANSI C63.10-2013 6.9.3)


The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

#### Test Settings :

Center frequency = the highest, middle and the lowest channels

- a) Span = 3 MHz (between 2 times and 5 times the OBW)
- b) RBW = 30 kHz (1% to 5% of the OBW)
- c) VBW = 100 kHz (approximately 3 times RBW)
- d) Sweep = auto
- e) Detector function = peak
- f) Trace = max hold

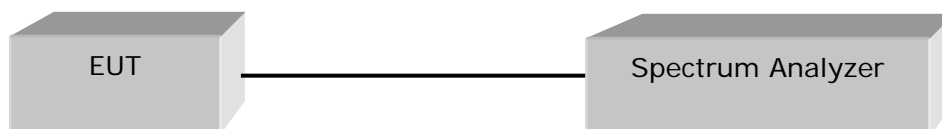

#### Limit :

N/A



CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### Test Data (20 dB bandwidth)

**Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)**

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2 402	0	1.013	Complies
2 441	39	1.014	Complies
2 480	78	1.016	Complies

**Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)**

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2 402	0	1.318	Complies
2 441	39	1.317	Complies
2 480	78	1.318	Complies

### Test Data (Occupied Bandwidth)

**Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)**

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2 402	0	0.885	Complies
2 441	39	0.883	Complies
2 480	78	0.886	Complies

**Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)**

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2 402	0	1.204	Complies
2 441	39	1.203	Complies
2 480	78	1.203	Complies

See next pages for actual measured spectrum plots.




CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### 20 dB Bandwidth, Occupied Bandwidth

#### GFSK

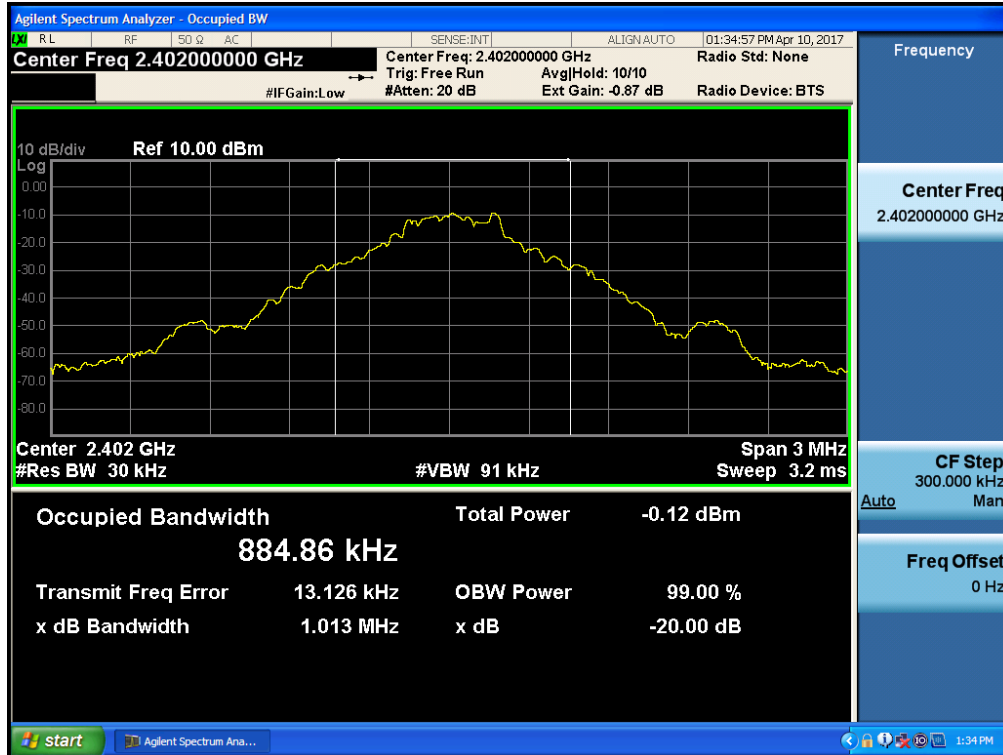




CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

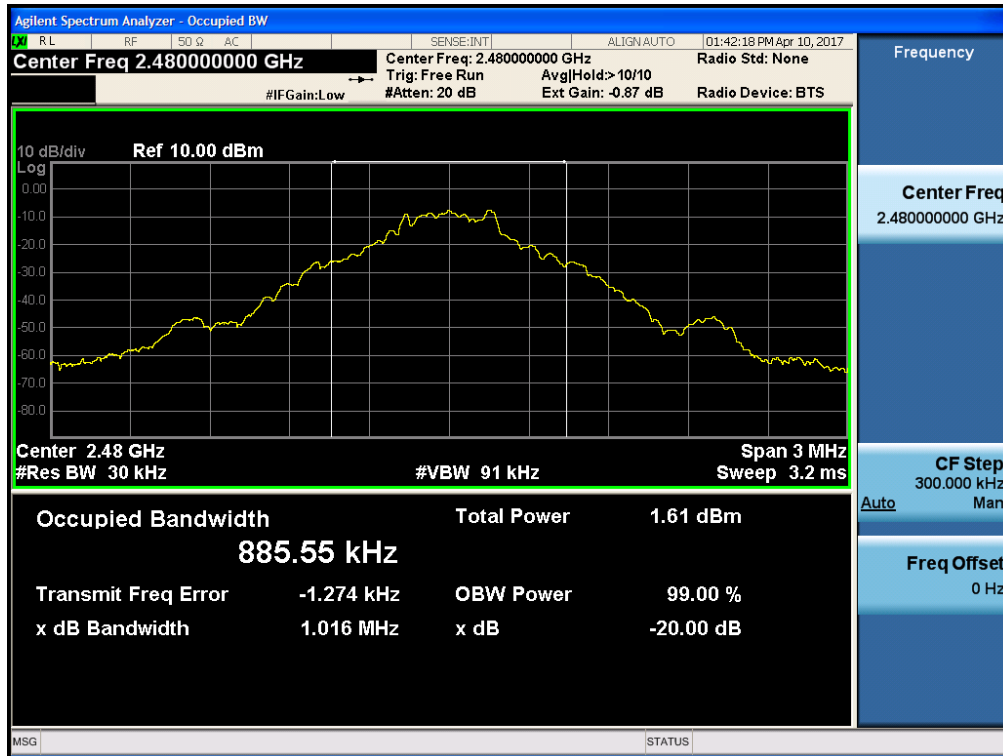







CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### 8-DPSK

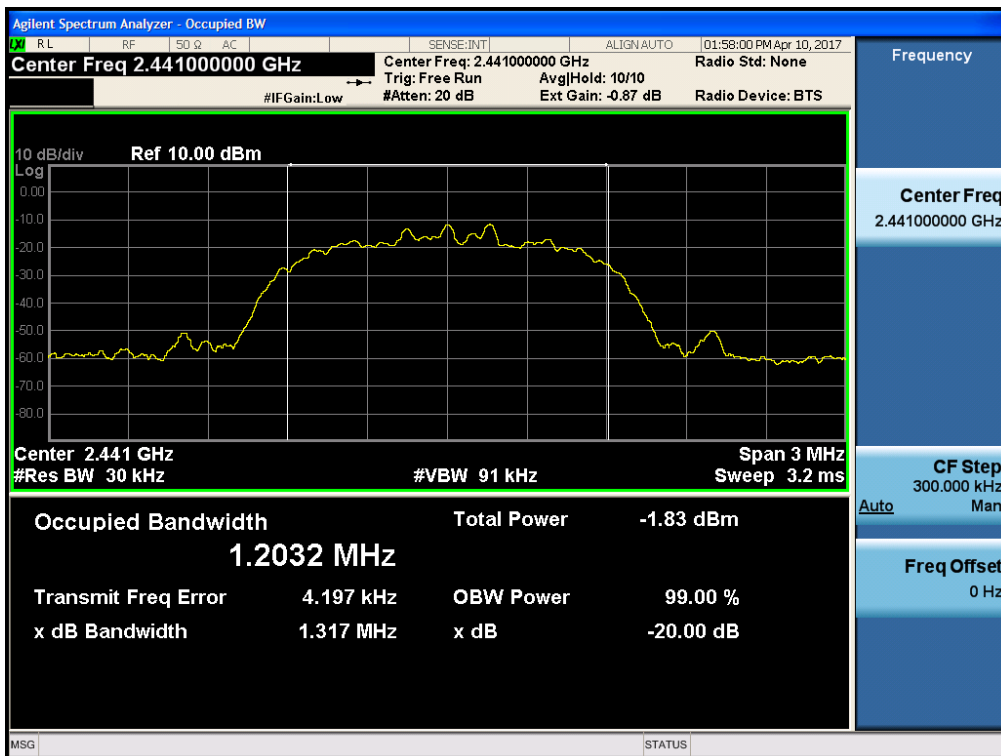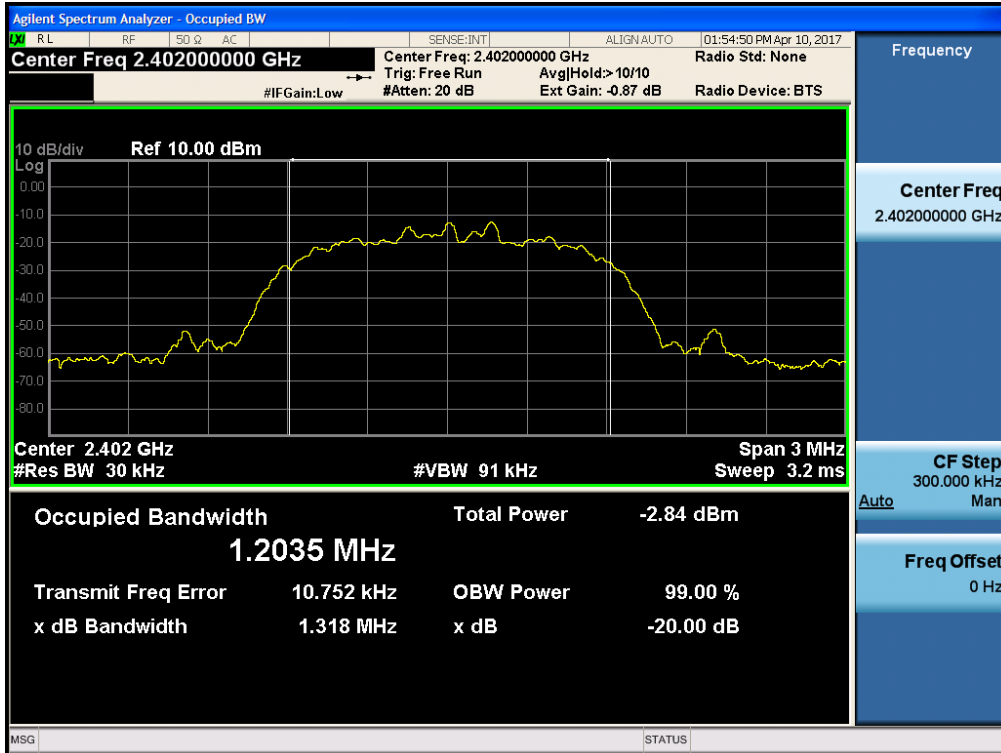




CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

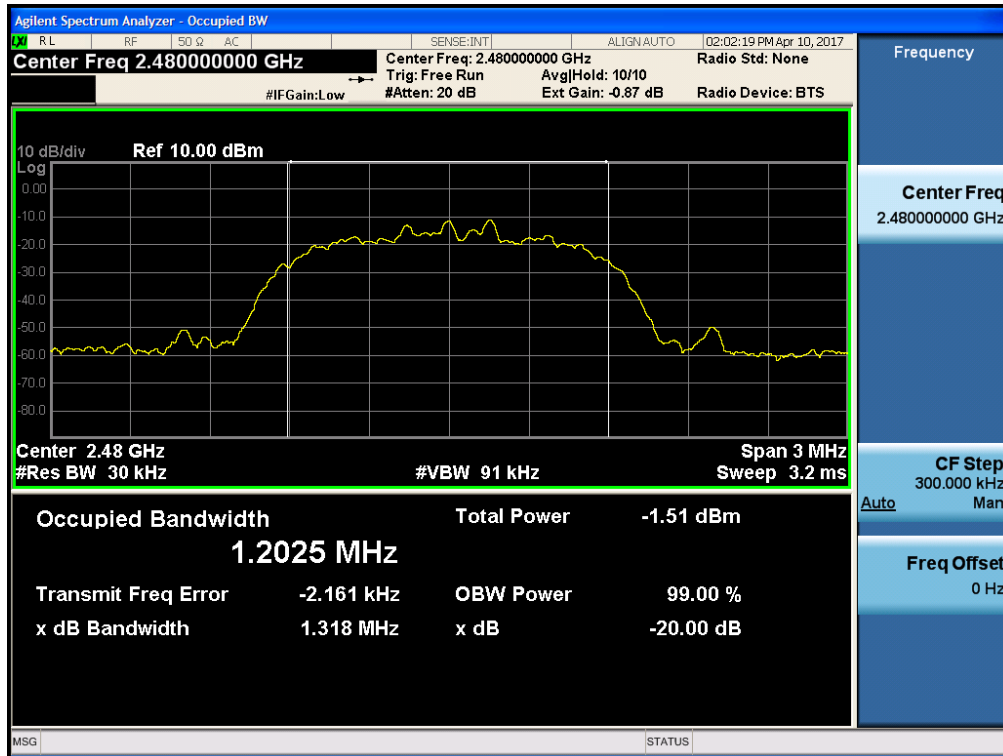

## 2.1.4 Time of Occupancy (Dwell Time)

### Test Procedures(ANSI C63.10-2013 7.8.4)


The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.
6. The BCEA001 has 3 type of payload, DH1, DH3, DH5. The hopping rate is 1600 per second.

#### Test Settings:

Center frequency = the highest, middle and the lowest channels

- |  |  |
|--|--|
| a) Span = zero   | b) RBW = 1 MHz ( $\leq$ channel spacing) |
| c) VBW = 1 MHz ( $\geq$ RBW)   | d) Trace = max hold                      |
| e) Detector = peak   |  |
| g) Sweep = as necessary to capture the entire dwell time per hopping channel |  |

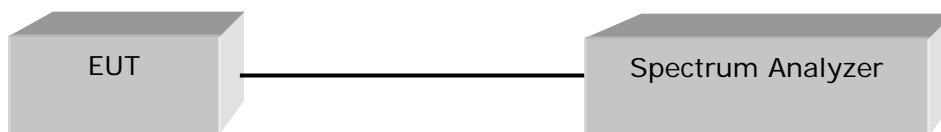

#### **Limit :**

Time of Occupancy < 0.4

## Test Data

Time of occupancy on the TX channel in 31.6 sec = time domain slot length × hop rate ÷  
number of hop per channel × 31.6

### Test mode : GFSK

Channel Frequency (MHz)	Packet Type	Length of Transmission Time (ms)	Test Results	
			Time of occupancy on the TX channel in 31.6sec (ms)	Result
2 441	DH 1	0.396	126.7	Complies
	DH 3	1.653	264.5	Complies
	DH 5	2.898	309.1	Complies

DH1 Dwell time =  $0.396 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 126.7 \text{ ms}$

DH3 Dwell time =  $1.653 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 264.5 \text{ ms}$

DH5 Dwell time =  $2.898 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 309.1 \text{ ms}$

### Test mode : 8-DPSK

Channel Frequency (MHz)	Packet Type	Length of Transmission Time (ms)	Test Results	
			Time of occupancy on the TX channel in 31.6sec (ms)	Result
2 441	3DH 1	0.403	129.0	Complies
	3DH 3	1.660	265.6	Complies
	3DH 5	2.905	309.9	Complies

3DH1 Dwell time =  $0.403 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 129.0 \text{ ms}$

3DH3 Dwell time =  $1.660 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 265.6 \text{ ms}$

3DH5 Dwell time =  $2.905 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 309.9 \text{ ms}$

See next pages for actual measured spectrum plots.




CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### Time of Occupancy

#### PACKET Type DH1 - GFSK

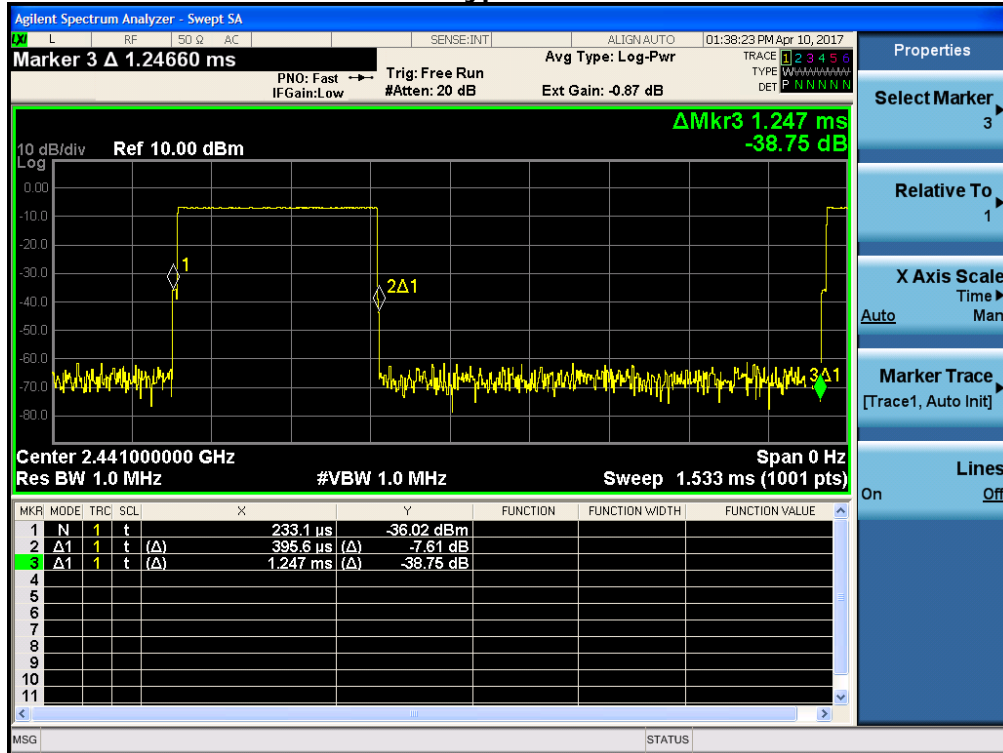

#### PACKET Type DH3 - GFSK

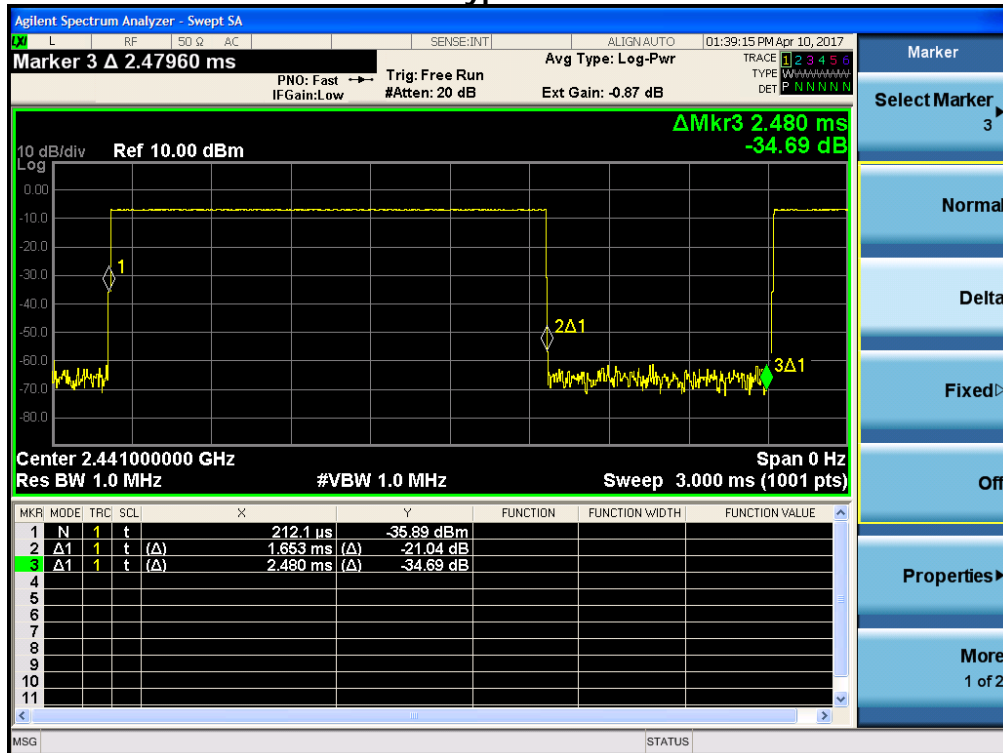




CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### PACKET Type DH5 - GFSK

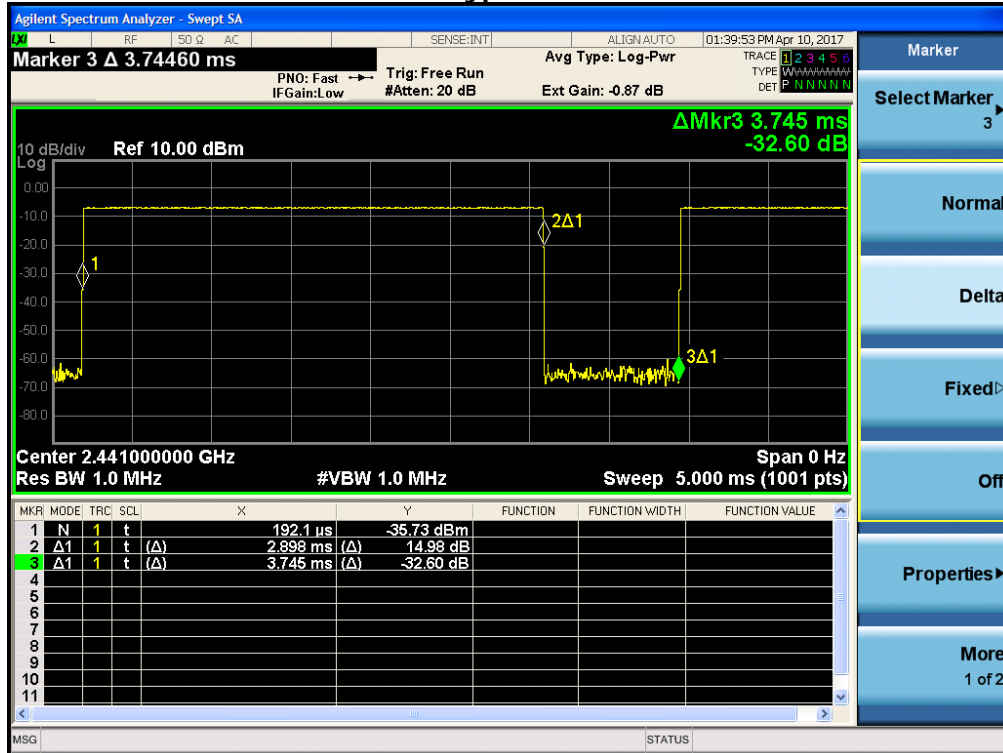




CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance


## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### PACKET Type 3DH1 - 8-DPSK

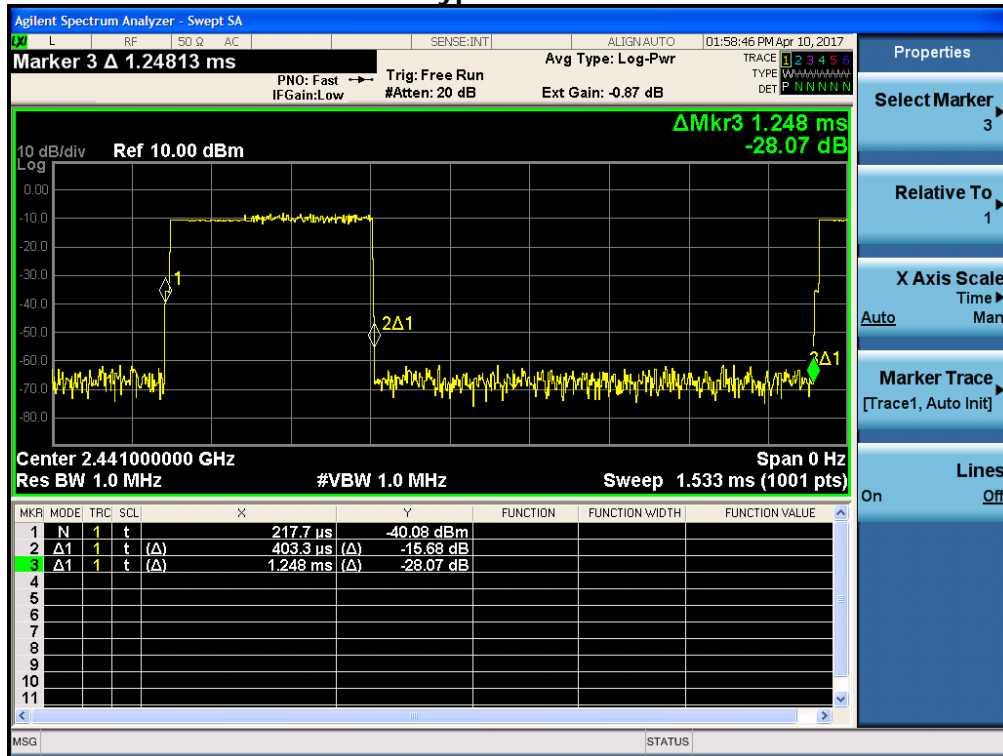

### PACKET Type 3DH3 - 8-DPSK

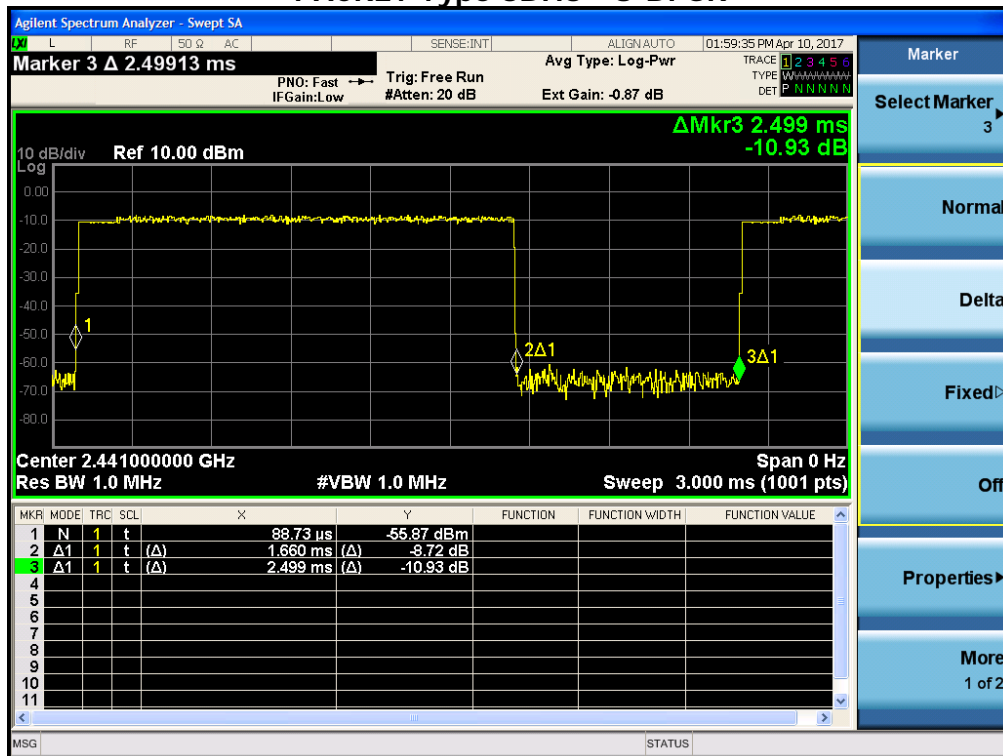




CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### PACKET Type 3DH5 - 8-DPSK

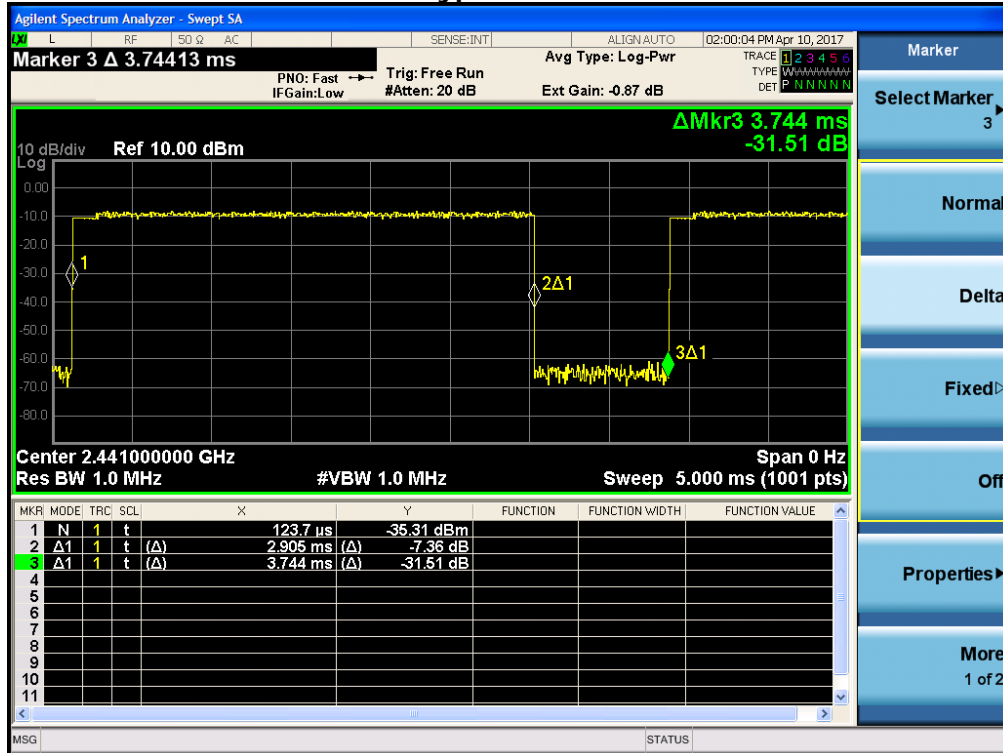



## 2.1.5 Maximum peak Conducted Output Power


### Test Procedures(ANSI C63.10-2013 7.8.5)

The maximum peak conducted output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

#### Test Settings:

Center frequency = the highest, middle and the lowest channels

- a) Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)
- b) RBW = 3 MHz (greater than the 20 dB bandwidth of the emission being measured)
- c) VBW = 3 MHz ( $\geq$  RBW)
- d) Detector = peak
- e) Trace = max hold
- f) Sweep = auto

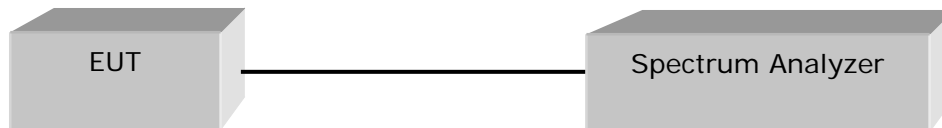

#### Limit :

Maximum peak Conducted Output Power < 1 W

### Test Data

#### Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency (MHz)	Channel No.	Peak output power(dBm)	Peak output power(mW)	Result
2 402	0	-7.942	0.161	Complies
2 441	39	-6.756	0.211	Complies
2 480	78	-6.228	0.238	Complies

#### Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency (MHz)	Channel No.	Peak output power(dBm)	Peak output power(mW)	Result
2 402	0	-8.390	0.145	Complies
2 441	39	-7.466	0.179	Complies
2 480	78	-7.095	0.195	Complies

See next pages for actual measured spectrum plots.





CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### Maximum peak Conducted Output Power

#### GFSK

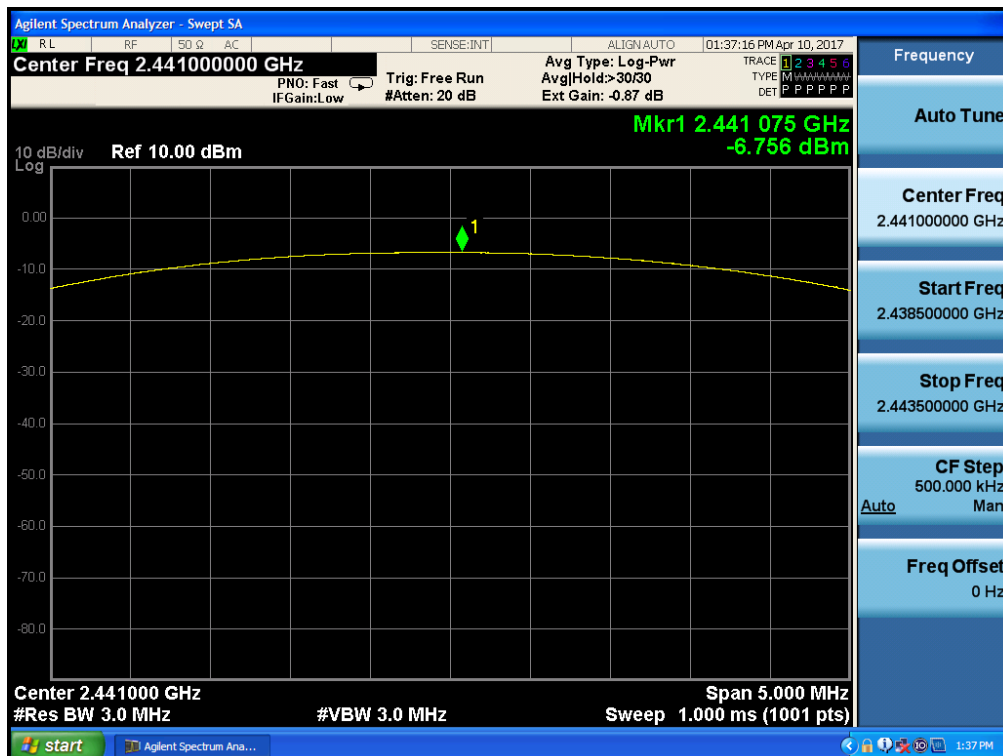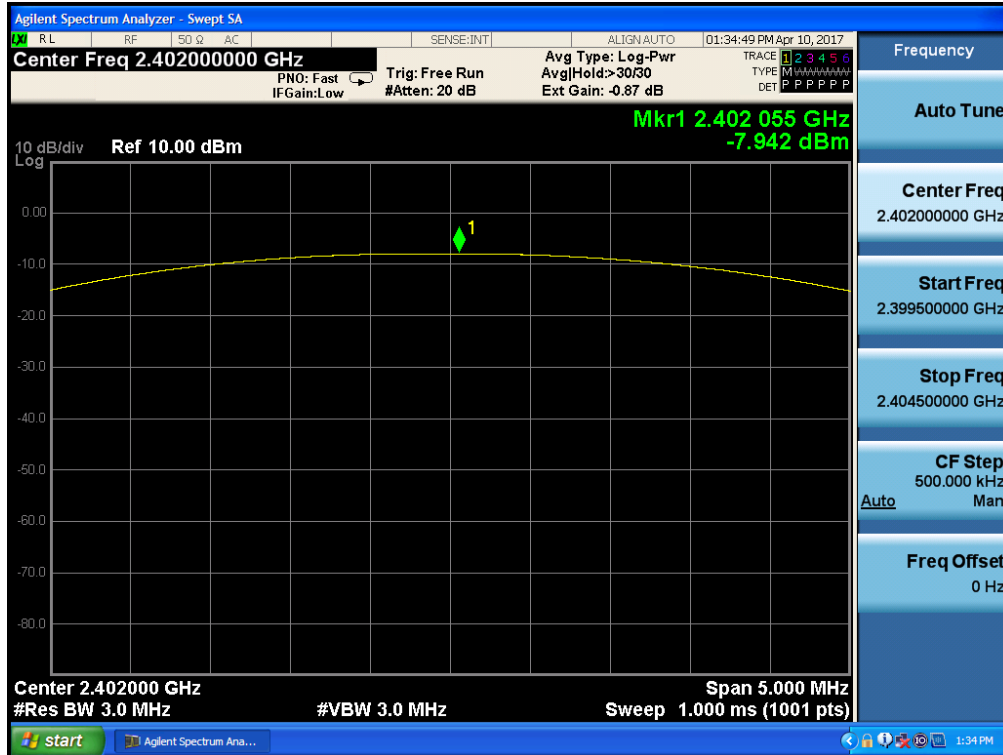




CTK Co., Ltd.

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

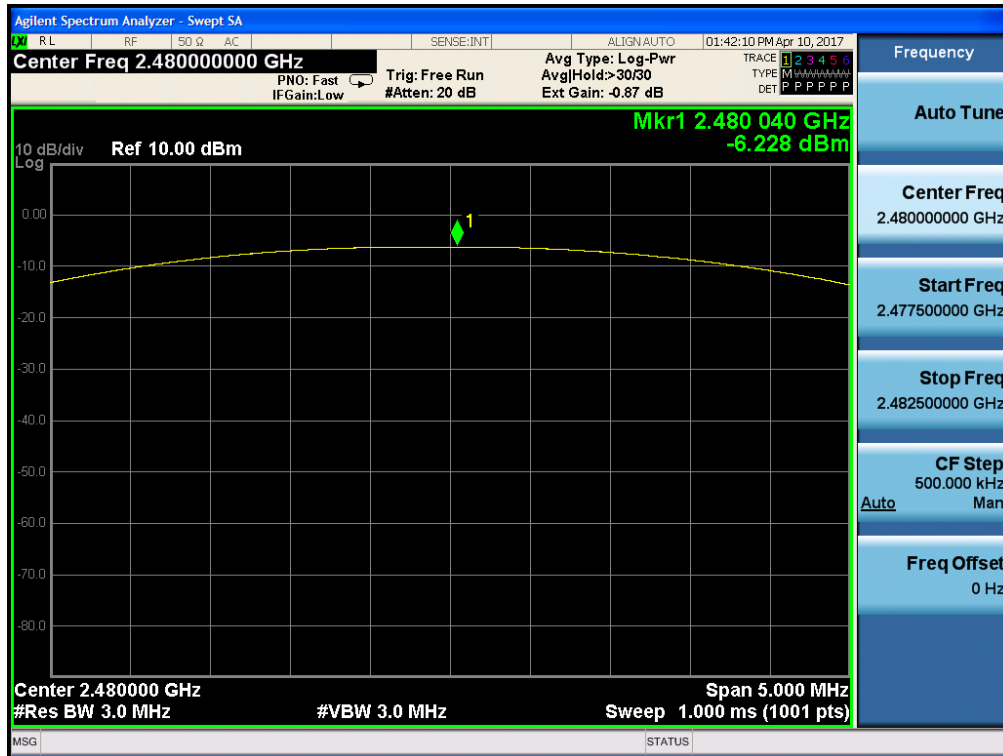



CTK Co., Ltd.



# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

## 8-DPSK

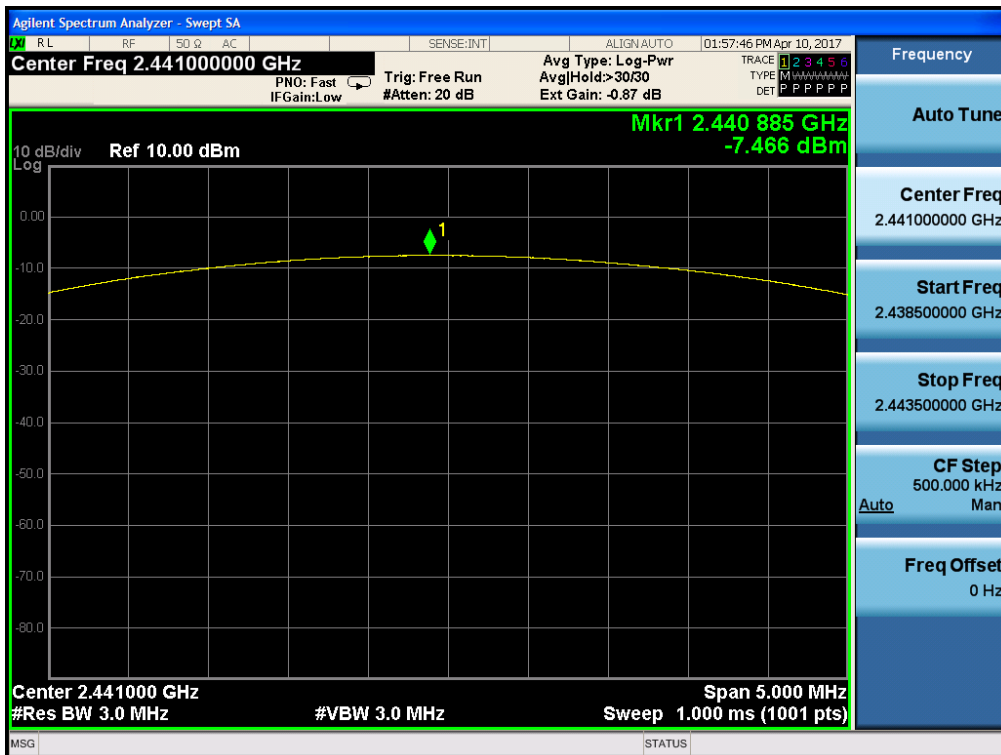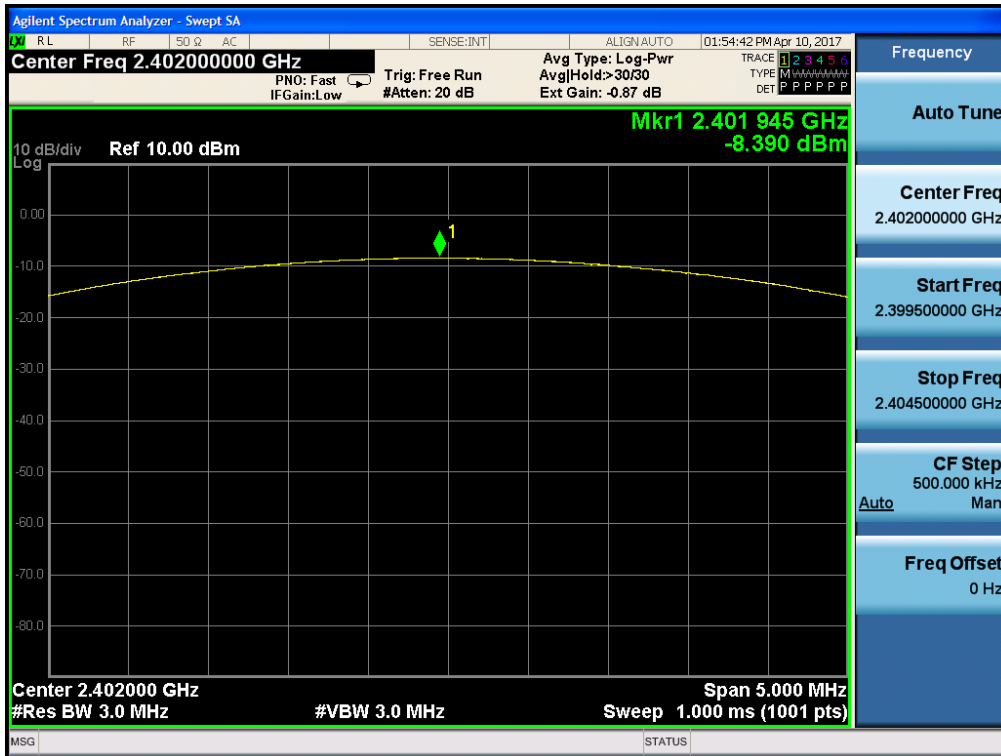




CTK Co., Ltd.

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

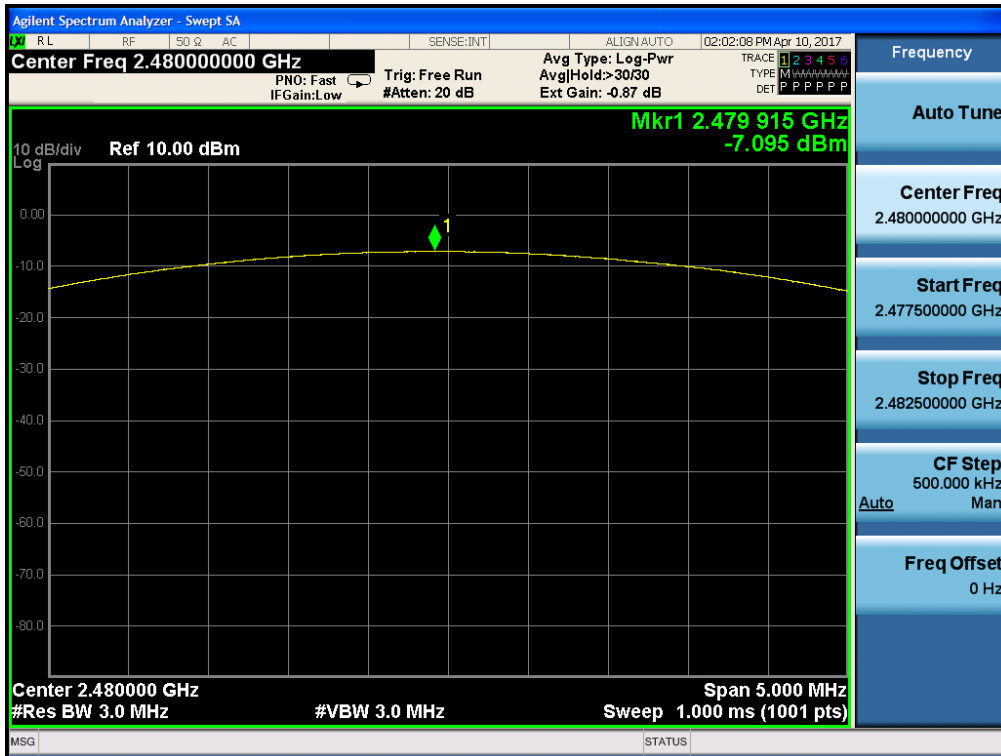

## 2.1.6 Band-edge


### Test Procedures(ANSI C63.10-2013 7.8.6 / ANSI C63.10-2013 7.8.8)

The bandwidth at 20 dB down from the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

#### Test Settings:

Center frequency = the highest, middle and the lowest channels

- |                     |                                |
|---------------------|--------------------------------|
| a) RBW = 100 kHz    | b) VBW = 300 kHz ( $\geq$ RBW) |
| c) Span = 10 MHz    | d) Detector = peak             |
| e) Trace = max hold | f) Sweep = auto                |

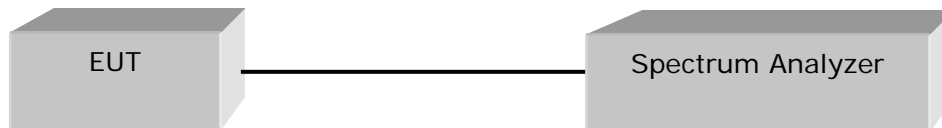

#### **Limit :**

---

Band-edge > 20 dBc

---

### Test Results

All conducted emission in any 100 kHz bandwidth outside of the spectrum band was at least 20 dB lower than the highest level of the inband spectral density.  
Therefore the applying equipment meets the requirement.

See next pages for actual measured spectrum plots.




CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### Band – edge (with Hopping) - GFSK

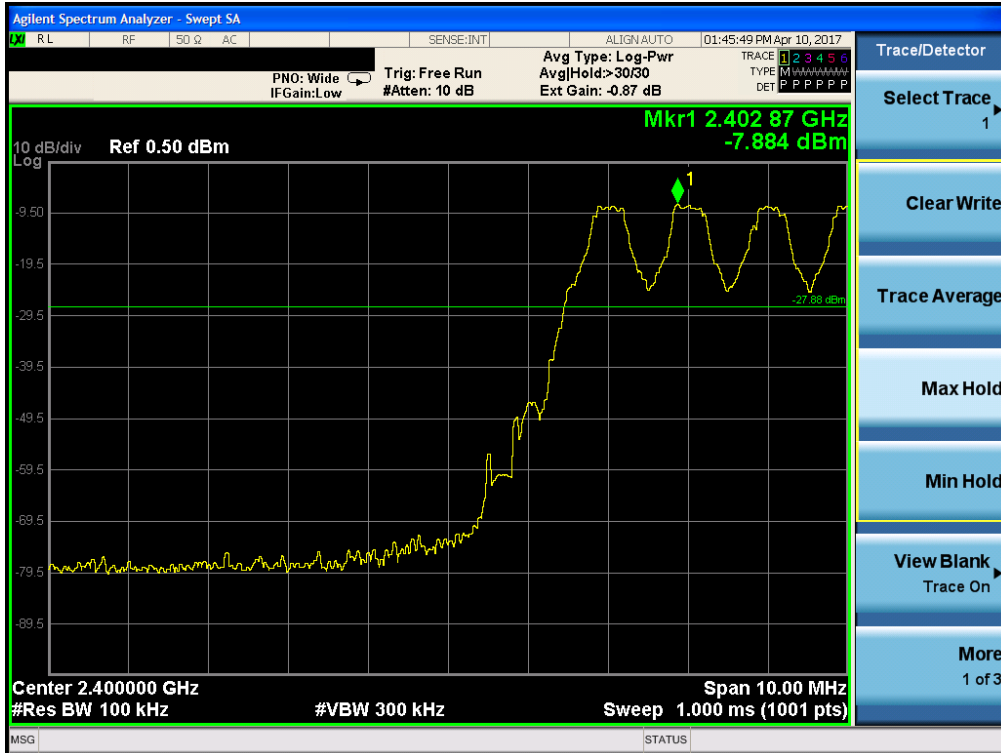





CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### Band – edge (without Hopping) - GFSK

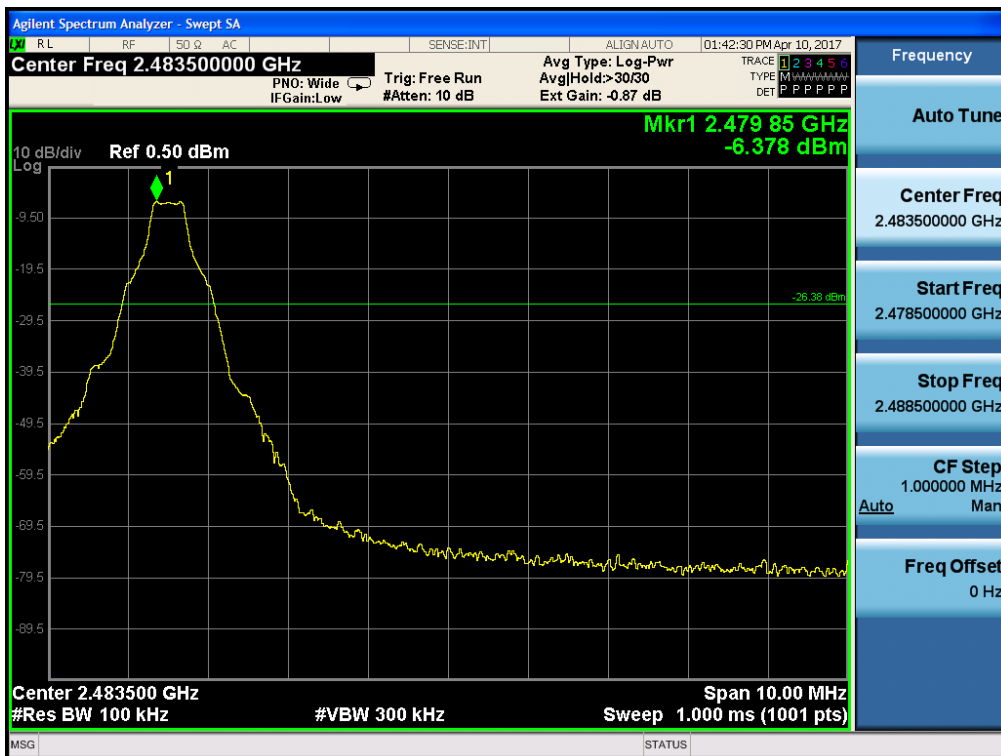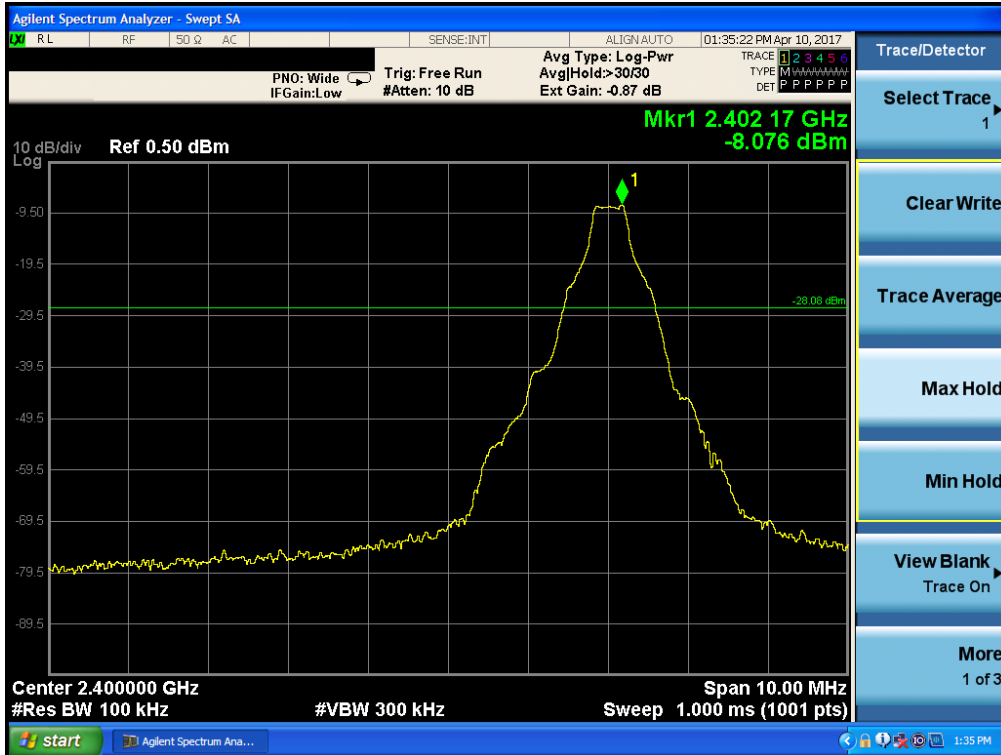






CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance



## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com


### Band – edge (with Hopping) – 8-DPSK

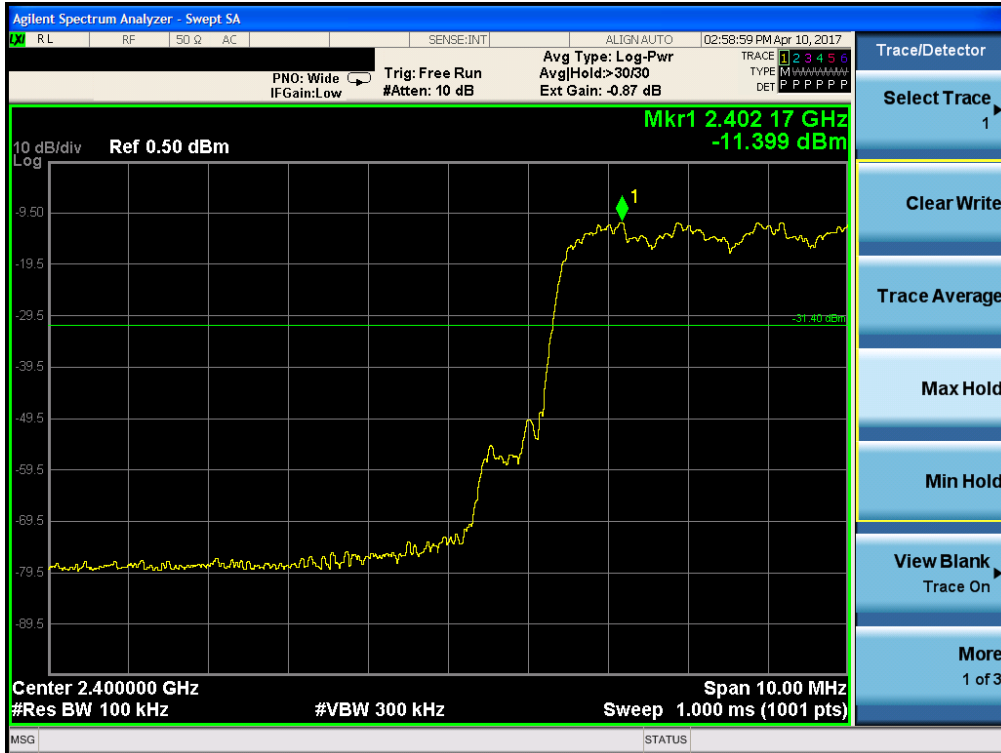

### Band – edge (without Hopping) – 8-DPSK

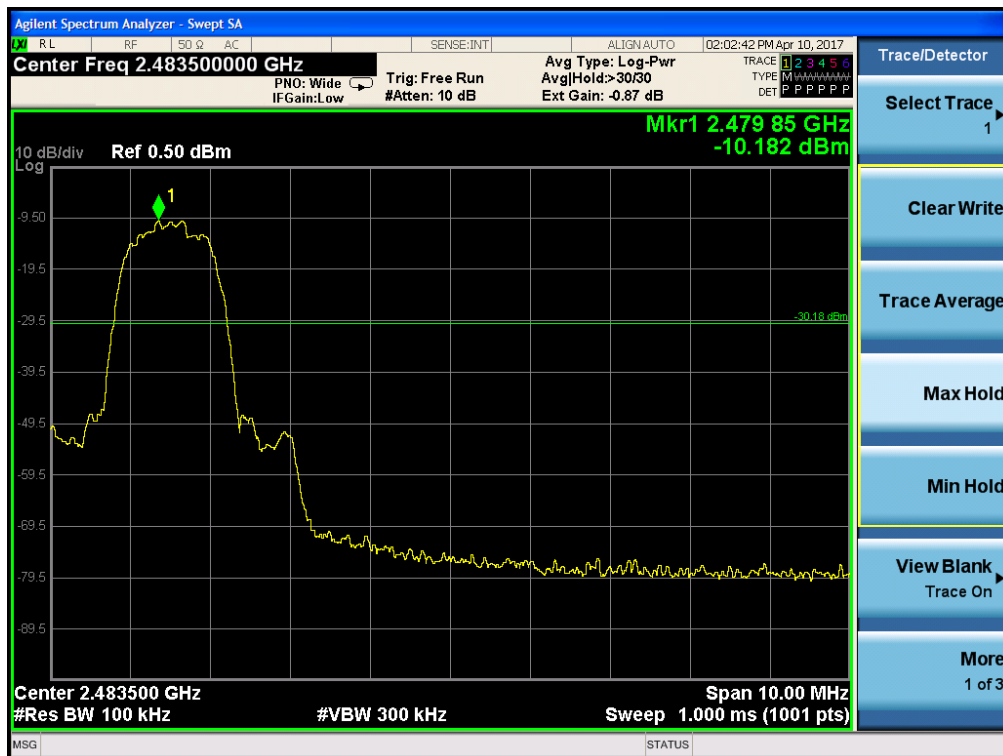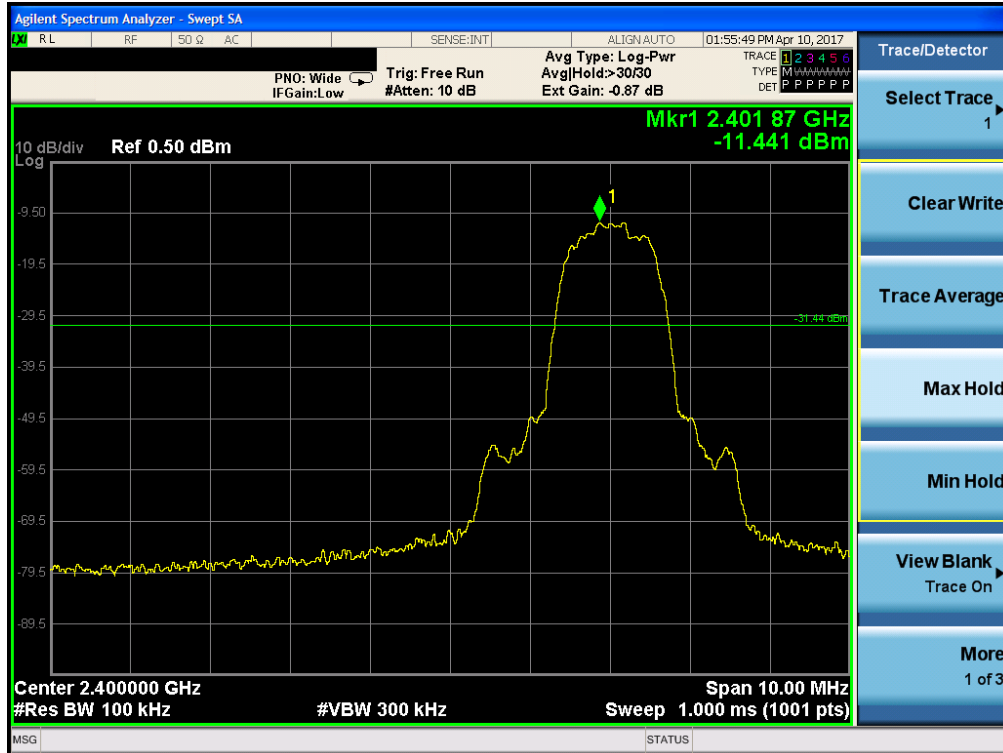

Band – edge (at 20 dB blow) – Low channel  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic  
(GFSK : Worst-Case)

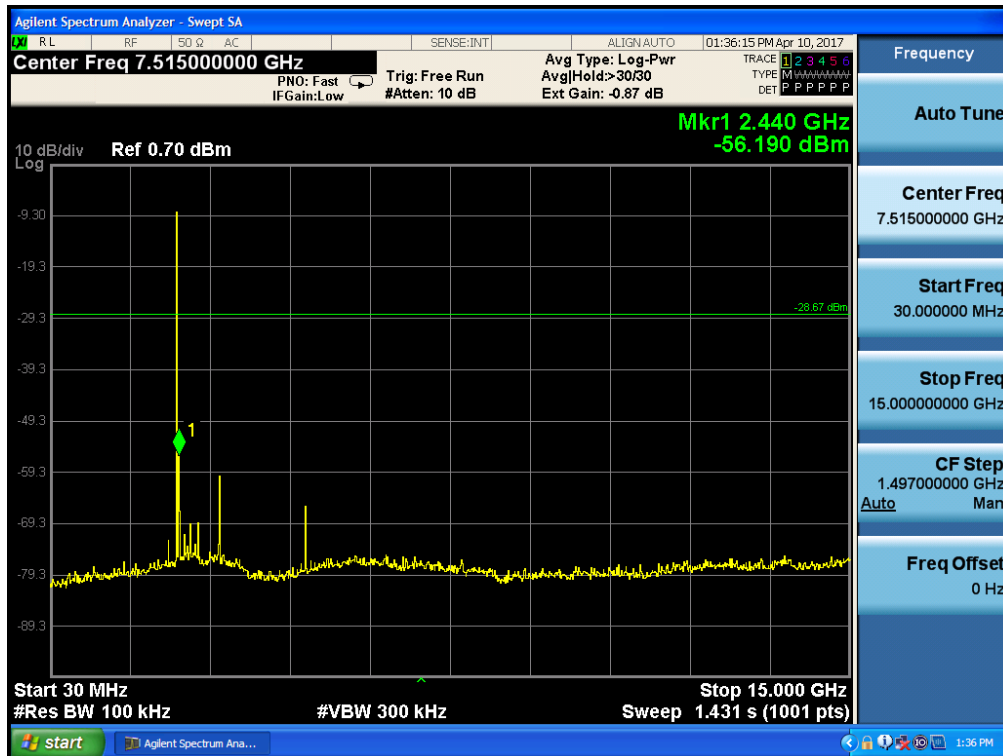




CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance


## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

Band – edge (at 20 dB blow) – Mid channel  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic  
(GFSK : Worst-Case)

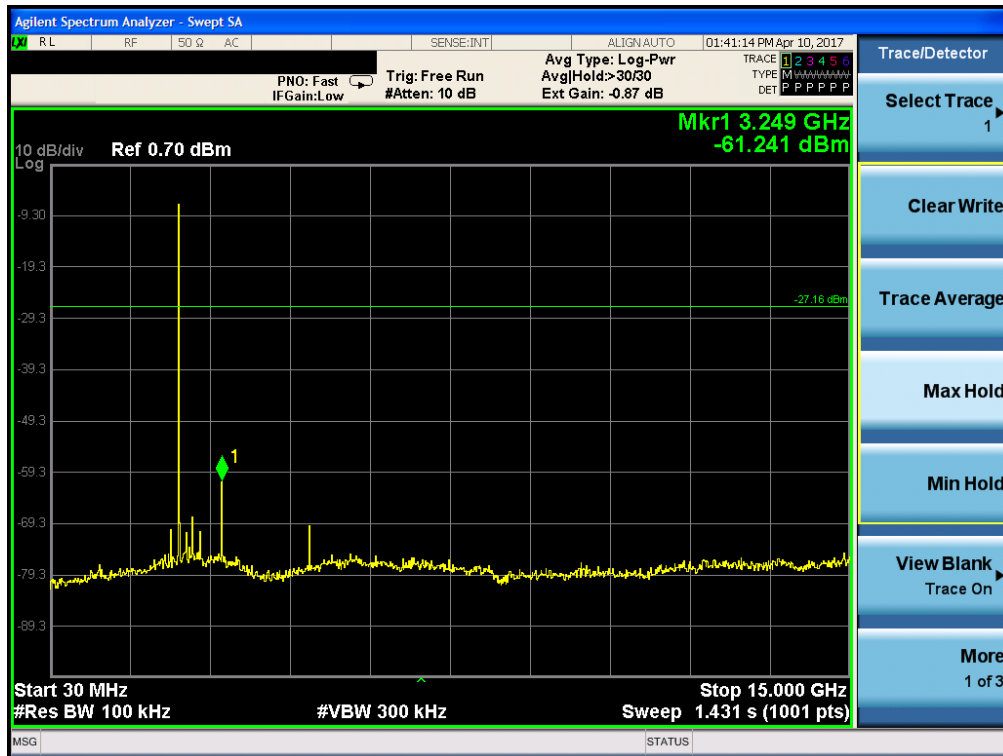

Band – edge (at 20 dB blow) – High channel  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic  
(GFSK : Worst-Case)

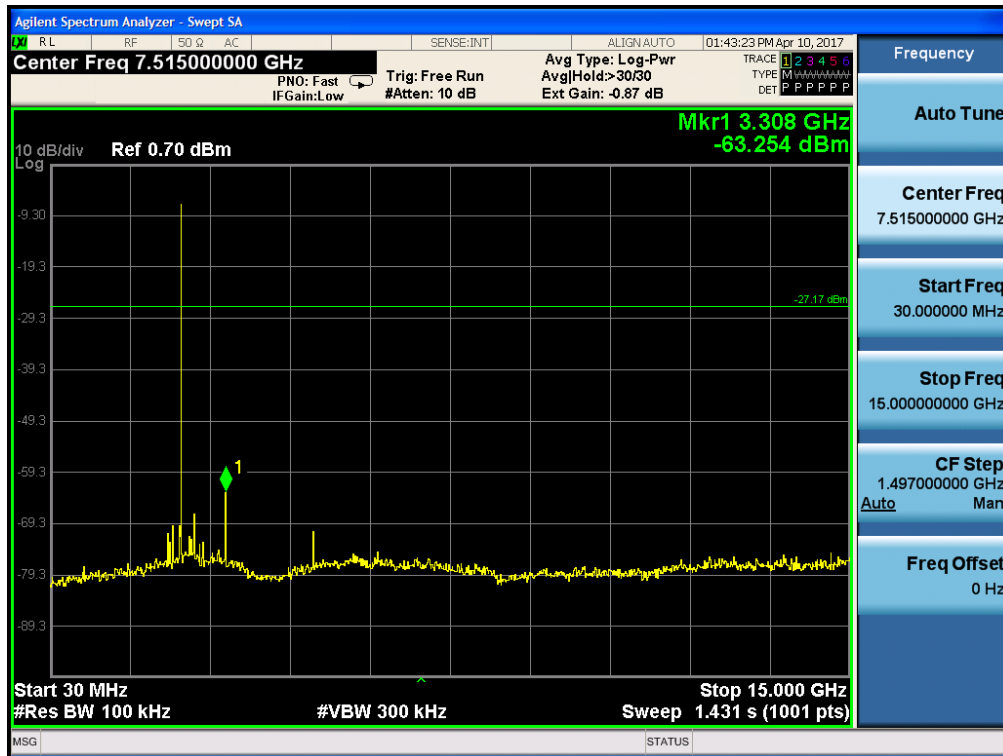




CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance


## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

Band – edge (at 20 dB blow) – Low channel  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic  
(8-DPSK : Worst-Case)

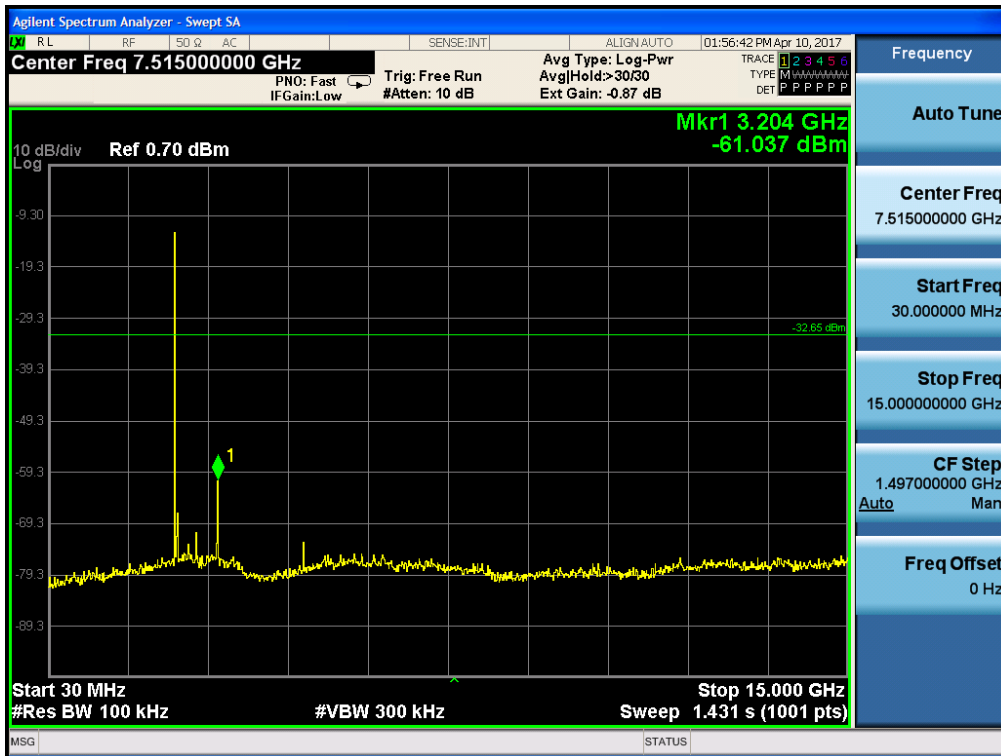


Band – edge (at 20 dB blow) – Mid channel  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic  
(8-DPSK : Worst-Case)

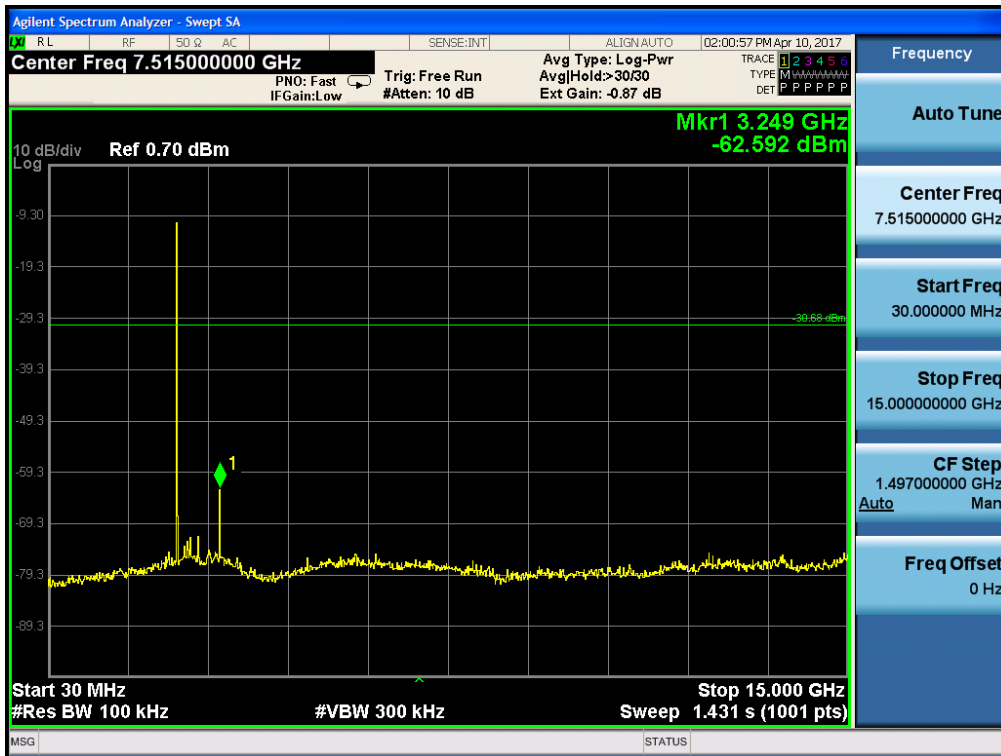



**Band – edge (at 20 dB blow) – High channel**  
**Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic**  
**(8-DPSK : Worst-Case)**

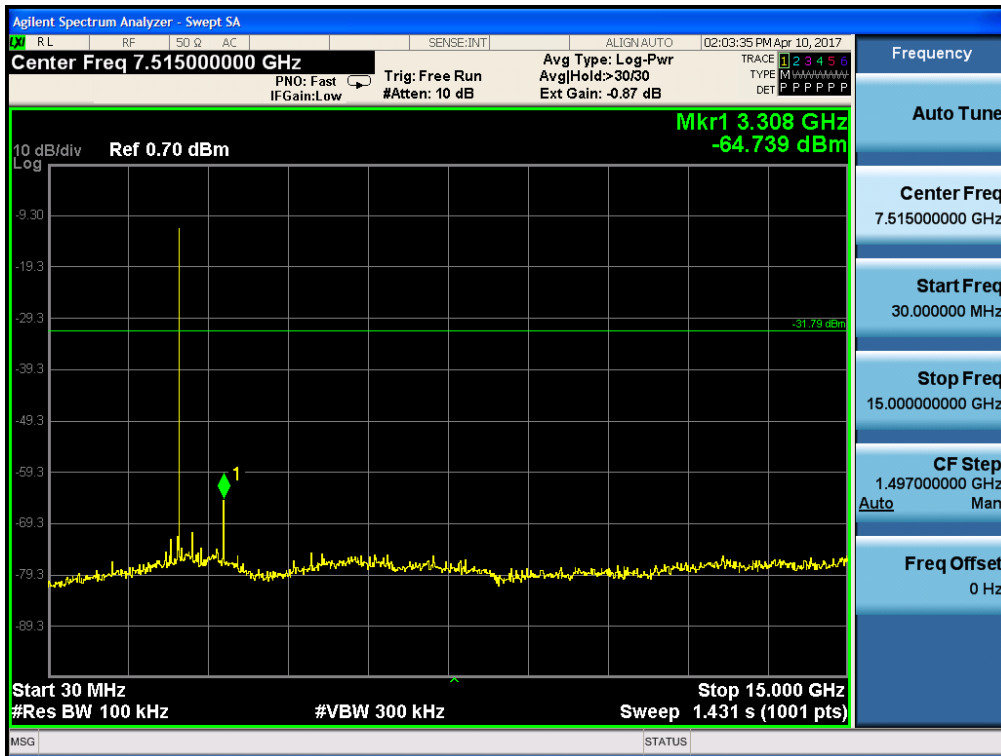



## 2.1.7 Field Strength of Emissions

### Test Location

- ☒ 10 m SAC (test distance : ☐ 10 m, ☒ 3 m)  
☒ 3 m SAC (test distance : 3 m)

### Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

### Test Settings:

Frequency Range = 9 kHz ~ 25 GHz (2.4 GHz 10<sup>th</sup> harmonic)

- a) RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz, 9 kHz for  $f < 30$  MHz
- b) VBW  $\geq$  RBW
- c) Sweep = auto

### Limit

#### - 15.209(a)

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


\*\* Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

#### Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)

### Test Setup:


- 1) For field strength of emissions from 9 kHz to 30 MHz

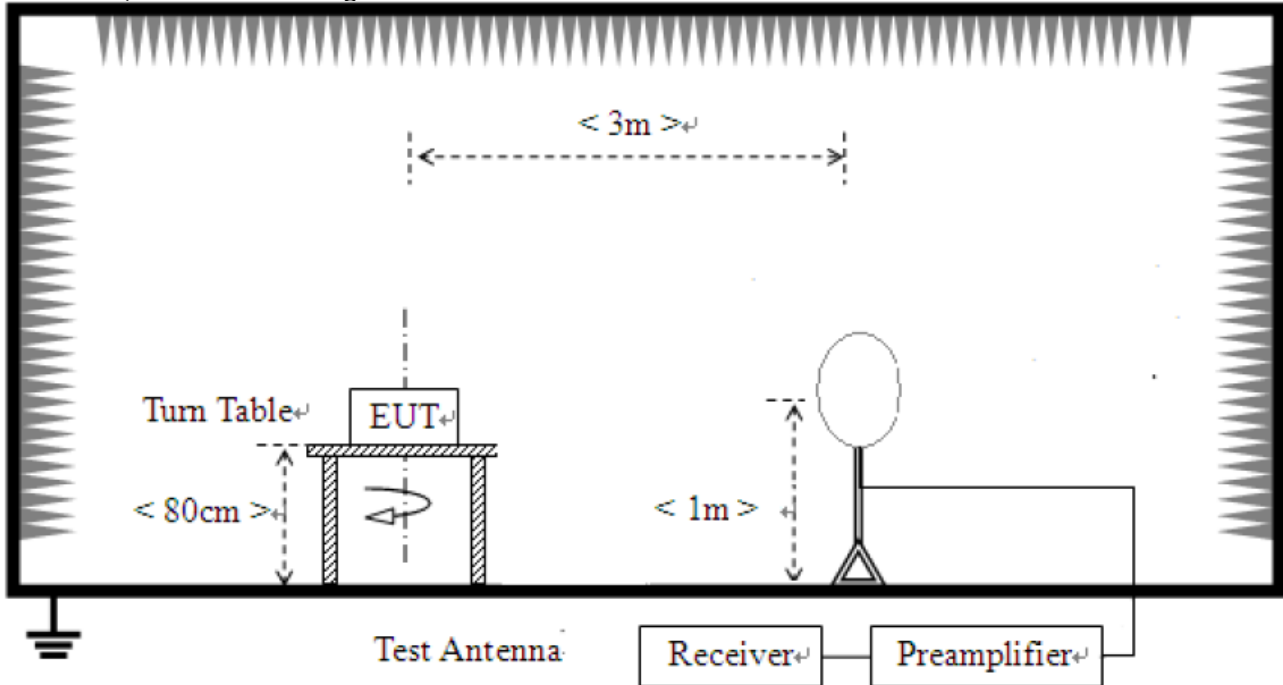

- 2) For field strength of emissions from 30 MHz to 1 GHz

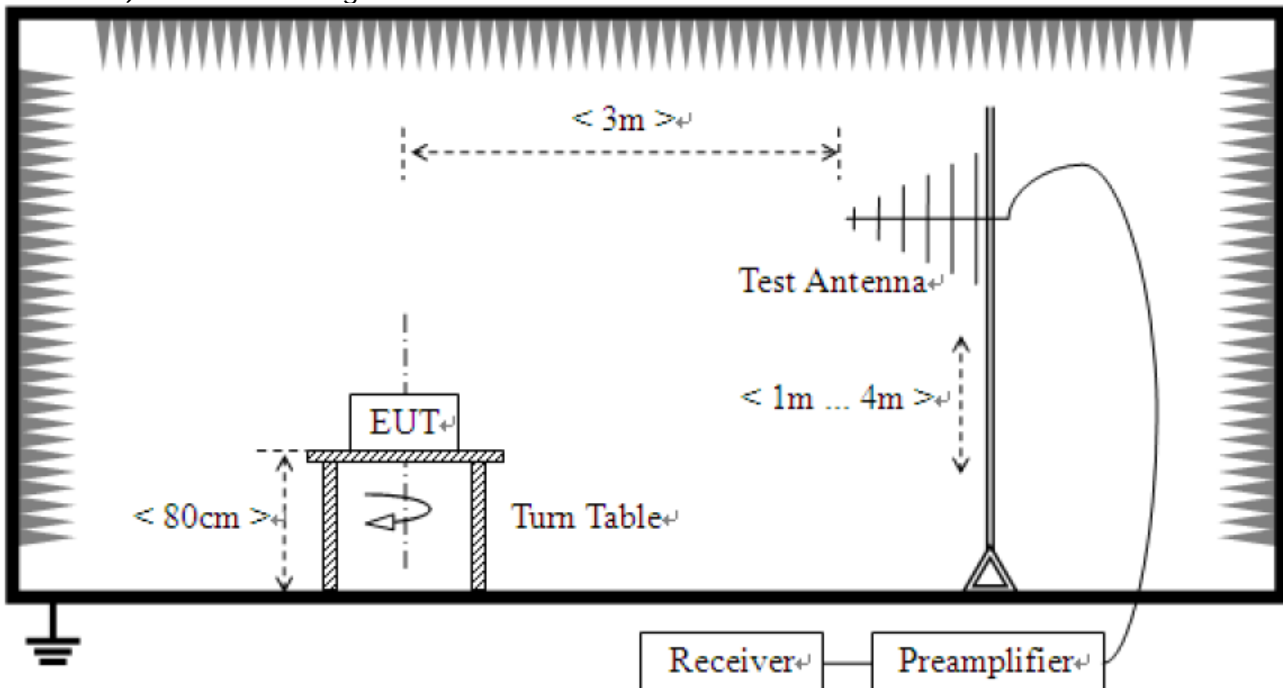

3) For field strength of emissions above 1 GHz

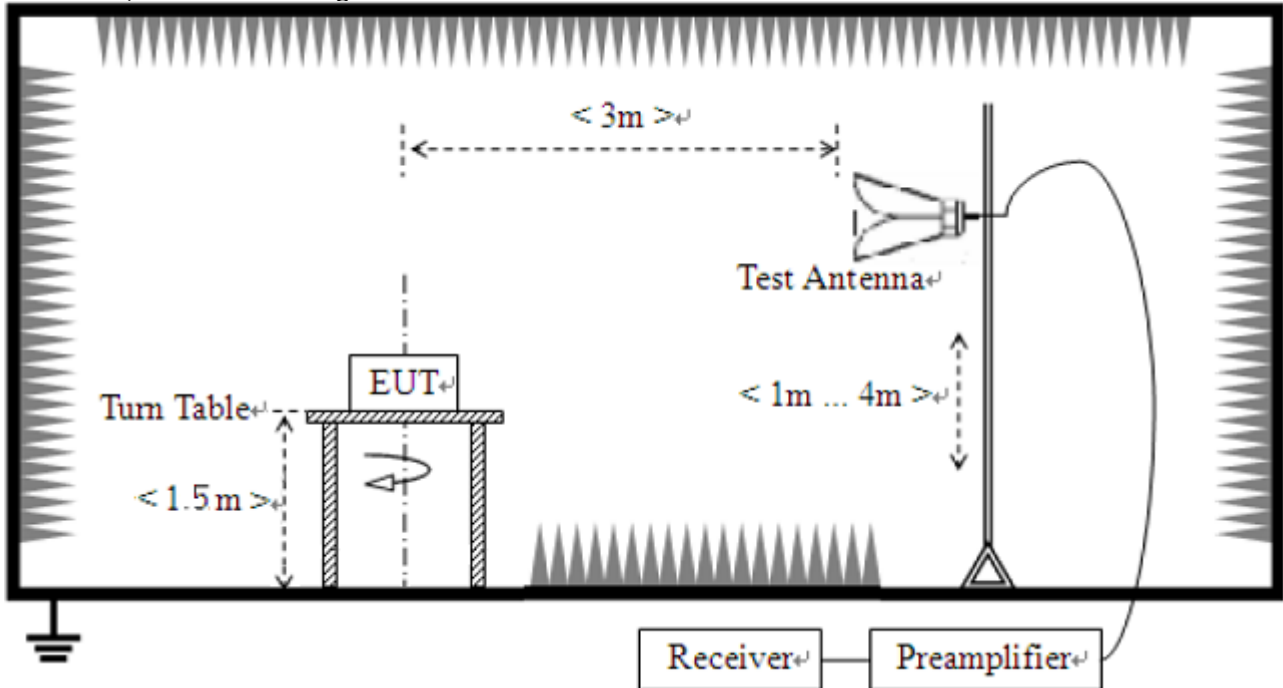

## Test Results

### 1) 9 kHz to 30 MHz

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

EUT	Android Module	Measurement Detail	
Model	SO7	Frequency Range	9 kHz – 30 MHz
Test mode	GFSK, 8-DPSK	Detector function	Quasi-Peak

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

### Note :

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB)



CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

### 2) 30 MHz to 1 GHz

Test mode : Hopping(GFSK), CFG PKT Packet Type : 15 Packet Size : 339(DH5)


EUT	Android Module	Measurement Detail	
Model	SO7	Frequency Range	Below 1000MHz
Test mode	GFSK Hopping(Worst Case)	Detector function	Quasi-Peak / Peak

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
850.620	41.0	5.0	Quasi-Peak

### Test Data

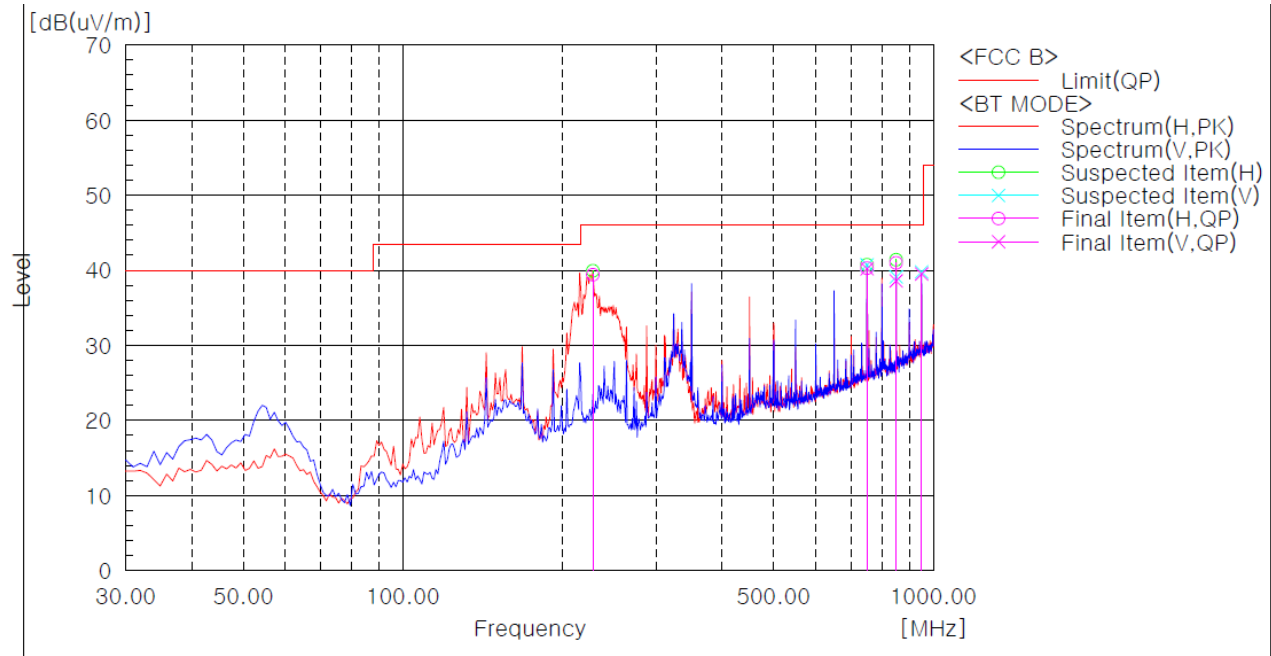

### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Angle [deg]
1	227.880	H	53.7	-14.3	39.4	46.0	6.6	309.9
2	749.740	H	44.3	-4.0	40.3	46.0	5.7	57.1
3	749.740	V	44.2	-4.0	40.2	46.0	5.8	188.8
4	850.620	H	43.4	-2.4	41.0	46.0	5.0	7.2
5	850.620	V	41.0	-2.4	38.6	46.0	7.4	8.3
6	950.530	V	40.0	-0.5	39.5	46.0	6.5	345.7

### Remark :

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.



CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### 3) above 1 GHz

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

EUT	Android Module	Measurement Detail	
Model	SO7	Frequency Range	1-25GHz
		Detector function	Average / Peak

#### Remarks

We have tested three mode (X, Y, Z). The worst mode (Z axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBUV/m)	Margin (dB)	Remark
3198.00	46.59	7.41	Average

#### Test Data

Ch.0(Low Channel)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
4804.00	H	54.00	74.00	34.64	46.29	19.36	27.71
4804.00	V	54.00	74.00	36.07	47.37	17.93	26.63
1050.00	H	54.00	74.00	37.33	40.98	16.67	33.02
1050.00	V	54.00	74.00	38.05	41.62	15.95	32.38
1066.00	H	54.00	74.00	37.69	41.37	16.31	32.63
1066.00	V	54.00	74.00	38.62	42.34	15.38	31.66
2132.00	H	54.00	74.00	44.66	42.48	9.34	31.52
2132.00	V	54.00	74.00	42.82	46.44	11.18	27.56
3198.00	H	54.00	74.00	42.04	46.82	11.96	27.18
3198.00	V	54.00	74.00	46.59	49.97	7.41	24.03
5330.00	H	54.00	74.00	43.31	49.19	10.69	24.81
5330.00	V	54.00	74.00	44.31	50.23	9.69	23.77



CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### Ch.39(Mid Channel)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
4882.00	H	54.00	74.00	33.90	45.57	20.10	28.43
4882.00	V	54.00	74.00	35.99	46.67	18.01	27.33
1050.00	H	54.00	74.00	37.57	41.45	16.43	32.55
1050.00	V	54.00	74.00	38.24	41.38	15.76	32.62
1066.00	H	54.00	74.00	37.31	41.73	16.69	32.27
1066.00	V	54.00	74.00	38.36	42.13	15.64	31.87
2132.00	H	54.00	74.00	44.65	47.29	9.35	26.71
2132.00	V	54.00	74.00	42.89	46.29	11.11	27.71
3198.00	H	54.00	74.00	42.08	46.93	11.92	27.07
3198.00	V	54.00	74.00	46.58	50.51	7.42	23.49
5330.00	H	54.00	74.00	43.24	48.81	10.76	25.19
5330.00	V	54.00	74.00	44.60	50.70	9.40	23.30

### Ch.78(High Channel)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
4960.00	H	54.00	74.00	33.31	44.92	20.69	29.08
4960.00	V	54.00	74.00	34.21	46.19	19.79	27.81
1050.00	H	54.00	74.00	38.21	41.74	15.79	32.26
1050.00	V	54.00	74.00	38.14	41.58	15.86	32.42
1066.00	H	54.00	74.00	39.01	42.00	14.99	32.00
1066.00	V	54.00	74.00	38.64	41.99	15.36	32.01
2132.00	H	54.00	74.00	45.39	48.06	8.61	25.94
2132.00	V	54.00	74.00	44.89	47.66	9.11	26.34
3198.00	H	54.00	74.00	41.36	46.25	12.64	27.75
3198.00	V	54.00	74.00	44.96	48.86	9.04	25.14
5330.00	H	54.00	74.00	43.44	49.45	10.56	24.55
5330.00	V	54.00	74.00	45.10	50.75	8.90	23.25



CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

EUT	Android Module	Measurement Detail	
Model	SO7	Frequency Range	1-25GHz
		Detector function	Average / Peak

### Remarks

We have tested three mode (X, Y, Z). The worst mode (Z axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
2132.00	45.69	8.31	Average

### Test Data

#### Ch.0(Low Channel)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
4804.00	H	54.00	74.00	33.96	45.19	20.04	28.81
4804.00	V	54.00	74.00	34.99	45.31	19.01	28.69
1050.00	H	54.00	74.00	36.95	41.04	17.05	32.96
1050.00	V	54.00	74.00	36.18	40.45	17.82	33.55
1066.00	H	54.00	74.00	37.78	40.45	16.22	33.55
1066.00	V	54.00	74.00	38.94	42.87	15.06	31.13
2132.00	H	54.00	74.00	45.56	47.95	8.44	26.05
2132.00	V	54.00	74.00	44.39	47.37	9.61	26.63
3198.00	H	54.00	74.00	42.25	46.53	11.75	27.47
3198.00	V	54.00	74.00	45.29	49.17	8.71	24.83



CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### Ch.39(Mid Channel)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
4882.00	H	54.00	74.00	33.80	45.39	20.20	28.61
4882.00	V	54.00	74.00	35.77	45.53	18.23	28.47
1050.00	H	54.00	74.00	36.88	41.41	17.12	32.59
1050.00	V	54.00	74.00	36.31	40.84	17.69	33.16
1066.00	H	54.00	74.00	37.60	41.54	16.40	32.46
1066.00	V	54.00	74.00	38.72	43.15	15.28	30.85
2132.00	H	54.00	74.00	45.69	48.14	8.31	25.86
2132.00	V	54.00	74.00	44.40	47.50	9.60	26.50
3198.00	H	54.00	74.00	42.18	48.01	11.82	25.99
3198.00	V	54.00	74.00	45.24	49.05	8.76	24.95
5330.00	H	54.00	74.00	43.01	49.06	10.99	24.94
5330.00	V	54.00	74.00	45.59	51.10	8.41	22.90

### Ch.78(High Channel)

Frequency [MHz]	(P)	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
4960.00	H	54.00	74.00	33.30	44.61	20.70	29.39
4960.00	V	54.00	74.00	33.97	45.18	20.03	28.82
1050.00	H	54.00	74.00	37.06	41.06	16.94	32.94
1050.00	V	54.00	74.00	36.22	40.54	17.78	33.46
1066.00	H	54.00	74.00	38.10	41.11	15.90	32.89
1066.00	V	54.00	74.00	40.83	44.05	13.17	29.95
2132.00	H	54.00	74.00	45.61	48.16	8.39	25.84
2132.00	V	54.00	74.00	44.32	47.31	9.68	26.69
3198.00	H	54.00	74.00	42.45	46.65	11.55	27.35
3198.00	V	54.00	74.00	45.25	49.12	8.75	24.88
5330.00	H	54.00	74.00	43.07	49.96	10.93	24.04
5330.00	V	54.00	74.00	45.43	51.03	8.57	22.97





CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### 2.1.8 AC Conducted Emissions

#### Test Location

Shielded Room

#### Frequency Range of Measurement

150 kHz to 30 MHz

#### Instrument Settings

IF Band Width: 9 kHz

#### Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

#### Limit

##### - 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency.

#### Test Results

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
0.181 500	45.2	9.2	Quasi-peak



CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance


## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### Test Data

[LINE]

3CE\_Class B\_L1

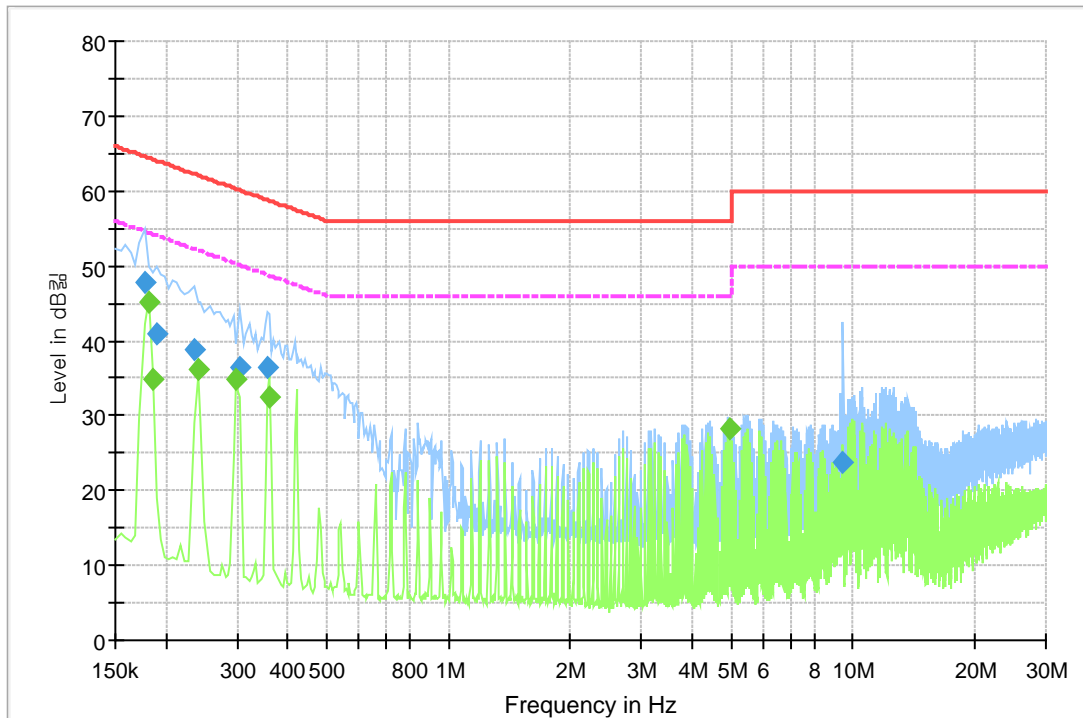

### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.177000	47.9	1000.0	9.000	On	L1	9.9	16.7	64.6
0.190500	40.8	1000.0	9.000	On	L1	9.9	23.2	64.0
0.235500	38.9	1000.0	9.000	On	L1	9.8	23.4	62.3
0.303000	36.5	1000.0	9.000	On	L1	9.9	23.7	60.2
0.357000	36.4	1000.0	9.000	On	L1	10.0	22.4	58.8
9.469500	23.7	1000.0	9.000	On	L1	10.0	36.3	60.0

### Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.181500	45.2	1000.0	9.000	On	L1	9.9	9.2	54.4
0.186000	34.8	1000.0	9.000	On	L1	9.9	19.4	54.2
0.240000	36.2	1000.0	9.000	On	L1	9.8	15.9	52.1
0.298500	34.8	1000.0	9.000	On	L1	9.9	15.5	50.3
0.361500	32.4	1000.0	9.000	On	L1	10.0	16.3	48.7
4.974000	28.2	1000.0	9.000	On	L1	9.8	17.8	46.0




CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### [NEUTRAL]

3CE\_Class B\_N

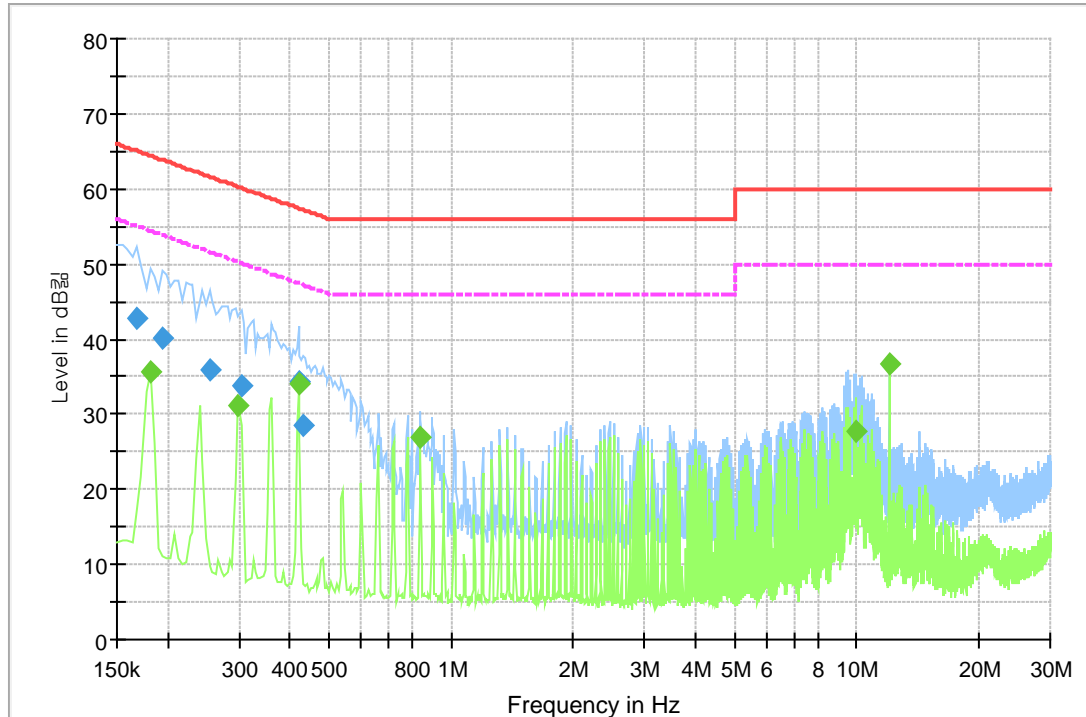

### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.168000	42.7	1000.0	9.000	On	N	9.9	22.3	65.1
0.195000	40.0	1000.0	9.000	On	N	9.9	23.8	63.8
0.253500	35.9	1000.0	9.000	On	N	9.7	25.8	61.6
0.303000	33.8	1000.0	9.000	On	N	9.9	26.4	60.2
0.420000	34.3	1000.0	9.000	On	N	10.0	23.2	57.4
0.433500	28.4	1000.0	9.000	On	N	10.0	28.8	57.2

### Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.181500	35.6	1000.0	9.000	On	N	9.9	18.8	54.4
0.298500	31.1	1000.0	9.000	On	N	9.9	19.2	50.3
0.420000	34.2	1000.0	9.000	On	N	10.0	13.3	47.4
0.838500	27.0	1000.0	9.000	On	N	9.9	19.0	46.0
9.946500	27.8	1000.0	9.000	On	N	10.0	22.2	50.0
11.998500	36.6	1000.0	9.000	On	N	10.0	13.4	50.0



CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Signal Analyzer	Agilent	N9020A	MY48011598	2016-11-01	2017-11-01
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2016-11-01	2017-11-01
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100032	2017-02-02	2018-02-02
4	LISN	Rohde & Schwarz	ENV216	101235	2016-05-14	2017-05-14
5	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2016-11-01	2017-11-01
6	Bilog Antenna	Schaffner	CBL6111C	2551	2016-05-13	2018-05-13
7	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-126	2016-05-25	2018-05-25
8	6dB Attenuator	R&S	DNF	272.4110.50-2	2016-11-01	2017-11-01
9	6dB Attenuator	R&S	DNF	272.4110.50-1	2017-02-03	2018-02-03
10	AMPLIFIER	SONOMA	310	291721	2017-02-02	2018-02-02
11	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2015-05-14	2017-05-14
12	Preamplifier	Agilent	8449B	3008A02011	2016-12-01	2017-12-01
13	Horn Antenna	ETS-Lindgren	3115	00078894	2015-09-02	2017-09-02
14	Horn Antenna	ETS-Lindgren	3116	00062504	2015-09-04	2017-09-04
15	Horn Antenna	ETS-Lindgren	3117	00154525	2015-09-02	2017-09-02
16	Band Reject Filter	Micro Tronics	BRM50702	G233	2017-02-03	2018-02-03