



FCC PART 22H, PART 24E MEASUREMENT AND TEST REPORT

For

AVENIR TELECOM

208, Boulevard de Plombières 13014 Marseille-France

FCC ID: 2AM4J-P490

Report Type: Product Type:
Original Report 3G Mobile Phone

Report Number: RSZ180507002-00A

Report Date: 2018-06-04

Rocky Kang

Reviewed By: RF Engineer

Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen)

6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone,

Rocky Kang

Shenzhen, Guangdong, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*".

TABLE OF CONTENTS

GENERAL INFORMATION	
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
Objective	
TEST METHODOLOGY	
MEASUREMENT UNCERTAINTY	
TEST FACILITY	
SYSTEM TEST CONFIGURATION	
DESCRIPTION OF TEST CONFIGURATION	
EQUIPMENT MODIFICATIONS	
SUPPORT EQUIPMENT LIST AND DETAILS	
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	
TEST EQUIPMENT LIST	······'
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION	
APPLICABLE STANDARD	
TEST RESULT	
FCC §2.1047 - MODULATION CHARACTERISTIC	
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) - RF OUTPUT POWER	10
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST DATA	
FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH	15
APPLICABLE STANDARD	
Test Procedure	
TEST DATA	
FCC §2.1051, §22.917(A) & §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	
APPLICABLE STANDARD	
TEST PROCEDURE	
FCC § 2.1053; § 22.917 (A);§ 24.238 (A) -SPURIOUS RADIATED EMISSIONS	
Applicable Standard	
TEST PROCEDURE TEST DATA	
FCC § 22.917 (A); § 24.238 (A) - BAND EDGES	
APPLICABLE STANDARD	
TEST PROCEDURE	
Test Data	
FCC § 2.1055; § 22.355; § 24.235 - FREQUENCY STABILITY	39
APPLICABLE STANDARD	39
TEST PROCEDURE	
TEST DATA	40

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *AVENIR TELECOM's* product, model number: *POWERMAX P490 (FCC ID: 2AM4J-P490)* or the "EUT" in this report was a *3G Mobile Phone*, which was measured approximately: 139.2 mm (L) * 65.6 mm (W) * 12.6 mm (H), rated with input voltage: DC 3.8V from rechargeable Li-ion rechargeable battery or DC 5.0V from adapter.

Report No.: RSZ180507002-00A

Adapter Information: Model: YW1000M

Input: AC 100-240V, 50/60Hz, 0.2A

Output: DC 5.0V, 1A

Notes: This series products model: PM490EU, PM490EU2 and POWERMAX P490 are electrically identical; the difference among them is only model number due to marketing purpose. Model POWERMAX P490 was selected for fully testing, the detailed information can be referred to the declaration letter which was stated and guaranteed by the applicant

*All measurement and test data in this report was gathered from production sample serial number: 180507002. (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2018-05-07.

Objective

This type approval report is prepared on behalf of *AVENIR TELECOM* in accordance with Part 2, Part 22-Subpart H, Part 24-Subpart E of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS & DTS submissions with FCC ID: 2AM4J-P490

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-Part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA 603-D.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

FCC Part 22H/24E Page 3 of 42

Measurement Uncertainty

Parameter		Uncertainty
Occupied Char	nnel Bandwidth	±5%
RF output power, conducted		±1.5dB
Unwanted Emis	sion, conducted	±1.5dB
Emissions,	Below 1GHz	±4.70dB
radiated	Above 1GHz	±4.80dB
Temperature		±1℃
Supply	voltages	±0.4%

Report No.: RSZ180507002-00A

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

FCC Part 22H/24E Page 4 of 42

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.

Equipment Modifications


No modification was made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891

Report No.: RSZ180507002-00A

Block Diagram of Test Setup

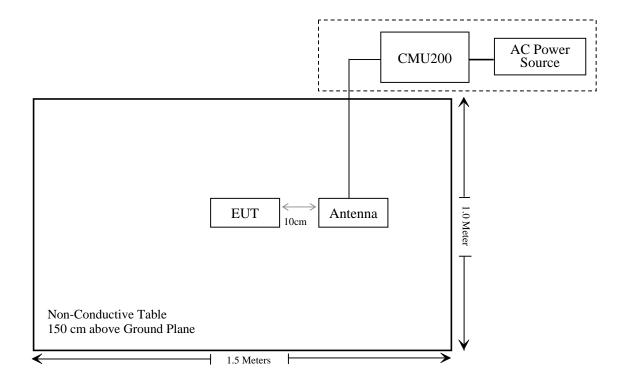

FCC Part 22H/24E Page 5 of 42

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307, §2.1093	RF Exposure (SAR)	Compliance*
\$2.1046; \$ 22.913 (a); \$ 24.232 (c)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a)	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a)	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235	Frequency stability	Compliance

Report No.: RSZ180507002-00A

Compliance*: Please refer to SAR report released by BACL, report number: RSZ180507003-20.

FCC Part 22H/24E Page 6 of 42

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
		Radiated Emission	on Test		
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017-12-22	2020-12-21
Rohde & Schwarz	Signal Analyzer	FSEM	845987/005	2018-04-24	2019-04-24
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2018-05-21	2019-05-21
HP	Amplifier	HP8447E	1937A01046	2018-05-21	2018-11-19
Anritsu	Signal Generator	68369B	004114	2017-12-07	2018-12-07
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2018-01-11	2019-01-11
COM POWER	Dipole Antenna	AD-100	041000	NCR	NCR
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Ducommun technologies	RF Cable	UFA210A-1-4724- 30050U	MFR64369 223410-001	2018-05-21	2018-11-19
Ducommun technologies	RF Cable	104PEA	218124002	2018-05-21	2018-11-19
Ducommun technologies	RF Cable	RG-214	1	2018-05-21	2018-11-19
Ducommun technologies	RF Cable	RG-214	2	2018-05-22	2018-11-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-28
Ducommun technologies	Horn Antenna	ARH-4223-02	1007726-03	2017-12-29	2020-12-28
Ducommun technologies	Pre-amplifier	ALN-22093530-01	991373-01	2017-08-03	2018-08-03
		RF Conducted	Test		
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2017-12-24	2018-12-24
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2017-12-21	2018-12-21
Long Wei	DC Power Supply	TPR-6420D	398363	NCR	NCR
Rohde & Schwarz	Wideband Radio Communication Tester	CMU200	106891	2017-12-14	2018-12-14
Ducommun technologies	RF Cable	RG-214	3	Each	Time
N/A	Power Splitter	N/A	N/A	2018-05-21	2019-05-21

Report No.: RSZ180507002-00A

FCC Part 22H/24E Page 7 of 42

^{*} Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Report No.: RSZ180507002-00A

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ180507003-20.

FCC Part 22H/24E Page 8 of 42

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC \S 2.1047(d), Part 22H, 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

Report No.: RSZ180507002-00A

FCC Part 22H/24E Page 9 of 42

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

Report No.: RSZ180507002-00A


According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the CMU200 through sufficient attenuation.



Radiated method:

TIA 603-D section 2.2.17

Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Hill He on 2018-05-28.

FCC Part 22H/24E Page 10 of 42

Conducted Power

Cellular Band (Part 22H)

Report No.: RSZ180507002-00A

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
	128	824.2	32.56	38.45
GSM	190	836.6	32.65	38.45
	251	848.8	32.66	38.45

Made Channel		Frequency	Avo	erage Output Power (dBm)			Limit
Mode	Channel	(MHz)	1 slot	2 slots	3 slots	4 slots	(dBm)
	128	824.2	32.57	31.78	29.66	28.13	38.45
GPRS	190	836.6	32.65	31.86	29.69	28.15	38.45
	251	848.8	32.70	31.92	29.68	28.19	38.45

	Test	3GPP	Average Output Power (dBm)			
Mode	Mode	Sub Test	Low Frequency	Middle Frequency	High Frequency	
	RN	MC	21.83	21.97	21.92	
		1	20.83	20.93	20.94	
	HSDPA	2	20.83	20.81	20.88	
		3	20.89	20.97	21.01	
WCDMA		4	20.77	20.83	20.86	
(Band V)		1	20.87	20.96	20.99	
	HSUPA	2	20.87	20.91	20.93	
		3	20.91	21.01	21.08	
		4	20.78	20.90	20.86	
		5	20.98	20.99	21.09	

FCC Part 22H/24E Page 11 of 42

PCS Band (Part 24E)

Report No.: RSZ180507002-00A

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
	512	1850.2	29.12	33
GSM	661	1880.0	29.10	33
	810	1909.8	28.94	33

Mada Channal		Frequency	Average Output Power (dBm)				Limit
Mode	Channel	(MHz)	1 slot	2 slots	3 slots	4 slots	(dBm)
	512	1850.2	29.11	28.24	25.94	24.55	33
GPRS	661	1880.0	29.02	28.11	25.74	24.38	33
	810	1909.8	28.97	28.04	25.55	24.17	33

	Test	3GPP	Averag	ge Output Power	(dBm)
Mode	Mode	Sub Test	Low Frequency	Middle Frequency	High Frequency
	RN	МС	22.46	22.36	22.14
		1	21.43	21.35	21.10
	HSDPA	2	21.43	21.25	21.07
		3	21.53	21.46	21.17
WCDMA		4	21.35	21.24	21.06
(Band II)		1	21.40	21.30	21.07
	HSUPA	2	21.40	21.20	20.97
		3	21.43	21.43	21.17
		4	21.28	21.18	21.01
		5	21.50	21.42	21.14

FCC Part 22H/24E Page 12 of 42

Peak-to-average ratio (PAR)

Cellular Band

Report No.: RSZ180507002-00A

Mode	Channel	PAR (dB)	Limit (dB)
	Low	3.52	13
GSM	Middle	3.42	13
	High	3.25	13

Mode	Channel	PAR (dB)	Limit (dB)
	Low	3.21	13
WCDMA (BPSK)	Middle	3.12	13
(Bi Sit)	High	3.25	13
	Low	3.26	13
HSDPA (16QAM)	Middle	3.24	13
(10Q/11/1)	High	3.31	13
	Low	3.36	13
HSUPA (BPSK)	Middle	3.25	13
(BI SIL)	High	3.24	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)	
	Low	3.36	13	
GSM	Middle	3.18	13	
	High	3.24	13	

Mode	Channel	PAR (dB)	Limit (dB)
	Low	4.12	13
WCDMA (BPSK)	Middle	4.16	13
(BI SIK)	High	4.19	13
	Low	4.20	13
HSDPA (16QAM)	Middle	4.26	13
(10(1111)	High	4.30	13
	Low	4.33	13
HSUPA (BPSK)	Middle	4.26	13
(21511)	High	4.25	13

FCC Part 22H/24E Page 13 of 42

Radiated Power

GSM Mode:

	Receiver	Turntable	Rx An	tenna	S	ubstitut	ed	Absolute	FCC Part	t 22H/24E
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
	ERP for Cellular Band (Part 22H), Middle Channel									
836.6	90.15	42	1.0	Н	27.8	0.7	0.0	27.10	38.45	11.35
836.6	92.26	95	2.1	V	31.8	0.7	0.0	31.10	38.45	7.35
	EIRP for PCS Band (Part 24E), Middle Channel									
1880.00	85.60	356	2.1	Н	15.6	1.30	9.40	23.70	33	9.3
1880.00	87.65	234	1.2	V	17.4	1.30	9.40	25.50	33	7.5

Report No.: RSZ180507002-00A

WCDMA Mode:

E	Receiver	Turntable	Rx Antenna Substituted			Absolute	FCC Pai	rt 22H/24E		
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
	ERP for WCDMA Band V (Part 22H), Middle Channel									
836.6	80.16	313	2.2	Н	10.1	1.30	9.40	18.20	38.45	20.25
836.6	82.23	91	2.1	V	12.0	1.30	9.40	20.10	38.45	18.35
	EIRP for WCDMA Band II (Part 24E), Middle Channel									
1880.00	78.12	224	1.7	Н	8.1	1.30	9.40	16.20	33	16.8
1880.00	81.42	69	2.2	V	11.2	1.30	9.40	19.30	33	13.7

Note:

All above data were tested with no amplifier.

Absolute Level = Substituted Level - Ĉable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC Part 22H/24E Page 14 of 42

FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH

Report No.: RSZ180507002-00A


Applicable Standard

FCC 47 §2.1049, §22.917, §22.905 and §24.238.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at $5~\rm kHz$ (GSM) & $100~\rm kHz$ (WCDMA) and the $26~\rm dB$ & 99% bandwidth was recorded.

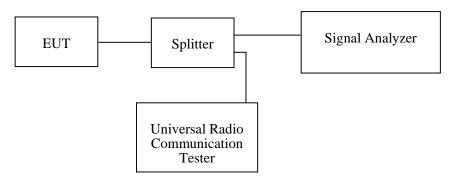

Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Hill He on 2018-05-28.

EUT operation mode: Transmitting

FCC Part 22H/24E Page 15 of 42

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Report No.: RSZ180507002-00A

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	248.4	318.9

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	836.6	4.15	4.68
HSUPA (BPSK)	836.6	4.15	4.68
HSDPA (16QAM)	836.6	4.15	4.70

PCS Band (Part 24E)


Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1880.0	245. 2	320.5

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1880.0	4.17	4.73
HSUPA (BPSK)	1880.0	4.18	4.71
HSDPA (16QAM)	1880.0	4.18	4.73

FCC Part 22H/24E Page 16 of 42


Cellular Band (Part 22H) 26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode

Report No.: RSZ180507002-00A

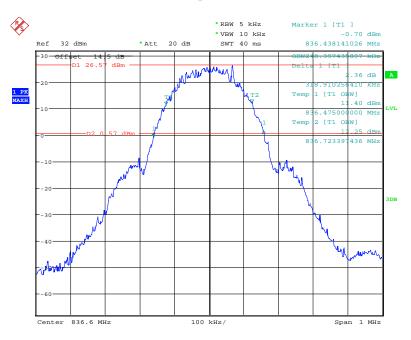

Date: 28.MAY.2018 15:57:44

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode

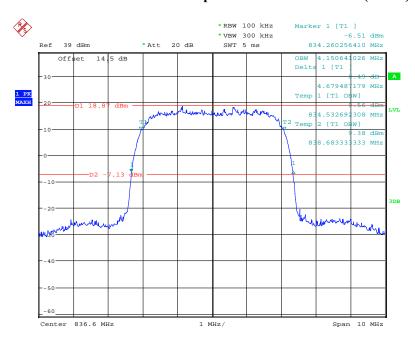


Date: 28.MAY.2018 16:44:18

FCC Part 22H/24E Page 17 of 42


26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode

Report No.: RSZ180507002-00A

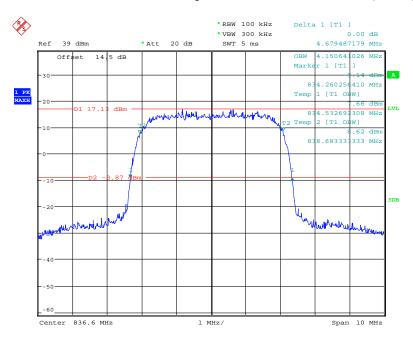

Date: 28.MAY.2018 16:49:55

26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode

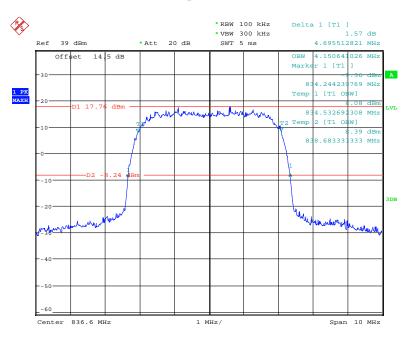


Date: 28.MAY.2018 16:48:34

FCC Part 22H/24E Page 18 of 42


PCS Band (Part 24E) 26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode

Report No.: RSZ180507002-00A

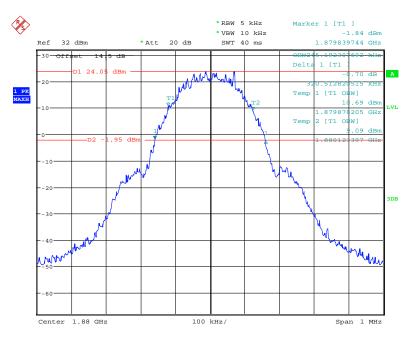

Date: 28.MAY.2018 16:12:05

26 dB Emissions & 99% Occupied Bandwidth for RMC (BPSK) Mode

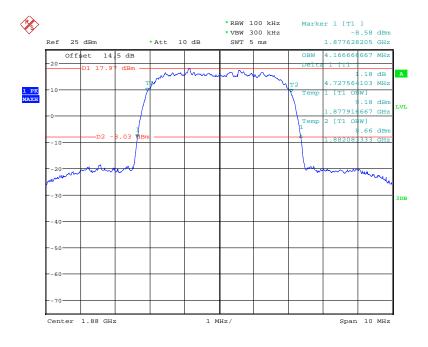


Date: 28.MAY.2018 17:49:13

FCC Part 22H/24E Page 19 of 42


26 dB Emissions & 99% Occupied Bandwidth for HSUPA (BPSK) Mode

Report No.: RSZ180507002-00A

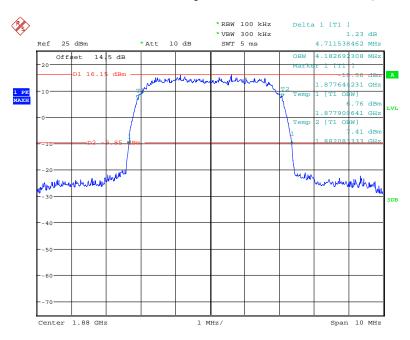

Date: 28.MAY.2018 17:39:22

26 dB Emissions & 99% Occupied Bandwidth for HSDPA (16QAM) Mode

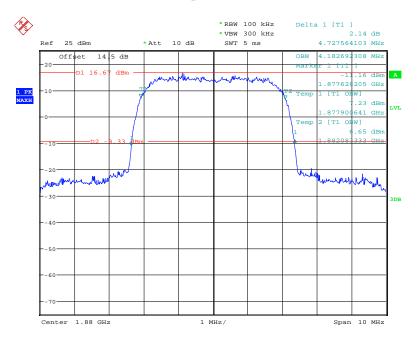

Date: 28.MAY.2018 17:41:39

FCC Part 22H/24E Page 20 of 42

FCC §2.1051, §22.917(a) & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard


FCC §2.1051, §22.917(a) and §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Report No.: RSZ180507002-00A

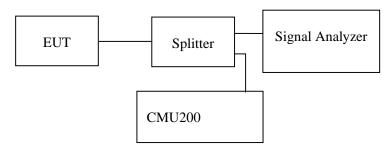

Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Hill He on 2018-05-28.


EUT operation mode: Transmitting

Test result: Compliance, please refer to the following plots.

FCC Part 22H/24E Page 21 of 42

Cellular Band (Part 22H)


30 MHz – 1 GHz (GSM Mode)

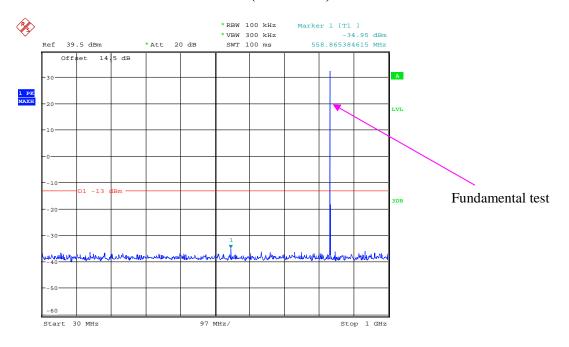

Report No.: RSZ180507002-00A

Date: 28.MAY.2018 15:54:26


1 GHz - 10 GHz (GSM Mode)

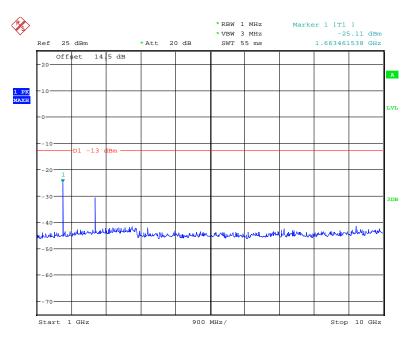

Date: 28.MAY.2018 15:55:21

FCC Part 22H/24E Page 22 of 42


30 MHz – 1 GHz (WCDMA Mode)

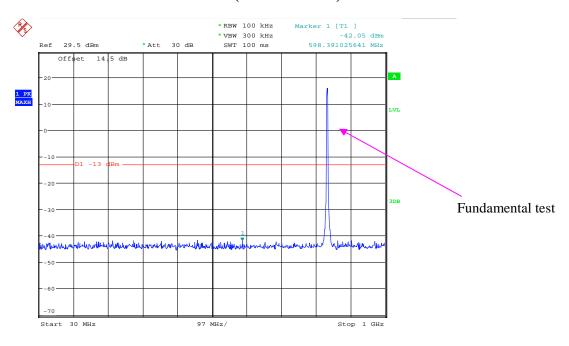

Report No.: RSZ180507002-00A

Date: 28.MAY.2018 17:00:50

1 GHz – 10GHz (WCDMA Mode)

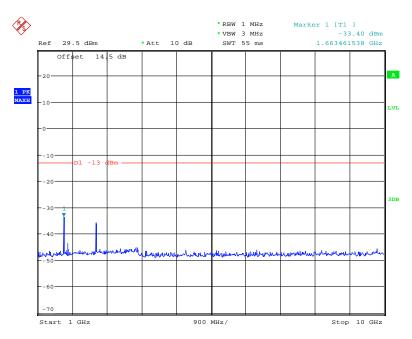


Date: 28.MAY.2018 17:01:45

FCC Part 22H/24E Page 23 of 42

PCS Band (Part 24E)


30 MHz – 1 GHz (GSM Mode)

Report No.: RSZ180507002-00A

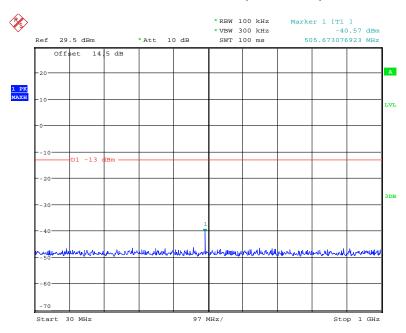

Date: 28.MAY.2018 16:14:35

1 GHz – 2 GHz (GSM Mode)

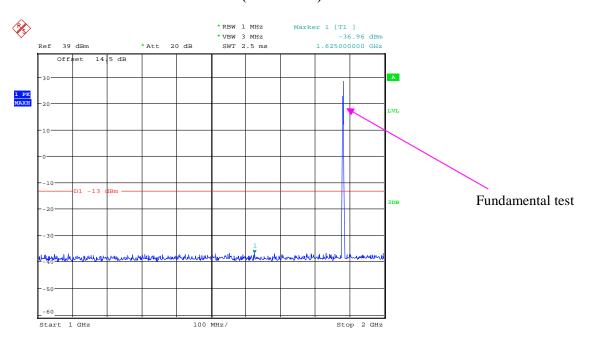


Date: 28.MAY.2018 16:15:29

FCC Part 22H/24E Page 24 of 42


2 GHz - 20 GHz (GSM Mode)

Report No.: RSZ180507002-00A

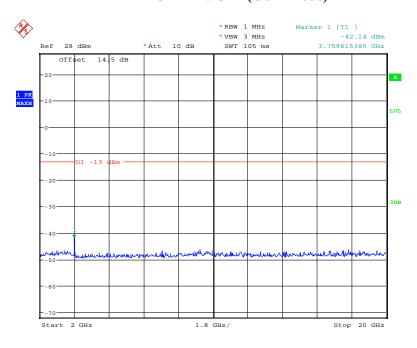

Date: 28.MAY.2018 16:16:16

30 MHz - 1 GHz (WCDMA Mode)

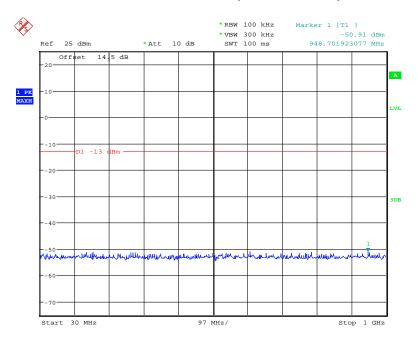


Date: 28.MAY.2018 17:52:13

FCC Part 22H/24E Page 25 of 42


Report No.: RSZ180507002-00A

1 GHz – 2 GHz (WCDMA Mode)

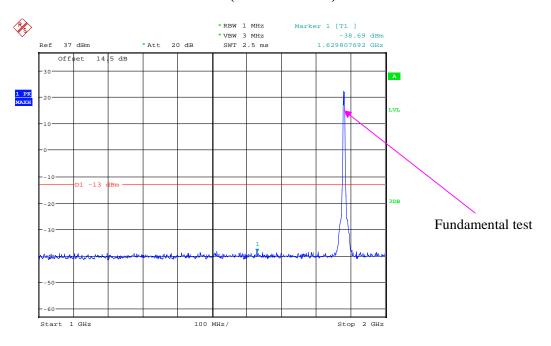

Date: 28.MAY.2018 17:53:17

2 GHz - 20 GHz (WCDMA Mode)

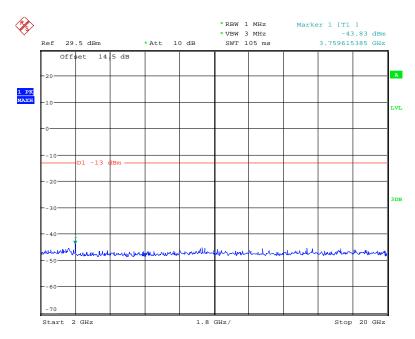

Date: 28.MAY.2018 17:54:11

FCC Part 22H/24E Page 26 of 42

FCC § 2.1053; § 22.917 (a); § 24.238 (a) -SPURIOUS RADIATED EMISSIONS

Report No.: RSZ180507002-00A

Applicable Standard

FCC § 2.1053, §22.917(a) and § 24.238(a).

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in $dB = 10 \lg (TX pwr in Watts/0.001) - the absolute level$

Spurious attenuation limit in $dB = 43 + 10 \text{ Log}_{10}$ (power out in Watts)

Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Hill He on 2018-05-01.

EUT operation mode: Transmitting

FCC Part 22H/24E Page 27 of 42

Pre-scan with Low, Middle and High channel, the worst case as below:

30 MHz ~ **10 GHz**:

Cellular Band (Part 22H)

Report No.: RSZ180507002-00A

	Receiver	Turntable	Rx An	tenna	\$	Substitut	ed	Absolute		
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
			G\$	SM Mode	e, Middle	channel				
238.96	36.09	281	1.7	Н	-60.9	0.31	0	-61.21	-13	48.21
238.96	38.86	47	2.1	V	-58.1	0.31	0	-58.41	-13	45.41
1673.20	51.29	266	2.3	Н	-55.8	1.30	8.90	-48.20	-13	35.20
1673.20	52.4	217	2.1	V	-54.1	1.30	8.90	-46.50	-13	33.50
2509.80	53.87	19	1.8	Н	-49.7	2.60	10.20	-42.10	-13	29.10
2509.80	54.58	80	1.2	V	-48.3	2.60	10.20	-40.70	-13	27.70
3346.40	43.87	222	1.3	Н	-56.5	1.50	11.70	-46.30	-13	33.30
3346.40	42.35	134	1.4	V	-58.0	1.50	11.70	-47.80	-13	34.80
			WCI	OMA Mo	de, Middl	e channel				
238.96	37.31	7	1.3	Н	-59.7	0.31	0	-60.01	-13	47.01
238.96	38.42	245	1.5	V	-58.6	0.31	0	-58.91	-13	45.91
1673.20	48.72	154	1.2	Н	-58.4	1.30	8.90	-50.80	-13	37.80
1673.20	45.69	35	2.0	V	-60.8	1.30	8.90	-53.20	-13	40.20
2509.80	52.11	328	1.2	Н	-51.4	2.60	10.20	-43.80	-13	30.80
2509.80	49.86	133	1.0	V	-53.1	2.60	10.20	-45.50	-13	32.50
3346.40	45.69	67	1.1	Н	-54.7	1.50	11.70	-44.50	-13	31.50
3346.40	43.06	193	1.7	V	-57.3	1.50	11.70	-47.10	-13	34.10

FCC Part 22H/24E Page 28 of 42

30 MHz ~ 20 GHz:

PCS Band (Part 24E)

Report No.: RSZ180507002-00A

	Receiver	Turntable	Rx An	tenna	,	Substitut	ed	Absolute		
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
	GSM Mode, Middle channel									
238.96	37.78	130	1.1	Н	-59.2	0.31	0	-59.51	-13	46.51
238.96	37.53	116	1.9	V	-59.5	0.31	0	-59.81	-13	46.81
3760.00	48.72	241	2.5	Н	-52.5	1.50	11.80	-42.20	-13	29.20
3760.00	49.06	236	1.9	V	-51.7	1.50	11.80	-41.40	-13	28.40
5640.00	47.26	154	1.4	Н	-50.3	1.70	12.40	-39.60	-13	26.60
5640.00	45.24	212	1.1	V	-52.0	1.70	12.40	-41.30	-13	28.30
7520.00	41.66	275	1.4	Н	-52.3	1.90	10.70	-43.50	-13	30.50
7520.00	41.84	183	1.2	V	-51.7	1.90	10.70	-42.90	-13	29.90
			WCl	DMA Mo	de, Middl	e channel				
238.96	37.31	293	1.0	Н	-59.7	0.31	0	-60.01	-13	47.01
238.96	37.64	79	1.5	V	-59.4	0.31	0	-59.71	-13	46.71
3760.00	50.63	168	1.9	Н	-50.6	1.50	11.80	-40.30	-13	27.30
3760.00	51.6	256	1.8	V	-49.2	1.50	11.80	-38.90	-13	25.90
5640.00	51.72	56	2.3	Н	-45.9	1.70	12.40	-35.20	-13	22.20
5640.00	50.57	60	2.0	V	-46.7	1.70	12.40	-36.00	-13	23.00
7520.00	50.27	26	1.1	Н	-43.7	1.90	10.70	-34.90	-13	21.90
7520.00	46.85	344	1.1	V	-46.7	1.90	10.70	-37.90	-13	24.90

Note:

1) Absolute Level = Substituted Level - Cable loss + Antenna Gain

2) Margin = Limit- Absolute Level

FCC Part 22H/24E Page 29 of 42

FCC § 22.917 (a); § 24.238 (a) - BAND EDGES

Applicable Standard

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


Report No.: RSZ180507002-00A

According to \$24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P) \, dB$.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency



Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Hill He on 2018-05-28.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following plots.

FCC Part 22H/24E Page 30 of 42


Cellular Band, Left Band Edge for GSM (GMSK) Mode

Report No.: RSZ180507002-00A

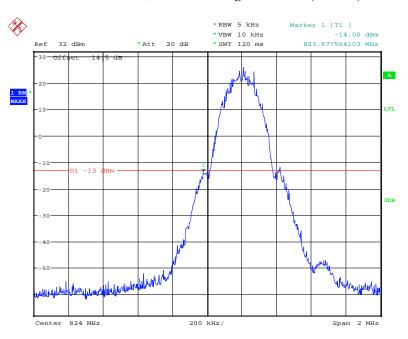

Date: 28.MAY.2018 16:00:29

Cellular Band, Right Band Edge for GSM (GMSK) Mode

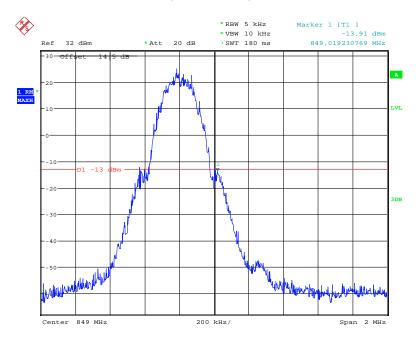


Date: 28.MAY.2018 16:02:11

FCC Part 22H/24E Page 31 of 42


Cellular Band, Left Band Edge for WCDMA (BPSK) Mode

Report No.: RSZ180507002-00A

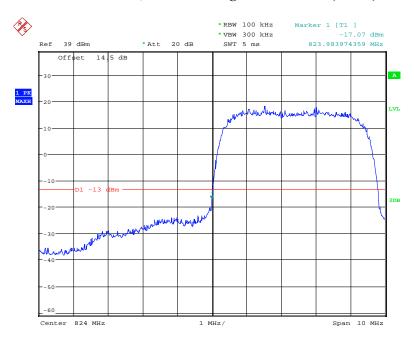

Date: 28.MAY.2018 16:58:08

Cellular Band, Right Band Edge for WCDMA (BPSK) Mode

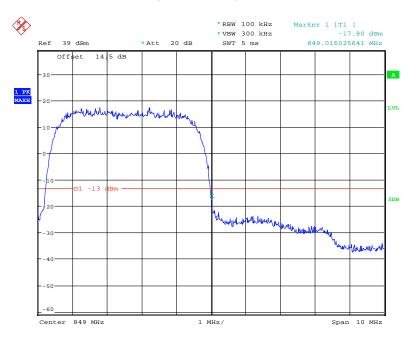


Date: 28.MAY.2018 16:58:46

FCC Part 22H/24E Page 32 of 42


Cellular Band, Left Band Edge for HSDPA (16QAM) Mode

Report No.: RSZ180507002-00A

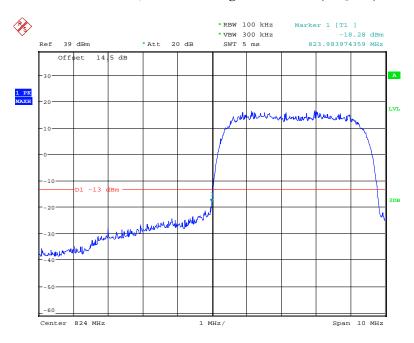

Date: 28.MAY.2018 16:57:27

Cellular Band, Right Band Edge for HSDPA (16QAM) Mode

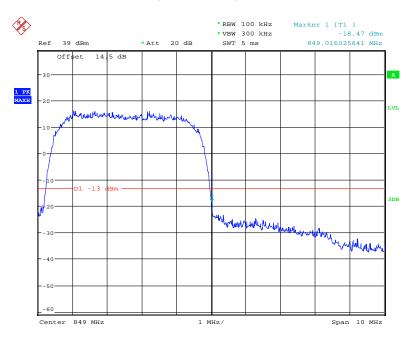


Date: 28.MAY.2018 16:56:40

FCC Part 22H/24E Page 33 of 42


Cellular Band, Left Band Edge for HSUPA (BPSK) Mode

Report No.: RSZ180507002-00A

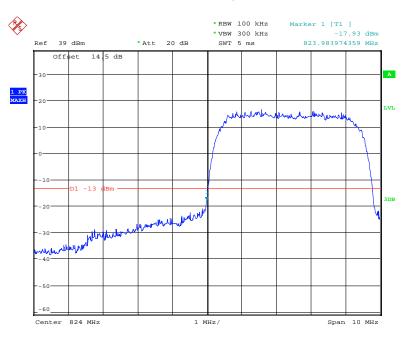

Date: 28.MAY.2018 16:51:31

Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

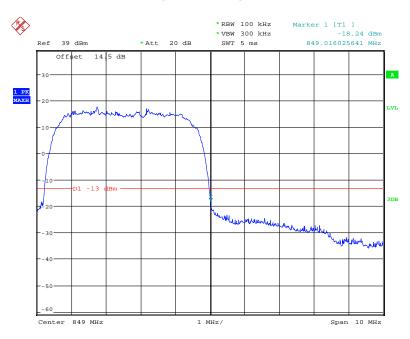


Date: 28.MAY.2018 16:55:40

FCC Part 22H/24E Page 34 of 42


PCS Band, Left Band Edge for GSM (GMSK) Mode

Report No.: RSZ180507002-00A

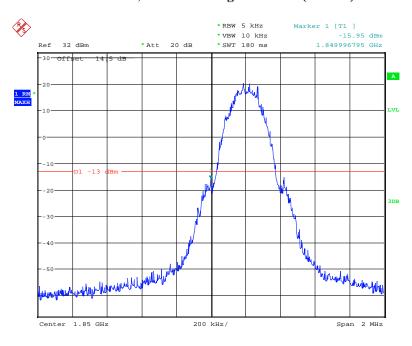

Date: 28.MAY.2018 16:08:14

PCS Band, Right Band Edge for GSM (GMSK) Mode

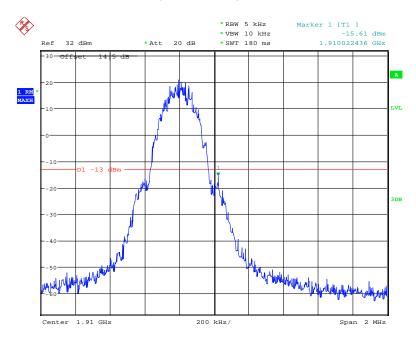


Date: 28.MAY.2018 16:09:05

FCC Part 22H/24E Page 35 of 42


PCS Band, Left Band Edge for WCDMA (BPSK) Mode

Report No.: RSZ180507002-00A

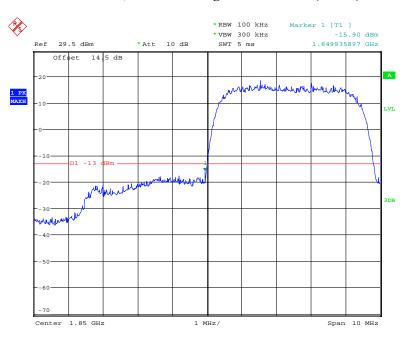

Date: 28.MAY.2018 17:26:59

PCS Band, Right Band Edge for WCDMA (BPSK) Mode

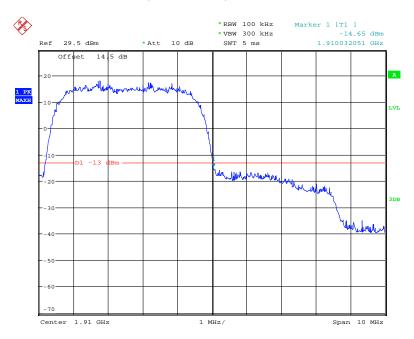


Date: 28.MAY.2018 17:29:39

FCC Part 22H/24E Page 36 of 42


PCS Band, Left Band Edge for HSDPA (16QAM) Mode

Report No.: RSZ180507002-00A

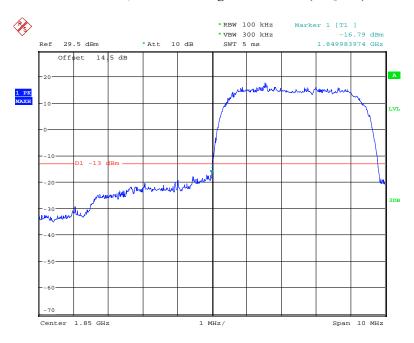

Date: 28.MAY.2018 17:31:56

PCS Band, Right Band Edge for HSDPA (16QAM) Mode

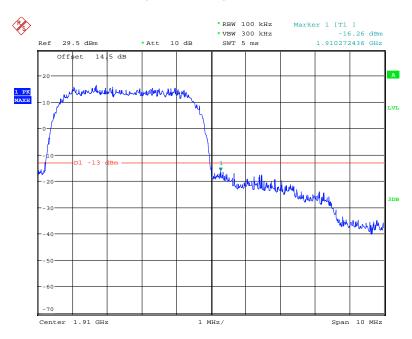


Date: 28.MAY.2018 17:30:27

FCC Part 22H/24E Page 37 of 42


PCS Band, Left Band Edge for HSUPA (BPSK) Mode

Report No.: RSZ180507002-00A

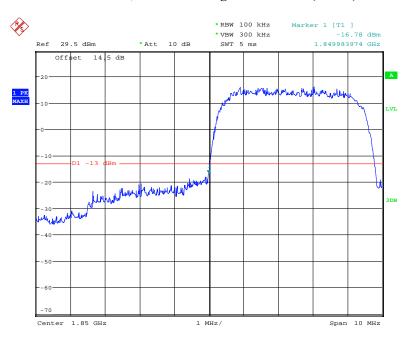

Date: 28.MAY.2018 17:32:46

PCS Band, Right Band Edge for HSUPA (BPSK) Mode

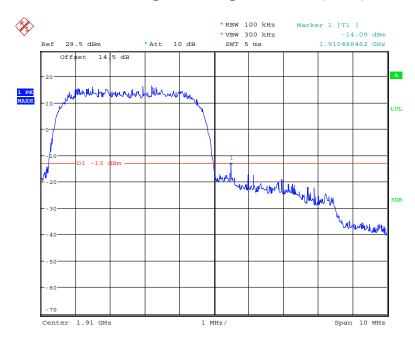

Date: 28.MAY.2018 17:33:30

FCC Part 22H/24E Page 38 of 42

FCC § 2.1055; § 22.355; § 24.235 - FREQUENCY STABILITY

Applicable Standard

FCC § 2.1055, §22.355 and §24.235.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mob
--

Report No.: RSZ180507002-00A

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤3 watts (ppm)	Mobile > 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.



FCC Part 22H/24E Page 39 of 42

Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Hill He on 2018-05-28.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

Cellular Band (Part 22H)

Report No.: RSZ180507002-00A

GSM Mode

	Middle Channel, f _o =836.6MHz							
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)				
-30		11	0.013148	2.5				
-20		5	0.005977	2.5				
-10		10	0.011953	2.5				
0		13	0.015539	2.5				
10	3.8	9	0.010758	2.5				
20		12	0.014344	2.5				
30		15	0.017930	2.5				
40		12	0.014344	2.5				
50		14	0.016734	2.5				
25	V min.= 3.6	11	0.013148	2.5				
25	V max.= 4.18	19	0.022711	2.5				

FCC Part 22H/24E Page 40 of 42

WCDMA Mode

Report No.: RSZ180507002-00A

	Middle Channel, f ₀ =836.6MHz							
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)				
-30		10	0.011953	2.5				
-20		3	0.003586	2.5				
-10		5	0.005977	2.5				
0		4	0.004781	2.5				
10	3.8	7	0.008367	2.5				
20		-3	-0.003586	2.5				
30		6	0.007172	2.5				
40		4	0.004781	2.5				
50		-9	-0.010758	2.5				
25	V min.= 3.6	2	0.002391	2.5				
25	V max.= 4.18	-12	-0.014344	2.5				

PCS Band (Part 24E) GSM Mode

	Middle Channel, f _o =1880.0 MHz						
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result			
-30		19	0.010106	pass			
-20		-15	-0.007979	pass			
-10		14	0.007447	pass			
0		10	0.005319	pass			
10	3.8	9	0.004787	pass			
20		12	0.006383	pass			
30		-13	-0.006915	pass			
40		2	0.001064	pass			
50		6	0.003191	pass			
25	V min.= 3.6	3	0.001596	pass			
25	V max.= 4.18	29	0.015426	pass			

FCC Part 22H/24E Page 41 of 42

WCDMA Mode

Report No.: RSZ180507002-00A

Middle Channel, f _o =1880.0 MHz						
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result		
-30		6	0.003191	pass		
-20		4	0.002128	pass		
-10		7	0.003723	pass		
0		5	0.002660	pass		
10	3.8	-2	-0.001064	pass		
20		5	0.002660	pass		
30		1	0.000532	pass		
40		-6	-0.003191	pass		
50		4	0.002128	pass		
25	V min.= 3.6	3	0.001596	pass		
25	V max.= 4.18	8	0.004255	pass		

***** END OF REPORT *****

FCC Part 22H/24E Page 42 of 42