



# FCC PART 15.247 TEST REPORT

For

## **AVENIR TELECOM**

208 Bd. de Plombieres - 13581 Marseille Cedex 20, Marseille, France

FCC ID: 2AM4J-E100

Report Type: Product Type:

Original Report 2G RUGGED PHONE

**Report Number:** RSZ180312004-00B

**Report Date:** 2018-04-02

Candy Li

**Reviewed By:** RF Engineer

**Prepared By:** Bay Area Compliance Laboratories Corp. (Shenzhen)

6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone,

Candy, Li

Shenzhen, Guangdong, China Tel: +86-755-33320018

Fax: +86-755-33320008 www.baclcorp.com.cn

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "\*"

# **TABLE OF CONTENTS**

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	
Measurement Uncertainty Test Facility	
SYSTEM TEST CONFIGURATION	
DESCRIPTION OF TEST CONFIGURATION	
EUT Exercise Software	
SPECIAL ACCESSORIES	
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	
EXTERNAL I/O CABLEBLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE	10
APPLICABLE STANDARD	
FCC §15.203 – ANTENNA REQUIREMENT	
APPLICABLE STANDARD	11
Antenna Connector Construction	
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	
EUT SETUP	
EMI TEST RECEIVER SETUP	12
Test Procedure	
CORRECTED FACTOR & MARGIN CALCULATION	
TEST RESULTS SUMMARY	
Test Data	
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS	
APPLICABLE STANDARD	16
EUT SETUP	
EMI Test Receiver & Spectrum Analyzer Setup	
TEST PROCEDURE	
CORRECTED AMPLITUDE & MARGIN CALCULATION	
TEST DATA	
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	
APPLICABLE STANDARD	
TEST PROCEDURE	
TEST DATA	

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH	30
APPLICABLE STANDARD	30
TEST PROCEDURE	
Test Data	
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	36
APPLICABLE STANDARD	36
TEST PROCEDURE	
Test Data	
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
Test Data	
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	55
APPLICABLE STANDARD	55
TEST PROCEDURE	
Test Data	
FCC §15.247(d) - BAND EDGES TESTING	56
APPLICABLE STANDARD	
Test Procedure	
TEST DATA	56

## **GENERAL INFORMATION**

#### **Product Description for Equipment under Test (EUT)**

The AVENIR TELECOM's product, model number: ENERGY 100(FCC ID: 2AM4J-E100) or the "EUT" in this report was a 2G RUGGED PHONE, which was measured approximately: 12.9cm (L) ×6.3cm (W) ×1.6cm (H), rated with input voltage: DC 3.7 V battery or DC 5.0V from adapter.

Report No.: RSZ180312004-00B

Adapter Information: Model: YW1000M

Input: AC 100-240V, 50/60Hz, 0.2A

Output: DC 5.0V, 1A

Notes: This series products model: EM1003 and ENERGY 100 are identical schematics, and only are different for model name. Model ENERGY 100 was selected for fully testing, the detailed information can be referred to the declaration which was stated and guaranteed by the applicant.

\*All measurement and test data in this report was gathered from production sample serial number: 1800293. (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2018-03-12.

## **Objective**

This test report is prepared on behalf of *AVENIR TELECOM* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC Part 22H/24E PCE submissions with FCC ID: 2AM4J-E100.

#### **Test Methodology**

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

FCC Part 15.247 Page 4 of 63

#### **Measurement Uncertainty**

Parameter		Uncertainty	
Occupied Cha	nnel Bandwidth	±5%	
RF Output Power with Power meter		±0.5dB	
RF conducted to	est with spectrum	±1.5dB	
AC Power Lines Conducted Emissions		±1.95dB	
Emissions,	Below 1GHz	±4.75dB	
Radiated	Above 1GHz	±4.88dB	
Temperature		±3℃	
Humidity		±6%	
Supply	voltages	±0.4%	

Report No.: RSZ180312004-00B

## **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

FCC Part 15.247 Page 5 of 63

## **SYSTEM TEST CONFIGURATION**

## **Description of Test Configuration**

The system was configured for testing in an engineering mode.

## **EUT Exercise Software**

No software was used.

## **Special Accessories**

No special accessory.

## **Equipment Modifications**

No modification was made to the EUT tested.

## **Support Equipment List and Details**

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50-146520-wh

Report No.: RSZ180312004-00B


## **External I/O Cable**

Cable Description	Length (m)	From Port	То
Un-Shielding Detachable USB Cable With Magnet Ring	1.0	EUT	Adapter

FCC Part 15.247 Page 6 of 63

## **Block Diagram of Test Setup**

For conducted emission:

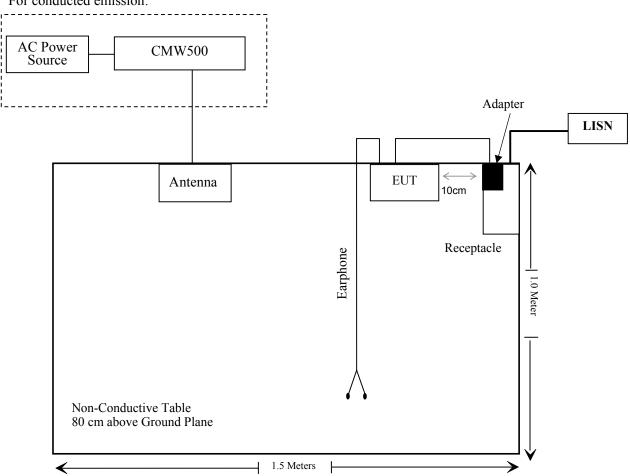

FCC Part 15.247 Page 7 of 63

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

Report No.: RSZ180312004-00B

FCC Part 15.247 Page 8 of 63

## TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date		
Conducted Emissions Test							
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2017-08-04	2018-08-04		
Rohde & Schwarz	LISN	ENV216	3560.6650.12- 101613-Yb	2017-12-07	2018-12-07		
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2017-11-19	2018-05-21		
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR		
N/A	Conducted Emission Cable	N/A	UF A210B-1- 0720-504504	2017-11-12	2018-05-12		
	Radia	ted Emission T	est				
A.H.System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17		
Rohde & Schwarz	Signal Analyzer	FSEM	845987/005	2017-04-24	2018-04-24		
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-05-21	2018-05-21		
HP	Amplifier	HP8447E	1937A01046	2017-11-19	2018-05-21		
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2017-12-17	2020-12-16		
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2017-12-07	2018-12-07		
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR		
Ducommun technologies	RF Cable	UFA210A-1- 4724-30050U	MFR64369 223410-001	2017-11-19	2018-05-21		
Ducommun technologies	RF Cable	104PEA	218124002	2017-11-19	2018-05-21		
Ducommun technologies	RF Cable	RG-214	1	2017-11-19	2018-05-21		
Ducommun technologies	RF Cable	RG-214	2	2017-11-22	2018-05-22		
Ducommun Technologies	Horn Antenna	ARH-4223- 02	1007726-04	2017-12-29	2020-12-29		
Ducommun Technologies	Pre-amplifier	ALN- 22093530-01	991373-01	2017-08-03	2018-08-03		
Sinoscite	Notch Filter	BSF2402- 2480MN- 0898-001	N/A	2017-05-21	2018-05-21		
	RF	Conducted Test	t				
Agilent	P-Series Power Meter	N1912A	MY5000448	2017-12-05	2018-12-05		
Agilent	Wideband Power Sensor	N1921A	MY54210016	2017-12-05	2018-12-05		
WEINSCHEL	3dB Attenuator	N/A	N/A	2017-11-23	2018-05-22		
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2017-12-24	2018-12-24		
Ducommun technologies	RF Cable	RG-214	3	2017-11-22	2018-05-22		

Report No.: RSZ180312004-00B

FCC Part 15.247 Page 9 of 63

<sup>\*</sup> Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE

#### **Applicable Standard**

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

Report No.: RSZ180312004-00B

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq$  50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]  $[\sqrt{f(GHz)}] \le 3.0$  for 1-g SAR and  $\le 7.5$  for 10-g extremity SAR, where

- 1. f(GHz) is the RF channel transmit frequency in GHz.
- 2. Power and distance are rounded to the nearest mW and mm before calculation.
- 3. The result is rounded to one decimal place for comparison.
- 4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

#### For worst case:

Frequency	Maximum Tune-up power		Calculated Distance	Calculated	Threshold	SAR Test
(MHz)	(dBm)	(mW)	(mm)	Value	(1-g SAR)	Exclusion
2480	7.5	5.62	5.0	1.8	3.0	Yes

Result: No Standalone SAR test is required

FCC Part 15.247 Page 10 of 63

## FCC §15.203 – ANTENNA REQUIREMENT

#### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Report No.: RSZ180312004-00B

#### **Antenna Connector Construction**

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 1.6 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.


FCC Part 15.247 Page 11 of 63

## FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

#### **Applicable Standard**

FCC §15.207(a)

## **EUT Setup**

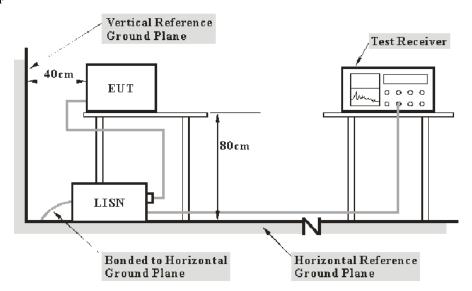

Report No.: RSZ180312004-00B

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

## **EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W	
150 kHz – 30 MHz	9 kHz	

#### **Test Procedure**

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

FCC Part 15.247 Page 12 of 63

#### **Corrected Factor & Margin Calculation**

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

Correction Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Report No.: RSZ180312004-00B

Margin = Limit - Corrected Amplitude

#### **Test Results Summary**

According to the recorded data in following table, the EUT complied with the FCC Part 15.207,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \leq L_{\rm lim} + U_{\rm cispr}$$

In BACL,  $U_{(Lm)}$  is less than  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

#### **Test Data**

#### **Environmental Conditions**


Temperature:	25 ℃
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Hill He on 2018-03-16.

EUT operation mode: Transmitting (BDR mode, High channel)

FCC Part 15.247 Page 13 of 63

## AC 120V/60 Hz, Line

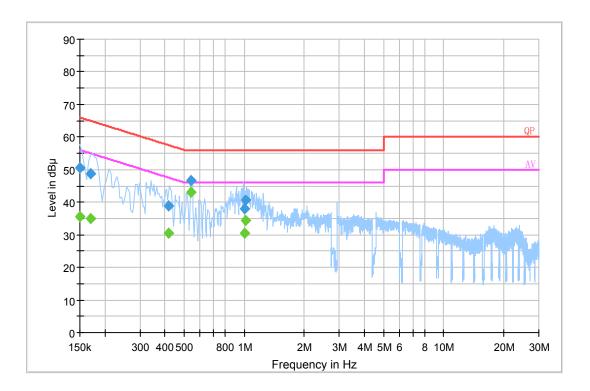


Report No.: RSZ180312004-00B

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.150000	50.5	20.2	66.0	15.5	QP
0.169500	48.8	20.2	65.0	16.2	QP
0.415670	38.9	20.2	57.5	18.6	QP
0.537870	46.6	20.2	56.0	9.4	QP
1.007090	38.0	20.1	56.0	18.0	QP
1.018550	40.8	20.1	56.0	15.2	QP
0.150000	35.6	20.2	56.0	20.4	Ave.
0.169500	34.9	20.2	55.0	20.1	Ave.
0.415670	30.6	20.2	47.5	16.9	Ave.
0.537870	42.9	20.2	46.0	3.1	Ave.
1.007090	30.5	20.1	46.0	15.5	Ave.
1.018550	34.4	20.1	46.0	11.6	Ave.

FCC Part 15.247 Page 14 of 63

## AC 120V/60 Hz, Neutral

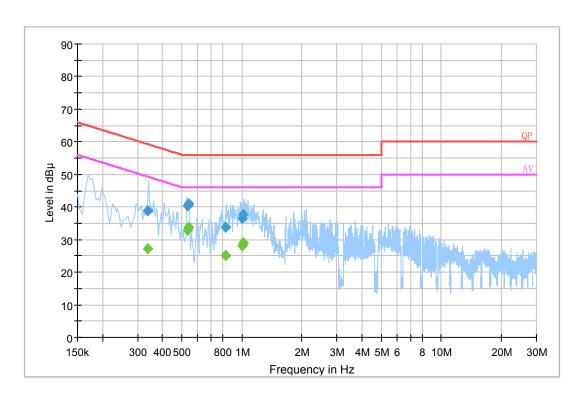

Report No.: RSZ180312004-00B

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.336870	38.7	20.2	59.3	20.6	QP
0.533930	40.4	20.2	56.0	15.6	QP
0.537950	40.9	20.2	56.0	15.1	QP
0.829490	33.7	20.0	56.0	22.3	QP
0.999210	36.6	20.1	56.0	19.4	QP
1.010610	37.8	20.1	56.0	18.2	QP
0.336870	27.4	20.2	49.3	21.9	Ave.
0.533930	32.9	20.2	46.0	13.1	Ave.
0.537950	33.9	20.2	46.0	12.1	Ave.
0.829490	25.2	20.0	46.0	20.8	Ave.
0.999210	28.1	20.1	46.0	17.9	Ave.
1.010610	28.9	20.1	46.0	17.1	Ave.

#### **Note:**

- 1) Correction Factor =LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit Corrected Amplitude

FCC Part 15.247 Page 15 of 63


## FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

## **Applicable Standard**

FCC §15.205; §15.209; §15.247(d)


## **EUT Setup**

#### **Below 1 GHz:**

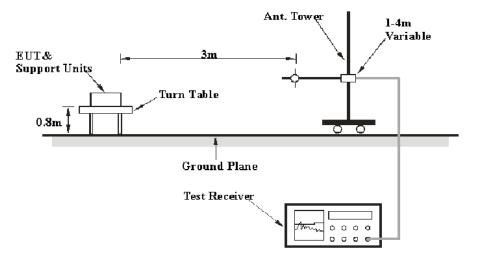

Report No.: RSZ180312004-00B

## **Above 1GHz:**

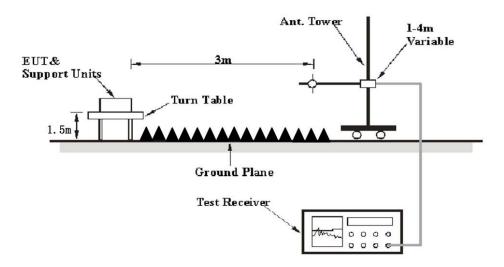

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

FCC Part 15.247 Page 16 of 63

### **EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
Above I GHZ	1 MHz	10 Hz	/	Ave.

Report No.: RSZ180312004-00B

#### **Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

#### **Corrected Amplitude & Margin Calculation**

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

#### **Test Results Summary**

According to the recorded data in following table, the EUT complied with the <u>FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247</u>.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \le L_{\rm lim} + U_{\rm cispr}$$

In BACL,  $U_{(Lm)}$  is less than  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	24 ℃	
Relative Humidity:	52 %	
ATM Pressure:	101.0 kPa	


The testing was performed by Hill He on 2018-03-29.

FCC Part 15.247 Page 17 of 63

EUT operation mode: Transmitting (Scan with GFSK,  $\pi/4$ -DQPSK, 8-DPSK mode, the worst case was GFSK mode)

Report No.: RSZ180312004-00B

30 MHz - 1GHz: (High channel)

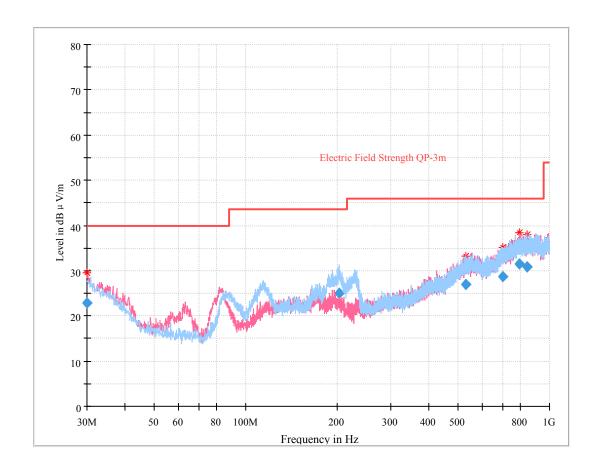

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
30.099478	22.93	169.0	V	333.0	0.2	40.00	17.07
202.884375	25.01	209.0	Н	45.0	-5.3	43.50	18.49
528.749125	26.86	349.0	V	191.0	4.1	46.00	19.14
699.718125	28.72	224.0	Н	182.0	6.7	46.00	17.28
796.173625	31.39	100.0	V	16.0	8.9	46.00	14.61
843.291000	30.84	195.0	V	345.0	9.0	46.00	15.16

FCC Part 15.247 Page 18 of 63

1 GHz - 25 GHz:

Frequency	Meas	surement	Turntable	Rx An	itenna		Corrected	15.247	C Part //205/209
(MHz)	Reading (dBµV)	PK/QP/Ave.	Degree	Height (m)	Polar (H/V)	Factor (dB/m)	Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
			Low Ch	annel (2	2402 M	Hz)			
2402.00	60.45	PK	292	1.1	Н	33.92	94.37	/	/
2402.00	49.22	Ave.	292	1.1	Н	33.92	83.14	/	/
2402.00	59.16	PK	192	1.8	V	33.92	93.08	/	/
2402.00	48.37	Ave.	192	1.8	V	33.92	82.29	/	/
2367.07	27.04	PK	164	2.1	Н	33.92	60.96	74	13.04
2367.07	13.22	Ave.	164	2.1	Н	33.92	47.14	54	6.86
2489.25	26.73	PK	86	1.2	Н	34.08	60.81	74	13.19
2489.25	13.11	Ave.	86	1.2	Н	34.08	47.19	54	6.81
4804.00	59.49	PK	80	1.3	Н	5.84	65.33	74	8.67
4804.00	35.30	Ave.	80	1.3	Н	5.84	41.14	54	12.86
7206.00	46.98	PK	168	2.2	V	14.00	60.98	74	13.02
7206.00	31.53	Ave.	168	2.2	V	14.00	45.53	54	8.47
	Middle Channel (2441 MHz)								
2441.00	60.57	PK	75	1.5	Н	33.92	94.49	/	/
2441.00	49.21	Ave.	75	1.5	Н	33.92	83.13	/	/
2441.00	59.64	PK	102	2.3	V	33.92	93.56	/	/
2441.00	48.69	Ave.	102	2.3	V	33.92	82.61	/	/
4882.00	60.85	PK	332	2.3	Н	6.21	67.06	74	6.94
4882.00	35.75	Ave.	332	2.3	Н	6.21	41.96	54	12.04
			High Ch	annel (2	2480 M	Hz)			
2480.00	62.27	PK	317	1.3	Н	34.08	96.35	/	/
2480.00	50.83	Ave.	317	1.3	Н	34.08	83.91	/	/
2480.00	60.10	PK	10	2.3	V	34.08	94.18	/	/
2480.00	49.07	Ave.	10	2.3	V	34.08	83.15	/	/
2370.28	26.94	PK	55	2.3	Н	33.92	60.86	74	13.14
2370.28	13.16	Ave.	55	2.3	Н	33.92	47.08	54	6.92
2484.45	34.99	PK	306	1.7	Н	34.08	69.07	74	4.93
2484.45	14.12	Ave.	306	1.7	Н	34.08	48.20	54	5.80
4960.00	59.81	PK	103	2.0	Н	7.82	67.63	74	6.37
4960.00	35.03	Ave.	103	2.0	Н	7.82	42.85	54	11.15

## Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor Corrected Amplitude = Corrected Factor + Reading


Margin = Limit - Corrected. Amplitude

The other spurious emission which is 20dB to the limit was not recorded.


And for the pre-scan is performed with the 2400-2483.5MHz band filter.

FCC Part 15.247 Page 19 of 63

#### 1-18GHz - Horizontal

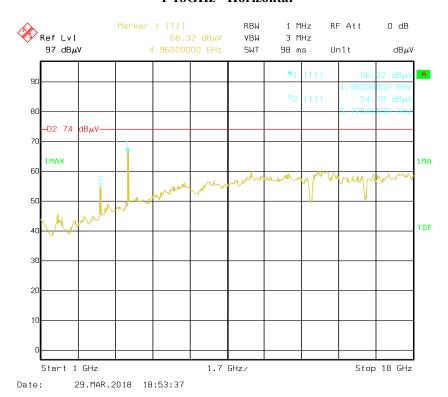


#### 18-25GHz - Horizontal

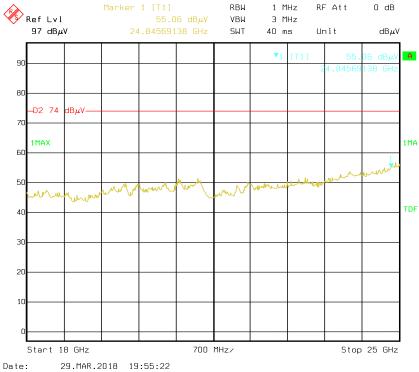


FCC Part 15.247 Page 20 of 63

## 1-18GHz - Vertical

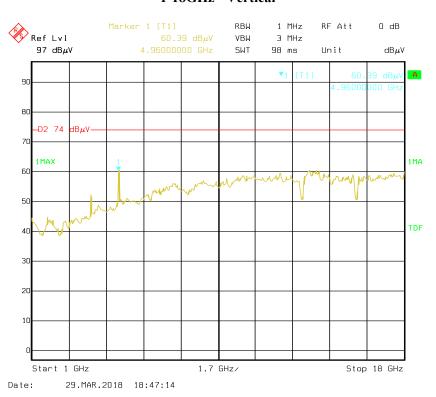


#### 18-25GHz - Vertical

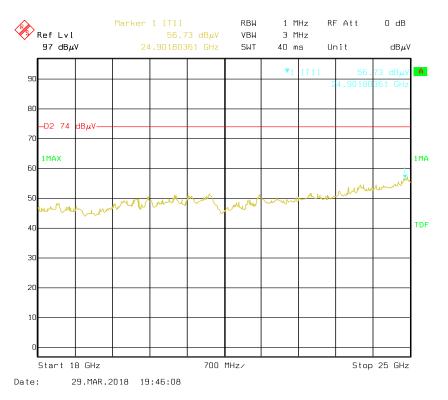


FCC Part 15.247 Page 21 of 63

#### For Average - Horizontal

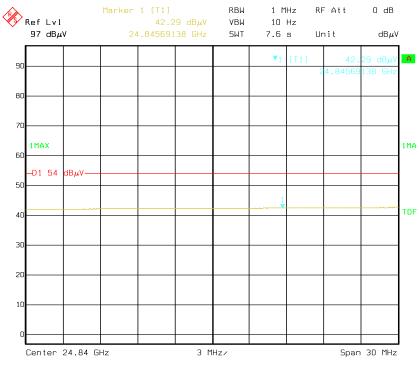

Date: 29.MAR.2018 20:03:49

## For Average - Vertical

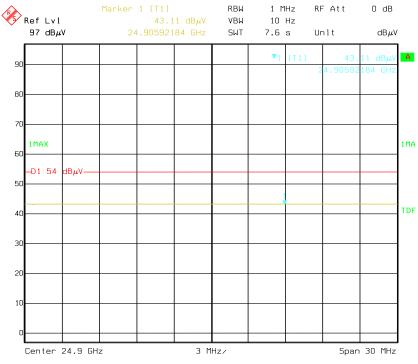

Date: 29.MAR.2018 20:13:17

FCC Part 15.247 Page 22 of 63

## FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

## **Applicable Standard**

Frequency hopping systems shall have hoping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Report No.: RSZ180312004-00B

#### **Test Procedure**

- 1. Set the EUT in transmitting mode, maxhold the channel.
- 2. Set the adjacent channel of the EUT and maxhold another trace.
- 3. Measure the channel separation.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 ℃	
Relative Humidity:	52 %	
ATM Pressure:	101.0 kPa	

The testing was performed by Hill He on 2018-03-14.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots


FCC Part 15.247 Page 23 of 63

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	≥Limit (MHz)	Result
	Low	2402	1.00	0.625	Pass
	Adjacent	2403	1.00	0.623	Pass
BDR	Middle	2441	1.00	0.641	Pass
(GFSK)	Adjacent	2442	1.00	0.041	Pass
	High	2480	1.00	0.644	D
	Adjacent	2479	1.00	0.644	Pass
	Low	2402	1.00	0.843	Pass
	Adjacent	2403			
EDR	Middle	2441	1.00	0.846	Pass Pass
(π/4-DQPSK)	Adjacent	2442	1.00		
	High	2480	1.00		
	Adjacent	2479	1.00		
	Low	2402	1.00	0.846	Pass
	Adjacent	2403	1.00	0.840	Pass
EDR	Middle	2441	1.00	0.840	Pass
(8DPSK)	Adjacent	2442	1.00	0.040	1 a88
	High	2480	1.00	0.042	Pass
	Adjacent	2479	1.00	0.843	г азз

Note: Limit = 20 dB bandwidth \*2/3


FCC Part 15.247 Page 24 of 63

## BDR (GFSK): Low Channel

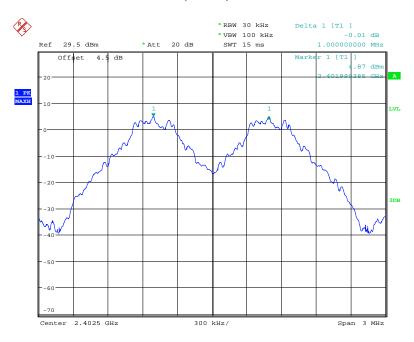

Date: 14.MAR.2018 14:26:22


## BDR (GFSK): Middle Channel

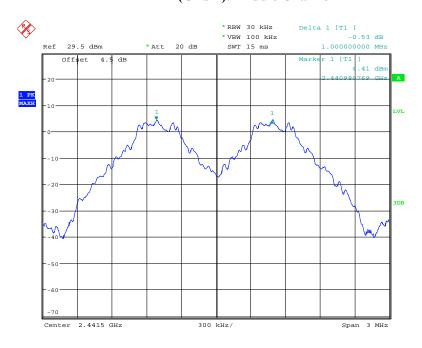

Date: 14.MAR.2018 14:27:09


FCC Part 15.247 Page 25 of 63

## BDR (GFSK): High Channel

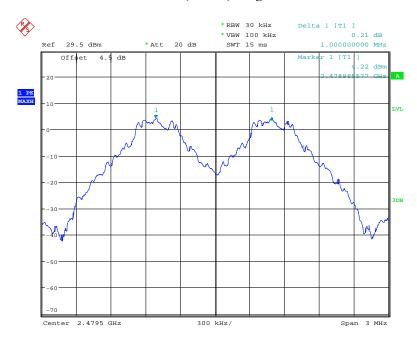

Date: 14.MAR.2018 14:27:41


## EDR ( $\pi/4$ -DQPSK): Low Channel

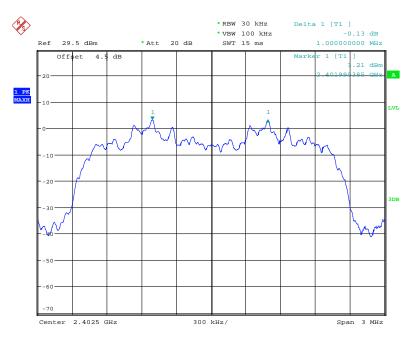

Date: 14.MAR.2018 14:22:07


FCC Part 15.247 Page 26 of 63

## EDR (π/4-DQPSK): Middle Channel

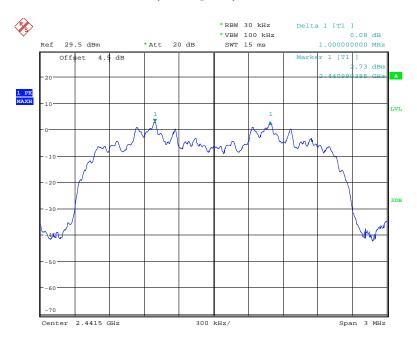

Date: 14.MAR.2018 14:22:36


## EDR ( $\pi/4$ -DQPSK): High Channel

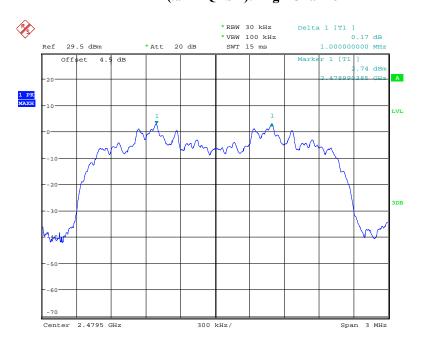

Date: 14.MAR.2018 14:24:31


FCC Part 15.247 Page 27 of 63

## EDR (8DPSK): Low Channel

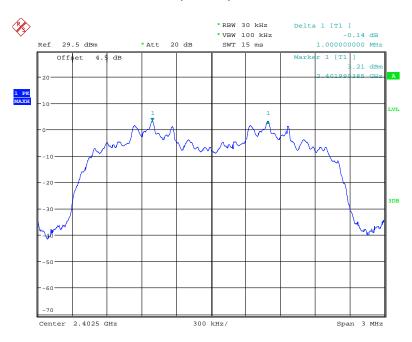

Date: 14.MAR.2018 14:17:39


## EDR (8DPSK): Middle Channel

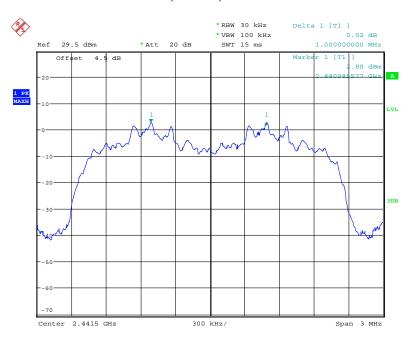

Date: 14.MAR.2018 14:18:23

FCC Part 15.247 Page 28 of 63

## EDR (8DPSK): High Channel

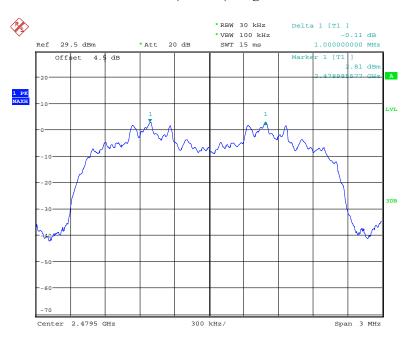

Date: 14.MAR.2018 14:19:11

FCC Part 15.247 Page 29 of 63

## FCC $\S15.247(a)$ (1) – 20 dB EMISSION BANDWIDTH

#### **Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Report No.: RSZ180312004-00B

#### **Test Procedure**

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- 4. Repeat above procedures until all frequencies measured were complete.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 ℃
Relative Humidity:	50~52 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Hill He on 2018-03-14.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots

FCC Part 15.247 Page 30 of 63

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)	
	Low	2402	0.937	
BDR (GFSK)	Middle	2441	0.962	
(31312)	High	2480	0.966	
EDR (π/4-DQPSK)	Low	2402	1.264	
	Middle	2441	1.269	
	High	2480	1.274	
EDR (8DPSK)	Low	2402	1.269	
	Middle	2441	1.260	
	High	2480	1.264	


## BDR (GFSK): Low Channel

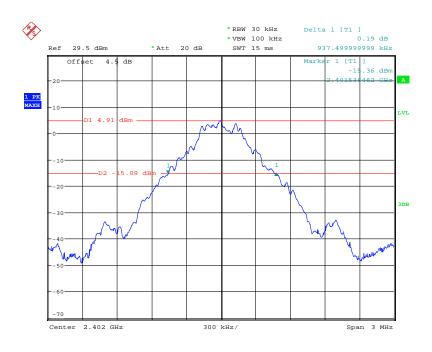

Date: 14.MAR.2018 14:06:33


FCC Part 15.247 Page 31 of 63

## BDR (GFSK): Middle Channel

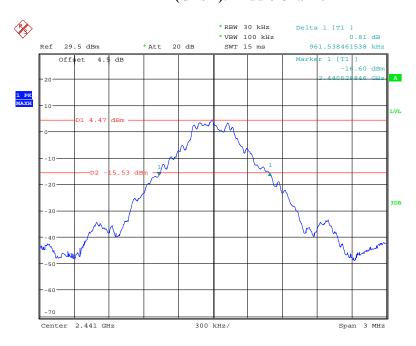

Date: 14.MAR.2018 14:08:12


## BDR (GFSK): High Channel

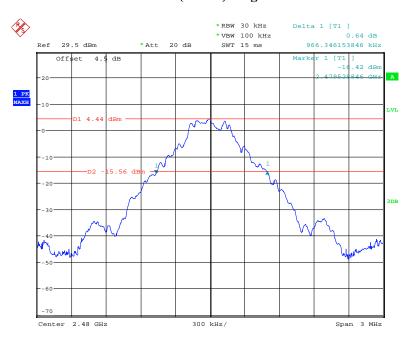

Date: 14.MAR.2018 14:09:05


FCC Part 15.247 Page 32 of 63

## EDR ( $\pi/4$ -DQPSK): Low Channel

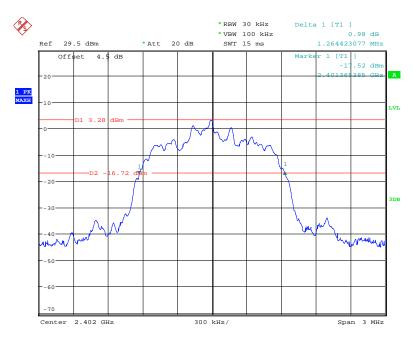

Date: 14.MAR.2018 14:10:37


## EDR ( $\pi/4$ -DQPSK): Middle Channel

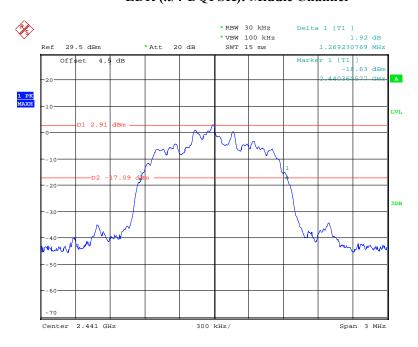

Date: 14.MAR.2018 14:11:49


FCC Part 15.247 Page 33 of 63

## EDR ( $\pi/4$ -DQPSK): High Channel

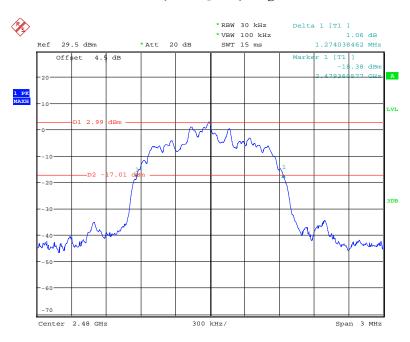

Date: 14.MAR.2018 14:12:37


## EDR (8DPSK): Low Channel

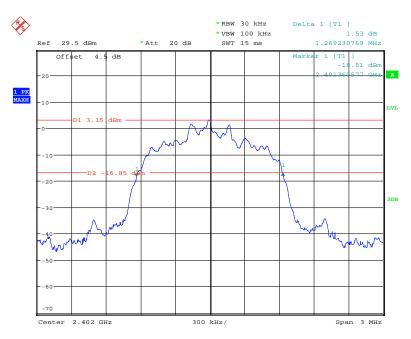

Date: 14.MAR.2018 14:13:22


FCC Part 15.247 Page 34 of 63

## EDR (8DPSK): Middle Channel

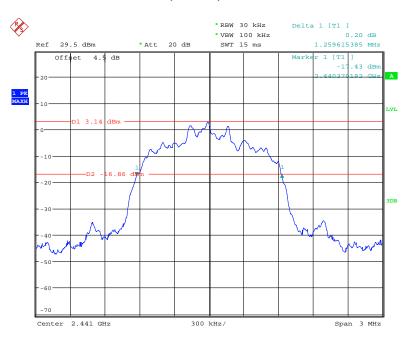

Date: 14.MAR.2018 14:14:11

## EDR (8DPSK): High Channel

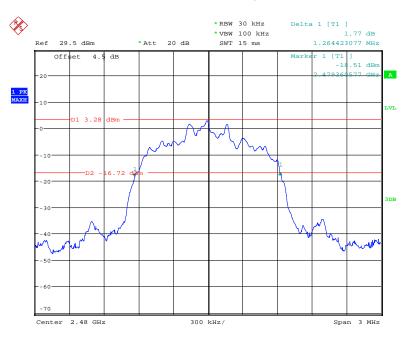

Date: 14.MAR.2018 14:14:54

FCC Part 15.247 Page 35 of 63

## FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

#### **Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Report No.: RSZ180312004-00B

#### **Test Procedure**

- 1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- 2. Set the EUT in hopping mode from first channel to last.
- 3. By using the max-hold function record the quantity of the channel.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 ℃
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa


The testing was performed by Hill He on 2018-03-14.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots

FCC Part 15.247 Page 36 of 63

# **BDR (GFSK): Number of Hopping Channels**

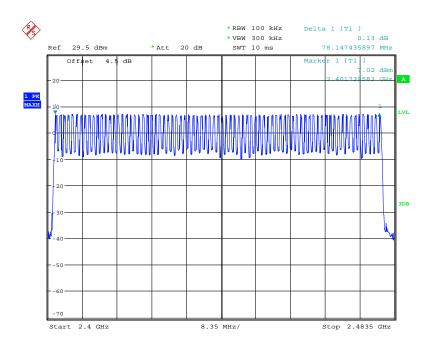


Date: 14.MAR.2018 12:54:36

FCC Part 15.247 Page 37 of 63


# EDR ( $\pi/4$ -DQPSK): Number of Hopping Channels

Report No.: RSZ180312004-00B

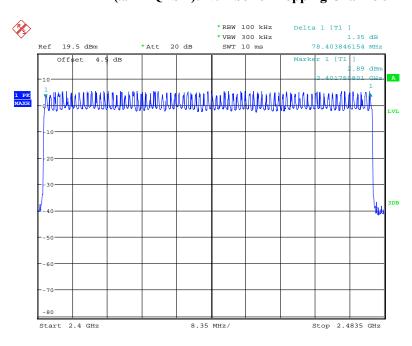

Date: 14.MAR.2018 12:45:16

## **EDR (8DPSK): Number of Hopping Channels**

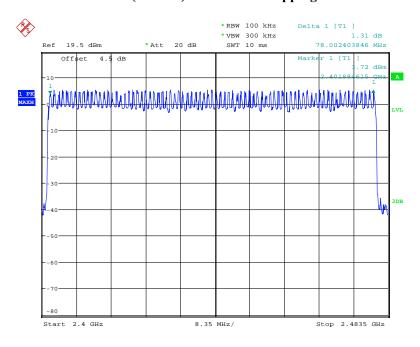

Date: 14.MAR.2018 12:41:59

FCC Part 15.247 Page 38 of 63

# FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

#### **Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Report No.: RSZ180312004-00B

#### **Test Procedure**

- 1. The EUT was worked in channel hopping.
- 2. Set the RBW to: 1MHz.
- 3. Set the VBW  $\geq$  3×RBW.
- 4. Set the span to 0Hz.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Recorded the time of single pulses

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 ℃
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Hill He on 2018-03-14.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table and plots


FCC Part 15.247 Page 39 of 63

Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
		Low	0.391	0.125	0.4	Pass
	D. 1.	Middle	0.391	0.125	0.4	Pass
	DH 1	High	0.391	0.125	0.4	Pass
BDR		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
		Low	1.671	0.267	0.4	Pass
	DII 2	Middle	1.671	0.267	0.4	Pass
(GFSK)	DH 3	High	1.671	0.267	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
		Low	2.913	0.311	0.4	Pass
	DIL 5	Middle	2.913	0.311	0.4	Pass
	DH 5	High	2.913	0.311	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
		Low	0.397	0.127	0.4	Pass
	ADII 1	Middle	0.397	0.127	0.4	Pass
	2DH 1	High	0.397	0.127	0.4	Pass
	-	Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
EDR	2DH 3	Low	1.671	0.267	0.4	Pass
		Middle	1.671	0.267	0.4	Pass
$(\pi/4\text{-DQPSK})$		High	1.671	0.267	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH 5	Low	2.929	0.312	0.4	Pass
		Middle	2.929	0.312	0.4	Pass
		High	2.929	0.312	0.4	Pass
		Note:2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
	3DH 1	Low	0.403	0.129	0.4	Pass
		Middle	0.402	0.129	0.4	Pass
		High	0.402	0.129	0.4	Pass
		Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH 3	Low	1.671	0.267	0.4	Pass
EDR		Middle	1.671	0.267	0.4	Pass
(8DPSK)		High	1.671	0.267	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH 5	Low	2.929	0.312	0.4	Pass
		Middle	2.929	0.312	0.4	Pass
		High	2.929	0.312	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				

FCC Part 15.247 Page 40 of 63


# BDR (GFSK): Pulse time, Low Channel, DH1

Report No.: RSZ180312004-00B

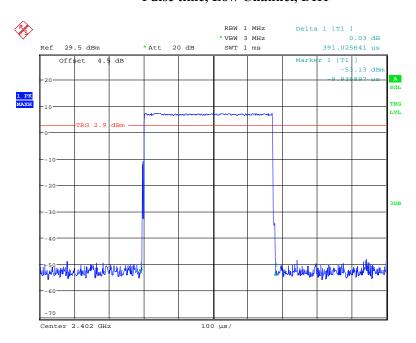

Date: 14.MAR.2018 14:59:49


## Pulse time, Middle Channel, DH1

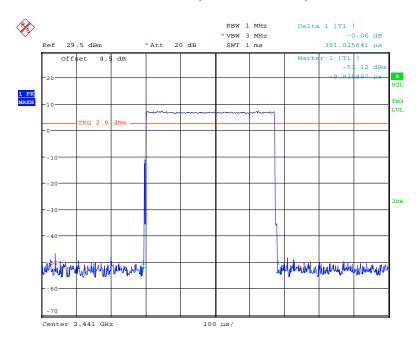

Date: 14.MAR.2018 15:00:48


FCC Part 15.247 Page 41 of 63

## Pulse time, High Channel, DH1

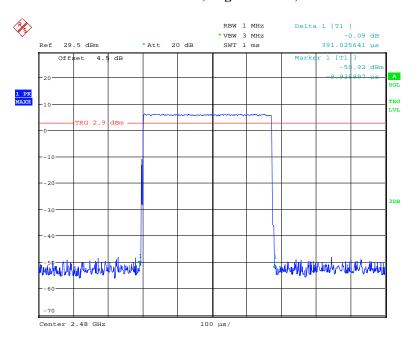

Date: 14.MAR.2018 15:00:59


## Pulse time, Low Channel, DH3

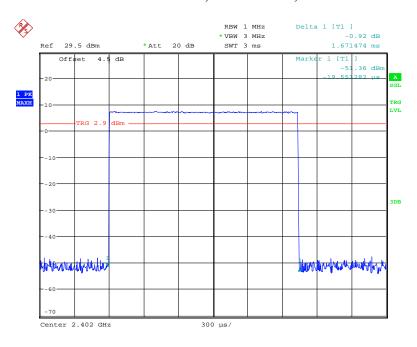

Date: 14.MAR.2018 15:03:32


FCC Part 15.247 Page 42 of 63

## Pulse time, Middle Channel, DH3

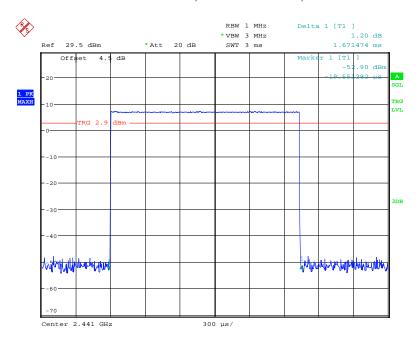

Date: 14.MAR.2018 15:03:50


## Pulse time, High Channel, DH3

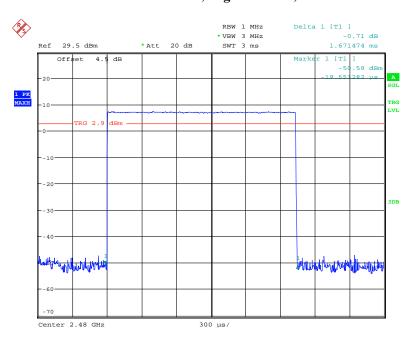

Date: 14.MAR.2018 15:04:04


FCC Part 15.247 Page 43 of 63

## Pulse time, Low Channel, DH5

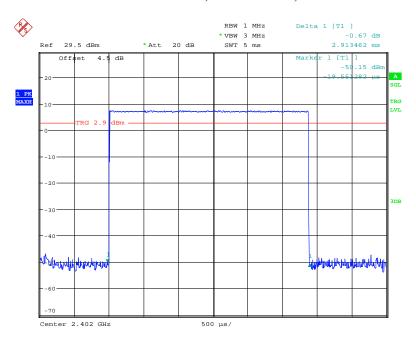

Date: 14.MAR.2018 15:07:06


## Pulse time, Middle Channel, DH5

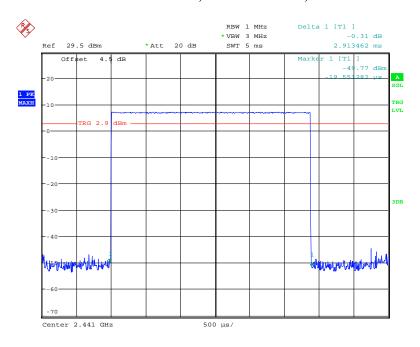

Date: 14.MAR.2018 15:06:55


FCC Part 15.247 Page 44 of 63

## Pulse time, High Channel, DH5

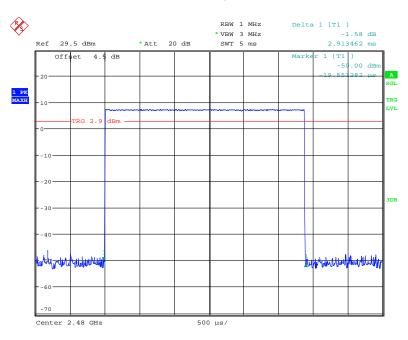

Date: 14.MAR.2018 15:06:35


# EDR ( $\pi/4$ -DQPSK): Pulse time, Low Channel, 2DH1

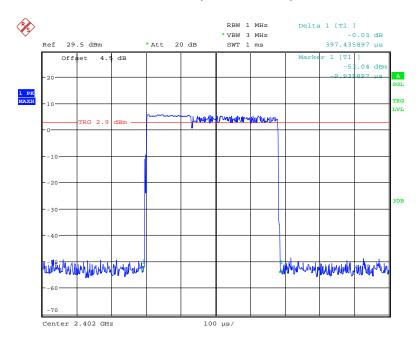

Date: 14.MAR.2018 15:01:33


FCC Part 15.247 Page 45 of 63

## Pulse time, Middle Channel, 2DH1

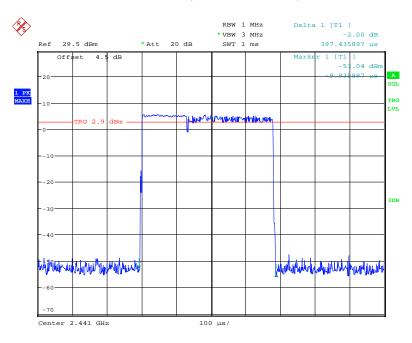

Date: 14.MAR.2018 15:01:50


## Pulse time, High Channel, 2DH1

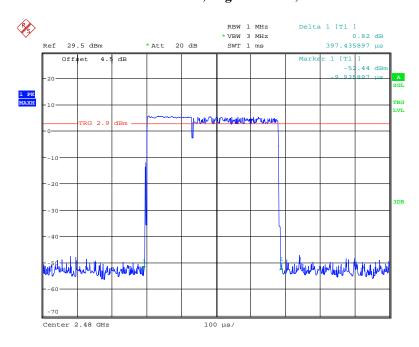

Date: 14.MAR.2018 15:02:00


FCC Part 15.247 Page 46 of 63

## Pulse time, Low Channel, 2DH3

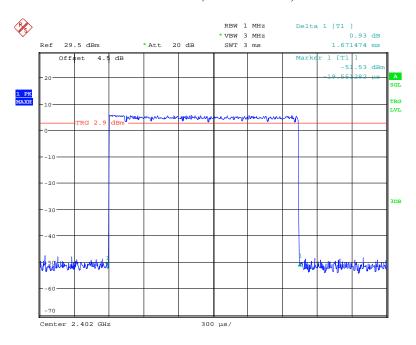

Date: 14.MAR.2018 15:04:35


## Pulse time, Middle Channel, 2DH3

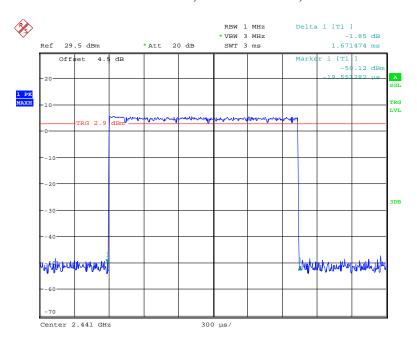

Date: 14.MAR.2018 15:04:49


FCC Part 15.247 Page 47 of 63

## Pulse time, High Channel, 2DH3

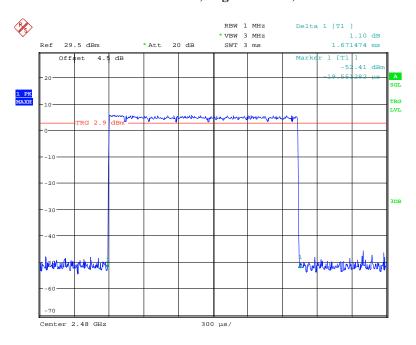

Date: 14.MAR.2018 15:05:02


## Pulse time, Low Channel, 2DH5

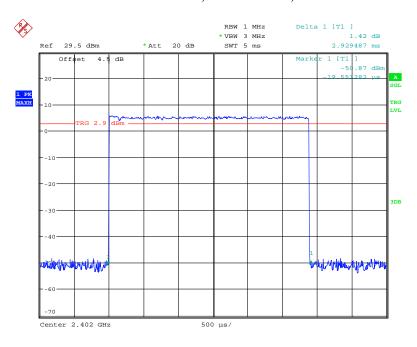

Date: 14.MAR.2018 15:07:33


FCC Part 15.247 Page 48 of 63

## Pulse time, Middle Channel, 2DH5

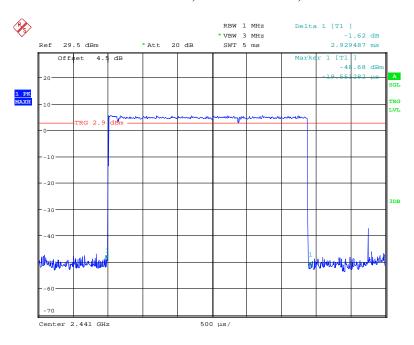


Date: 14.MAR.2018 15:07:49


## Pulse time, High Channel, 2DH5

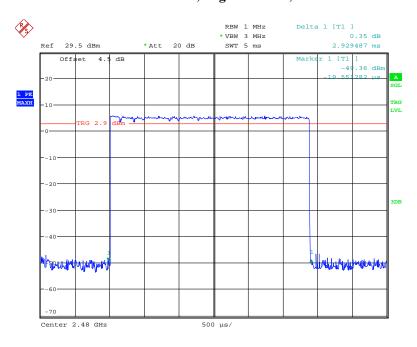

Date: 14.MAR.2018 15:07:58


FCC Part 15.247 Page 49 of 63



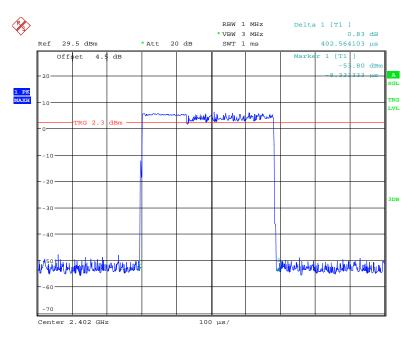

Date: 14.MAR.2018 15:11:23


## Pulse time, Middle Channel, 3DH1

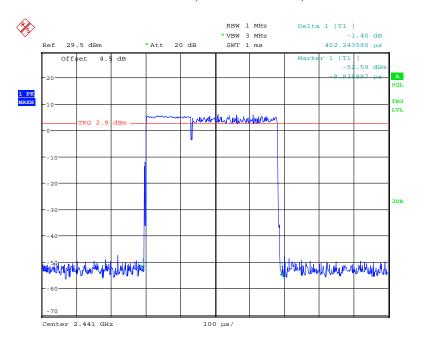

Date: 14.MAR.2018 15:02:33


FCC Part 15.247 Page 50 of 63

## Pulse time, High Channel, 3DH1

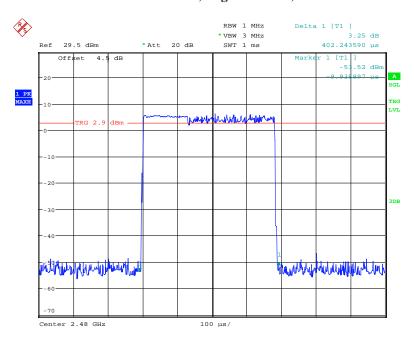

Date: 14.MAR.2018 15:02:46


## Pulse time, Low Channel, 3DH3

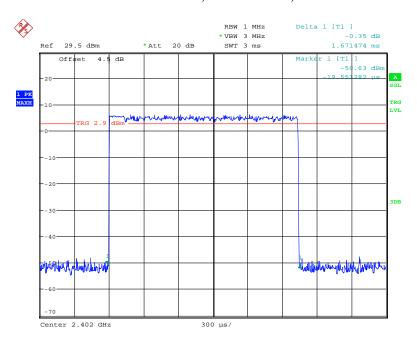

Date: 14.MAR.2018 15:05:22


FCC Part 15.247 Page 51 of 63

## Pulse time, Middle Channel, 3DH3

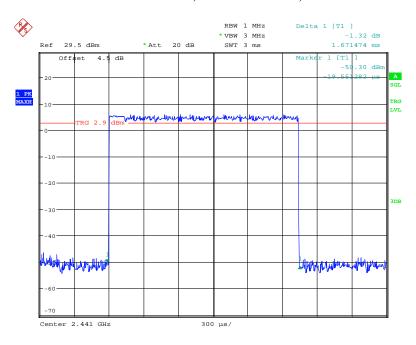

Date: 14.MAR.2018 15:05:36


## Pulse time, High Channel, 3DH3

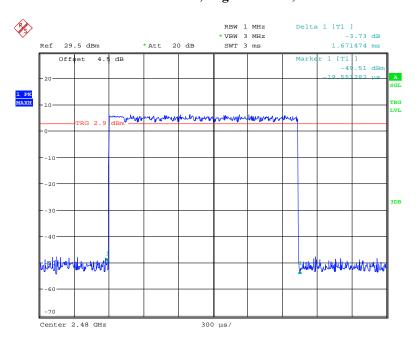

Date: 14.MAR.2018 15:05:46


FCC Part 15.247 Page 52 of 63

## Pulse time, Low Channel, 3DH5

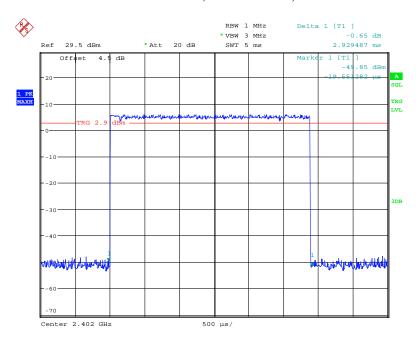

Date: 14.MAR.2018 15:08:56


## Pulse time, Middle Channel, 3DH5

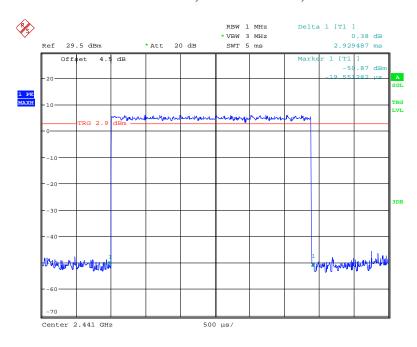

Date: 14.MAR.2018 15:08:41

FCC Part 15.247 Page 53 of 63

## Pulse time, High Channel, 3DH5

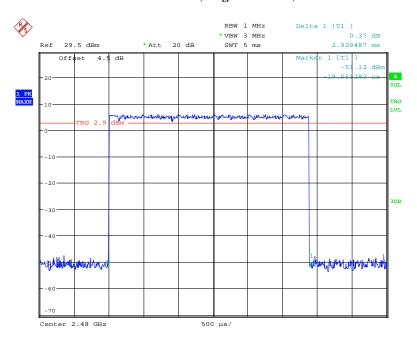

Date: 14.MAR.2018 15:08:26

FCC Part 15.247 Page 54 of 63

# FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

## **Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Report No.: RSZ180312004-00B

#### **Test Procedure**

- 1. Place the EUT on a bench and set in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- 3. Add a correction factor to the display.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	24 ℃
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Hill He on 2018-03-14.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following table.

Mode	Channel	Frequency (MHz)	Peak Output Power		Limit
			(dBm)	(mW)	(mW)
BDR (GFSK)	Low	2402	6.97	4.977	125
	Middle	2441	6.99	5.000	125
	High	2480	7.03	5.047	125
EDR (π/4-DQPSK)	Low	2402	6.32	4.285	125
	Middle	2441	6.12	4.093	125
	High	2480	6.27	4.236	125
EDR (8DPSK)	Low	2402	6.84	4.831	125
	Middle	2441	6.73	4.710	125
	High	2480	6.85	4.842	125

FCC Part 15.247 Page 55 of 63

# FCC §15.247(d) - BAND EDGES TESTING

#### **Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Report No.: RSZ180312004-00B

#### **Test Procedure**

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
- 3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5. Repeat above procedures until all measured frequencies were complete.

#### **Test Data**

#### **Environmental Conditions**

Temperature:	21~25 ℃
Relative Humidity:	51~52 %
ATM Pressure:	100~101.0 kPa


The testing was performed by Hill He from 2018-03-14 to 2018-03-22.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots.


FCC Part 15.247 Page 56 of 63

## BDR (GFSK): Band Edge-Left Side

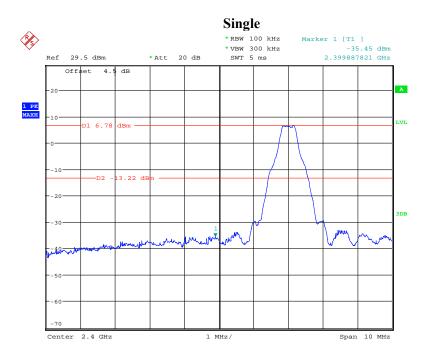

Date: 14.MAR.2018 14:34:02


## Hopping

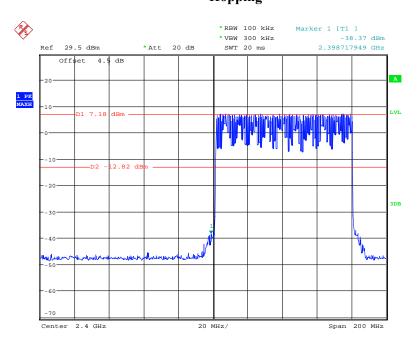

Date: 14.MAR.2018 14:40:19


FCC Part 15.247 Page 57 of 63

# BDR (GFSK): Band Edge-Right Side

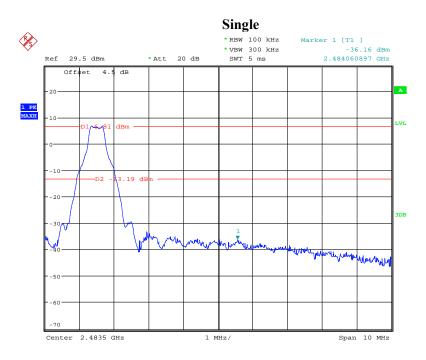

Date: 14.MAR.2018 14:35:32


## Hopping

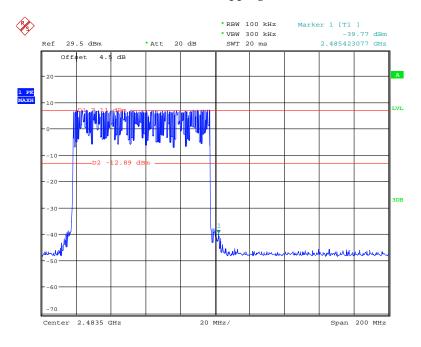

Date: 14.MAR.2018 14:38:08


FCC Part 15.247 Page 58 of 63

# EDR (π/4-DQPSK): Band Edge-Left Side Single

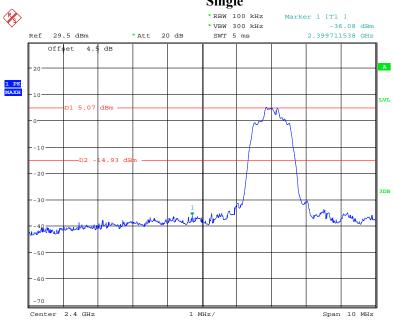

Date: 14.MAR.2018 14:50:17


## Hopping

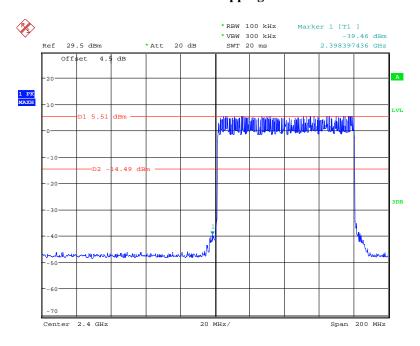

Date: 14.MAR.2018 14:45:30


FCC Part 15.247 Page 59 of 63

# EDR (π/4-DQPSK): Band Edge-Right Side Single

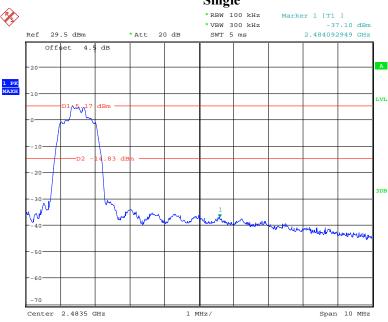

Date: 14.MAR.2018 14:48:54


## Hopping

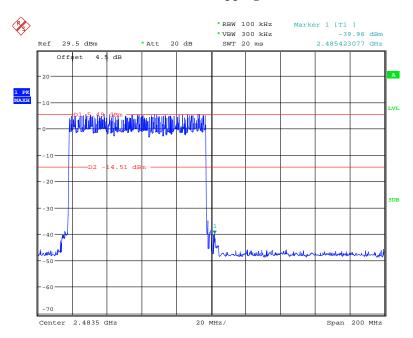

Date: 14.MAR.2018 14:47:23


FCC Part 15.247 Page 60 of 63

# EDR (8DPSK): Band Edge-Left Side Single

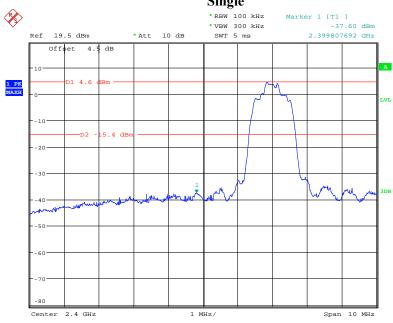

Date: 22.MAR.2018 13:51:27


## Hopping

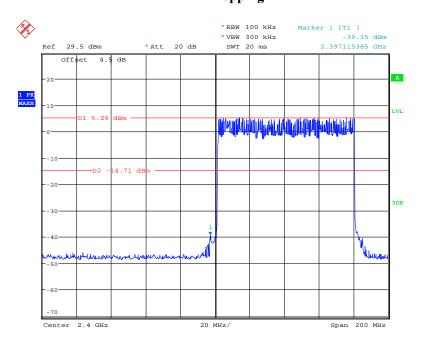


Date: 14.MAR.2018 14:56:41

FCC Part 15.247 Page 61 of 63

# EDR (8DPSK): Band Edge-Right Side Single

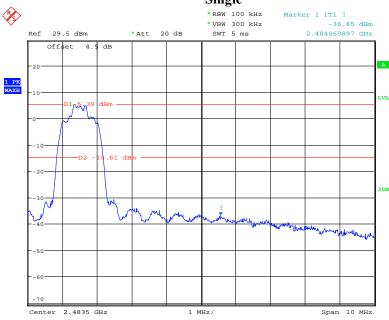

Date: 14.MAR.2018 14:53:05

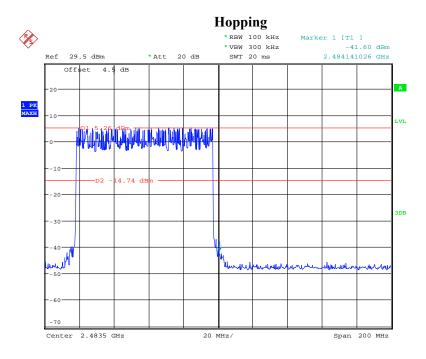

Date: 14.MAR.2018 14:54:49

\*\*\*\*\* END OF REPORT \*\*\*\*\*

FCC Part 15.247 Page 62 of 63