



BT-Stubby

2.4 GHz 1/4 Wave
Stubby Antenna

Features

- 1/4 Wave Stubby Antenna
- Right Angle SMA Connector
- Groundplane Dependent
- Ideal for fixed and mobile devices

Specifications

Radiating element	1/4 Wave Helical
Frequency range	2.4 - 2.5 GHz
Peak gain	2.6 dBi
Polarisation	Linear
Return Loss	-12 dB
Impedance	50 Ohm
Cable / Connector	SMA-Male
Dimensions	36 x17.5 mm (max)

Ordering Options


FBTS35024-SM-RA	BT-Stubby with SMA-Male RA Connector
-----------------	--------------------------------------

Specifications subject to change without notice. Peak Gain value revised to agree with polar plot value WB @ AP 9/17




BT-Stubby | 2.4 GHz Stubby RA Antenna

Return Loss

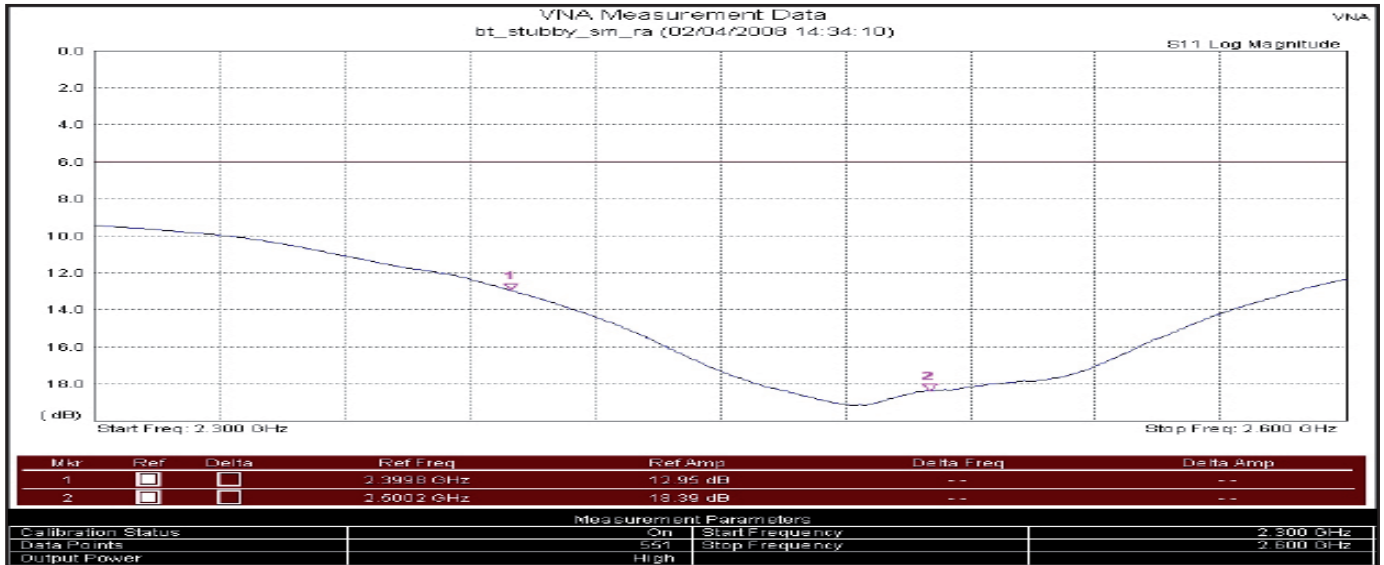

Outline Drawing

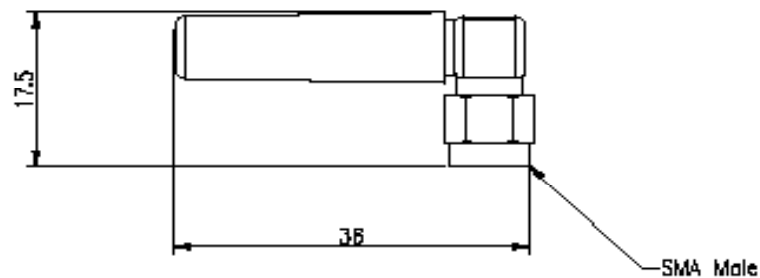

Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com

EAD
embedded antenna design ltd
Delivering Antenna Innovation