

# FCC Test Report

Equipment : INFOTAG 2.7" E4  
Brand Name : DIGI  
Model No. : IFT-22702  
FCC ID : SUFIFT22702  
Standard : 47 CFR FCC Part 15.249  
Operating Band : 2400 MHz – 2483.5 MHz  
FCC Classification : DXX  
Applicant : Teraoka Weigh System Pte Ltd  
Manufacturer : 4 Leng Kee Rd, #05-03/04/05&11, SIS Building,  
Singapore 159088

The product sample received on Jan. 11, 2016 and completely tested on Jan. 26, 2016. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

  
James Fan / Assistant Manager

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Support Equipment.....	6
1.3	Testing Applied Standards .....	6
1.4	Testing Location Information .....	6
1.5	Measurement Uncertainty .....	7
<b>2</b>	<b>TEST CONFIGURATION OF EUT.....</b>	<b>8</b>
2.1	The Worst Case Modulation Configuration .....	8
2.2	Test Channel Frequencies Configuration.....	8
2.3	The Worst Case Measurement Configuration.....	8
2.4	Test Setup Diagram .....	9
<b>3</b>	<b>TRANSMITTER TEST RESULT .....</b>	<b>10</b>
3.1	AC Power-line Conducted Emissions .....	10
3.2	Emission Bandwidth .....	12
3.3	Fundamental Emissions .....	14
3.4	Transmitter Radiated Unwanted Emissions .....	16
<b>4</b>	<b>TEST EQUIPMENT AND CALIBRATION DATA .....</b>	<b>27</b>
	<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1-A4</b>

## Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	See Note.	FCC 15.207	N/A
3.2	15.215(c)	Emission Bandwidth	0.70 MHz; fall in band	Information only	Complied
3.3	15.249(a)	Fundamental Emissions	[dBuV/m at 3m]: 2441 MHz 85.71 (Margin 28.29dB) peak	[dBuV/m at 3m]: peak: 114	Complied
3.4	15.249(a)/(d)	Transmitter Radiated Unwanted Emissions	[dBuV/m at 3m]: 2400.00 MHz 38.97 (Margin 15.03dB) - AV	Harmonics: 50 dB below the level of the fundamental or FCC 15.209, whichever is the lesser attenuation.	Complied

Note: Conducted emission test is not applicable since the EUT consumes DC power from battery.

## Revision History

[illegible]

# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

RF General Information				
Frequency Range (MHz)	Modulation	Ch. Frequency (MHz)	Channel Number	Fundamental Field Strength (dBuV/m)
2400-2483.5	GFSK	2402-2480	0-78 [79]	85.71
Note: Field strength performed peak level at 3m.				

### 1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	External antenna (dedicated antennas) ; Unique antenna connector

Antenna General Information						
No.	Ant. Cat.	Ant. Type	Brand	Model	Gain (dBi)	Connector
1	Integral	PCB	N/A	N/A	3.3	PCB SURFACE MOUNT

### 1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

### 1.1.4 EUT Operational Condition

<b>Power Supply Type</b>	3Vdc from 2 DC Cell Button batteries (Brand: Panasonic; Model: CR2450)
--------------------------	--

## 1.2 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	Latitude E6430	G3GB4X1

## 1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013

## 1.4 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C		
		TEL : 886-3-327-3456 FAX : 886-3-327-0973		
Test Condition		Test Site No.	Test Engineer	Test Date
Radiated Emission		03CH09-HY	Aaron Liang	18°C / 60%
Test site registered number [213289] with FCC.				
Test site registered number [4086G-1] with IC.				

## 1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth,		±1.42 %	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

## 2 Test Configuration of EUT




### 2.1 The Worst Case Modulation Configuration

Modulation Used for Conformance Testing	
Test Mode	Field Strength (dBuV/m at 3 m)
GFSK-Transmit	85.71

### 2.2 Test Channel Frequencies Configuration


Test Channel Frequencies Configuration	
Test Mode	Test Channel Frequencies (MHz)
GFSK-Transmit	2402-(F1), 2441-(F2), 2480-(F3)

### 2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests			
Tests Item	Emission Bandwidth, Fundamental Emissions, Radiated Unwanted Emissions		
Test Condition	Radiated measurement		
User Position	<input type="checkbox"/> EUT will be placed in fixed position.		
	<input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes. The worst planes is X.		
	<input checked="" type="checkbox"/> EUT will be a hand-held and battery-powered devices and operating multiple positions. EUT shall be performed three orthogonal planes. The worst plane is X.		
Operating Mode	<input checked="" type="checkbox"/> 1. Transmit		
Test Mode	GFSK-Transmit		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			



## 2.4 Test Setup Diagram

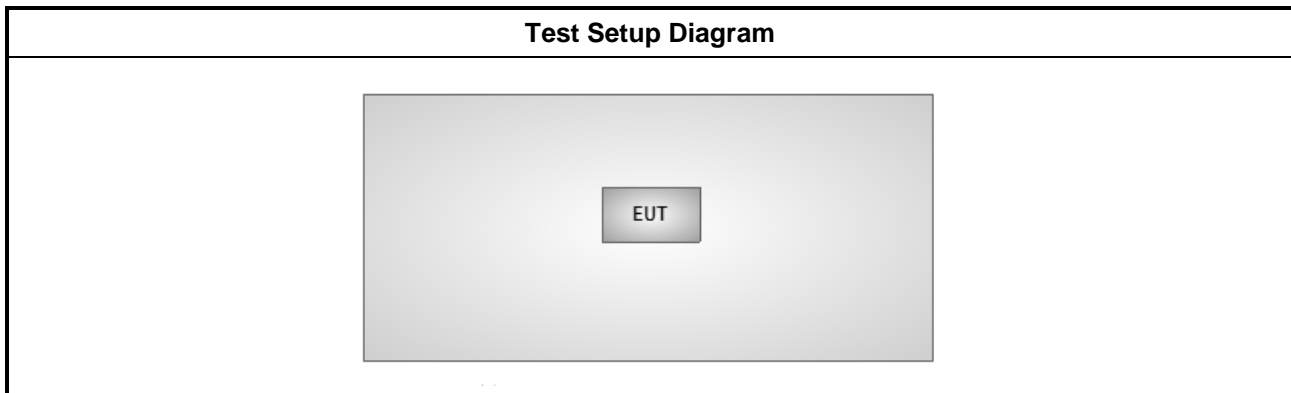

Note: The support notebook and controller board are disconnected from EUT and removed from test table when EUT is set to transmit continuously.

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

##### 3.1.4 Test Setup

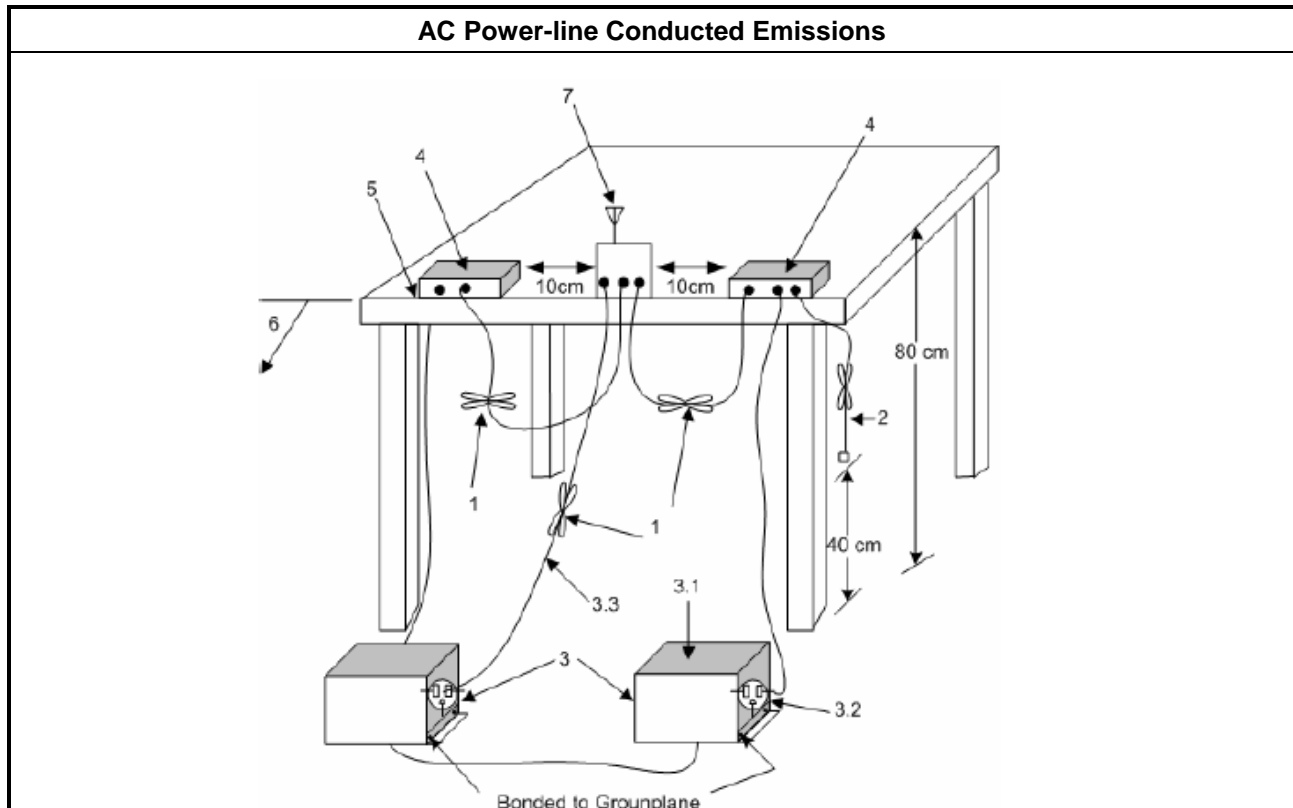



### **3.1.5 Test Result of AC Power-line Conducted Emissions**

The EUT consumes DC power, therefore, conducted emission test is not applicable.

## 3.2 Emission Bandwidth

### 3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
<input checked="" type="checkbox"/>	Emission bandwidth falls completely within authorized band.


### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.2.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9 for 20 dB emission bandwidth and 99% occupied bandwidth measurement.


### 3.2.4 Test Setup

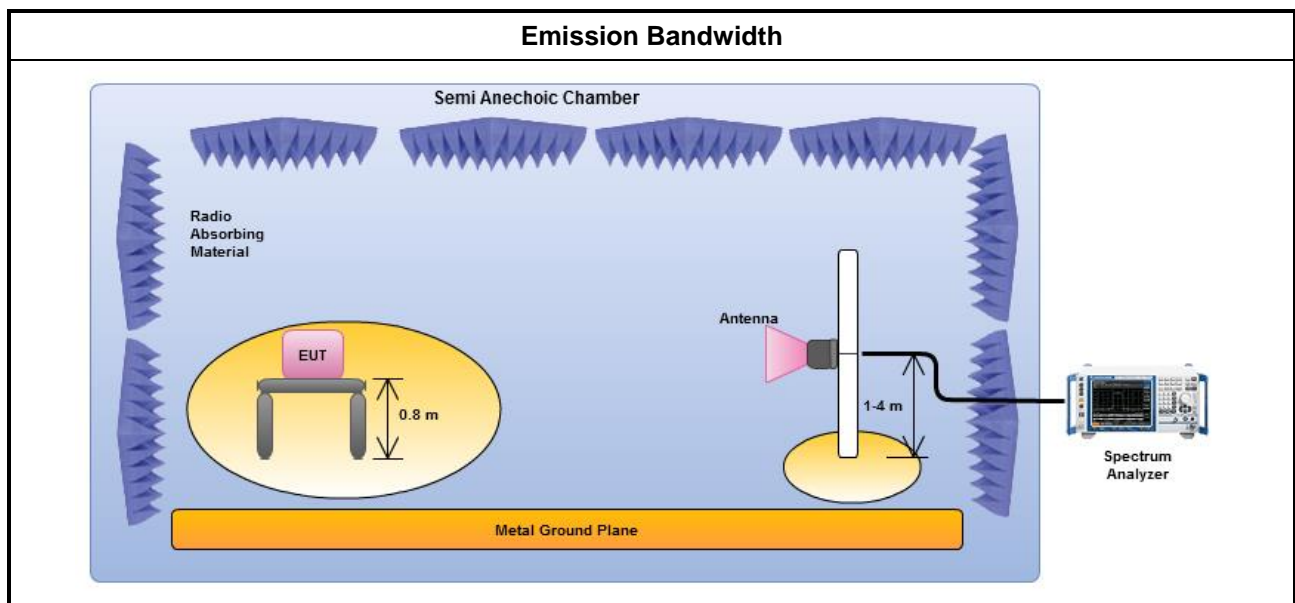

Note: Test distance is 3m

### 3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result					
Modulation Mode	Frequency (MHz)	99% Bandwidth (MHz)	F <sub>L</sub> at 20dB BW (MHz)	F <sub>H</sub> at 20dB BW (MHz)	20dB BW (MHz)
GFSK-Transmit	2402	0.65	2401.6600	-	0.70
GFSK-Transmit	2441	0.58	-	-	0.69
GFSK-Transmit	2480	0.57	-	2480.3400	0.69
Limit		N/A	2400	2483.5	N/A
Result		Complied			

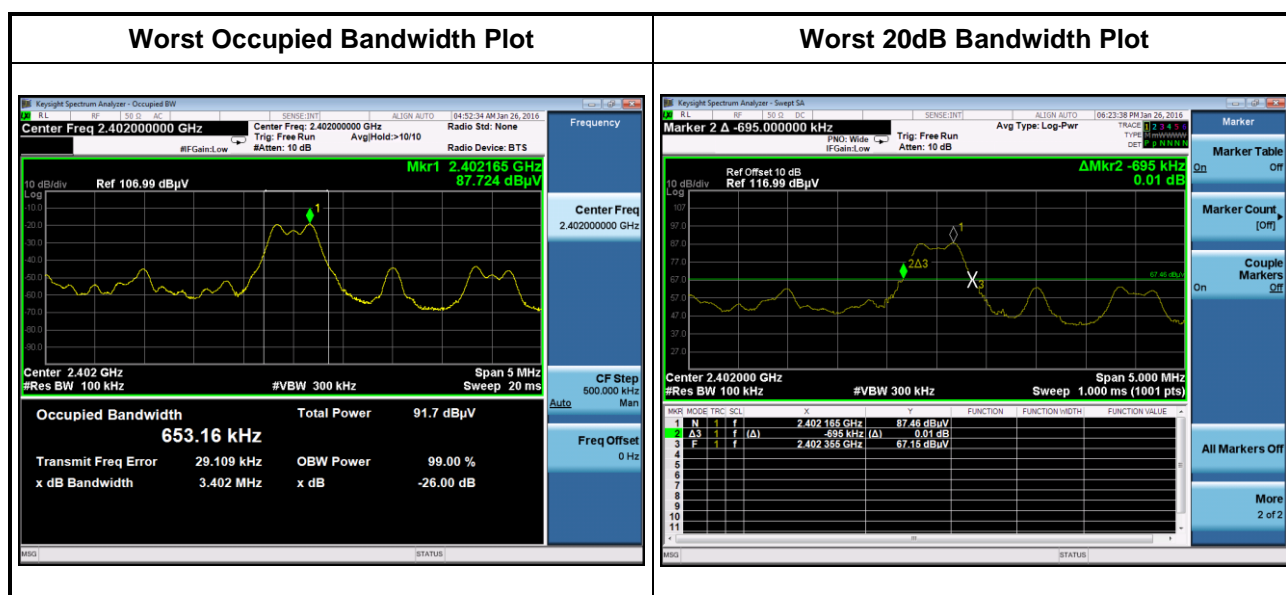

### 3.3 Fundamental Emissions

#### 3.3.1 Fundamental Emissions Limit

Fundamental Emissions E-Field Strength Limit (3m)	
<input type="checkbox"/>	902-928 MHz Band: 94 dBuV/m (quasi peak)
<input checked="" type="checkbox"/>	2400-2483.5 MHz Band: 94 dBuV/m (average)
<input type="checkbox"/>	5725-5785 MHz Band: 94 dBuV/m (average)


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.3.3 Test Procedures

<input type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq 100$ or by duty cycle correction factor].
<input checked="" type="checkbox"/>	For the transmitter emissions shall be measured using following options below:
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW) – Duty cycle $\geq 100\%$ .
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$ . Average emission = peak emission + 20 log (duty cycle).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement, refer as ANSI C63.10, clause 6.6 for radiated emissions

#### 3.3.4 Test Setup

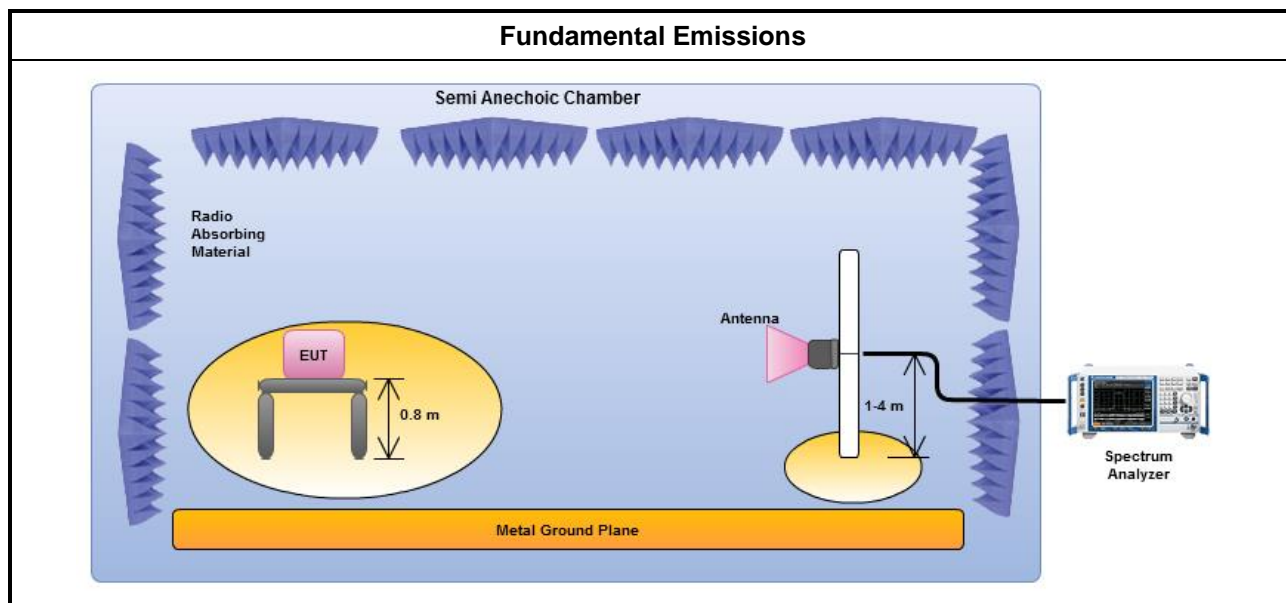

Note: Test distance is 3m

**3.3.5 Test Result of Fundamental Emissions**

Field Strength of Fundamental Emissions Result					
Modulation Mode	Frequency (MHz)	Fundamental (dBuV/m)@3m	Margin (dB)	Limit (dBuV/m)@3m	Type
GFSK-Transmit	2402	85.66	-28.34	114	peak
GFSK-Transmit	2402	51.14	-42.86	94	average
GFSK-Transmit	2441	85.71	-28.29	114	peak
GFSK-Transmit	2441	51.19	-42.81	94	average
GFSK-Transmit	2480	85.26	-28.74	114	peak
GFSK-Transmit	2480	50.74	-43.26	94	average
Result		Complied			
Note 1: Measurement worst emissions of receive antenna polarization: Vertical.					
Note 2: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).					

### 3.4 Transmitter Radiated Unwanted Emissions

#### 3.4.1 Transmitter Radiated Unwanted Emissions Limit

Transmitter Radiated Unwanted Emissions Limit	
<b>Harmonics:</b>	
<input checked="" type="checkbox"/>	54 dBuV/m (average)
<b>Other Unwanted Emissions:</b>	
<input checked="" type="checkbox"/>	50 dB below the level of the fundamental or FCC 15.209, whichever is the lesser attenuation.

#### 3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	Measurements in the frequency range 5 GHz - 10GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW) – Duty cycle $\geq$ 100%.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$ . Average emission = peak emission + $20 \log(\text{duty cycle})$ .
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.10 for band-edge testing.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.10 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.



### 3.4.4 Test Setup

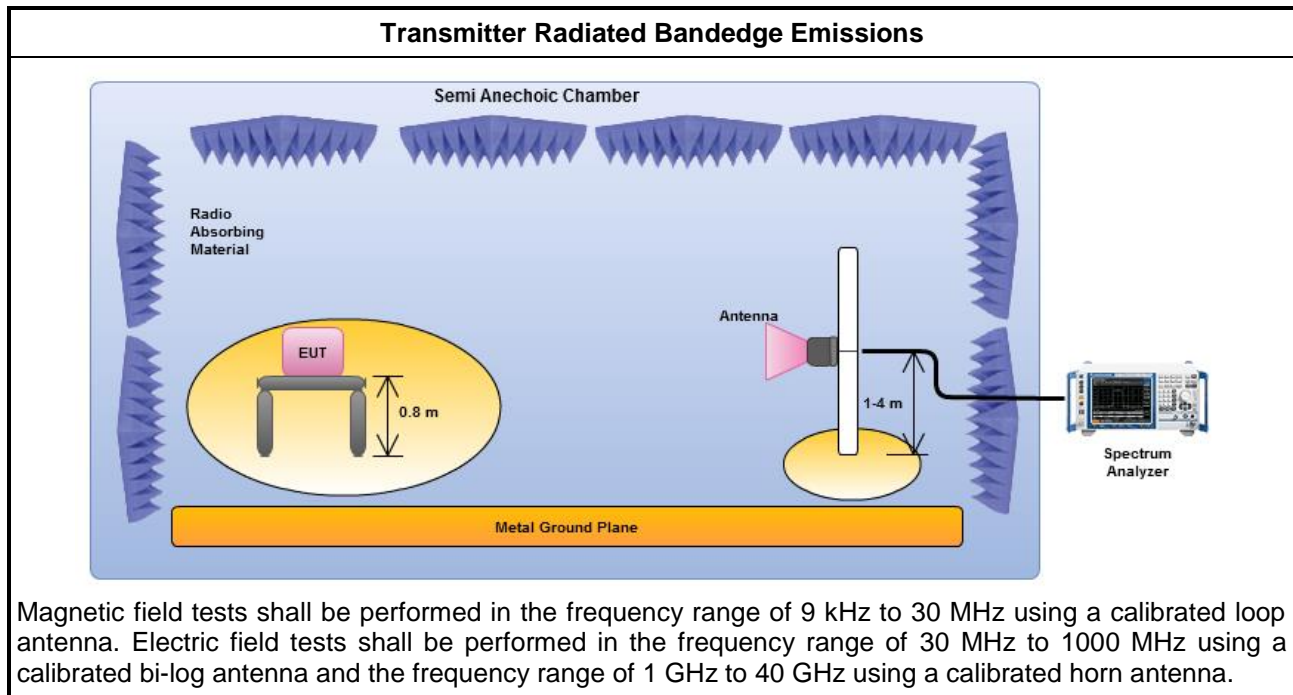


Note: Test distance is 3m

### 3.4.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

### 3.4.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

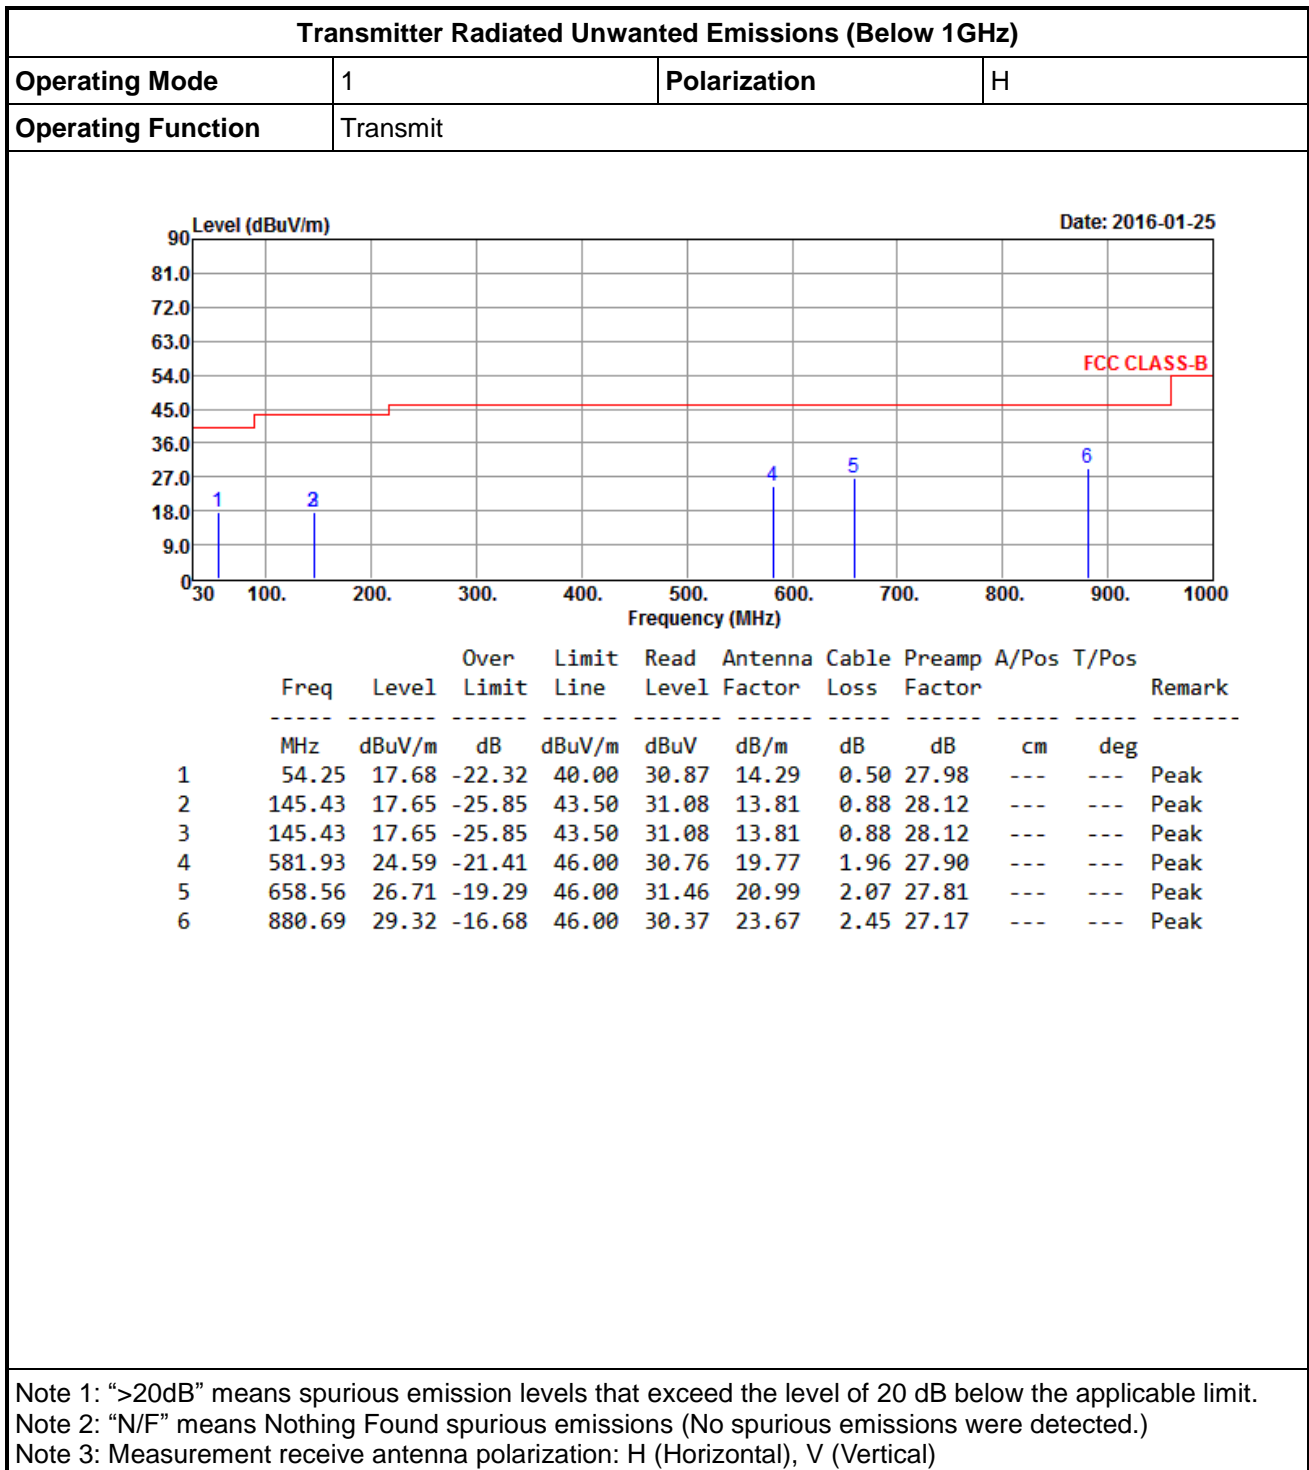

**Transmitter Radiated Unwanted Emissions (Below 1GHz)**

Operating Mode	1	Polarization	V
Operating Function	Transmit		

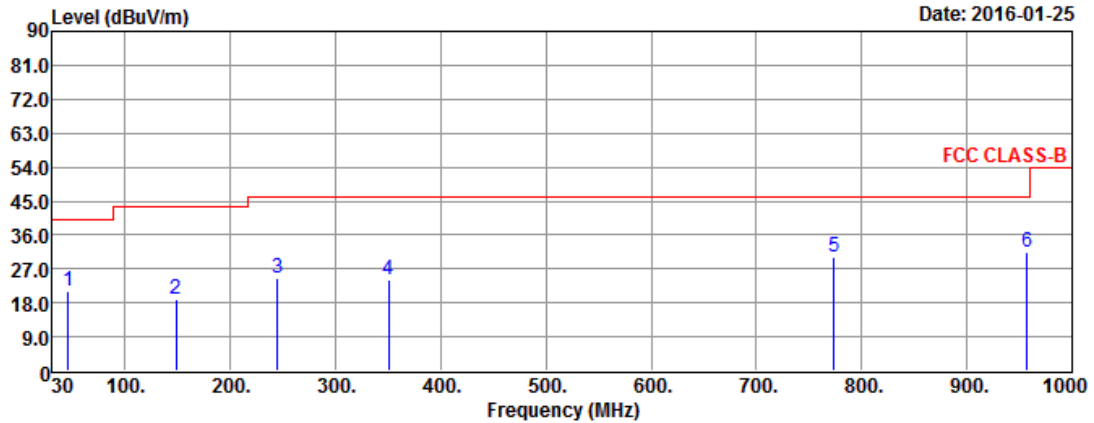

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	45.52	21.21	-18.79	40.00	33.75	14.89	0.55	27.98	---	---	Peak
2	148.34	18.75	-24.75	43.50	32.11	13.87	0.89	28.12	---	---	Peak
3	244.37	24.56	-21.44	46.00	39.12	12.49	1.11	28.16	---	---	Peak
4	350.10	24.24	-21.76	46.00	35.52	15.30	1.53	28.11	---	---	Peak
5	773.99	30.06	-15.94	46.00	32.78	22.54	2.26	27.52	---	---	Peak
6	957.32	31.62	-14.38	46.00	31.38	24.64	2.55	26.95	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

**3.4.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)**

Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																																																																																																											
Modulation Mode	GFSK-Transmit				Test Freq. (MHz)		2402																																																																																																																																																				
Operating Function	Transmit				Polarization		H																																																																																																																																																				
<div><div><div><div><div>Level (dBuV/m)</div><div><div><div>90</div><div>81.0</div><div>72.0</div><div>63.0</div><div>54.0</div><div>45.0</div><div>36.0</div><div>27.0</div><div>18.0</div><div>9.0</div><div>0</div></div></div><div><div>1000</div><div>4000</div><div>6000</div><div>8000</div><div>10000</div><div>12000</div><div>14000</div><div>16000</div><div>18000</div><div>20000</div><div>22000</div><div>25000</div></div><div>Frequency (MHz)</div></div><div><div>Date: 2016-01-25</div><div>FCC 15C 249(2.4G)</div><div>FCC 15C 249(2.4G-AV)</div></div></div></div></div>																																																																																																																																																											
<table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>Read Level</th><th>Antenna Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2390.00</td><td>38.40</td><td>-15.60</td><td>54.00</td><td>39.76</td><td>27.14</td><td>4.52</td><td>33.02</td><td>145</td><td>271</td><td>Average</td></tr><tr><td>2</td><td>2390.00</td><td>48.83</td><td>-25.17</td><td>74.00</td><td>50.19</td><td>27.14</td><td>4.52</td><td>33.02</td><td>145</td><td>271</td><td>Peak</td></tr><tr><td>3</td><td>2400.00</td><td>38.97</td><td>-15.03</td><td>54.00</td><td>40.30</td><td>27.16</td><td>4.53</td><td>33.02</td><td>145</td><td>271</td><td>Average</td></tr><tr><td>4</td><td>2400.00</td><td>49.45</td><td>-24.55</td><td>74.00</td><td>50.78</td><td>27.16</td><td>4.53</td><td>33.02</td><td>145</td><td>271</td><td>Peak</td></tr><tr><td>5</td><td>2402.00</td><td>51.14</td><td>-42.86</td><td>94.00</td><td>52.47</td><td>27.16</td><td>4.53</td><td>33.02</td><td>145</td><td>271</td><td>Average</td></tr><tr><td>6</td><td>2402.00</td><td>85.66</td><td>-28.34</td><td>114.00</td><td>86.99</td><td>27.16</td><td>4.53</td><td>33.02</td><td>145</td><td>271</td><td>Peak</td></tr><tr><td>7</td><td>4804.00</td><td>16.71</td><td>-37.29</td><td>54.00</td><td>10.78</td><td>31.23</td><td>7.01</td><td>32.31</td><td>230</td><td>11</td><td>Average</td></tr><tr><td>8</td><td>4804.00</td><td>51.23</td><td>-22.77</td><td>74.00</td><td>45.30</td><td>31.23</td><td>7.01</td><td>32.31</td><td>230</td><td>11</td><td>Peak</td></tr><tr><td>9</td><td>12010.00</td><td>21.06</td><td>-32.94</td><td>54.00</td><td>5.04</td><td>39.19</td><td>11.23</td><td>34.40</td><td>301</td><td>125</td><td>Average</td></tr><tr><td>10</td><td>12010.00</td><td>55.58</td><td>-18.42</td><td>74.00</td><td>39.56</td><td>39.19</td><td>11.23</td><td>34.40</td><td>301</td><td>125</td><td>Peak</td></tr></table>													Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	2390.00	38.40	-15.60	54.00	39.76	27.14	4.52	33.02	145	271	Average	2	2390.00	48.83	-25.17	74.00	50.19	27.14	4.52	33.02	145	271	Peak	3	2400.00	38.97	-15.03	54.00	40.30	27.16	4.53	33.02	145	271	Average	4	2400.00	49.45	-24.55	74.00	50.78	27.16	4.53	33.02	145	271	Peak	5	2402.00	51.14	-42.86	94.00	52.47	27.16	4.53	33.02	145	271	Average	6	2402.00	85.66	-28.34	114.00	86.99	27.16	4.53	33.02	145	271	Peak	7	4804.00	16.71	-37.29	54.00	10.78	31.23	7.01	32.31	230	11	Average	8	4804.00	51.23	-22.77	74.00	45.30	31.23	7.01	32.31	230	11	Peak	9	12010.00	21.06	-32.94	54.00	5.04	39.19	11.23	34.40	301	125	Average	10	12010.00	55.58	-18.42	74.00	39.56	39.19	11.23	34.40	301	125	Peak
	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark																																																																																																																																																
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																	
1	2390.00	38.40	-15.60	54.00	39.76	27.14	4.52	33.02	145	271	Average																																																																																																																																																
2	2390.00	48.83	-25.17	74.00	50.19	27.14	4.52	33.02	145	271	Peak																																																																																																																																																
3	2400.00	38.97	-15.03	54.00	40.30	27.16	4.53	33.02	145	271	Average																																																																																																																																																
4	2400.00	49.45	-24.55	74.00	50.78	27.16	4.53	33.02	145	271	Peak																																																																																																																																																
5	2402.00	51.14	-42.86	94.00	52.47	27.16	4.53	33.02	145	271	Average																																																																																																																																																
6	2402.00	85.66	-28.34	114.00	86.99	27.16	4.53	33.02	145	271	Peak																																																																																																																																																
7	4804.00	16.71	-37.29	54.00	10.78	31.23	7.01	32.31	230	11	Average																																																																																																																																																
8	4804.00	51.23	-22.77	74.00	45.30	31.23	7.01	32.31	230	11	Peak																																																																																																																																																
9	12010.00	21.06	-32.94	54.00	5.04	39.19	11.23	34.40	301	125	Average																																																																																																																																																
10	12010.00	55.58	-18.42	74.00	39.56	39.19	11.23	34.40	301	125	Peak																																																																																																																																																
<div>Note 1: "&gt;20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 4: If duty cycle &lt; 100%, average emission = peak emission + 20 log (duty cycle).</div>																																																																																																																																																											

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	GFSK-Transmit	<b>Test Freq. (MHz)</b>	2402
<b>Operating Function</b>	Transmit	<b>Polarization</b>	V

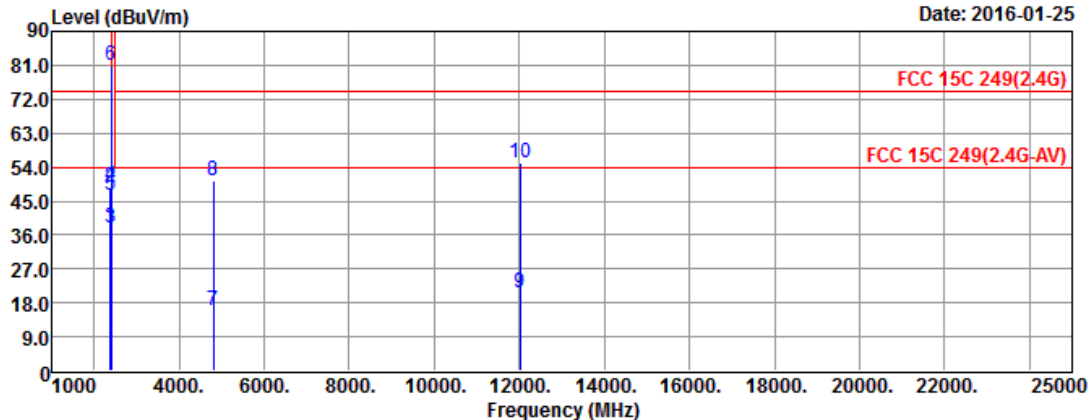

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	37.71	-16.29	54.00	39.07	27.14	4.52	33.02	150	253	Average
2	2390.00	48.76	-25.24	74.00	50.12	27.14	4.52	33.02	150	253	Peak
3	2400.00	38.05	-15.95	54.00	39.38	27.16	4.53	33.02	150	253	Average
4	2400.00	49.15	-24.85	74.00	50.48	27.16	4.53	33.02	150	253	Peak
5	2402.00	46.41	-47.59	94.00	47.74	27.16	4.53	33.02	150	253	Average
6	2402.00	80.93	-33.07	114.00	82.26	27.16	4.53	33.02	150	253	Peak
7	4804.00	15.90	-38.10	54.00	9.97	31.23	7.01	32.31	253	281	Average
8	4804.00	50.42	-23.58	74.00	44.49	31.23	7.01	32.31	253	281	Peak
9	12010.00	20.78	-33.22	54.00	4.76	39.19	11.23	34.40	325	215	Average
10	12010.00	55.30	-18.70	74.00	39.28	39.19	11.23	34.40	325	215	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	GFSK-Transmit	<b>Test Freq. (MHz)</b>	2440
<b>Operating Function</b>	Transmit	<b>Polarization</b>	H

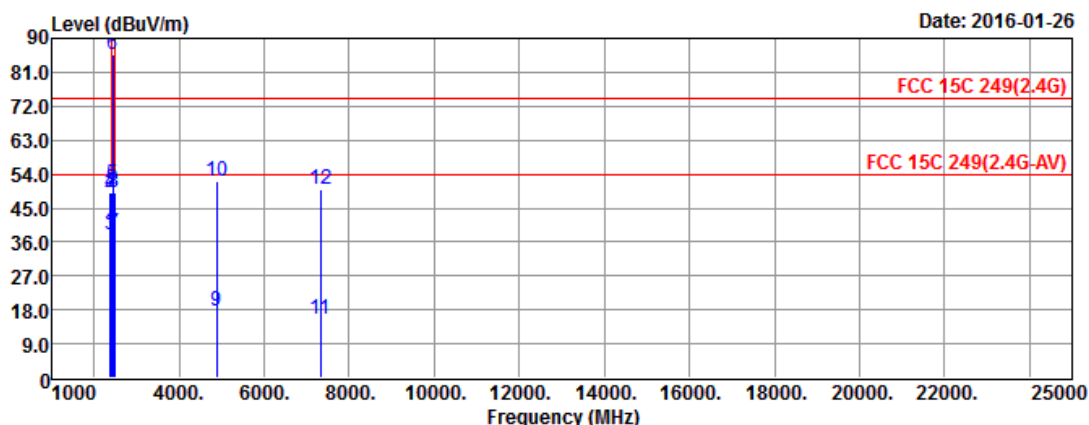

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	37.87	-16.13	54.00	39.23	27.14	4.52	33.02	261	275	Average
2	2390.00	48.89	-25.11	74.00	50.25	27.14	4.52	33.02	261	275	Peak
3	2400.00	38.10	-15.90	54.00	39.43	27.16	4.53	33.02	261	275	Average
4	2400.00	49.02	-24.98	74.00	50.35	27.16	4.53	33.02	261	275	Peak
5	2441.00	51.19	-42.81	94.00	52.37	27.26	4.57	33.01	261	275	Average
6	2441.00	85.71	-28.29	114.00	86.89	27.26	4.57	33.01	261	275	Peak
7	2483.50	38.51	-15.49	54.00	39.53	27.36	4.61	32.99	261	275	Average
8	2483.50	49.15	-24.85	74.00	50.17	27.36	4.61	32.99	261	275	Peak
9	4882.00	17.76	-36.24	54.00	11.78	31.33	6.94	32.29	289	314	Average
10	4882.00	52.28	-21.72	74.00	46.30	31.33	6.94	32.29	289	314	Peak
11	7323.00	15.29	-38.71	54.00	4.52	36.14	8.29	33.66	251	57	Average
12	7323.00	49.81	-24.19	74.00	39.04	36.14	8.29	33.66	251	57	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	GFSK-Transmit	<b>Test Freq. (MHz)</b>	2440
<b>Operating Function</b>	Transmit	<b>Polarization</b>	V

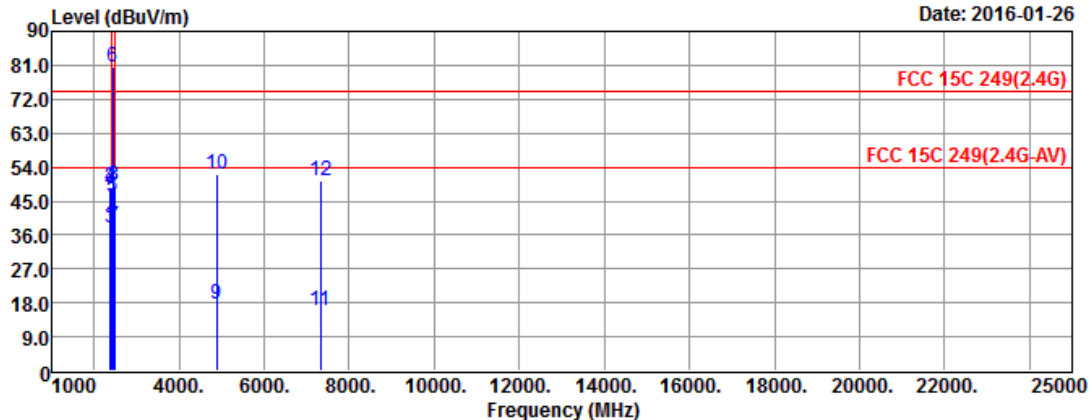

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2390.00	37.89	-16.11	54.00	39.25	27.14	4.52	33.02	289	275	Average
2	2390.00	48.69	-25.31	74.00	50.05	27.14	4.52	33.02	289	275	Peak
3	2400.00	38.06	-15.94	54.00	39.39	27.16	4.53	33.02	289	275	Average
4	2400.00	48.83	-25.17	74.00	50.16	27.16	4.53	33.02	289	275	Peak
5	2441.00	46.03	-47.97	94.00	47.21	27.26	4.57	33.01	289	275	Average
6	2441.00	80.55	-33.45	114.00	81.73	27.26	4.57	33.01	289	275	Peak
7	2483.50	38.36	-15.64	54.00	39.38	27.36	4.61	32.99	289	275	Average
8	2483.50	49.13	-24.87	74.00	50.15	27.36	4.61	32.99	289	275	Peak
9	4882.00	17.72	-36.28	54.00	11.74	31.33	6.94	32.29	229	23	Average
10	4882.00	52.24	-21.76	74.00	46.26	31.33	6.94	32.29	229	23	Peak
11	7323.00	16.00	-38.00	54.00	5.23	36.14	8.29	33.66	297	174	Average
12	7323.00	50.52	-23.48	74.00	39.75	36.14	8.29	33.66	297	174	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	GFSK-Transmit	<b>Test Freq. (MHz)</b>	2480
<b>Operating Function</b>	Transmit	<b>Polarization</b>	H

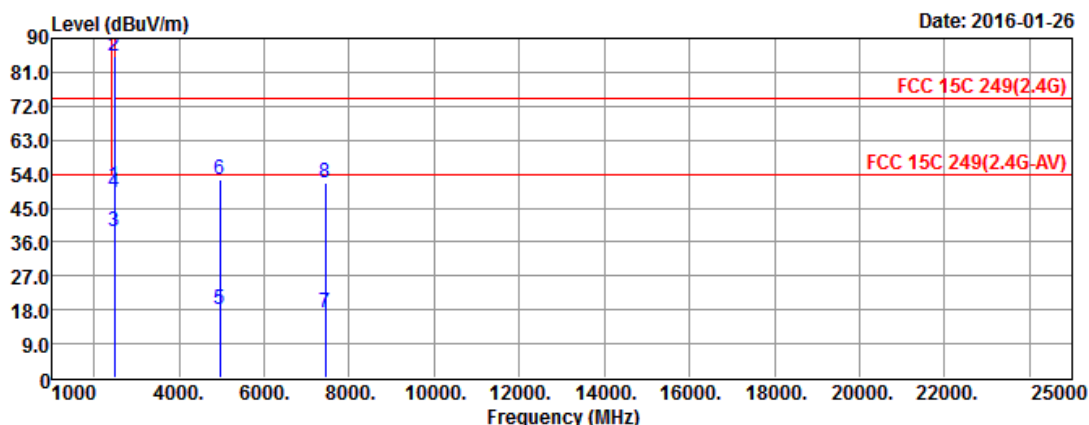

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2480.00	50.74	-43.26	94.00	51.78	27.35	4.61	33.00	251	270	Average
2	2480.00	85.26	-28.74	114.00	86.30	27.35	4.61	33.00	251	270	Peak
3	2483.50	38.61	-15.39	54.00	39.63	27.36	4.61	32.99	251	270	Average
4	2483.50	49.23	-24.77	74.00	50.25	27.36	4.61	32.99	251	270	Peak
5	4960.00	17.98	-36.02	54.00	11.95	31.44	6.87	32.28	287	312	Average
6	4960.00	52.50	-21.50	74.00	46.47	31.44	6.87	32.28	287	312	Peak
7	7440.00	17.18	-36.82	54.00	6.16	36.44	8.34	33.76	227	144	Average
8	7440.00	51.70	-22.30	74.00	40.68	36.44	8.34	33.76	227	144	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).



**Transmitter Radiated Unwanted Emissions (Above 1GHz)**

<b>Modulation Mode</b>	GFSK-Transmit	<b>Test Freq. (MHz)</b>	2480
<b>Operating Function</b>	Transmit	<b>Polarization</b>	V

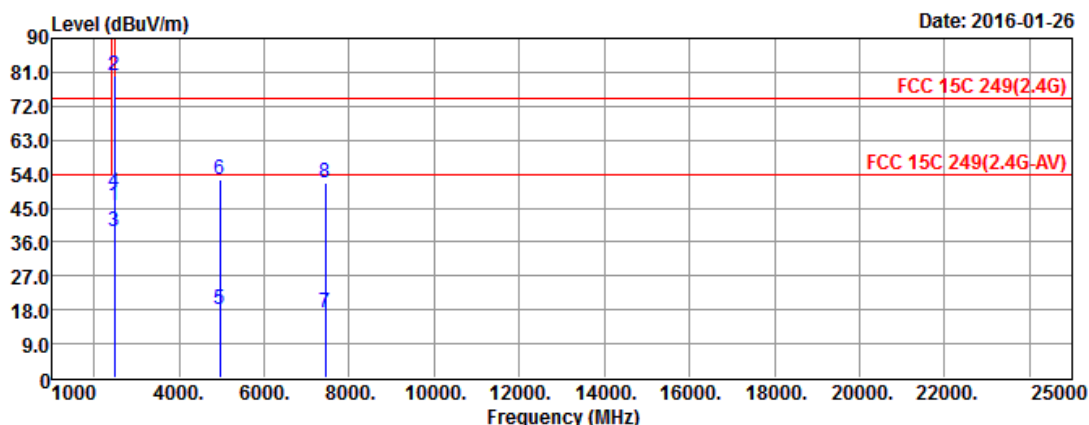



	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2480.00	45.77	-48.23	94.00	46.81	27.35	4.61	33.00	280	292	Average
2	2480.00	80.29	-33.71	114.00	81.33	27.35	4.61	33.00	280	292	Peak
3	2483.50	38.56	-15.44	54.00	39.58	27.36	4.61	32.99	280	292	Average
4	2483.50	49.23	-24.77	74.00	50.25	27.36	4.61	32.99	280	292	Peak
5	4960.00	17.88	-36.12	54.00	11.85	31.44	6.87	32.28	227	20	Average
6	4960.00	52.40	-21.60	74.00	46.37	31.44	6.87	32.28	227	20	Peak
7	7440.00	17.07	-36.93	54.00	6.05	36.44	8.34	33.76	235	182	Average
8	7440.00	51.59	-22.41	74.00	40.57	36.44	8.34	33.76	235	182	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

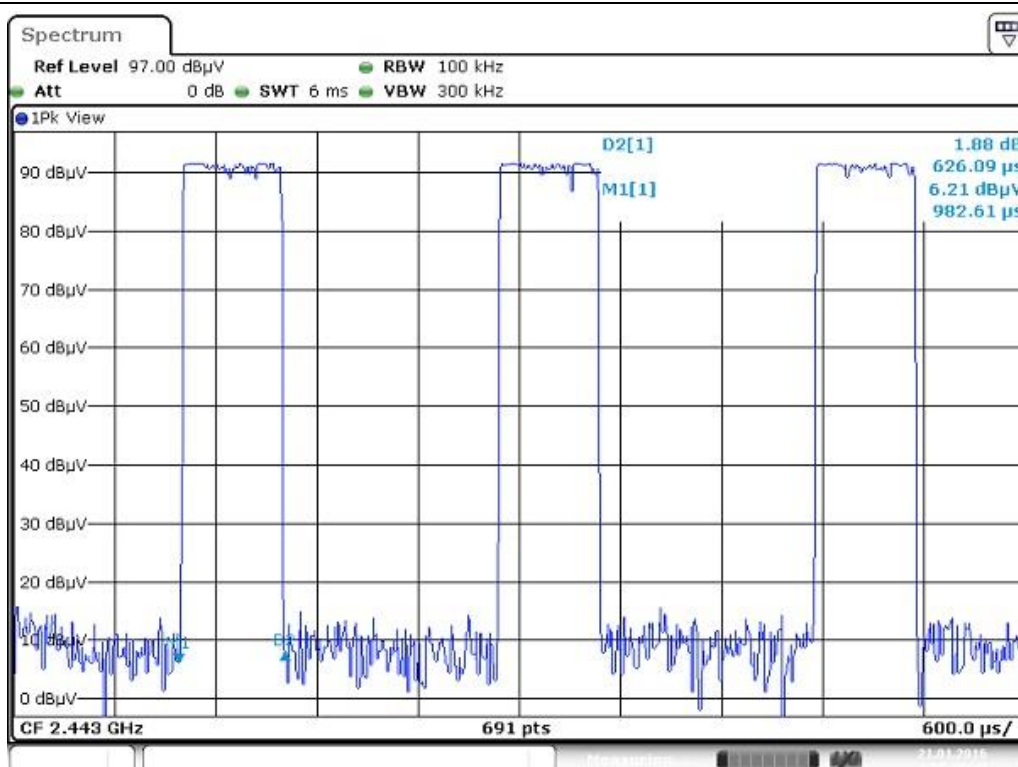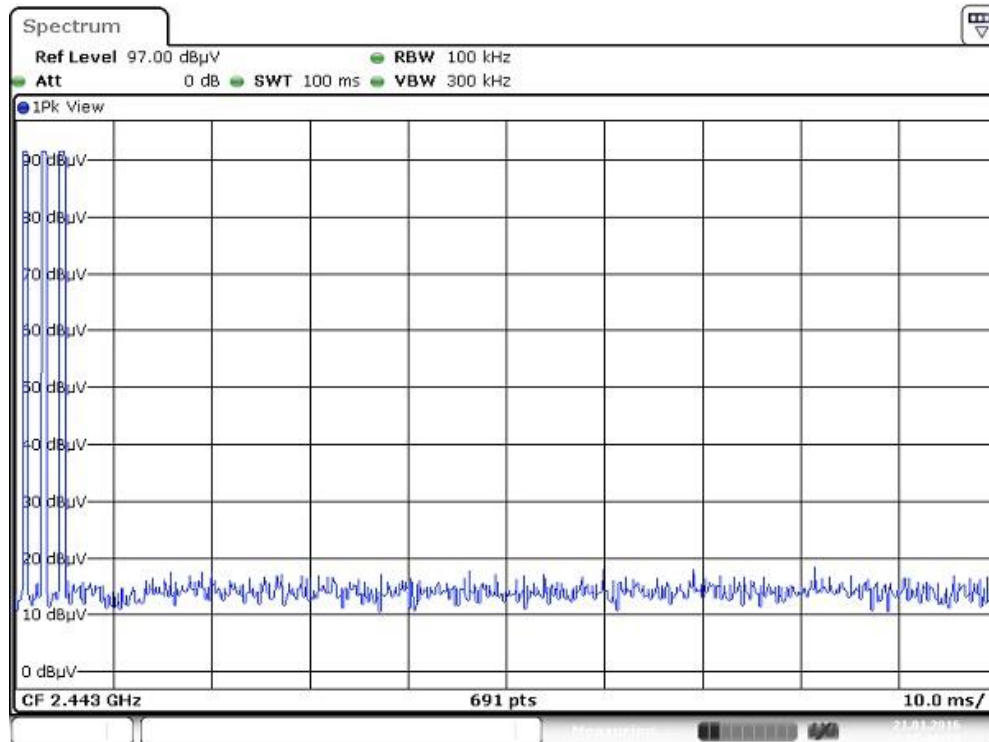

$$20\log(\text{Duty cycle}) = 20\log \frac{3 \times 0.62609 \text{ ms}}{100 \text{ ms}} = -34.52\text{dB}$$

## 4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	30MHz ~ 1GHz 3m	Jul. 01, 2015	Radiation (03CH09-HY)
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	1GHz ~ 18GHz 3m	Jul. 01, 2015	Radiation (03CH09-HY)
Amplifier	EMC	EMC9135	980209	9kHz ~ 1.0GHz	Dec 25, 2015	Radiation (03CH09-HY)
Amplifier	Agilent	8449B	3008A02096	1GHz ~ 26.5GHz	Apr. 09, 2015	Radiation (03CH09-HY)
Spectrum	KEYSIGHT	N9010A	MY54200885	10Hz ~ 44GHz	Jul. 15, 2015	Radiation (03CH09-HY)
Bilog Antenna	TESEQ	CBL 6112D	35418	30MHz ~ 1GHz	Mar. 30, 2015	Radiation (03CH09-HY)
Horn Antenna	AARONIA AG	POWERLOG 70180	05192	1GHz ~ 18GHz	Jan. 08, 2016	Radiation (03CH09-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170614	18GHz ~ 40GHz	Jan. 04, 2016	Radiation (03CH09-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Jul. 23, 2015	Radiation (03CH09-HY)
RF Cable-high	Jye Bao	RG142	03CH09-HY	1GHz ~ 40GHz	Jul. 23, 2015	Radiation (03CH09-HY)
Antenna Mast	Chain Tek	MBS-400	1308049	1 ~ 4 m	N/A	Radiation (03CH09-HY)

Note: Calibration Interval of instruments listed above is one year.