

FCC PART 15.247 TEST REPORT

For

Acomdata Technology, Inc.

12F.-1, No.99, Sec. 1, Nankan Rd., Luzhu Township, Taoyuan County 338, Taiwan (R.O.C.)

FCC ID: SYO-SOUNDPOP

Report Type: Original Report	Product Type: SoundPop Bluetooth speaker
Test Engineer:	Allen Qiao <i>Allen Qiao</i>
Report Number:	R2DG130424003-00A
Report Date:	2013-04-27
Reviewed By:	Ivan Cao RF Leader <i>Ivan Cao</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★"
(Rev.2), This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
PRINTER.....	6
KEYBOARD	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
APPLICABLE STANDARD	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
TEST EQUIPMENT LIST AND DETAILS.....	13
CORRECTED AMPLITUDE & MARGIN CALCULATION	13
TEST RESULTS SUMMARY	13
TEST RESULTS SUMMARY	13
TEST DATA	14
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	17
APPLICABLE STANDARD	17
MEASUREMENT UNCERTAINTY	17
EUT SETUP	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	18
TEST PROCEDURE	18
TEST EQUIPMENT LIST AND DETAILS.....	19
CORRECTED AMPLITUDE & MARGIN CALCULATION	19
TEST RESULTS SUMMARY	19
TEST DATA	19
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	28
APPLICABLE STANDARD	28

TEST EQUIPMENT LIST AND DETAILS.....	28
TEST PROCEDURE	28
TEST DATA	28
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	34
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST EQUIPMENT LIST AND DETAILS.....	40
TEST DATA	40
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	43
APPLICABLE STANDARD	43
TEST PROCEDURE	43
TEST EQUIPMENT LIST AND DETAILS.....	43
TEST DATA	43
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	59
APPLICABLE STANDARD	59
TEST PROCEDURE	59
TEST EQUIPMENT LIST AND DETAILS.....	59
TEST DATA	59
FCC §15.247(d) - BAND EDGES TESTING	65
APPLICABLE STANDARD	65
TEST PROCEDURE	65
TEST EQUIPMENT LIST AND DETAILS.....	65
TEST DATA	65
DECLARATION LETTER	69

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Acomdata Technology, INC.'s product, model number: SP0E, SP2E, SP2N, SP2P, SP6P, SP7P, SP9E (FCC ID: SYO-SOUNDPOP) or ("EUT") in this report is a *SoundPop Bluetooth speaker*, which is a Bluetooth 4.0 device, and measured approximately: 7.0 cm (L) x 7.0 cm (H) x 7.0 cm (W), rated input voltage: DC3.7V from battery or DC 5V from system.

Note: The serial product model SP0E, SP2E, SP2N, SP2P, SP6P, SP7P, SP9E, all the models are electrically identical, only their difference is model names, and we select model SP0E for the testing in this report, which was explained in the attached declaration letter.

** All measurement and test data in this report was gathered from production sample serial number: 130424003 (Assigned by BACL, Dongguan). The EUT was received on 2013-04-26.*

*Manufacturer company name: Qinyi Electronic Company Limited
Address: Lincun industrial area, tangxia town, dongguan city, guangdong province, China*

Objective

This report is prepared on behalf of Acomdata Technology, INC. in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine the EUT compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS submissions with FCC ID: SYO-SOUNDPOP.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

The uncertainty of any RF tests which use conducted method measurement is ± 0.96 dB, the uncertainty of any radiation on emissions measurement is: 30M~200MHz: 5.0 dB; 200M~1GHz: 6.2 dB; 1G~6GHz: 4.45 dB; 6G~18GHz: 5.23 dB.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Dongguan) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 500069-0).



The current scope of accreditations can be found at <http://ts.nist.gov/standards/scopes/5000690.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

EUT Exercise Software

EUT exercise software “CSR BlueSuite2.5.0” was used.

Equipment Modifications

No modification was made to the EUT tested.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
HP	Printer	C3941A	JPTVOB2337
SAST	Modem	AEM-2100	0293
DELL	Keyboard	L100	CNORH656658907BL05DC
DELL	Laptop	PP11L	N/A

External I/O Cable

Cable Description	Length (m)	From	To
Shielded Detachable Printer Cable	1.2	Parallel Port of Laptop	Printer
Shielded Detachable Serial Cable	1.2	Serial Port of Laptop	Modem
Shielded Detachable Keyboard Cable	1.5	Keyboard Port of Laptop	Keyboard

Block Diagram of Test Setup

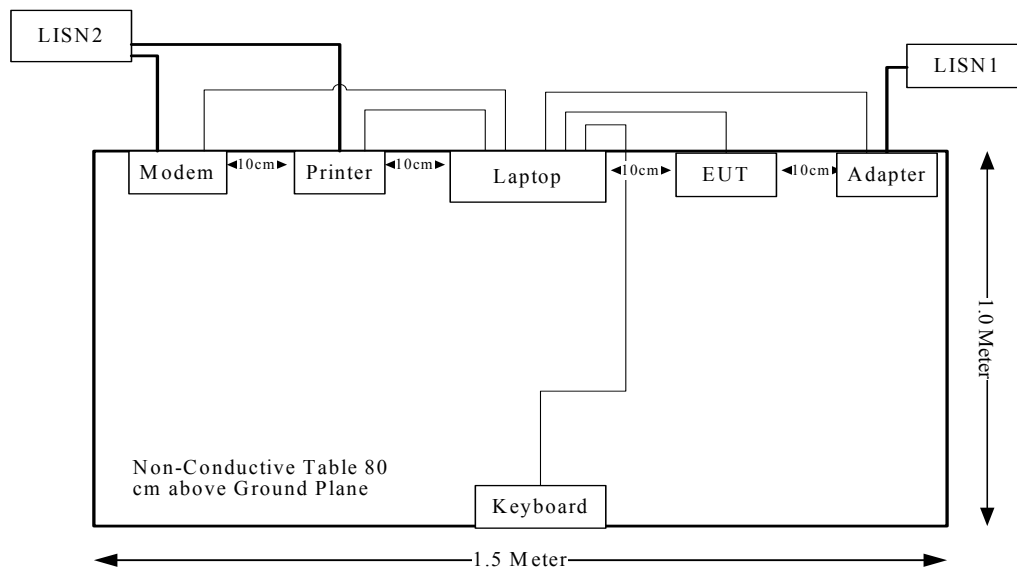

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307,§2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2480	0	1.00	5.78	3.78	20.00	0.00075	1.0

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has an internal printed antenna permanently soldering on the printed circuit board, which in accordance to FCC §15.203, the antenna's maximum gain is 0 dBi; please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS**Applicable Standard**

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cisp}

Measurement	U_{cisp}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

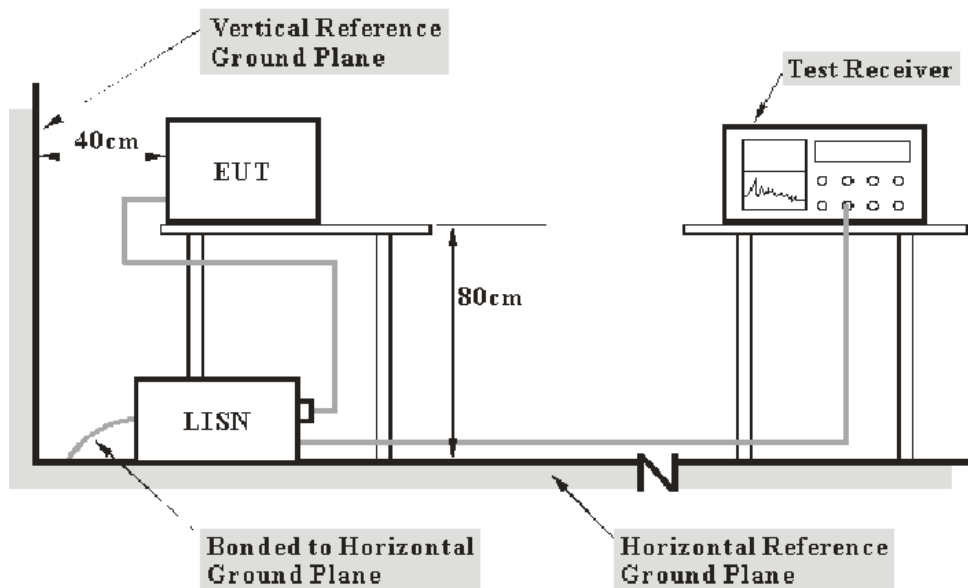

- Note:** 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<u>Frequency Range</u>	<u>IF B/W</u>
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2012-11-29	2013-11-28
R&S	LISN1	ESH3-Z5	843331/015	2012-09-17	2013-09-16
R&S	LISN2	ESH3-Z5	100113	2012-11-29	2013-11-28
BACL	Test Software	BACL-EMC	V1.0-2010	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

10.26 dB at 0.315 MHz in the Line conducted mode


Test Data**Environmental Conditions**

Temperature:	24.6 ° C
Relative Humidity:	67 %
ATM Pressure:	100.8 kPa

The testing was performed by Allen Qiao on 2013-04-26.


Test Mode: Transmitting

AC 120V/60 Hz, Line

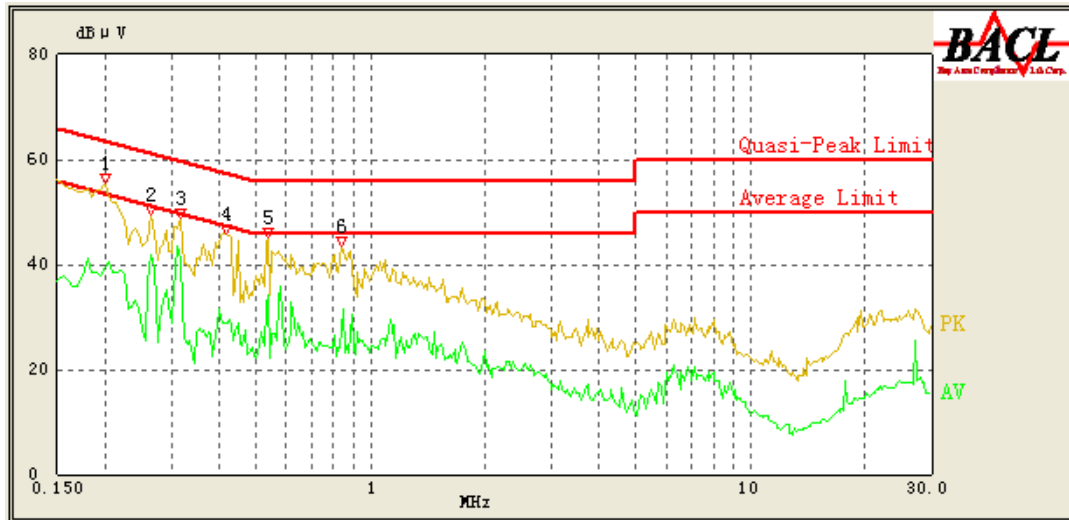

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/ QP/Ave.)
0.200	40.70	0.98	64.57	23.87	QP
0.200	39.65	0.98	54.57	14.92	AV
0.265	42.85	0.87	62.71	19.86	QP
0.265	41.71	0.87	52.71	11.00	AV
0.315	42.51	0.79	61.29	18.78	QP
0.315	41.03	0.79	51.29	10.26	AV
0.415	37.95	0.65	58.43	20.48	QP
0.415	28.75	0.65	48.43	19.68	AV
0.535	36.59	0.52	56.00	19.41	QP
0.535	34.07	0.52	46.00	11.93	AV
0.840	36.32	0.39	56.00	19.68	QP
0.845	31.66	0.39	46.00	14.34	AV

AC 120V/60 Hz, Neutral

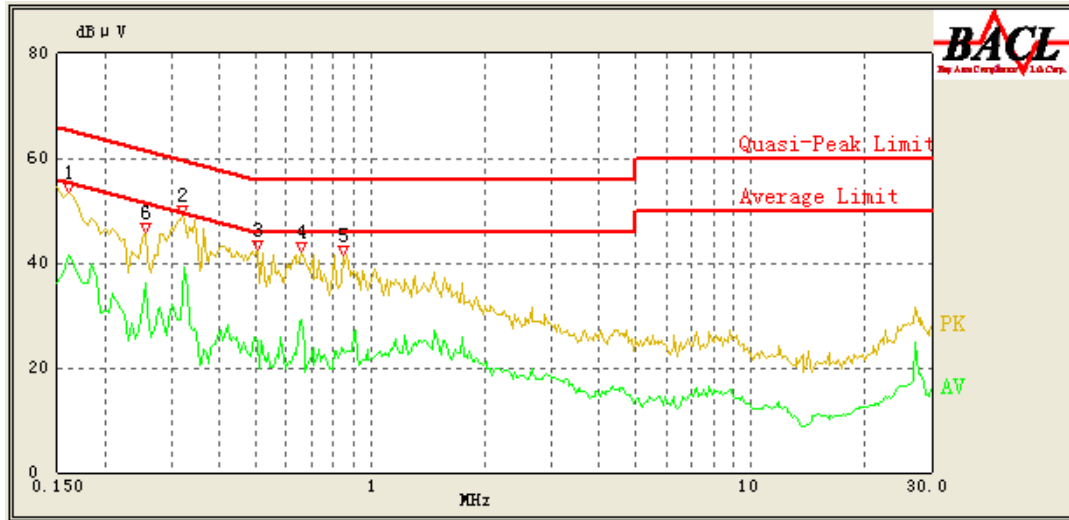

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/ QP/Ave.)
0.160	48.19	1.79	65.71	17.52	QP
0.160	41.55	1.79	55.71	14.16	AV
0.320	42.79	1.02	61.14	18.35	QP
0.320	34.04	1.02	51.14	17.10	AV
0.505	37.14	0.55	56.00	18.86	QP
0.505	25.11	0.55	46.00	20.89	AV
0.655	31.96	0.45	56.00	24.04	QP
0.655	29.14	0.45	46.00	16.86	AV
0.850	31.50	0.33	56.00	24.50	QP
0.840	23.77	0.33	46.00	22.23	AV
0.255	40.28	1.30	63.00	22.72	QP
0.255	36.13	1.30	53.00	16.87	AV

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB


Table 2 – Values of U_{cisp}

Measurement	U_{cisp}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

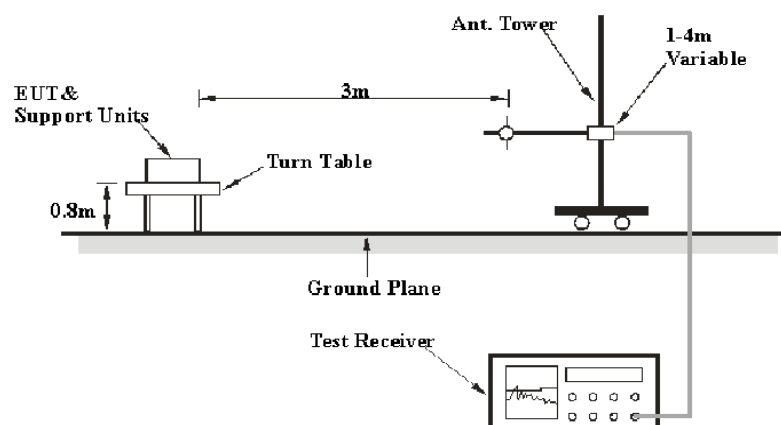

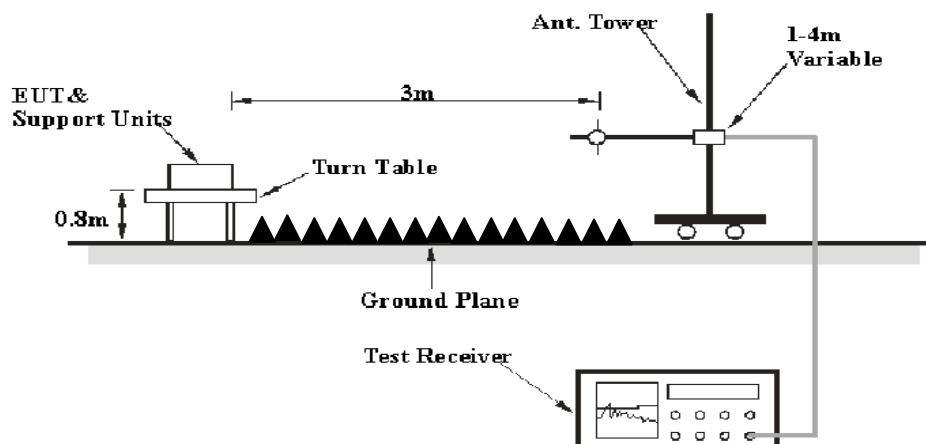Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video BW</i>	<i>Detector</i>
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave.

Test Procedure

For the radiated emissions test, the adapter was connected to the first AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2012-05-14	2013-05-13
Sunol Sciences	Hybrid Antennas	JB3	A060611-1	2011-09-06	2013-09-05
HP	Pre-amplifier	8447E	2434A02181	2012-10-08	2013-10-07
R&S	Spectrum analyzer	FSEM 30	849016/001	2012-9-4	2013-9-3
ETS-LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2014-09-05
Mini-Circuits	Amplifier	ZVA-213-S+	054201245	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

9.49 dB at 2483.5 MHz in the Horizontal polarization

Test Data**Environmental Conditions**

Temperature:	23.1°C
Relative Humidity:	69 %
ATM Pressure:	100.8 kPa

The testing was performed by Allen Qiao on 2013-04-26

Test Mode: Transmitting

BDR Mode (GFSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2402(MHz)									
2402	67.49	PK	H	25.65	3.90	0.00	97.04	N/A	N/A
2402	51.47	AV	H	25.65	3.90	0.00	81.02	N/A	N/A
2402	63.45	PK	V	25.65	3.90	0.00	93.00	N/A	N/A
2402	50.09	AV	V	25.65	3.90	0.00	79.64	N/A	N/A
2390	28.26	PK	H	25.61	3.84	0.00	57.71	74.00	16.29
2390	14.13	AV	H	25.61	3.84	0.00	43.58	54.00	10.42
4804	45.32	PK	H	30.59	4.67	27.26	53.32	74.00	20.68
4804	25.67	AV	H	30.59	4.67	27.26	33.67	54.00	20.33
7206	37.01	PK	H	34.09	6.50	26.30	51.30	74.00	22.70
7206	22.11	AV	H	34.09	6.50	26.30	36.40	54.00	17.60
9608	31.49	PK	V	35.96	8.75	26.22	49.98	74.00	24.02
9608	18.28	AV	V	35.96	8.75	26.22	36.77	54.00	17.23
1600	52.24	PK	V	23.80	3.18	26.90	52.32	74.00	21.68
1600	40.26	AV	V	23.80	3.18	26.90	40.34	54.00	13.66
123.49	34.46	QP	H	12.99	1.45	21.43	27.47	43.50	16.03
Middle Channel: 2441(MHz)									
2441	67.42	PK	H	25.75	3.99	0.00	97.16	N/A	N/A
2441	51.36	AV	H	25.75	3.99	0.00	81.10	N/A	N/A
2441	62.54	PK	V	25.75	3.99	0.00	92.28	N/A	N/A
2441	49.71	AV	V	25.75	3.99	0.00	79.45	N/A	N/A
4882	48.18	PK	H	30.79	4.75	27.26	56.46	74.00	17.54
4882	27.00	AV	H	30.79	4.75	27.26	35.28	54.00	18.72
7323	40.41	PK	H	34.38	6.72	26.53	54.98	74.00	19.02
7323	23.68	AV	H	34.38	6.72	26.53	38.25	54.00	15.75
9764	32.00	PK	V	36.33	8.58	25.62	51.29	74.00	22.71
9764	18.19	AV	V	36.33	8.58	25.62	37.48	54.00	16.52
1590	52.36	PK	V	23.78	3.15	26.91	52.38	74.00	21.62
1590	40.45	AV	V	23.78	3.15	26.91	40.47	54.00	13.53
1060	54.06	PK	V	22.46	2.45	27.18	51.79	74.00	22.21
1060	41.31	AV	V	22.46	2.45	27.18	39.04	54.00	14.96
123.23	34.69	QP	H	13.01	1.45	21.43	27.72	43.50	15.78
High Channel: 2480(MHz)									
2480	67.83	PK	H	25.85	3.82	0.00	97.50	N/A	N/A
2480	51.36	AV	H	25.85	3.82	0.00	81.03	N/A	N/A
2480	63.95	PK	V	25.85	3.82	0.00	93.62	N/A	N/A
2480	50.01	AV	V	25.85	3.82	0.00	79.68	N/A	N/A
2483.5	28.36	PK	H	25.86	3.80	0.00	58.02	74.00	15.98
2483.5	14.72	AV	H	25.86	3.80	0.00	44.38	54.00	9.62
4960	48.38	PK	H	31.00	4.70	27.27	56.81	74.00	17.19
4960	27.00	AV	H	31.00	4.70	27.27	35.43	54.00	18.57
7440	38.32	PK	H	34.66	6.95	26.56	53.37	74.00	20.63
7440	22.66	AV	H	34.66	6.95	26.56	37.71	54.00	16.29
9920	31.45	PK	V	36.71	8.41	25.50	51.07	74.00	22.93
9920	17.85	AV	V	36.71	8.41	25.50	37.47	54.00	16.53
1595.6	52.13	PK	V	23.79	3.17	26.90	52.19	74.00	21.81
1595.6	10.09	AV	V	23.79	3.17	26.90	10.15	54.00	43.85
123.86	34.16	QP	H	12.97	1.45	21.43	27.15	43.50	16.35


EDR Mode ($\pi/4$ -DQPSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2402(MHz)									
2402	65.36	PK	H	25.65	3.90	0.00	94.91	N/A	N/A
2402	49.75	AV	H	25.65	3.90	0.00	79.30	N/A	N/A
2402	61.29	PK	V	25.65	3.90	0.00	90.84	N/A	N/A
2402	48.67	AV	V	25.65	3.90	0.00	78.22	N/A	N/A
2390	28.36	PK	H	25.61	3.84	0.00	57.81	74.00	16.19
2390	14.28	AV	H	25.61	3.84	0.00	43.73	54.00	10.27
4804	45.48	PK	H	30.59	4.67	27.26	53.48	74.00	20.52
4804	25.75	AV	H	30.59	4.67	27.26	33.75	54.00	20.25
7206	37.13	PK	H	34.09	6.50	26.30	51.42	74.00	22.58
7206	22.17	AV	H	34.09	6.50	26.30	36.46	54.00	17.54
9608	31.74	PK	V	35.96	8.75	26.22	50.23	74.00	23.77
9608	18.5	AV	V	35.96	8.75	26.22	36.99	54.00	17.01
1600	52.51	PK	V	23.80	3.18	26.90	52.59	74.00	21.41
1600	40.46	AV	V	23.80	3.18	26.90	40.54	54.00	13.46
123.49	34.73	QP	H	12.99	1.45	21.43	27.74	43.50	15.76
Middle Channel: 2441(MHz)									
2441	66.39	PK	H	25.75	3.99	0.00	96.13	N/A	N/A
2441	50.28	AV	H	25.75	3.99	0.00	80.02	N/A	N/A
2441	61.69	PK	V	25.75	3.99	0.00	91.43	N/A	N/A
2441	49.18	AV	V	25.75	3.99	0.00	78.92	N/A	N/A
4882	48.34	PK	H	30.79	4.75	27.26	56.62	74.00	17.38
4882	27.19	AV	H	30.79	4.75	27.26	35.47	54.00	18.53
7323	40.42	PK	H	34.38	6.72	26.53	54.99	74.00	19.01
7323	23.78	AV	H	34.38	6.72	26.53	38.35	54.00	15.65
9764	32	PK	V	36.33	8.58	25.62	51.29	74.00	22.71
9764	18.46	AV	V	36.33	8.58	25.62	37.75	54.00	16.25
1590	52.58	PK	V	23.78	3.15	26.91	52.60	74.00	21.40
1590	40.74	AV	V	23.78	3.15	26.91	40.76	54.00	13.24
1060	54.18	PK	V	22.46	2.45	27.18	51.91	74.00	22.09
1060	41.59	AV	V	22.46	2.45	27.18	39.32	54.00	14.68
123.23	34.79	QP	H	13.01	1.45	21.43	27.82	43.50	15.68
High Channel: 2480(MHz)									
2480	66.78	PK	H	25.85	3.82	0.00	96.45	N/A	N/A
2480	50.23	AV	H	25.85	3.82	0.00	79.90	N/A	N/A
2480	61.29	PK	V	25.85	3.82	0.00	90.96	N/A	N/A
2480	49.67	AV	V	25.85	3.82	0.00	79.34	N/A	N/A
2483.5	28.43	PK	H	25.86	3.80	0.00	58.09	74.00	15.91
2483.5	14.85	AV	H	25.86	3.80	0.00	44.51	54.00	9.49
4960	48.53	PK	H	31.00	4.70	27.27	56.96	74.00	17.04
4960	27.06	AV	H	31.00	4.70	27.27	35.49	54.00	18.51
7440	38.39	PK	H	34.66	6.95	26.56	53.44	74.00	20.56
7440	22.94	AV	H	34.66	6.95	26.56	37.99	54.00	16.01
9920	31.67	PK	V	36.71	8.41	25.50	51.29	74.00	22.71
9920	17.95	AV	V	36.71	8.41	25.50	37.57	54.00	16.43
1595.6	52.36	PK	V	23.79	3.17	26.90	52.42	74.00	21.58
1595.6	10.13	AV	V	23.79	3.17	26.90	10.19	54.00	43.81
123.86	34.45	QP	H	12.97	1.45	21.43	27.44	43.50	16.06


EDR Mode (8-DPSK):

Frequency	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2402(MHz)									
2402	65.86	PK	H	25.65	3.90	0.00	95.41	N/A	N/A
2402	50.14	AV	H	25.65	3.90	0.00	79.69	N/A	N/A
2402	61.38	PK	V	25.65	3.90	0.00	90.93	N/A	N/A
2402	49.84	AV	V	25.65	3.90	0.00	79.39	N/A	N/A
2390	28.41	PK	H	25.61	3.84	0.00	57.86	74.00	16.14
2390	14.43	AV	H	25.61	3.84	0.00	43.88	54.00	10.12
4804	45.5	PK	H	30.59	4.67	27.26	53.50	74.00	20.50
4804	25.96	AV	H	30.59	4.67	27.26	33.96	54.00	20.04
7206	37.11	PK	H	34.09	6.50	26.30	51.40	74.00	22.60
7206	22.29	AV	H	34.09	6.50	26.30	36.58	54.00	17.42
9608	31.76	PK	V	35.96	8.75	26.22	50.25	74.00	23.75
9608	18.47	AV	V	35.96	8.75	26.22	36.96	54.00	17.04
1600	52.39	PK	V	23.80	3.18	26.90	52.47	74.00	21.53
1600	40.53	AV	V	23.80	3.18	26.90	40.61	54.00	13.39
123.49	34.55	QP	H	12.99	1.45	21.43	27.56	43.50	15.94
Middle Channel: 2441(MHz)									
2441	66.03	PK	H	25.75	3.99	0.00	95.77	N/A	N/A
2441	50.28	AV	H	25.75	3.99	0.00	80.02	N/A	N/A
2441	61.95	PK	V	25.75	3.99	0.00	91.69	N/A	N/A
2441	50.01	AV	V	25.75	3.99	0.00	79.75	N/A	N/A
4882	48.25	PK	H	30.79	4.75	27.26	56.53	74.00	17.47
4882	27.29	AV	H	30.79	4.75	27.26	35.57	54.00	18.43
7323	40.69	PK	H	34.38	6.72	26.53	55.26	74.00	18.74
7323	23.77	AV	H	34.38	6.72	26.53	38.34	54.00	15.66
9764	32.16	PK	V	36.33	8.58	25.62	51.45	74.00	22.55
9764	18.37	AV	V	36.33	8.58	25.62	37.66	54.00	16.34
1590	52.65	PK	V	23.78	3.15	26.91	52.67	74.00	21.33
1590	40.48	AV	V	23.78	3.15	26.91	40.50	54.00	13.50
1060	54.21	PK	V	22.46	2.45	27.18	51.94	74.00	22.06
1060	41.4	AV	V	22.46	2.45	27.18	39.13	54.00	14.87
123.23	34.82	QP	H	13.01	1.45	21.43	27.85	43.50	15.65
High Channel: 2480(MHz)									
2480	66.59	PK	H	25.85	3.82	0.00	96.26	N/A	N/A
2480	50.57	AV	H	25.85	3.82	0.00	80.24	N/A	N/A
2480	62.29	PK	V	25.85	3.82	0.00	91.96	N/A	N/A
2480	50.16	AV	V	25.85	3.82	0.00	79.83	N/A	N/A
2483.5	28.58	PK	H	25.86	3.80	0.00	58.24	74.00	15.76
2483.5	14.81	AV	H	25.86	3.80	0.00	44.47	54.00	9.53
4960	48.61	PK	H	31.00	4.70	27.27	57.04	74.00	16.96
4960	27.21	AV	H	31.00	4.70	27.27	35.64	54.00	18.36
7440	38.59	PK	H	34.66	6.95	26.56	53.64	74.00	20.36
7440	22.83	AV	H	34.66	6.95	26.56	37.88	54.00	16.12
9920	31.49	PK	V	36.71	8.41	25.50	51.11	74.00	22.89
9920	18.03	AV	V	36.71	8.41	25.50	37.65	54.00	16.35
1595.6	52.26	PK	V	23.79	3.17	26.90	52.32	74.00	21.68
1595.6	10.38	AV	V	23.79	3.17	26.90	10.44	54.00	43.56
123.86	34.44	QP	H	12.97	1.45	21.43	27.43	43.50	16.07

*Within measurement uncertainty!

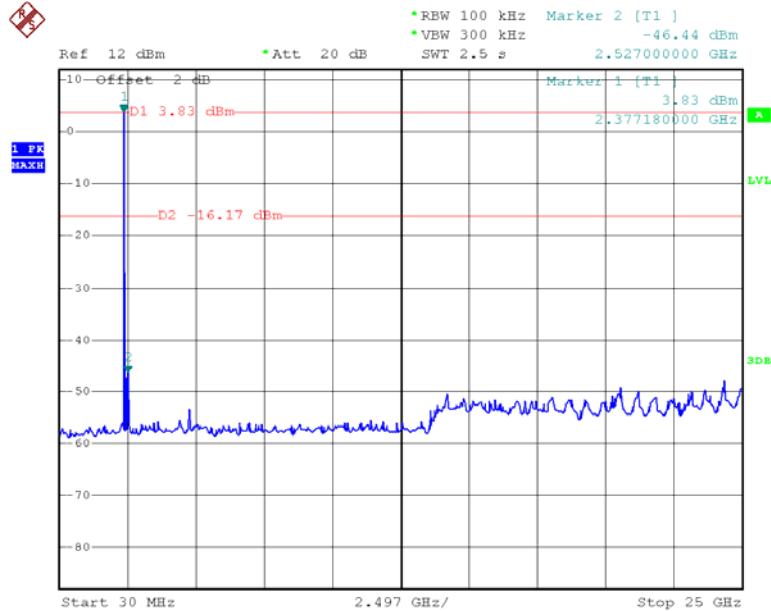
Conducted Spurious Emissions at Antenna Port*BDR Mode (GFSK):***Low Channel**

Date: 26.APR.2013 10:38:42

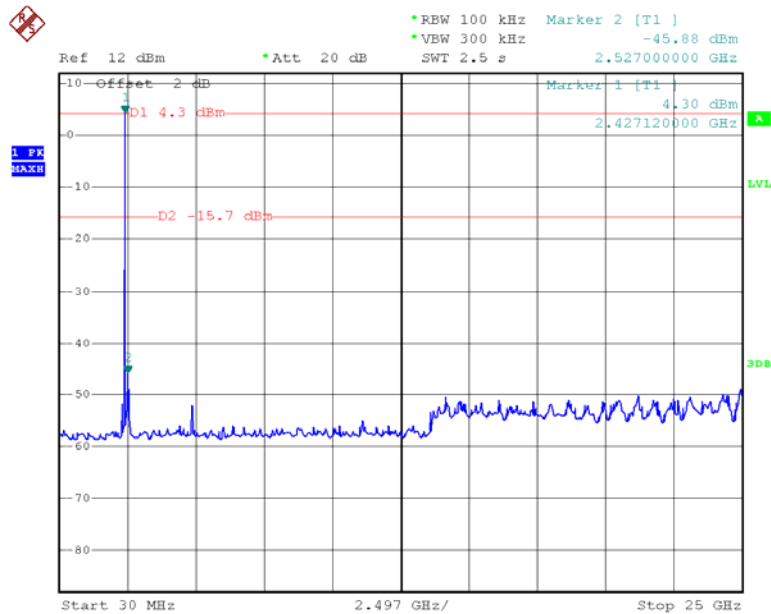Middle Channel

Date: 26.APR.2013 10:40:33


High Channel

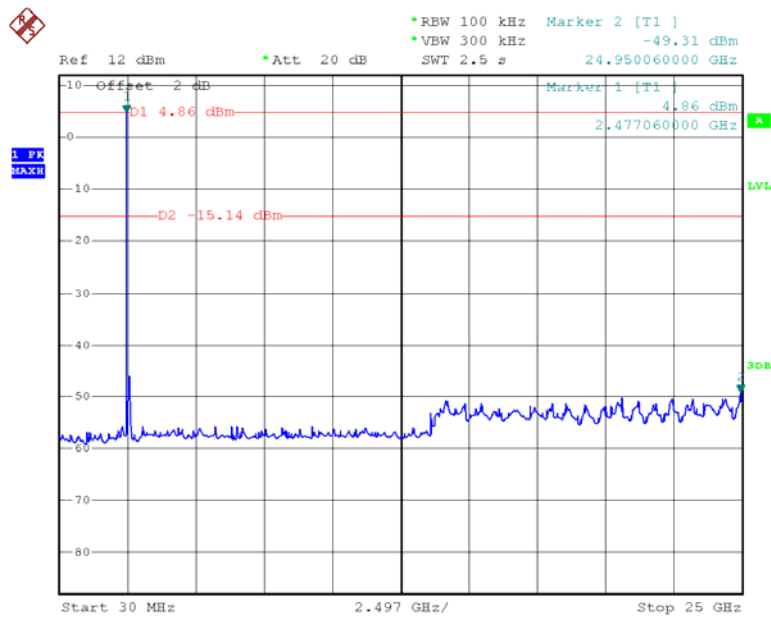

Date: 26.APR.2013 10:41:15


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

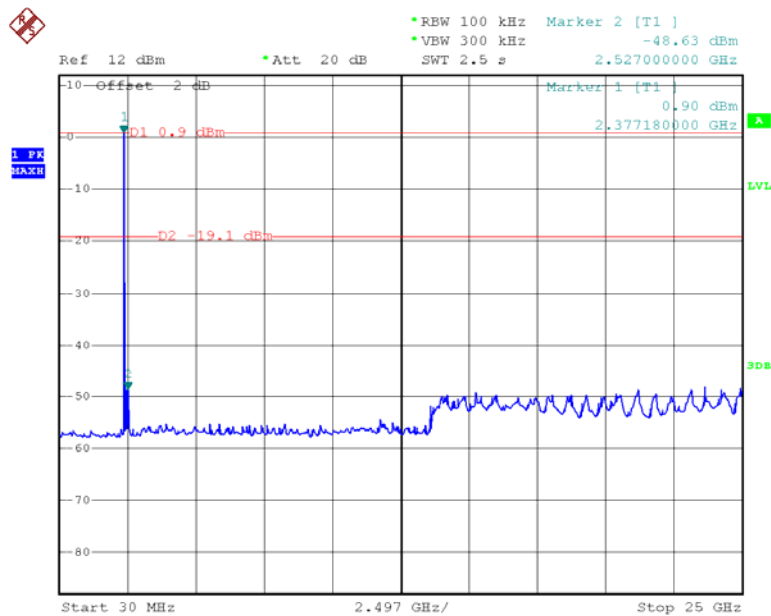


Date: 26.APR.2013 10:49:36

Middle Channel

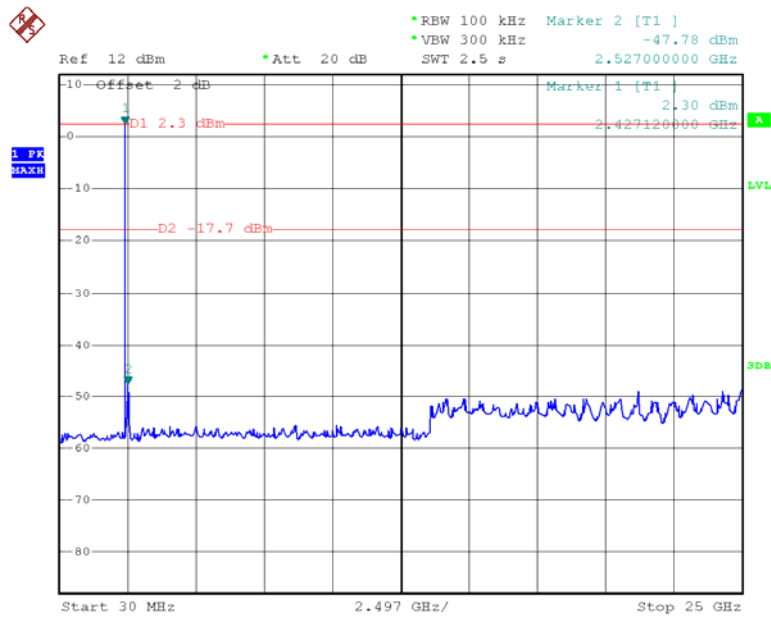


Date: 26.APR.2013 10:47:40


High Channel

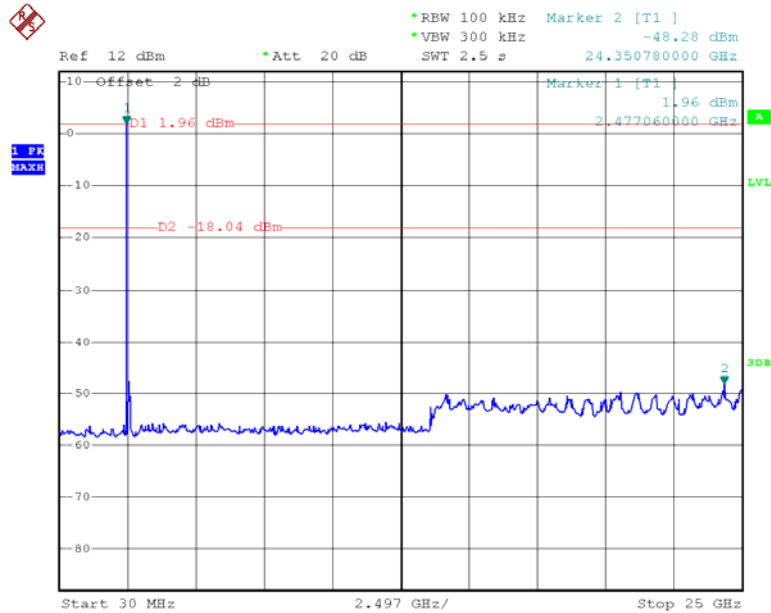

Date: 26.APR.2013 10:46:51

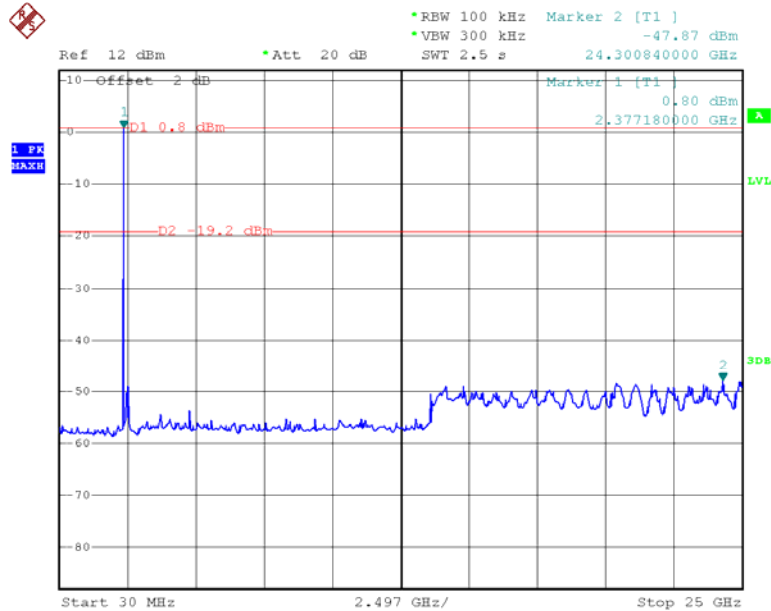
*EDR Mode (8-DPSK):***Low Channel**

Date: 26.APR.2013 11:10:24

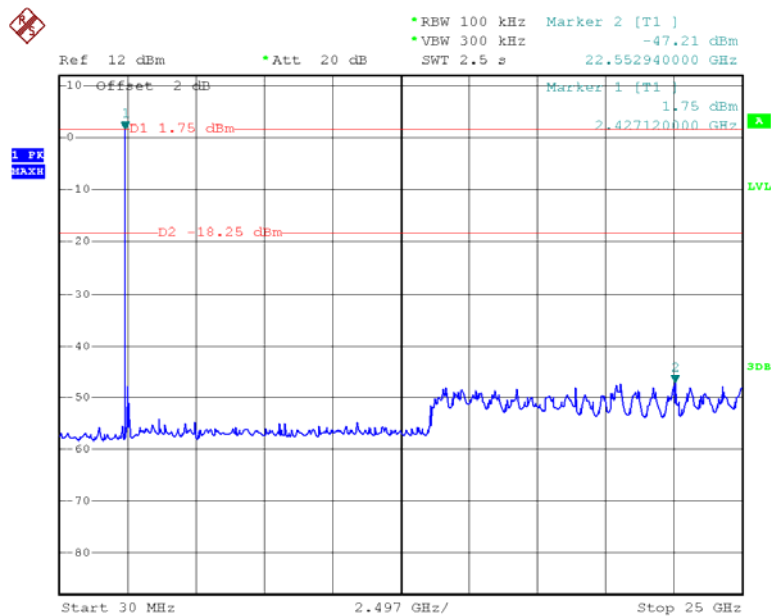Middle Channel

Date: 26.APR.2013 11:11:55

High Channel

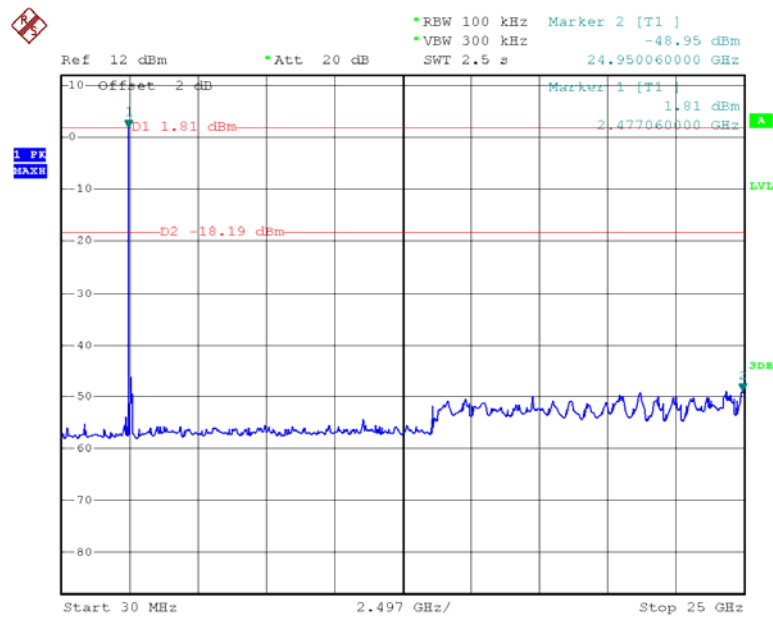

Date: 26.APR.2013 11:14:08

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	26.1°C
Relative Humidity:	69 %
ATM Pressure:	100.8 kPa

The testing was performed by Allen Qiao on 2013-04-26.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
BDR Mode (GFSK)	Low	2402	1.012	0.62	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.62	Pass
	Adjacent	2440			
	High	2480	1.000	0.62	Pass
	Adjacent	2479			
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.040	0.81	Pass
	Adjacent	2403			
	Middle	2441	1.000	0.82	Pass
	Adjacent	2440			
	High	2480	1.000	0.82	Pass
	Adjacent	2479			
EDR Mode (8-DPSK)	Low	2402	1.012	0.81	Pass
	Adjacent	2403			
	Middle	2441	1.024	0.81	Pass
	Adjacent	2440			
	High	2480	1.020	0.81	Pass
	Adjacent	2479			


BDR Mode (GFSK):

Low Channel

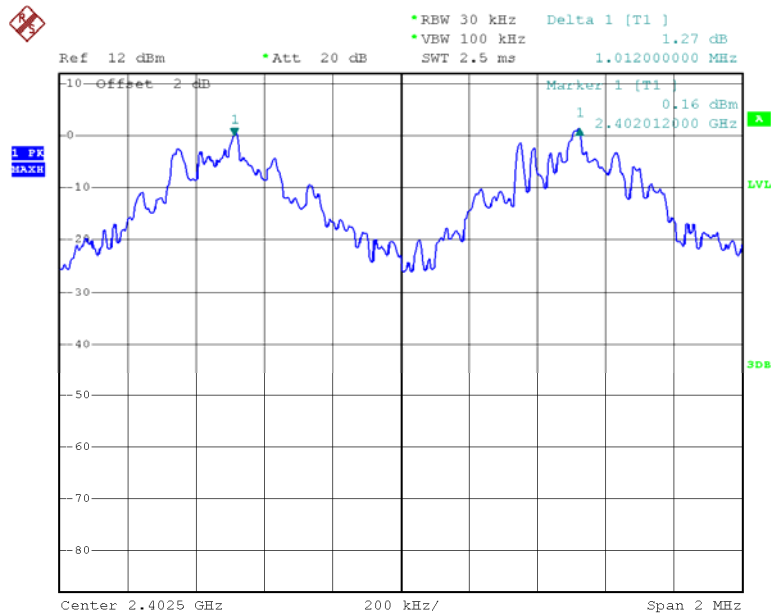


Date: 26.APR.2013 11:27:31

Middle Channel

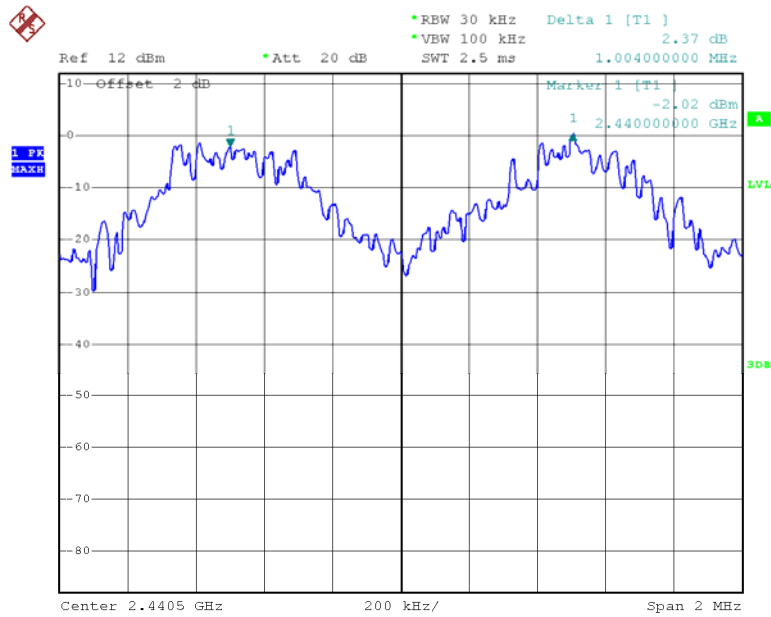

Date: 26.APR.2013 11:28:04


High Channel

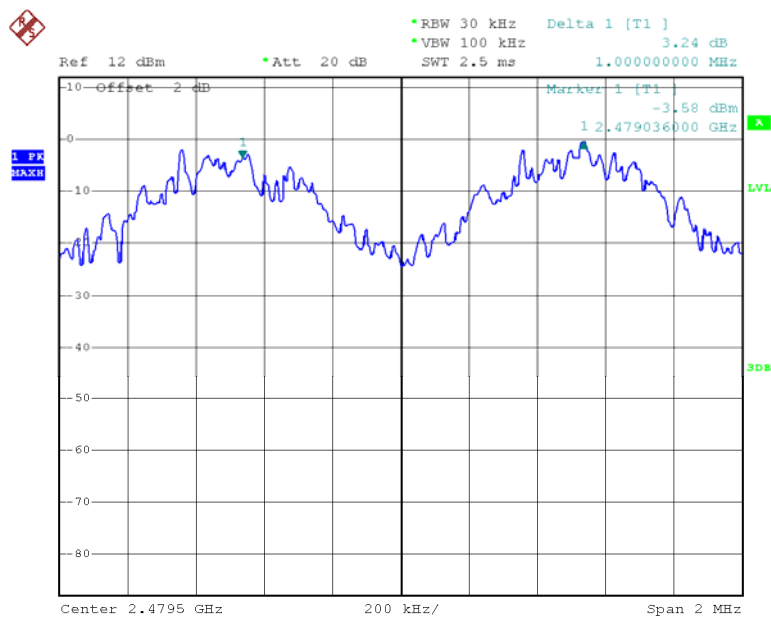

Date: 26.APR.2013 11:33:29


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

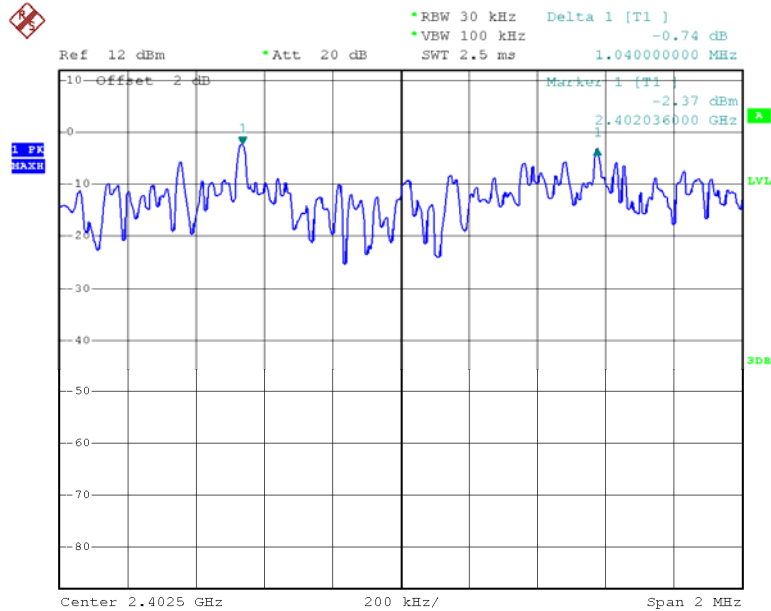


Date: 26.APR.2013 11:23:03

Middle Channel

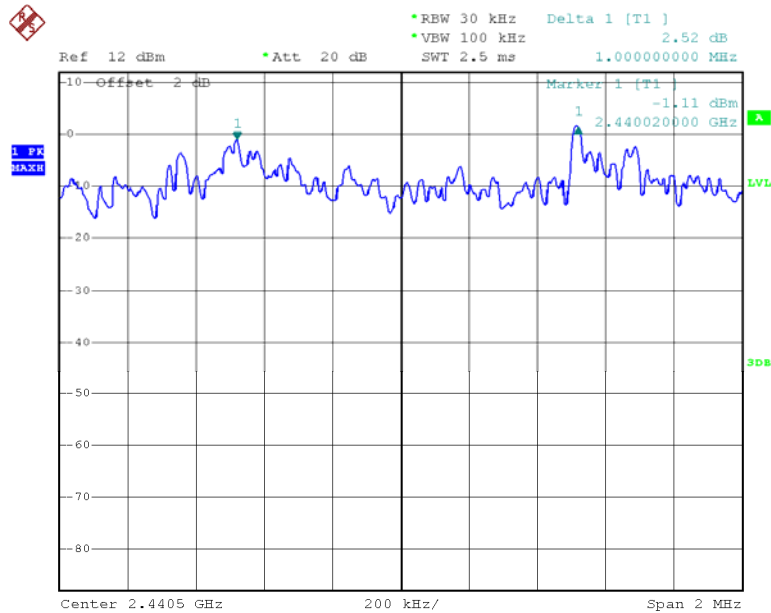

Date: 26.APR.2013 11:22:32


High Channel

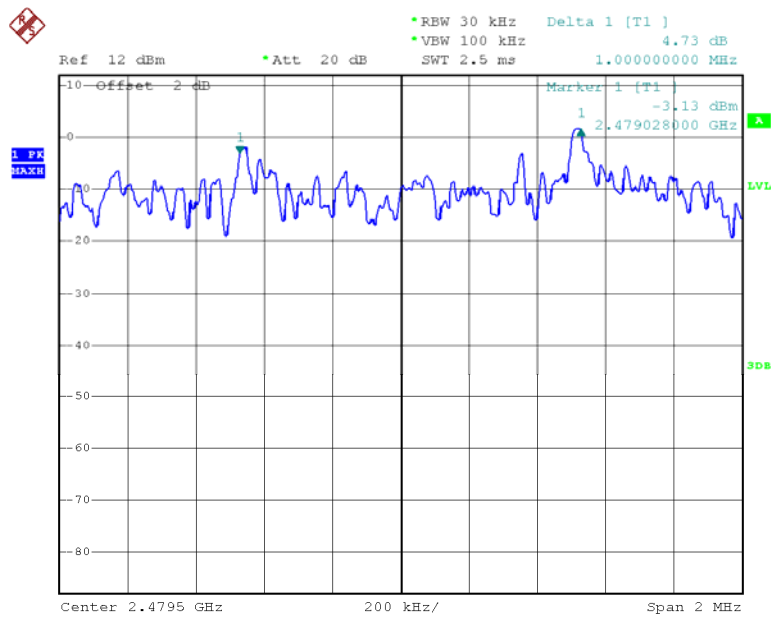

Date: 26.APR.2013 11:21:41


EDR Mode (8-DPSK):

Low Channel

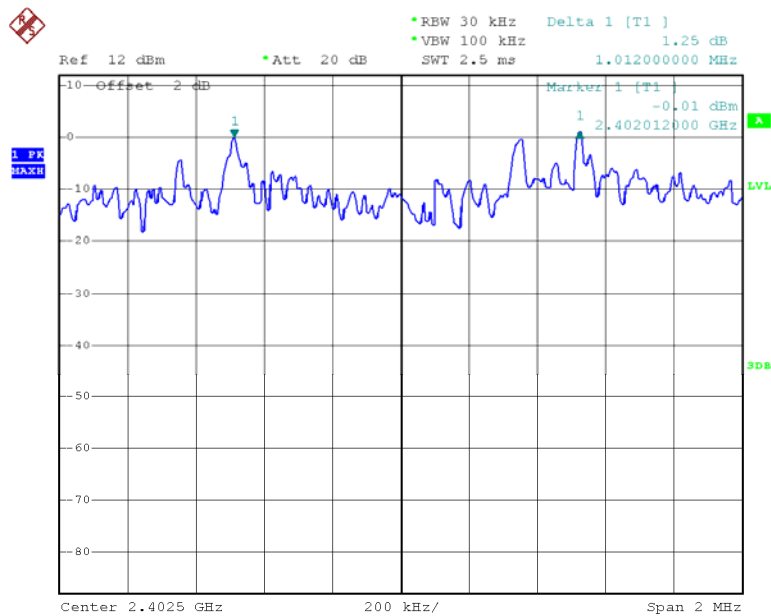


Date: 26.APR.2013 11:18:23

Middle Channel

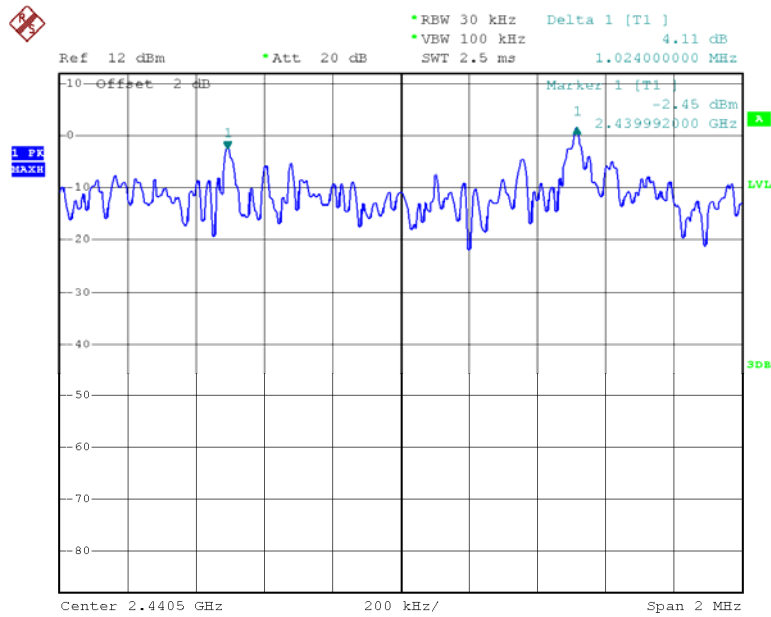

Date: 26.APR.2013 11:18:52

High Channel

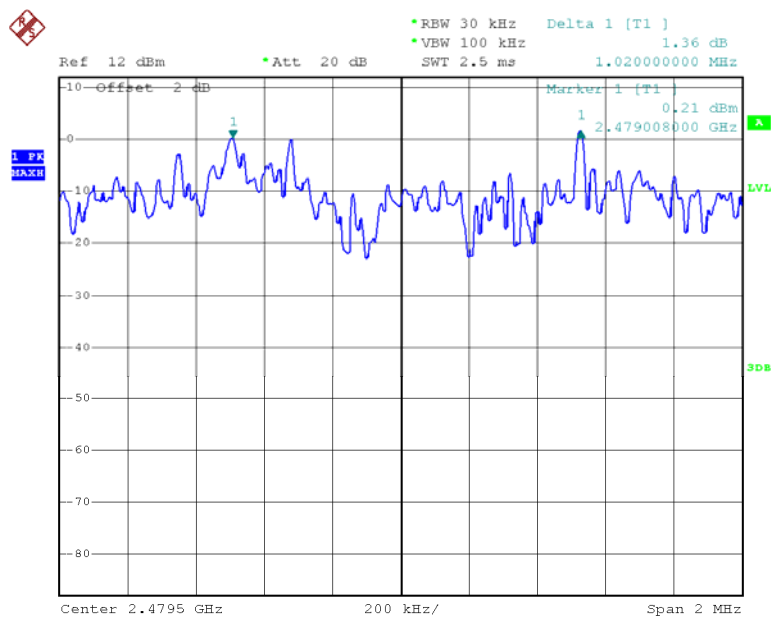

Date: 26.APR.2013 11:19:18

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26.1 °C
Relative Humidity:	69 %
ATM Pressure:	100.8 kPa

The testing was performed by Allen Qiao on 2013-04-26.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.924
	Middle	2441	0.924
	High	2480	0.924
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.212
	Middle	2441	1.224
	High	2480	1.224
EDR Mode (8-DPSK)	Low	2402	1.212
	Middle	2441	1.212
	High	2480	1.212


Please refer to the following plots.

BDR Mode (GFSK):

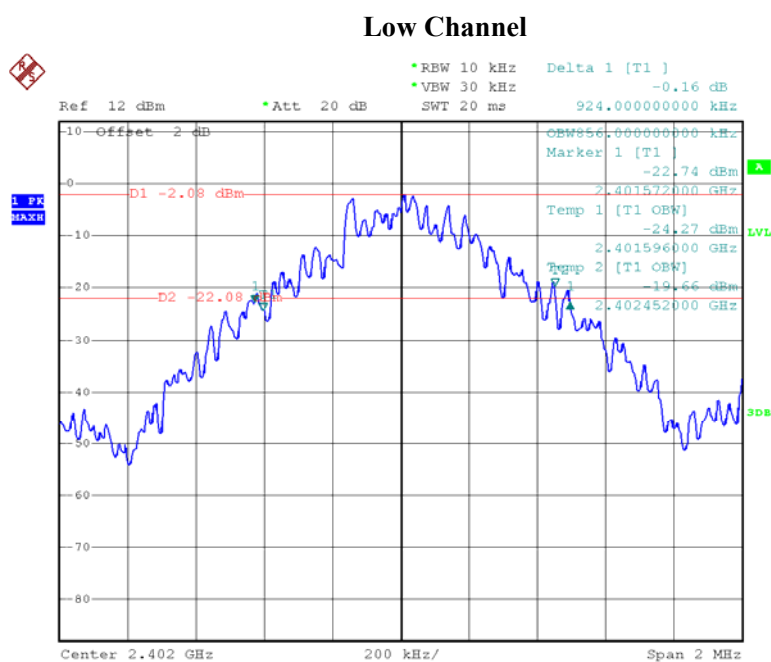


Date: 26.APR.2013 10:23:11

Middle Channel

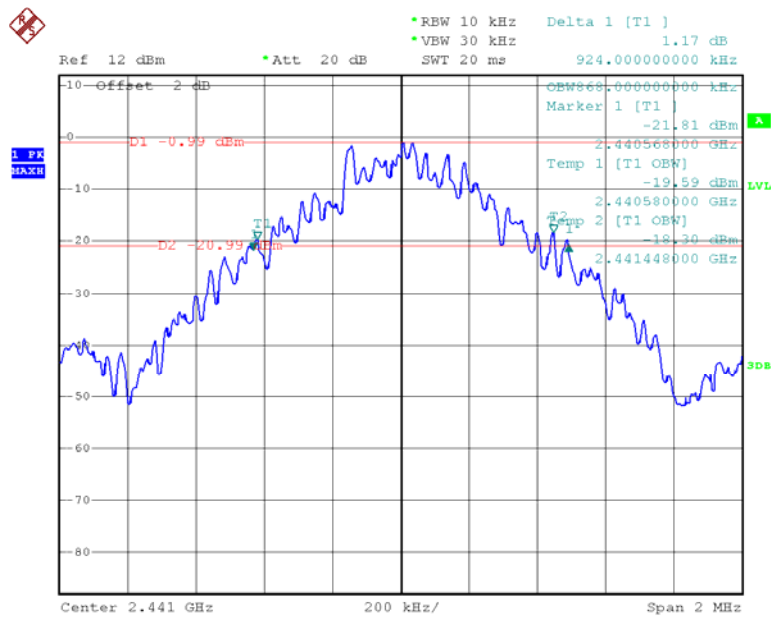

Date: 26.APR.2013 10:23:54


High Channel

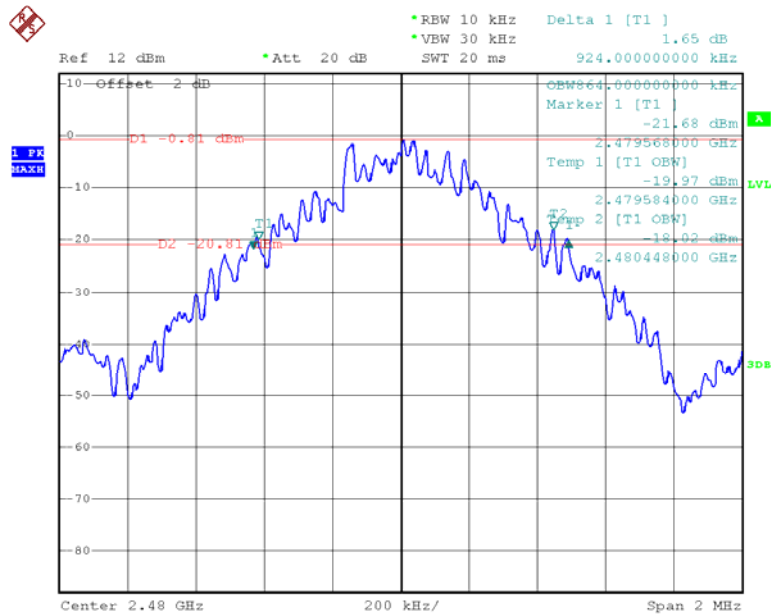

Date: 26.APR.2013 10:25:33


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

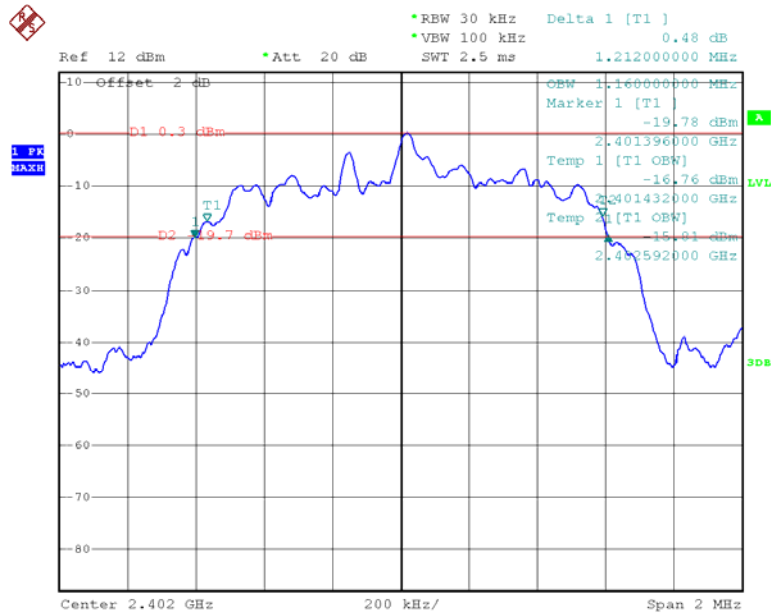


Date: 26.APR.2013 10:56:04

Middle Channel

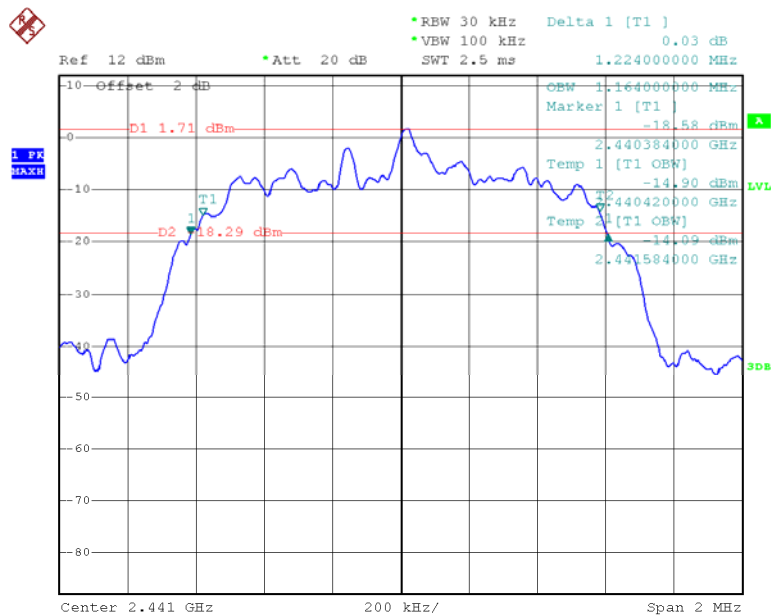

Date: 26.APR.2013 10:56:51


High Channel

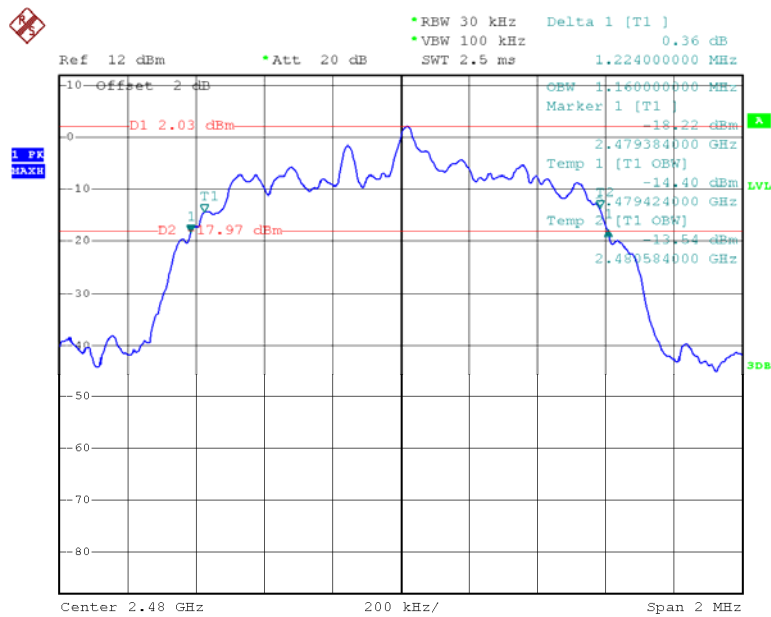

Date: 26.APR.2013 10:58:49


EDR Mode (8-DPSK):

Low Channel

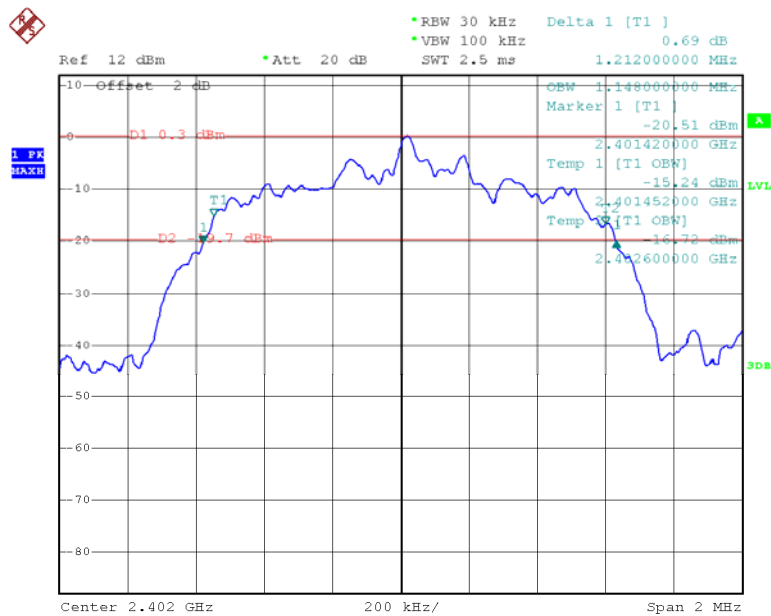


Date: 26.APR.2013 11:03:01

Middle Channel

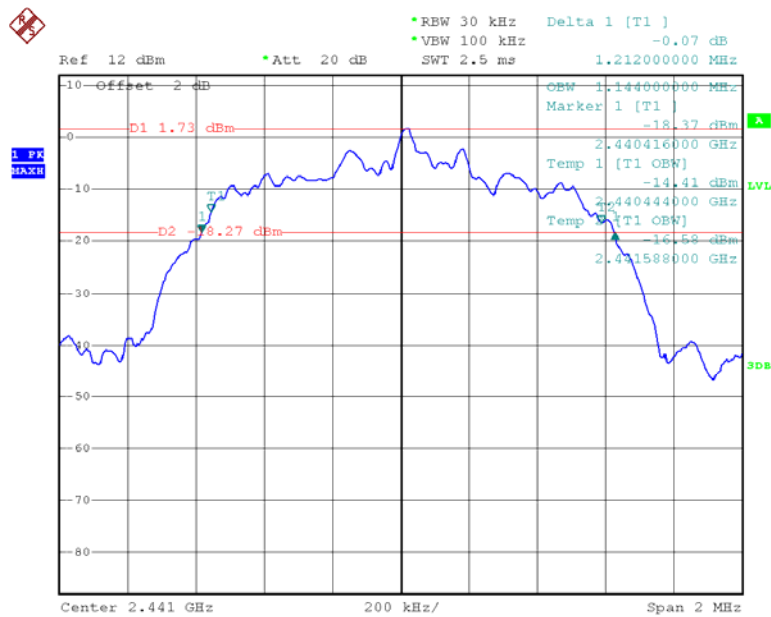

Date: 26.APR.2013 11:02:15

High Channel

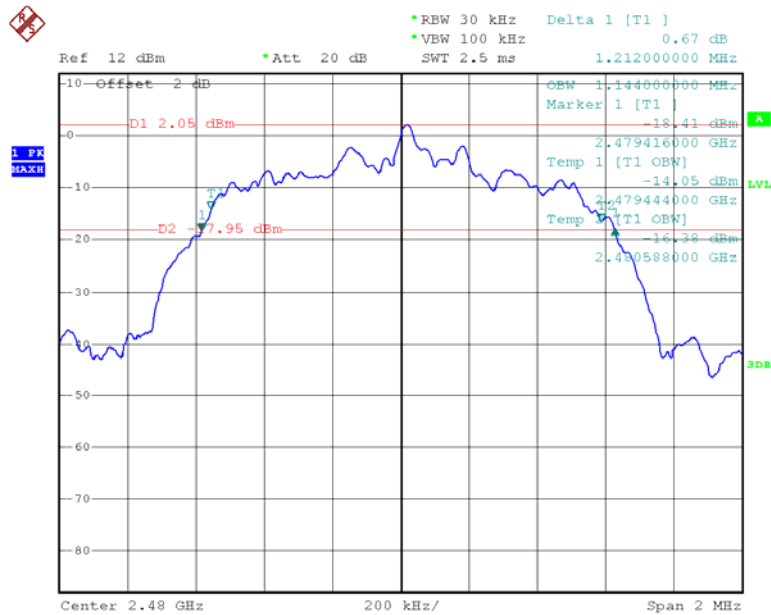

Date: 26.APR.2013 11:00:41

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26.1°C
Relative Humidity:	69 %
ATM Pressure:	100.8 kPa

The testing was performed by Allen Qiao on 2013-04-26.


Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Mode	Frequency Range (MHz)	Number of Hopping Channel	Limit
BDR Mode (GFSK)	2400-2483.5	79	≥ 15
EDR Mode ($\pi/4$ -DQPSK)	2400-2483.5	79	≥ 15
EDR Mode (8-DPSK)	2400-2483.5	79	≥ 15

BDR Mode (GFSK):

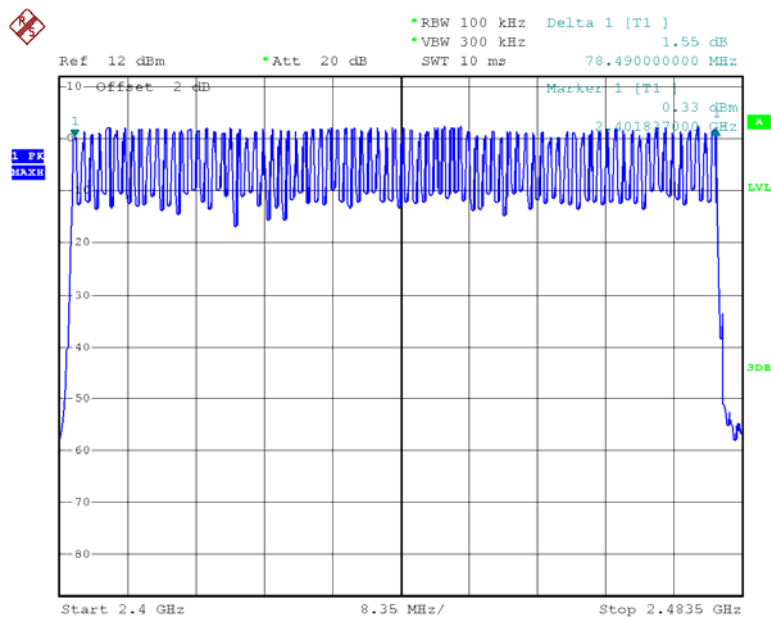
Number of Hopping Channels

Date: 26.APR.2013 11:26:11

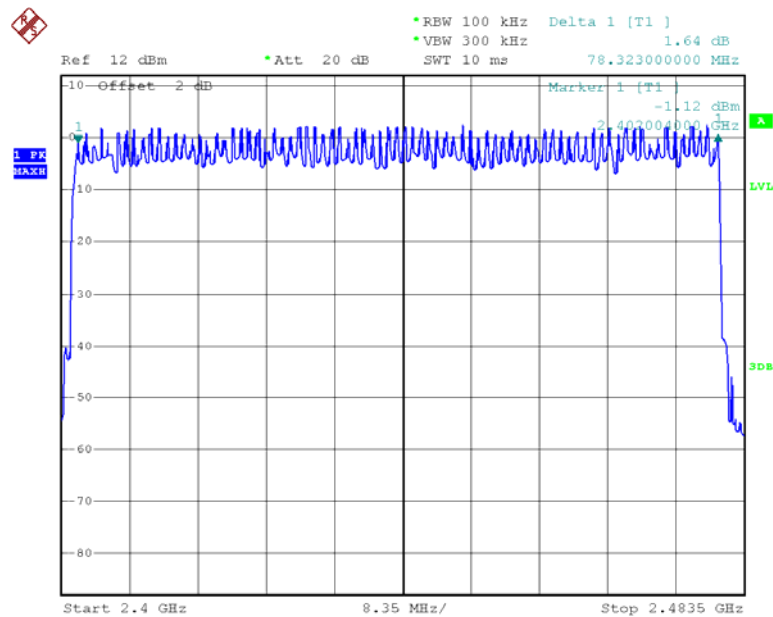EDR Mode ($\pi/4$ -DQPSK):**Number of Hopping Channels**

Date: 26.APR.2013 11:24:34

EDR Mode (8-DPSK):

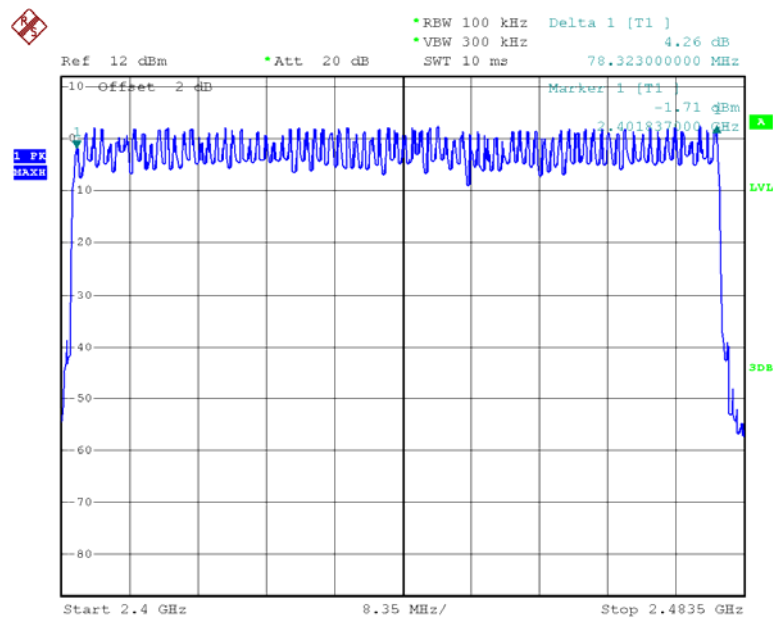Number of Hopping Channels

Date: 26.APR.2013 11:17:19

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as $0.4 \times \text{channel no. (s)}$, the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time = time slot length * hope rate / number of hopping channels * hopping NO. * 0.4s

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26.1°C
Relative Humidity:	69 %
ATM Pressure:	100.8 kPa

The testing was performed by Allen Qiao on 2013-04-26.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH 1	Low	0.440	0.141	0.4	Pass
	Middle	0.445	0.142	0.4	Pass
	High	0.445	0.142	0.4	Pass
	Note: Dwell time=Pulse time (ms) \times (1600/2/79) \times 31.6 s				
DH 3	Low	1.715	0.274	0.4	Pass
	Middle	1.715	0.274	0.4	Pass
	High	1.720	0.275	0.4	Pass
	Note: Dwell time=Pulse time (ms) \times (1600/4/79) \times 31.6 s				
DH 5	Low	2.968	0.317	0.4	Pass
	Middle	2.968	0.317	0.4	Pass
	High	2.984	0.318	0.4	Pass
	Note: Dwell time=Pulse time (ms) \times (1600/6/79) \times 31.6 s				

DH1: Low Channel

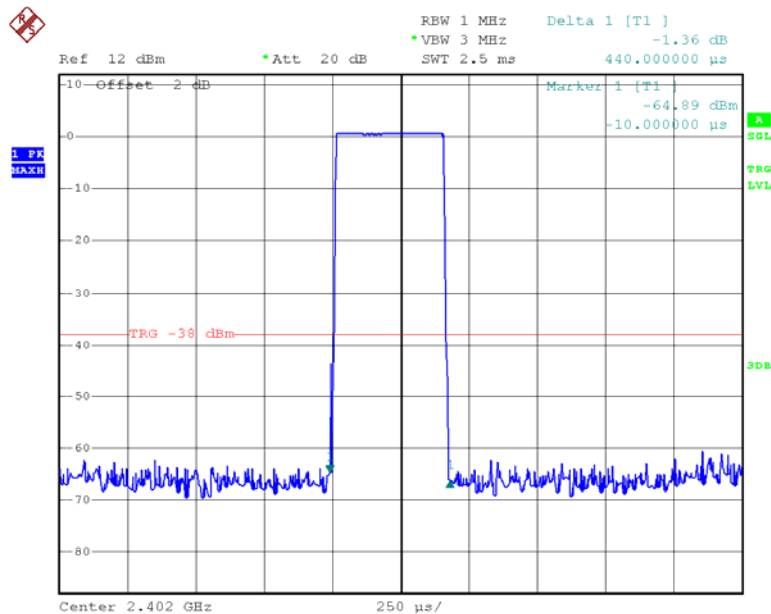


Date: 26.APR.2013 11:38:10

DH1: Middle Channel

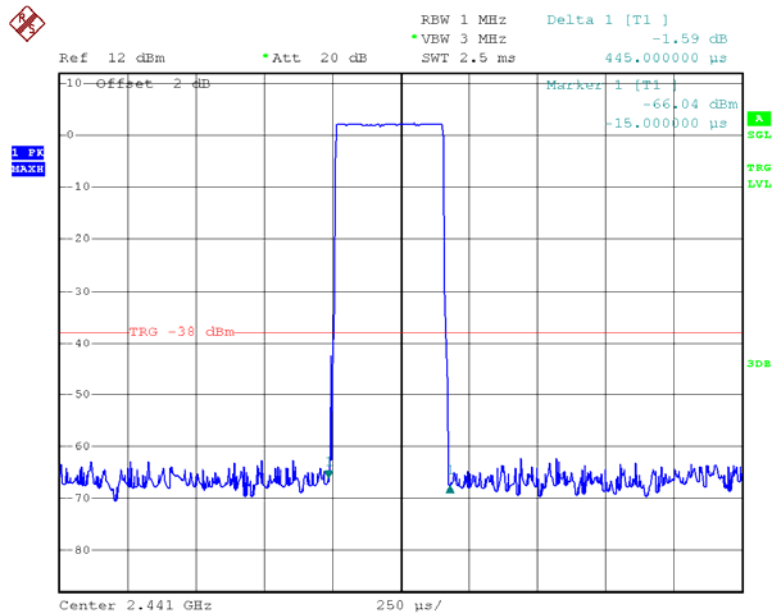


Date: 26.APR.2013 11:39:28

DH1: High Channel

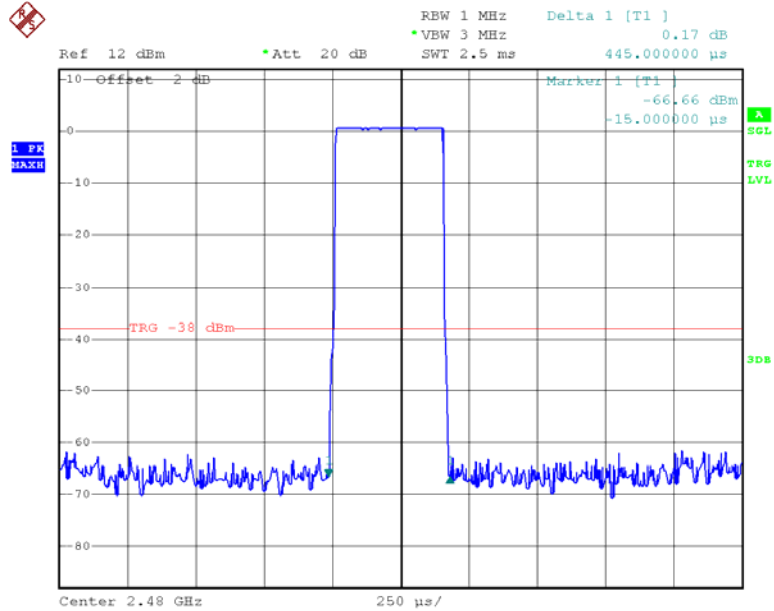


Date: 26.APR.2013 11:41:20

DH3: Low Channel

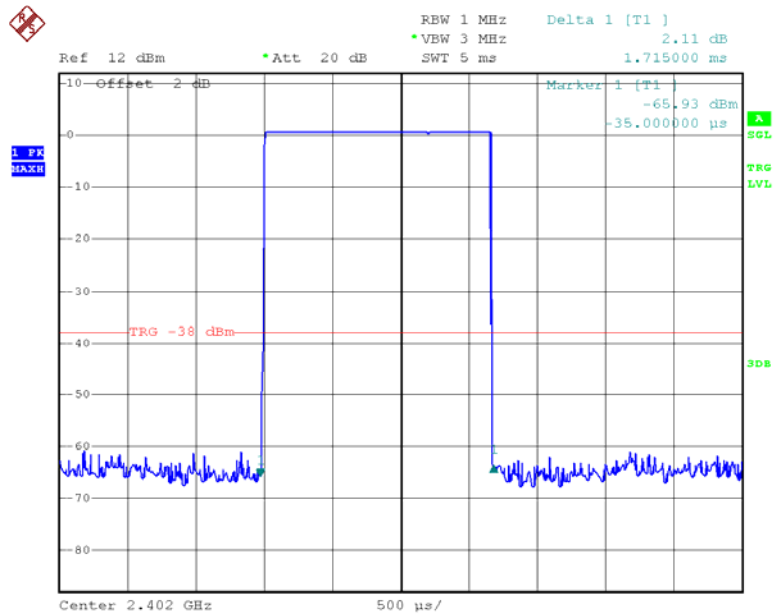


Date: 26.APR.2013 11:45:20

DH3: Middle Channel

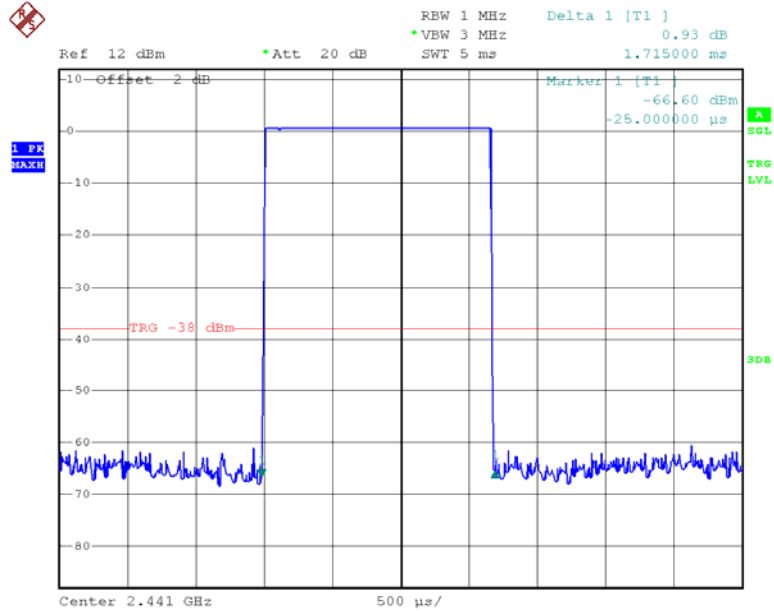


Date: 26.APR.2013 11:45:51

DH3: High Channel

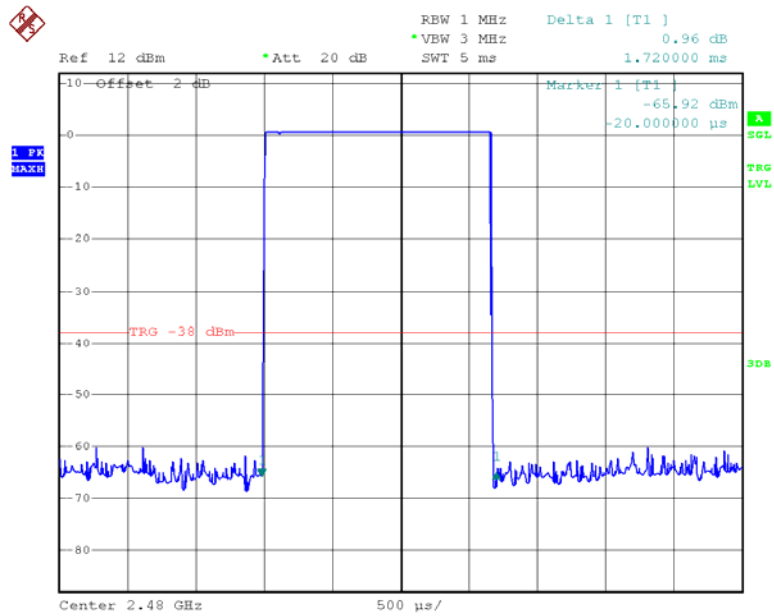


Date: 26.APR.2013 11:46:46

DH5: Low Channel

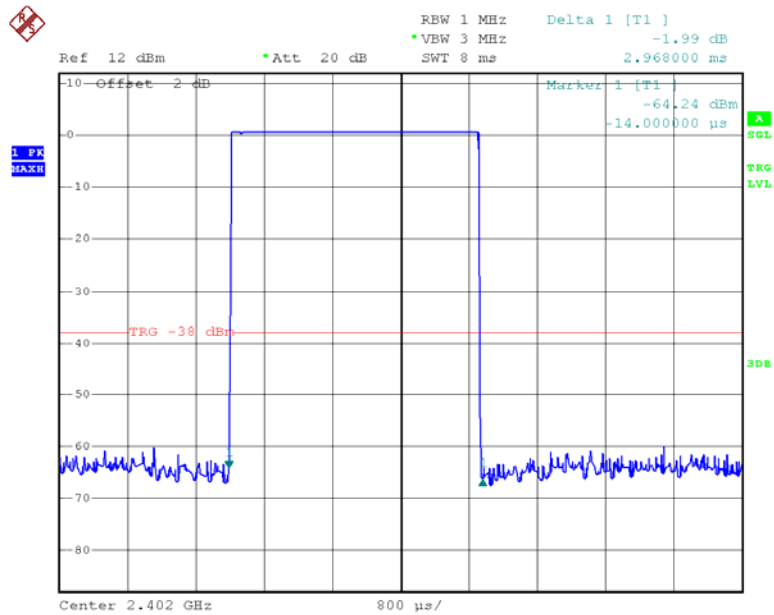


Date: 26.APR.2013 11:50:16

DH5: Middle Channel

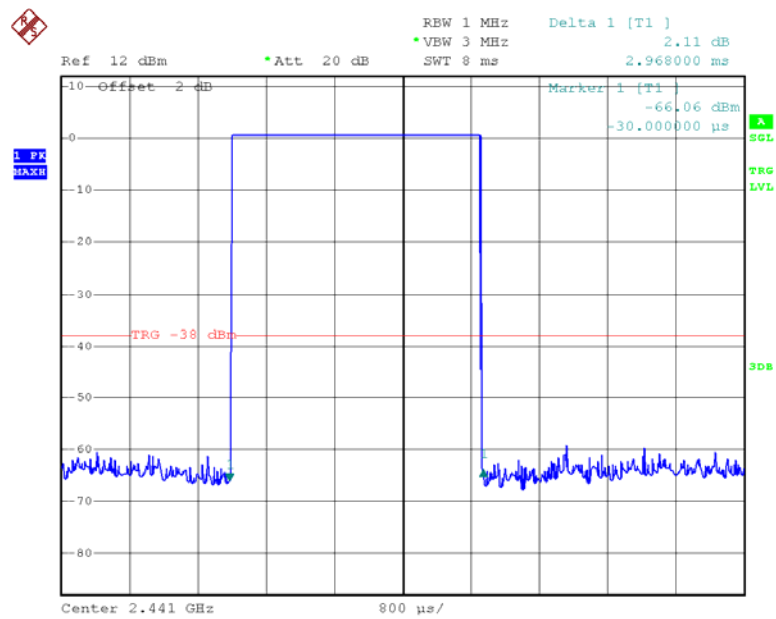

Date: 26.APR.2013 11:50:35

DH5: High Channel

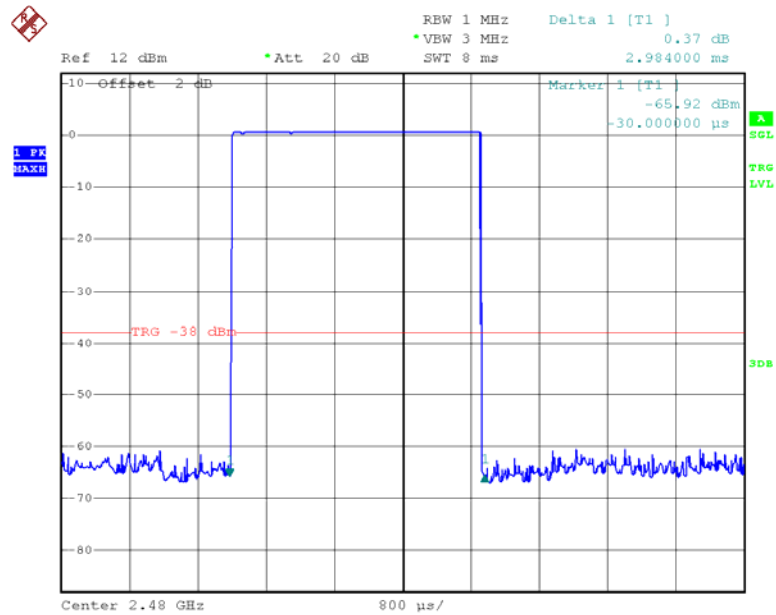


Date: 26.APR.2013 11:55:22

EDR Mode ($\pi/4$ -DQPSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH 1	Low	0.440	0.141	0.4	Pass
	Middle	0.445	0.142	0.4	Pass
	High	0.440	0.141	0.4	Pass
	Note: Dwell time=Pulse time (ms) \times (1600/2/79) \times 31.6 s				
DH 3	Low	1.725	0.276	0.4	Pass
	Middle	1.725	0.276	0.4	Pass
	High	1.720	0.275	0.4	Pass
	Note: Dwell time=Pulse time (ms) \times (1600/4/79) \times 31.6 s				
DH 5	Low	2.968	0.317	0.4	Pass
	Middle	2.968	0.317	0.4	Pass
	High	2.968	0.317	0.4	Pass
	Note: Dwell time=Pulse time (ms) \times (1600/6/79) \times 31.6 s				

DH1: Low Channel

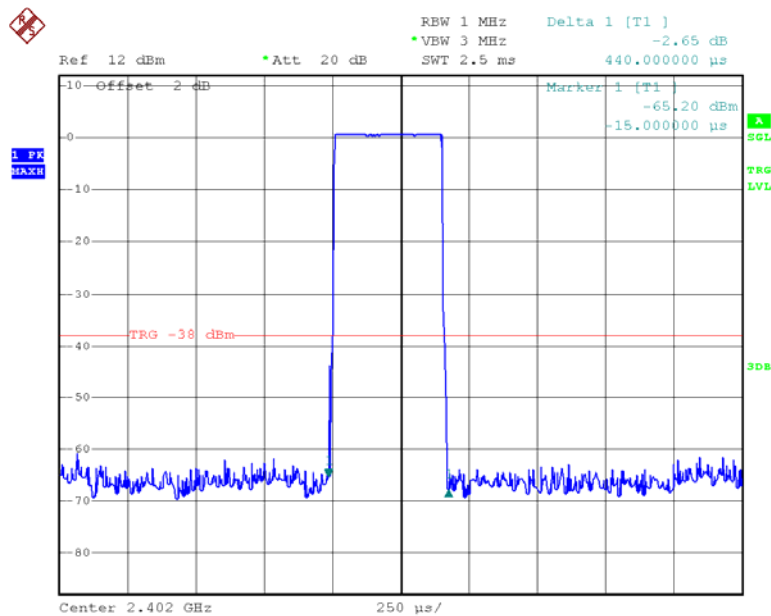


Date: 26.APR.2013 11:39:01

DH1: Middle Channel

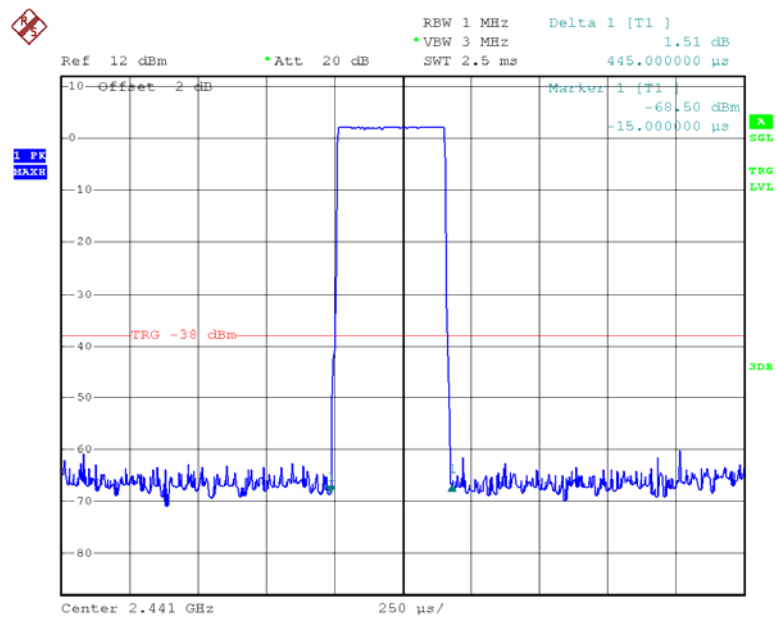


Date: 26.APR.2013 11:40:14

DH1: High Channel

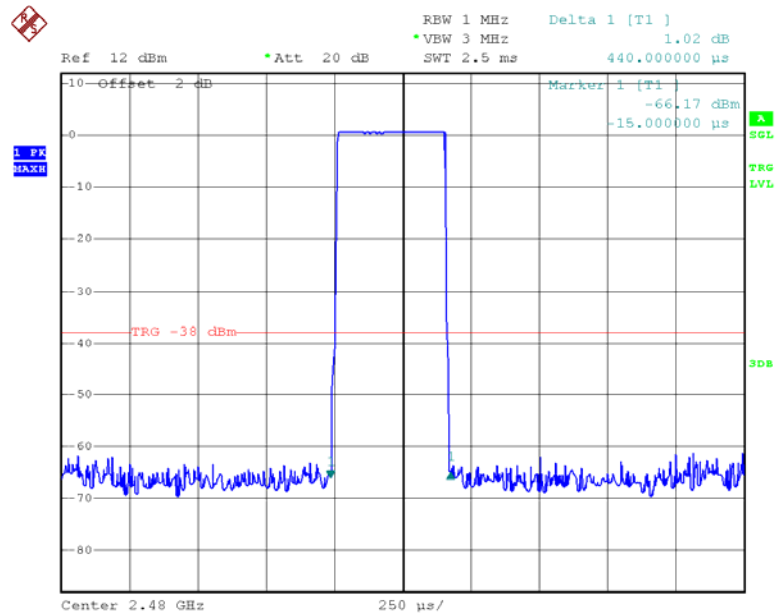


Date: 26.APR.2013 11:41:27

DH3: Low Channel

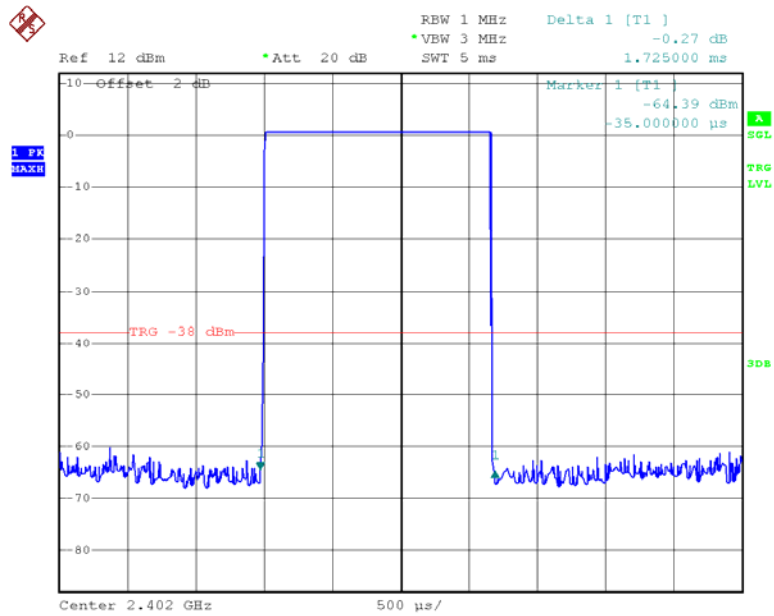


Date: 26.APR.2013 11:45:29

DH3: Middle Channel

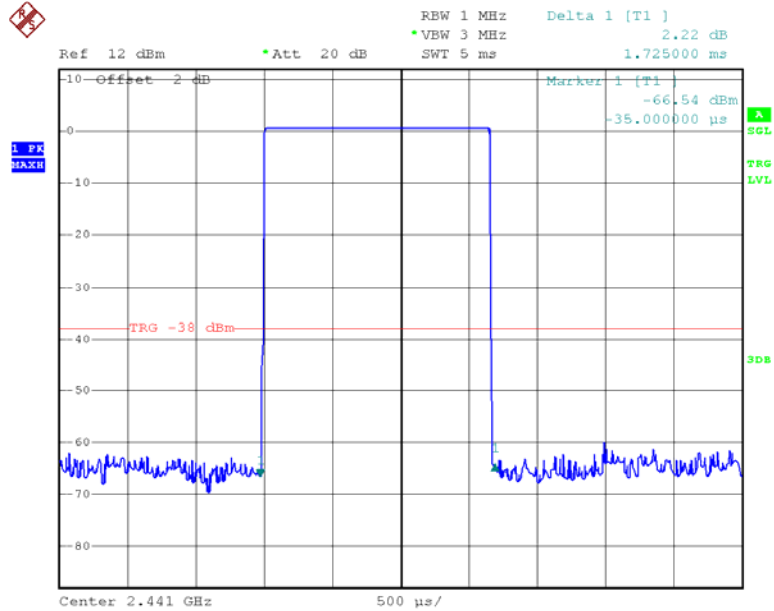


Date: 26.APR.2013 11:46:00

DH3: High Channel

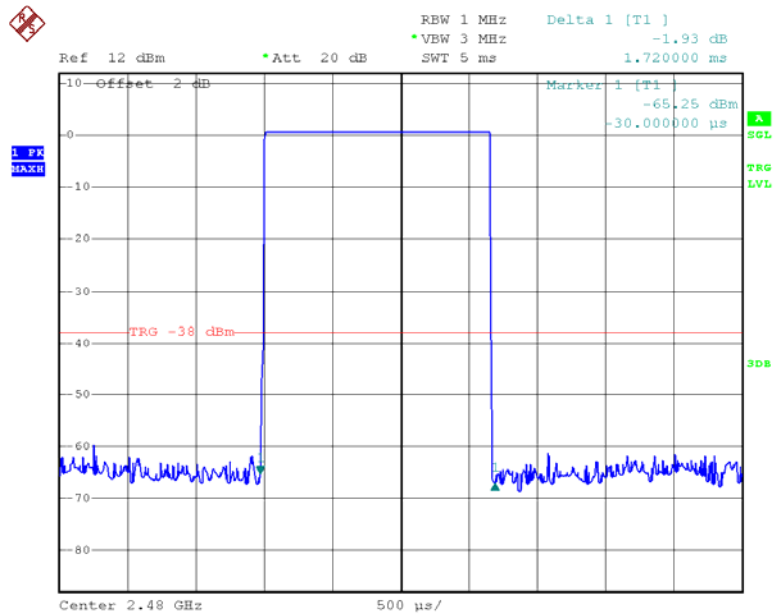


Date: 26.APR.2013 11:46:55

DH5: Low Channel

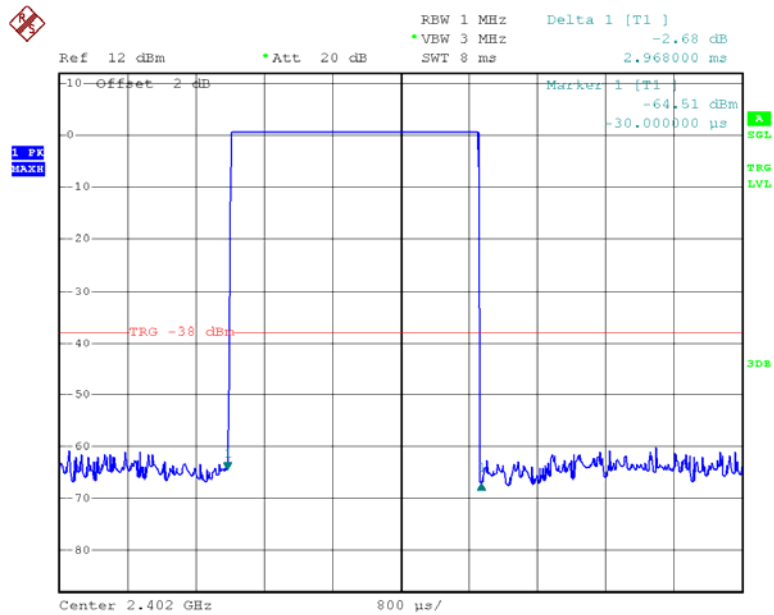


Date: 26.APR.2013 11:50:23

DH5: Middle Channel

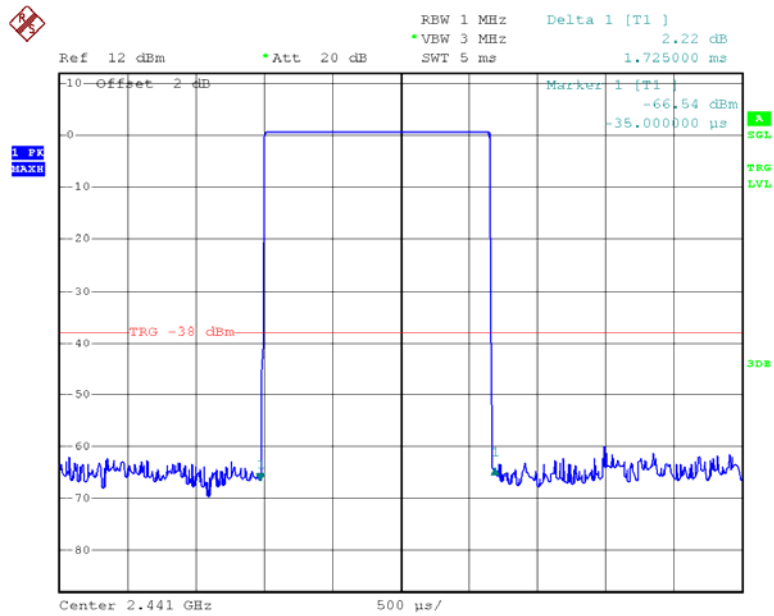

Date: 26.APR.2013 11:46:00

DH5: High Channel

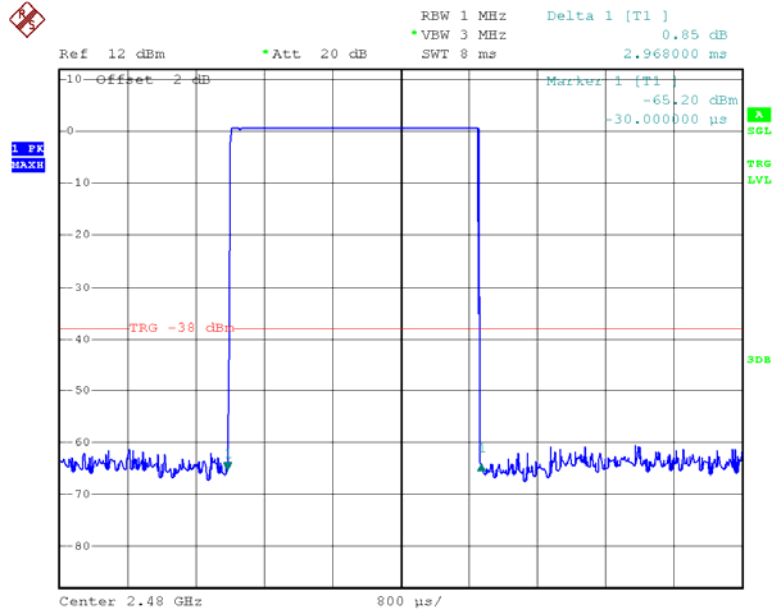


Date: 26.APR.2013 11:55:35

EDR Mode (8-DPSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH 1	Low	0.445	0.142	0.4	Pass
	Middle	0.445	0.142	0.4	Pass
	High	0.445	0.142	0.4	Pass
	Note: Dwell time=Pulse time (ms) \times (1600/2/79) \times 31.6 s				
DH 3	Low	1.715	0.274	0.4	Pass
	Middle	1.710	0.274	0.4	Pass
	High	1.720	0.275	0.4	Pass
	Note: Dwell time=Pulse time (ms) \times (1600/4/79) \times 31.6 s				
DH 5	Low	2.968	0.317	0.4	Pass
	Middle	2.968	0.317	0.4	Pass
	High	2.984	0.318	0.4	Pass
	Note: Dwell time=Pulse time (ms) \times (1600/6/79) \times 31.6 s				

DH1: Low Channel

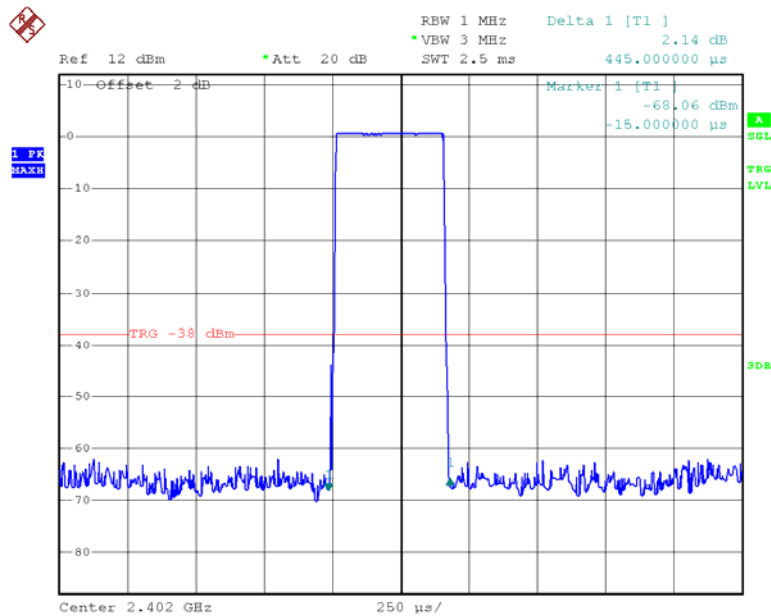


Date: 26.APR.2013 11:39:09

DH1: Middle Channel

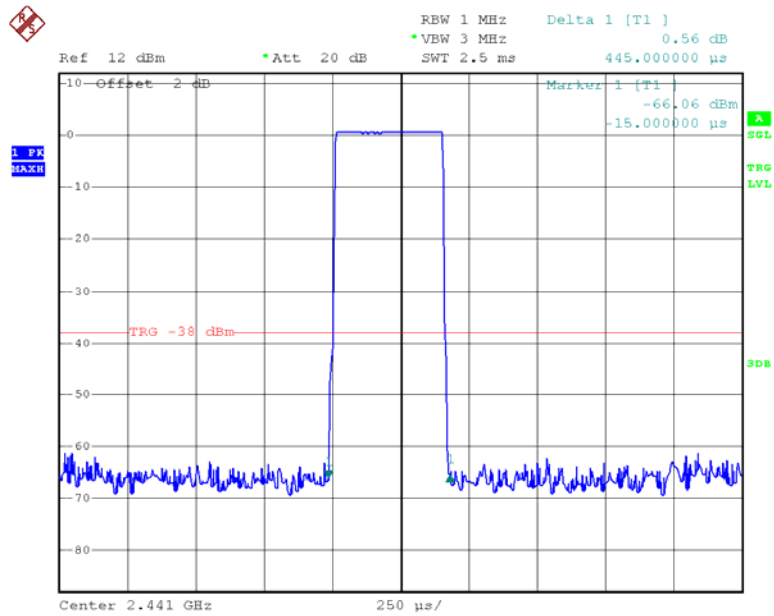


Date: 26.APR.2013 11:41:14

DH1: High Channel

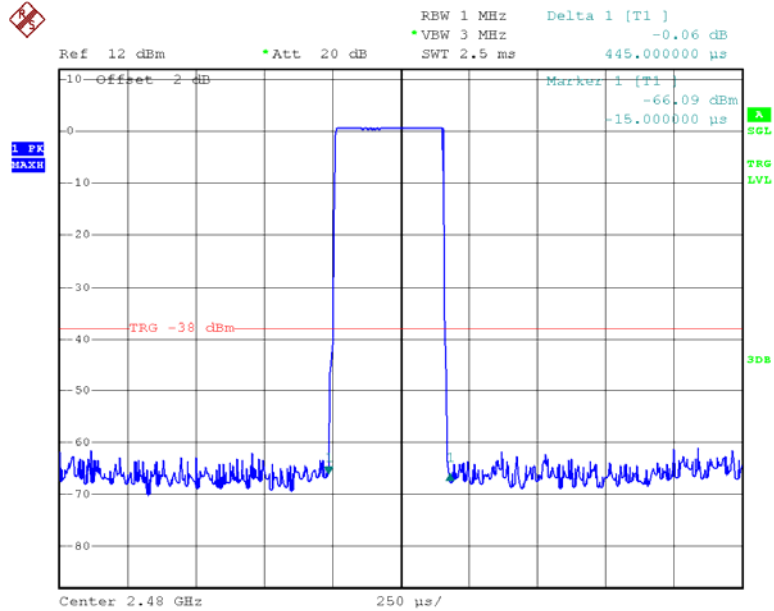


Date: 26.APR.2013 11:41:36

DH3: Low Channel

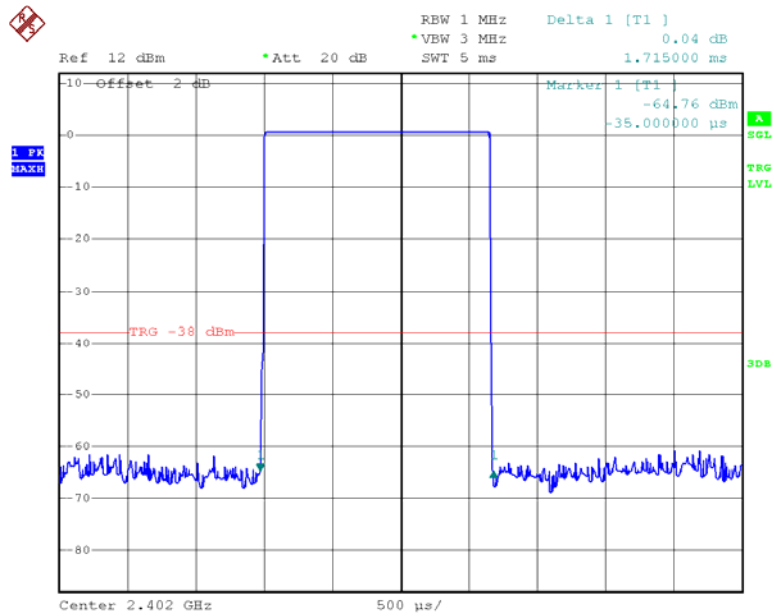


Date: 26.APR.2013 11:45:36

DH3: Middle Channel

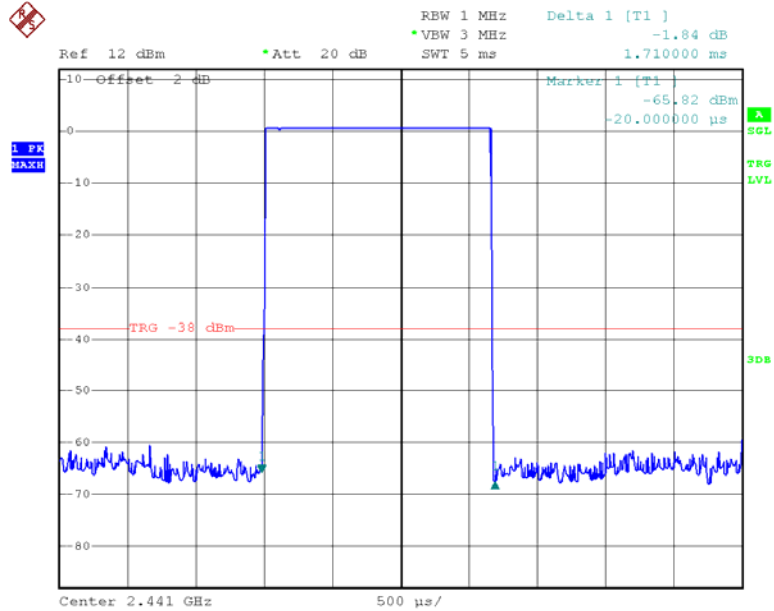


Date: 26.APR.2013 11:46:29

DH3: High Channel

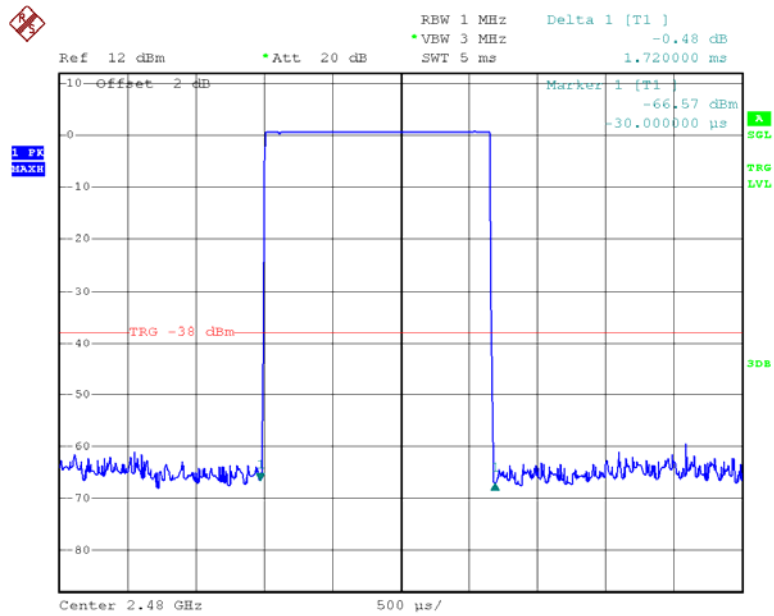


Date: 26.APR.2013 11:47:03

DH5: Low Channel

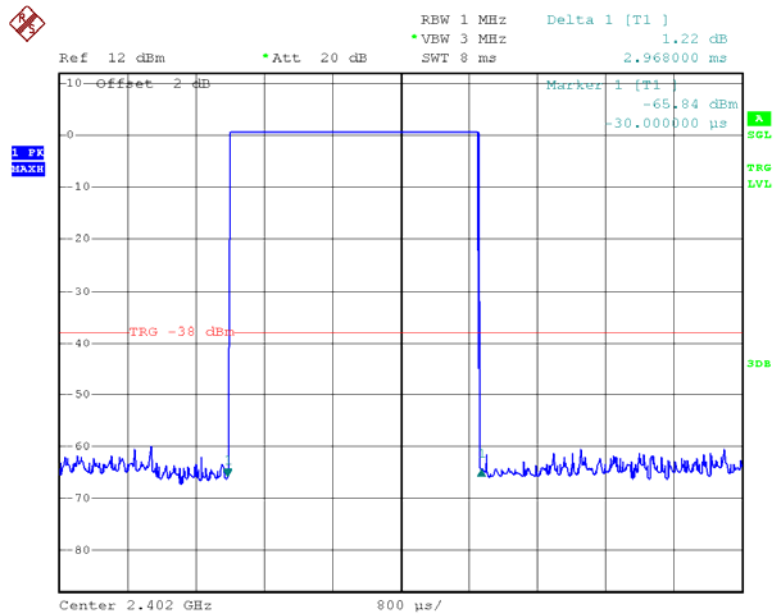


Date: 26.APR.2013 11:50:29

DH5: Middle Channel

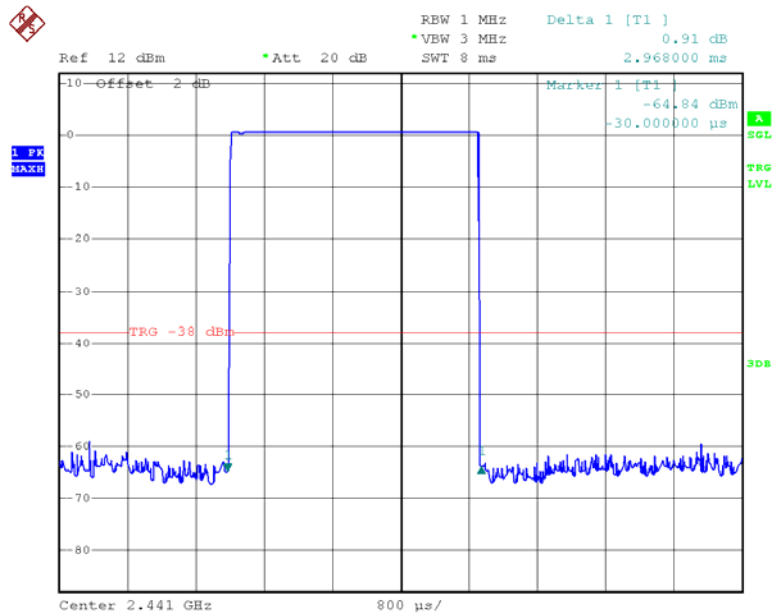

Date: 26.APR.2013 11:53:53

DH5: High Channel

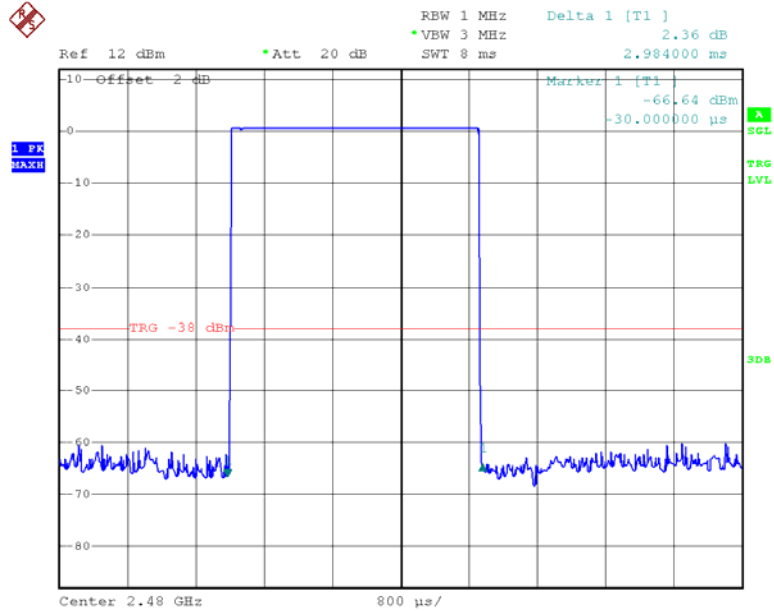

Date: 26.APR.2013 11:55:42

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26.1 °C
Relative Humidity:	29 %
ATM Pressure:	100.8 kPa

The testing was performed by Allen Qiao on 2013-04-26


Test Result: Compliance.

Test Mode: Transmitting

Model	Channel	Frequency (MHz)	Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	Low	2402	4.50	30
	Middle	2441	5.52	30
	High	2480	5.78	30
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.91	30
	Middle	2441	3.29	30
	High	2480	3.63	30
EDR Mode (8-DPSK)	Low	2402	2.52	30
	Middle	2441	3.73	30
	High	2480	4.03	30


Note: The data above was tested in conducted mode.

BDR Mode (GFSK):

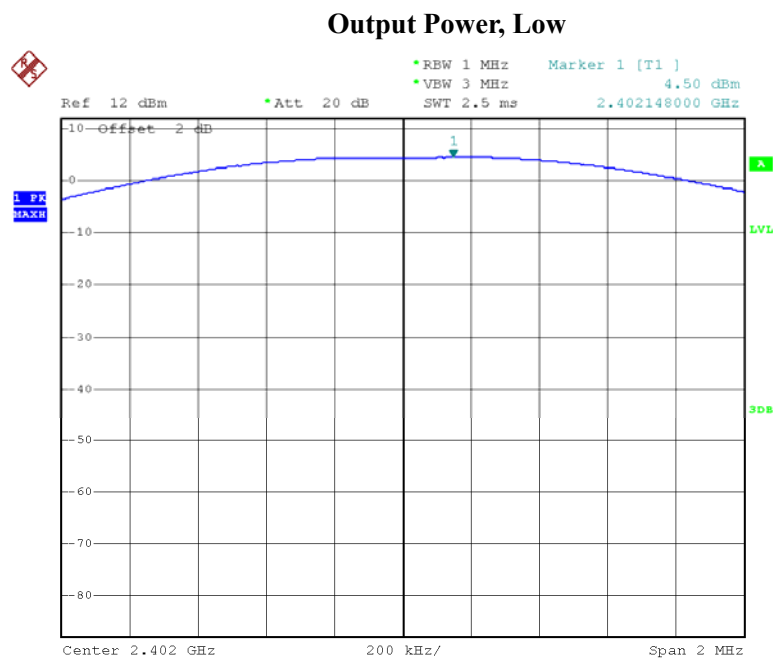


Date: 26.APR.2013 10:21:02

Output Power, Middle

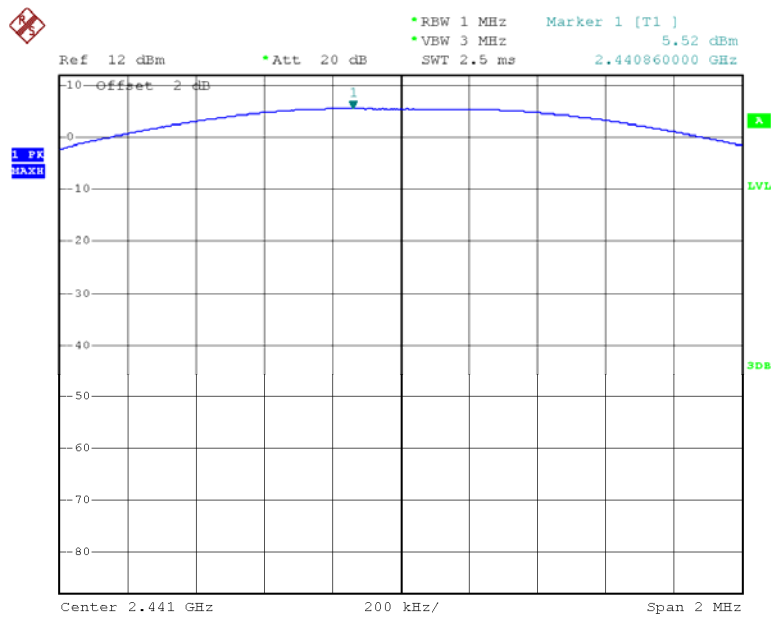

Date: 26.APR.2013 10:21:40


Output Power, High

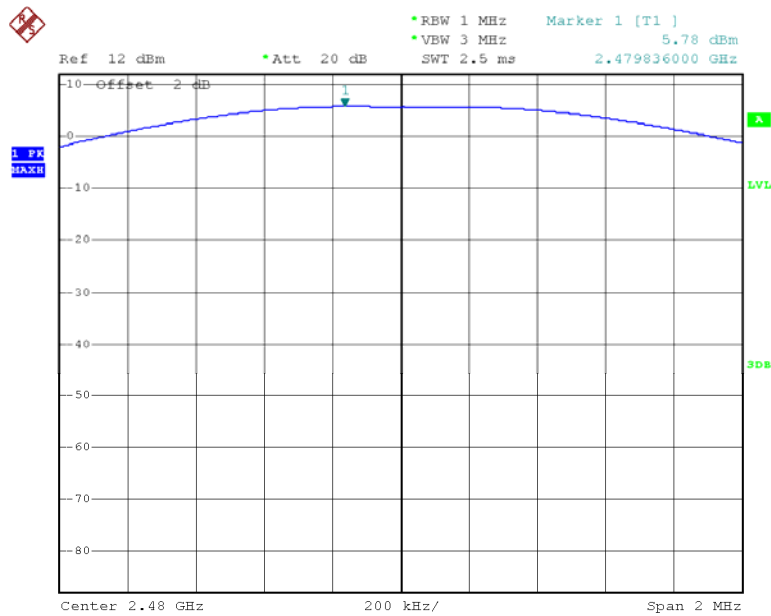

Date: 26.APR.2013 10:21:48


EDR Mode ($\pi/4$ -DQPSK):

Output Power, Low

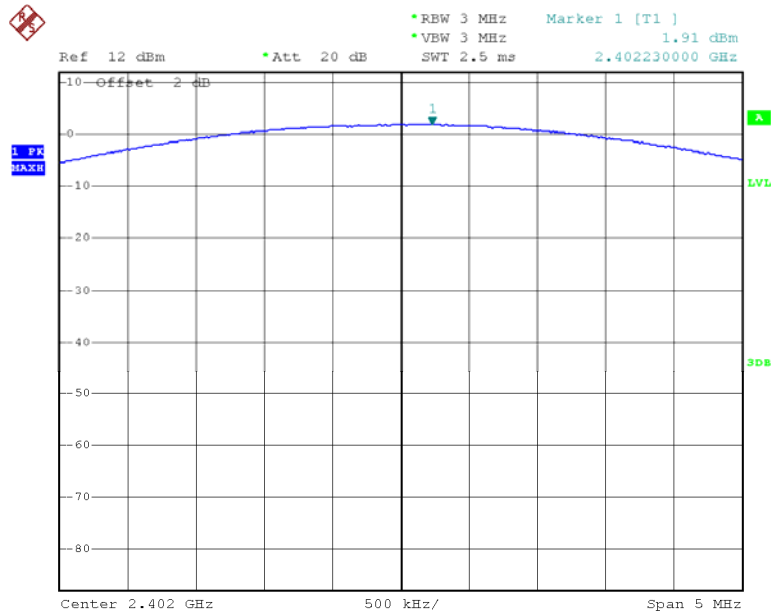


Date: 26.APR.2013 10:55:03

Output Power, Middle

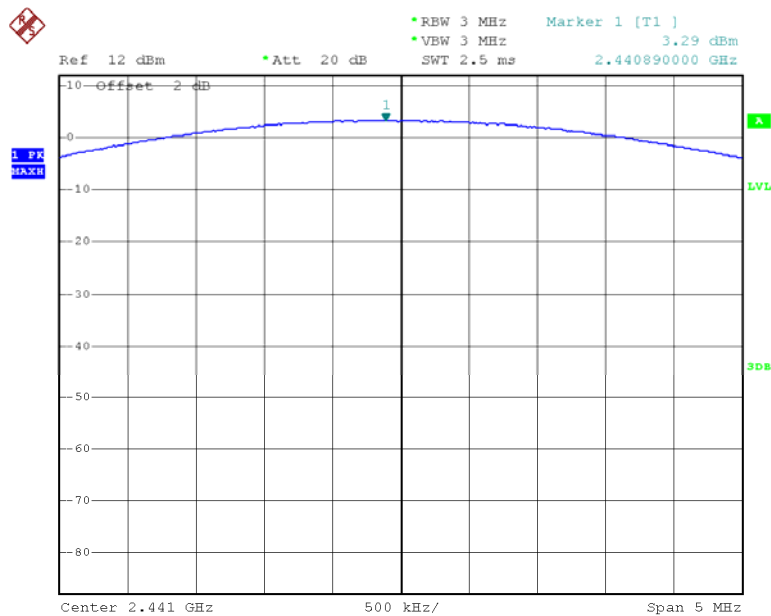

Date: 26.APR.2013 10:54:53


Output Power, High

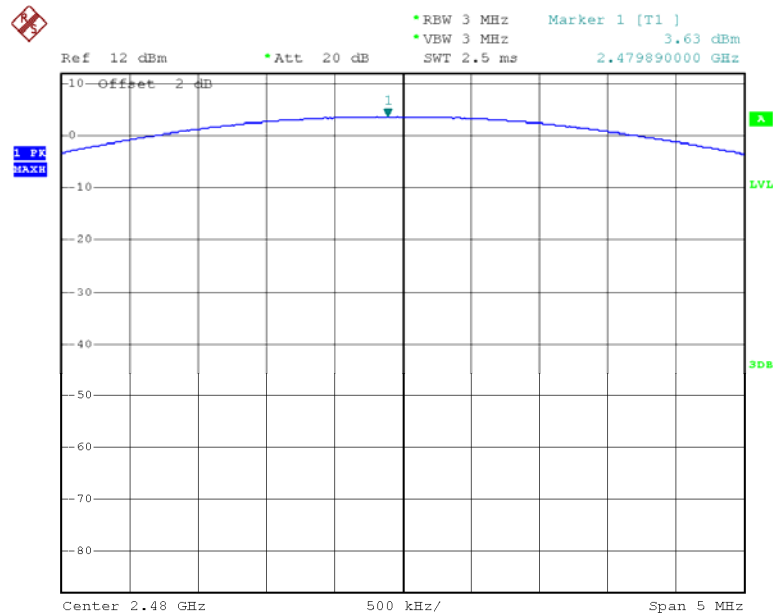

Date: 26.APR.2013 10:54:43


EDR Mode (8-DPSK):

Output Power, Low

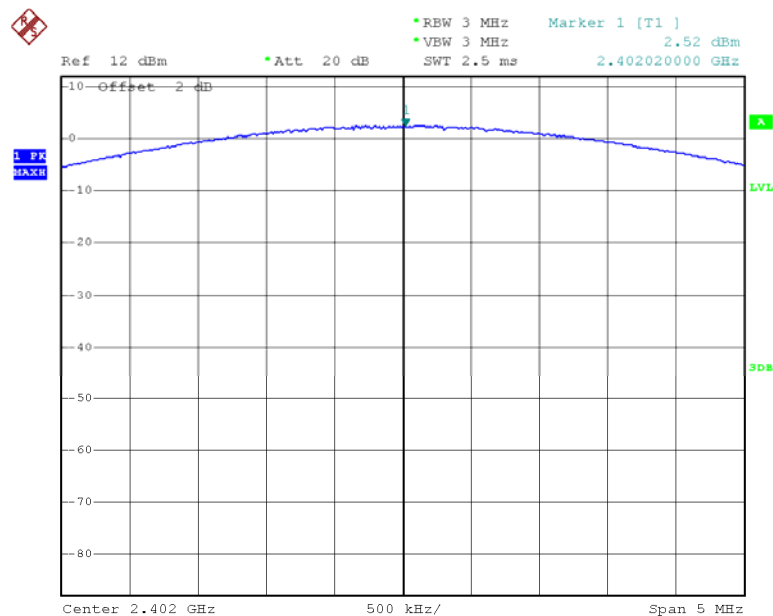


Date: 26.APR.2013 11:03:52

Output Power, Middle

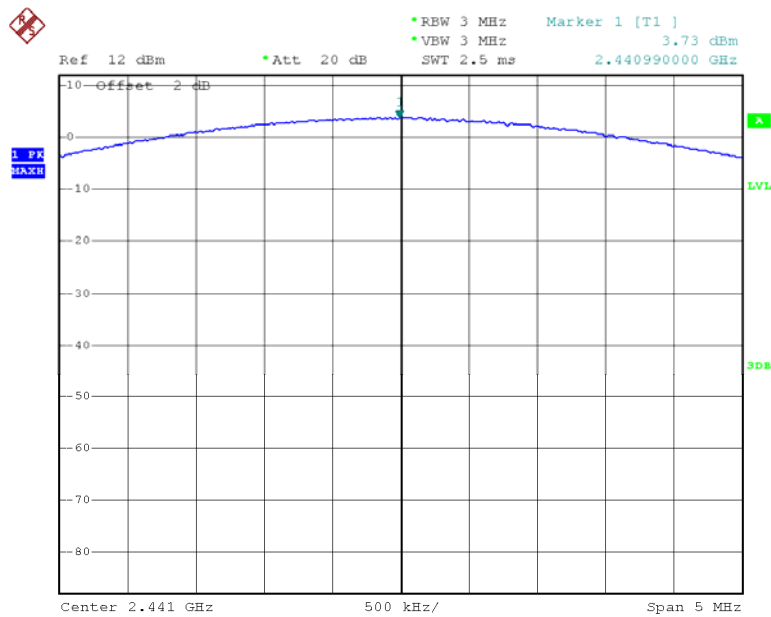

Date: 26.APR.2013 11:04:03

Output Power, High

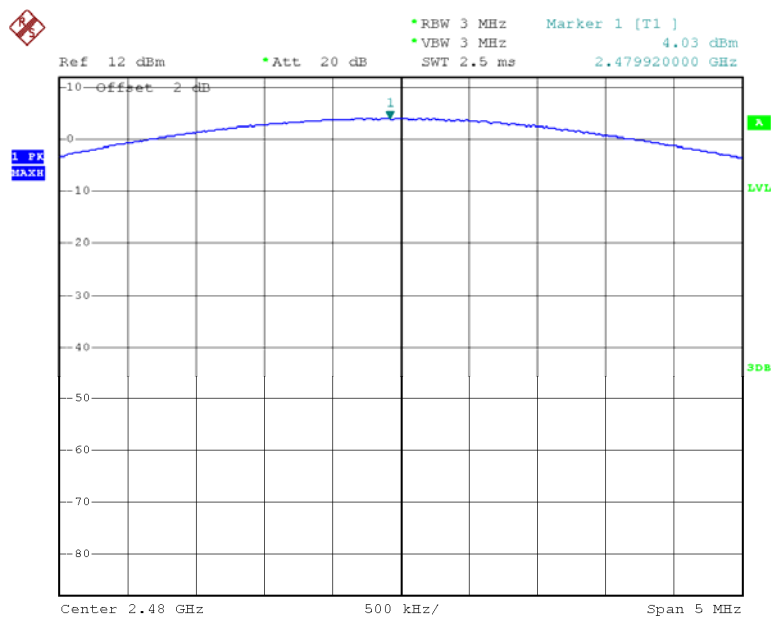

Date: 26.APR.2013 11:04:21

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	24.7°C
Relative Humidity:	60 %
ATM Pressure:	101 kPa


The testing was performed by Allen Qiao on 2013-04-10.

Test Result: Compliance


BDR Mode (GFSK):

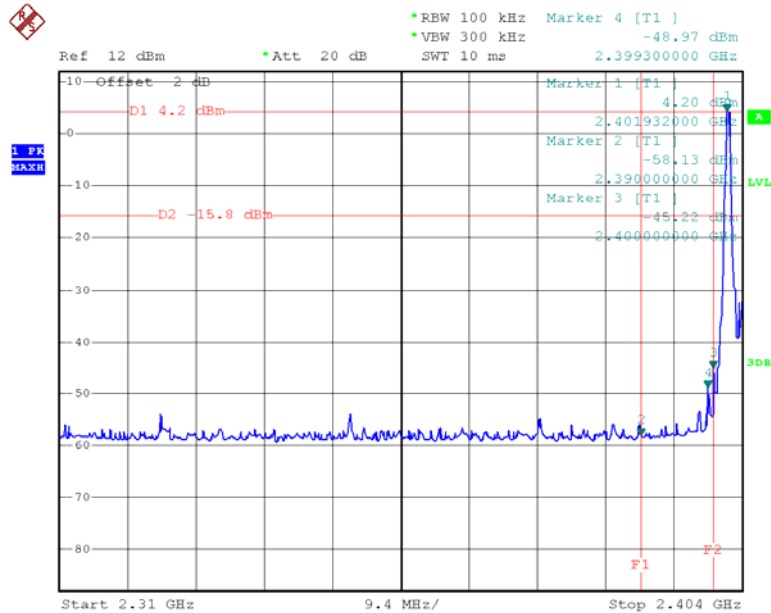Band Edge, Left Side


Date: 26.APR.2013 10:36:14

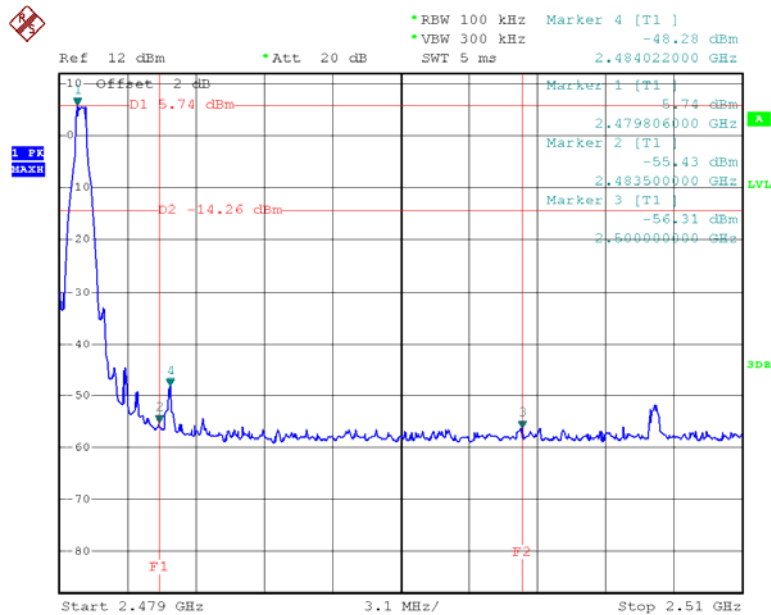Band Edge, Right Side

Date: 26.APR.2013 10:27:48

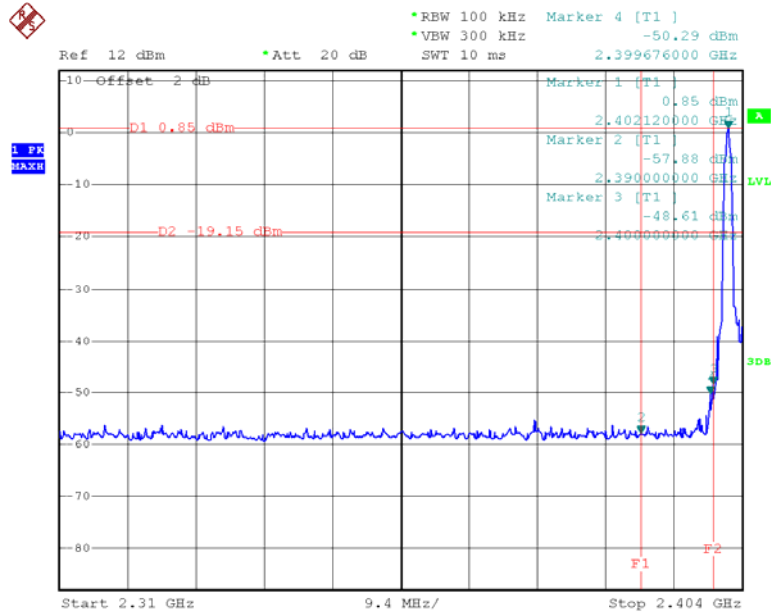
EDR Mode ($\pi/4$ -DQPSK):**Band Edge, Left Side**

Date: 26.APR.2013 10:50:34

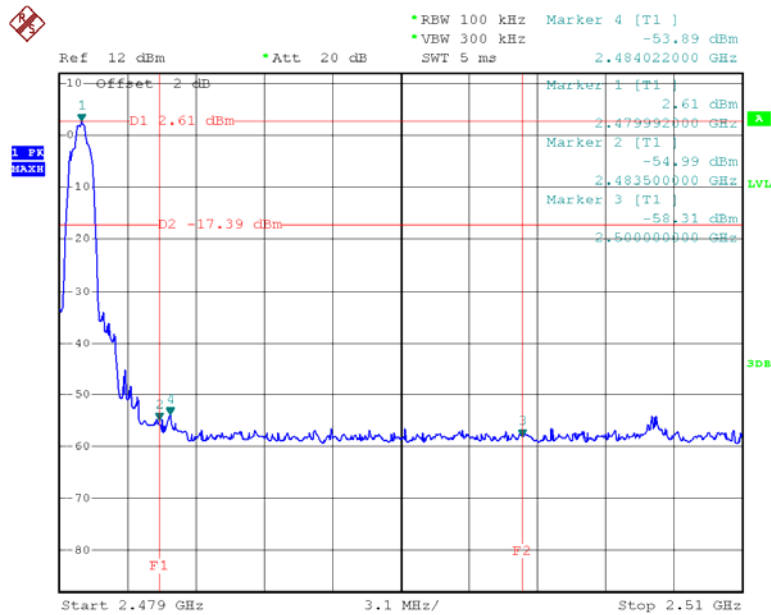
Band Edge, Right Side

Date: 26.APR.2013 10:54:08

EDR Mode (8-DPSK):

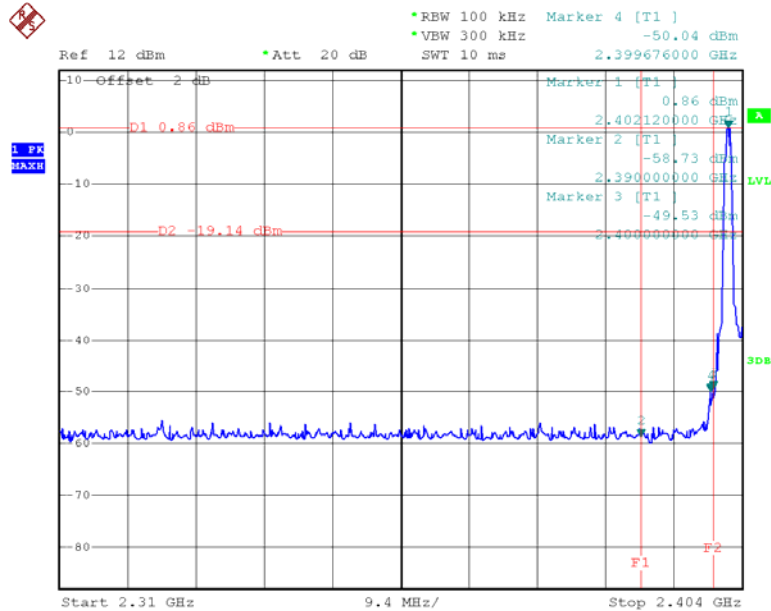Band Edge, Left Side

Date: 26.APR.2013 11:09:21

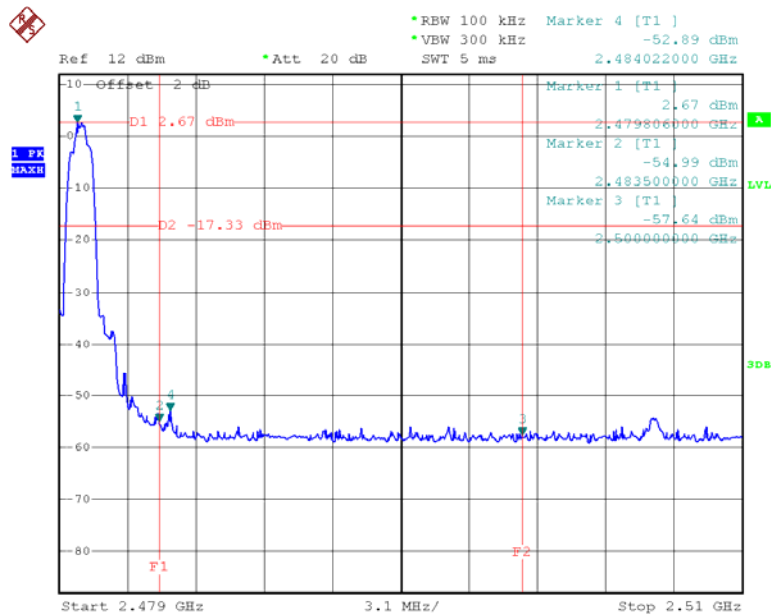Band Edge, Right Side

Date: 26.APR.2013 11:05:31

DECLARATION LETTER

Acomdata Technology, INC.

Add: 12F-1, No.99, Sec. 1, Nankan Rd., Luzhu Township, Taoyuan County 338,
Taiwan (R.O.C.)

Tel: 886 3 2126157 Fax: 886 3 2124480

DECLARATION OF SIMILARITY

April 27, 2013

To:

Bay Area Compliance Laboratories Corp. (Dongguan)

No.69 Pulong Village Puxinhu Industry Zone Tangxia, Dongguan, China

Tel: +86 769 86858888 ext. 8115 Fax: +86 769 86858891

<http://www.baclicorp.com>

Dear Sir or Madam:

We, Acomdata Technology, INC., hereby declare that our product: SoundPop Bluetooth speaker, models: SP2E, SP2N, SP2P, SP6P, SP7P and SP9E are electrically identical with the same electromagnetic emissions and electromagnetic compatibility characteristics as SP0E tested by BACL, the results of which are featured in BACL project: R2DG130424003, R2DG130424004, R2DG130424004-03.

A description of the differences between the tested model and those that are declared similar areas follows:

Models: SP0E, SP2E, SP2N, SP2P, SP6P, SP7P, SP9E. The only difference is the color.

Please contact me should there be need for any additional clarification or information.

Best Regards,

Signature: *Tina Xie*

Tina Xie/Manager

***** END OF REPORT *****