
Safety Label Note:

1. Printing color: Black

2. **Vendor ID:** (Requested by CSA)

Decide by Vendor

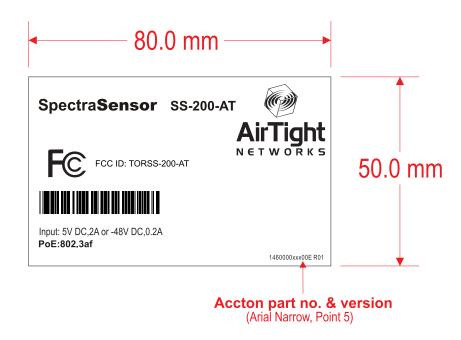

Modification	Card Paper / Top lineboard Corrugate list	Die Cut Tolerance + / - 0.5 mm	PE Bag White Pink	Label list (Total Thickness = 0.092 mm±10%)	Others	Acatac
1	GSM Paper CCNB SBS Double Flute Top Single wall/ Double wall GSM g/m (Top lineboard/ (Top lineboard/ Medium/Bottom lineboard)	DIM. GRADE 0 1 2 3 4 5 0 — 14 0.05 0.1 0.15 0.2 0.2 0.5	No Static Anti-Static Electronic	Material & Thickness Adhesive	Material Spec:	Accton technology corp.
2	250 P F Yellow 230 X 100 X 230	16 — 63 0.05 0.15 0.2 0.3 0.3 0.9	Bubble Single layer Double layer Thickness/mm 0.04 0.06 0.08	Art paper		Part No. 146000039400E REV. 04
3	280 White 220 X 100 X 200 300 Yellow 230 X 180 X 230		ESD Value/ $\frac{\Omega}{\text{ohm}}$ 9.11 < 5	✓ Matelized 0.050mm / 50# / 2mil ✓ Acrylic UL approved T=0.022mm White Polyester 0.076mm / 75# / 3mil "R" Adhesive T=0.022mm		
5	300 Yellow 230 X 180 X 230 310 Yellow 230 X 100 X 230	500 — 1000 0.3 0.5 0.8 1.2 90 Printing Tolerance +/- mm	EPE Foam White Pink	(PP)Pepa paper 0.178mm / 7mil Water Adhesive T=0.022mm		Description: UL label WA6102X-FW
6	340 AB 230X100X100X100X230		Expanded Rate/times 28 30 Other	PC 8B35 0.254mm / 10mil 3M 467 T=0.05mm / 2mil	Approve Enoch 07.28.05	OL label VVA0102A-FVV
7	Scatted June December 1 Bursting Strength (Kgf/cm²)	(CL) Cutting Line Flute Manufactory Glue	Pulp Tray (50% kraft + 50% newspaper)	PC 8010 0.381mm / 15mil 3M 468 T=0.127mm / 5mil	Check	UNIT SCALE 1 / 1 SIZE A3
8	Coated UV Mar Resistant Varnish PP Film LF(T=0.15mm) DF(T=0.18mm) 8 14 16 18 Office Off	(S1) Slit-Score Line (PCL) Partial Cutting Line	Thickness/mm 1.5 2.0 Other Weight / q = + / - 5%	Other	Design Melody 07.28.05	MM (N) Outside View Sheet 1 of 1

