

## **Radio Test Report**

## FCC ID: TQYBMBM81SPK01M

This report concerns (check one) : ⊠ Original Grant ☐ Class II Change

**Issued Date** : Jan. 28, 2013 **Project No.** : 1209136

**Equipment**: Bluetooth Module **Model Name**: BM81SPK01

**Applicant**: JAZZ HIPSTER CORPORATION **Address**: 2FD, NO.512, YUAN-SAN RD.,

CHUNG-HO DISTRICT, NEW TAIPEI

CITY, TAIWAN.

**Tested by:** Neutron Engineering Inc. EMC Laboratory

Date of Receipt: Sep. 26, 2012

Date of Test: Sep. 26, 2012 ~ Jan. 10, 2013

Testing Engineer:

(Rush Kao)

Technical Manager:

(Jeff Yang)

**Authorized Signatory** 

**Neutron Engineering Inc.** 

B1, No. 37, Lane 365, YangGuang St., NeiHu District 114, Taipei, Taiwan.

TEL: +886-2-2657-3299 FAX: +886-2-2657-3331





Report No.: NEI-FCCP-1-1209136 Page 1 of 101



### **Declaration**

**Neutron** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.** 

**Neutron**'s reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

**Neutron**'s reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

**Neutron**'s laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

#### Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Report No.: NEI-FCCP-1-1209136 Page 2 of 101

## **Table of Contents**

REPOR	RT ISSUED HISTORY	6
1	CERTIFICATION	7
2.	SUMMARY OF TEST RESULTS	8
2.1	TEST FACILITY	9
2.2	MEASUREMENT UNCERTAINTY	9
3	GENERAL INFORMATION	10
3.1	GENERAL DESCRIPTION OF EUT	10
3.2	DESCRIPTION OF TEST MODES	12
3.3	TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	13
3.4	BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
3.5	DESCRIPTION OF SUPPORT UNITS	15
4	ANTENNA CONDUCTED SPURIOUS EMISSION	16
4.1	LIMIT	16
4.2	MEASUREMENT INSTRUMENTS LIST	16
4.3	TEST PROCEDURES	16
4.4	TEST SETUP LAYOUT	16
4.5	DEVIATION FROM TEST STANDARD	16
4.6	EUT OPERATING CONDITIONS	16
4.7	TEST RESULTS	17
5	HOPPING CHANNEL SEPARATION	25
5.1	LIMIT	25
5.2	MEASUREMENT INSTRUMENTS LIST	25
5.3	MEASURING INSTRUMENTS SETTING	25
5.4	TEST PROCEDURES	25
5.5	TEST SETUP LAYOUT	25
5.6	DEVIATION FROM TEST STANDARD	25
5.7	EUT OPERATING CONDITIONS	25
5.8	TEST RESULTS	26
6	MAXIMUM PEAK CONDUCTED OUTPUT POWER	34
6.1	LIMIT	34
6.2	MEASUREMENT INSTRUMENTS LIST	34
6.3	TEST PROCEDURES	34
6.4	TEST SETUP LAYOUT	34
6.5	DEVIATION FROM TEST STANDARD	34
6.6	EUT OPERATING CONDITIONS	34
6.7	TEST RESULTS	35
7	RADIATED SPURIOUS EMISSION (9 KHZ TO 1 GHZ)	39
7.1	LIMIT	39

Report No.: NEI-FCCP-1-1209136 Page 3 of 101

## **Table of Contents**

7.2	MEASUREMENT INSTRUMENTS LIST	40
7.3	MEASURING INSTRUMENTS SETTING	40
7.4	TEST PROCEDURES	41
7.5	DEVIATION FROM TEST STANDARD	41
7.6	TEST SETUP LAYOUT	41
7.7	EUT OPERATING CONDITIONS	42
7.8	TEST RESULTS	43
8	RADIATED SPURIOUS EMISSION (ABOVE 1 GHZ)	45
8.1	LIMIT	45
8.2	MEASUREMENT INSTRUMENTS LIST	46
8.3	MEASURING INSTRUMENTS SETTING	46
8.4	TEST PROCEDURES	47
8.5	DEVIATION FROM TEST STANDARD	47
8.6	TEST SETUP LAYOUT	47
8.7	EUT OPERATING CONDITIONS	48
8.8	TEST RESULTS	49
8.9	TEST RESULTS (RESTRICTED BANDS)	73
9	NUMBER OF HOPPING FREQUENCY	81
9.1	LIMIT	81
9.2	MEASUREMENT INSTRUMENTS LIST	81
9.3	MEASURING INSTRUMENTS SETTING	81
9.4	TEST PROCEDURES	81
9.5	TEST SETUP LAYOUT	81
9.6	DEVIATION FROM TEST STANDARD	81
9.7	EUT OPERATING CONDITIONS	81
9.8	TEST RESULTS	82
10	AVERAGE TIME OF OCCUPANCY	84
10.1	LIMIT	84
10.2	MEASUREMENT INSTRUMENTS LIST	84
10.3	TEST PROCEDURES	84
10.4	TEST SETUP LAYOUT	84
10.5	DEVIATION FROM TEST STANDARD	84
10.6	EUT OPERATING CONDITIONS	85
10.7	TEST RESULTS	86
11	RF EXPOSURE COMPLIANCE	98
11.1	LIMIT	98
11.2	MEASUREMENT INSTRUMENTS LIST	98
11.3	MPE CALCULATION METHOD	98

Report No.: NEI-FCCP-1-1209136 Page 4 of 101



## **Table of Contents**

11.4	TEST SETUP LAYOUT	99
11.5	DEVIATION FROM TEST STANDARD	99
11.6	EUT OPERATING CONDITIONS	99
11.7	TEST RESULTS	99
12	EUT TEST PHOTO	100

Report No.: NEI-FCCP-1-1209136 Page 5 of 101



## REPORT ISSUED HISTORY

Revised Version No.	Description	Issued Date
-	Initial Issue.	Jan. 28, 2013

Report No.: NEI-FCCP-1-1209136 Page 6 of 101

### 1 CERTIFICATION

Equipment: Bluetooth Module

Brand Name: JS

Model Name: BM81SPK01

Applicant: JAZZ HIPSTER CORPORATION Date of Test: Sep. 26, 2012 ~ Jan. 10, 2013 Standards: FCC Part 15, Subpart C: 2011

ANSI C63.4: 2009

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-1209136) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Report No.: NEI-FCCP-1-1209136 Page 7 of 101



### 2. SUMMARY OF TEST RESULTS

Standard Clause	Test Item	Result
15.207	Conducted Emission	N/A
15.247 (c)	Antenna conducted Spurious Emission	PASS
15.247 (a)(1)	Hopping Channel Separation	PASS
15.247 (b)	Maximum Peak Conducted Output Power	PASS
15.247 (c)	Radiated Spurious Emission	PASS
15.247 (b)(1)	Number of Hopping Frequency	PASS
15.247 (a)(1)	Average time of occupancy	PASS
15.205	Restricted Bands	PASS
15.203	Antenna Requirement	PASS
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	PASS

NOTE:

1. N/A: denotes test is not applicable in this Test Report

Report No.: NEI-FCCP-1-1209136 Page 8 of 101

#### 2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

### Radiated emission Test (Below 1 GHz):

CB08: (FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)

1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

### Radiated emission Test (Above 1 GHz):

**CB08:** (VCCI RN: G-91; FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)

1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

### 2.2 MEASUREMENT UNCERTAINTY

## The measurement uncertainty is not specified by FCC/Industry Canada rules and for reference only.

The reported uncertainty of measurement  $\mathbf{y} \pm \mathbf{U}$ , where expended uncertainty  $\mathbf{U}$  is based on a standard uncertainty multiplied by a coverage factor of  $\mathbf{k=2}$ , providing a level of confidence of approximately 95%.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

#### Radiated emission test:

adiated efficient teet.														
Test Site	Item	Measurement	Frequency Range	Uncertainty	NOTE									
	CB08 Radiated emission at 3m Vertical Polarization 200 - 10	30 - 200MHz	3.35 dB											
		Radiated emission at 3m Vertice	Horizontal	Horizontal	200 - 1000MHz	3.11 dB								
			Polarization	1 - 18GHz	3.97 dB									
CBOS			emission at	emission at	emission at	emission at	emission at					18 - 40GHz	4.01 dB	
CBUO									30 - 200MHz	3.22 dB				
					Vertical	200 - 1000MHz	3.24 dB							
			Polarization	1 - 18GHz	4.05 dB	·								
			18 - 40GHz	4.04 dB	·									

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our  $U_{lab}$  values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called  $U_{\text{CISPR}}$ , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz : 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz : 5.2 dB

It can be seen that our  $U_{lab}$  values are smaller than  $U_{CISPR}$ .

Report No.: NEI-FCCP-1-1209136 Page 9 of 101



### **3 GENERAL INFORMATION**

### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Bluetooth Module		
Brand Name	JS		
Model Name	BM81SPK01		
OEM Brand/Model Name	N/A		
Model Difference	N/A		
	The EUT is a Bluetooth Mod	dule.	
	Operation Frequency	2402 MHz ~ 2480 MHz	
	Modulation Type	FHSS(GFSK)	
	Bit Rate of Transmitter	1/2/3 Mbps	
	Number Of Channel	Please refer to the Note 2.	
	Antenna Designation	Please refer to the Note 3.	
Product Description	Antenna Gain(Peak)	Please refer to the Note 3.	
	Maximum Peak Conducted 1 Mbps: 1.91 dBm		
	Output Power:	3 Mbps: 0.47 dBm	
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.		
Power Source	DC Voltage supplied from D	C Source	
Power Rating	I/P: DC 3.3V		
Connecting I/O Port(s)	Please refer to the User's Manual		
Products Covered	N/A		
EUT Modification(s)	N/A		

Report No.: NEI-FCCP-1-1209136 Page 10 of 101



### NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

### 2. Channel List:

Channel List	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

### 3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Printed	N/A	-0.50

Report No.: NEI-FCCP-1-1209136 Page 11 of 101



### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Items	Mode	Data Rate	Tested Channel/Mode	
Antenna conducted Spurious	FHSS(GFSK)	1 Mbps	2402 MHz, 2441 MHz, 2480 MHz	
Emission	FH33(GF3K)	3 Mbps	2402 WITZ, 2441 WITZ, 2460 WITZ	
Hopping Channel Separation	FHSS(GFSK)	1 Mbps	2402 MHz, 2441 MHz, 2480 MHz	
Tiopping Charmer Separation	11100(01 01)	3 Mbps	2402 WII IZ, 244 I WII IZ, 2400 WII IZ	
Maximum Peak Conducted	FHSS(GFSK)	1 Mbps	2402 MHz, 2441 MHz, 2480 MHz	
Output Power	FH33(GF3K)	3 Mbps	2402 101712, 2441 101712, 2460 101712	
Radiated Spurious Emission	FH > 1 (F > K )	1 Mbps	2441 MHz	
(30 MHz to 1 GHz)	11100(01011)	-		
Radiated Spurious Emission	FHSS(GFSK)	1 Mbps	2402 MHz, 2441 MHz, 2480 MHz	
(above 1 GHz)	11100(01010)	3 Mbps	2402 1411 12, 2441 1411 12, 2400 1411 12	
Number of Hopping	FHSS(GFSK)	1 Mbps	2402 MHz, 2441 MHz, 2480 MHz	
Frequency	11100(01 010)	3 Mbps	2402 1011 12, 2441 1011 12, 2400 1011 12	
Average time of occupancy	FHSS(GFSK)	1 Mbps	2402 MHz, 2441 MHz, 2480 MHz	
Average time of occupancy	11100(01 01)	3 Mbps	2402 1011 12, 2441 1011 12, 2480 1011 12	
Restricted Bands	EH66(CE6K)	1 Mbps	2402 MHz, 2441 MHz, 2480 MHz	
Restricted Barius	FHSS(GFSK)	3 Mbps	2402 WITZ, 2441 WITZ, 2460 WITZ	
Antenna Requirement	FHSS(GFSK)			
RF Exposure Compliance	FHSS(GFSK)			

NOTE: The measurements are performed at the highest, middle, lowest available channels.

Report No.: NEI-FCCP-1-1209136 Page 12 of 101

### 3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.


Data Rate	1 Mbps			
Test software Version	EDR_RF_test_Customer_080812			
Frequency	2402 MHz	2441 MHz	2480 MHz	
Parameter	3	3	3	

Data Rate	3 Mbps			
Test software Version	EDR_RF_test_Customer_080812			
Frequency	2402 MHz	2441 MHz	2480 MHz	
Parameter	3	3	3	

Report No.: NEI-FCCP-1-1209136 Page 13 of 101



### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

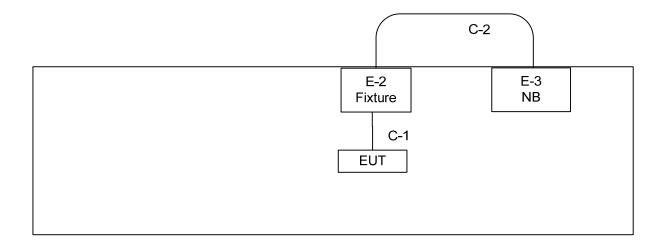

Report No.: NEI-FCCP-1-1209136 Page 14 of 101

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	Bluetooth Module	JS	BM81SPK01	TQYBMBM81SPK01M	N/A	EUT
E-2	Fixture	N/A	N/A	N/A	N/A	
E-3	Notebook PC	DELL	D600	DOC	7T390 A03	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	30cm	Control line
C-2	NO	NO	1.5M	USB

NOTE: The support equipment was authorized by Declaration of Conformity (DOC).

Report No.: NEI-FCCP-1-1209136 Page 15 of 101

### 4 ANTENNA CONDUCTED SPURIOUS EMISSION

### **4.1 LIMIT**

Test Item	Frequency Range (MHz)	Limit
Antenna conducted Spurious Emission	30-25000	20 dB less than the peak value of fundamental frequency

### 4.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: N/A: denotes No Model Name, No Serial No. or No Calibration specified.

### **4.3 TEST PROCEDURES**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

### 4.4 TEST SETUP LAYOUT

EUT	SPECTRUM
	ANALYZER

### 4.5 DEVIATION FROM TEST STANDARD

No deviation

### 4.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

Report No.: NEI-FCCP-1-1209136 Page 16 of 101

### **4.7 TEST RESULTS**

E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 5V		
Test Mode	Bluetooth/1 Mbps		


Channel of Worst Data					
The max. radio frequency power in any 100kHz bandwidth outside the frequency band bandwidth within the frequency band.					
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)		
2400.00	-48.89	2497.50	-58.36		

### Result


In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest lever of the desired power.


Report No.: NEI-FCCP-1-1209136 Page 17 of 101


## Bluetooth/1 Mbps/The max. radio frequency power in any 100kHz bandwidth outside the frequency band

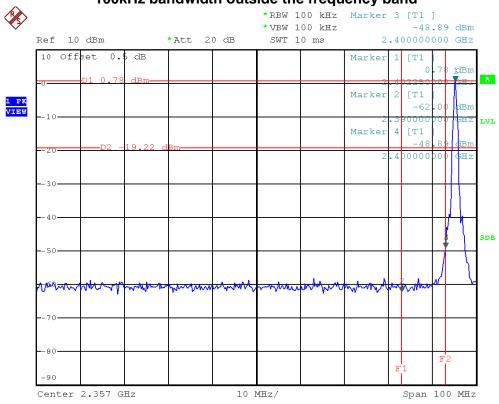


## Bluetooth/1 Mbps/The max. radio frequency power in any 100 kHz bandwidth within the frequency band

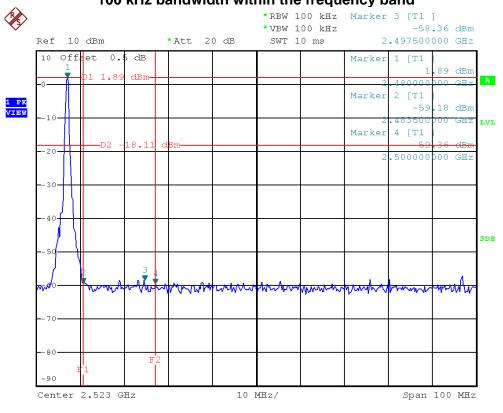




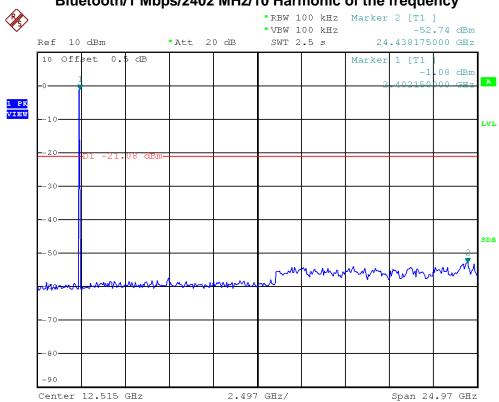

### Bluetooth/1 Mbps/2441 MHz/10 Harmonic of the frequency

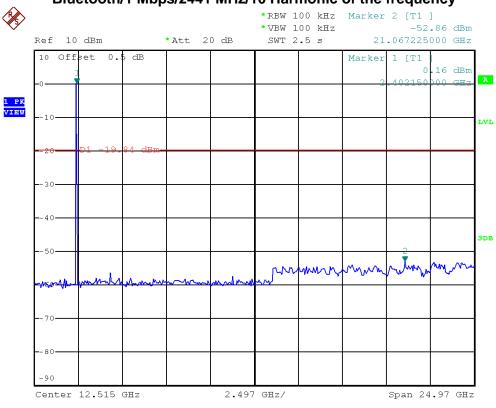

Report No.: NEI-FCCP-1-1209136 Page 19 of 101

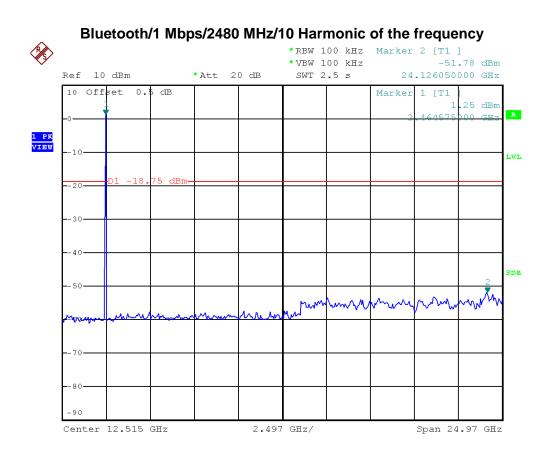

Report No.: NEI-FCCP-1-1209136 Page 20 of 101



E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 5V		
Test Mode	Bluetooth/3 Mbps		


Channel of Worst Data					
The max. radio frequency power in any 100kHz bandwidth outside the frequency band bandwidth within the frequency band.					
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)		
2400.00	-52.30	2496.50	-59.09		

### Result


In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest lever of the desired power.


Report No.: NEI-FCCP-1-1209136 Page 21 of 101


## Bluetooth/3 Mbps/The max. radio frequency power in any 100kHz bandwidth outside the frequency band

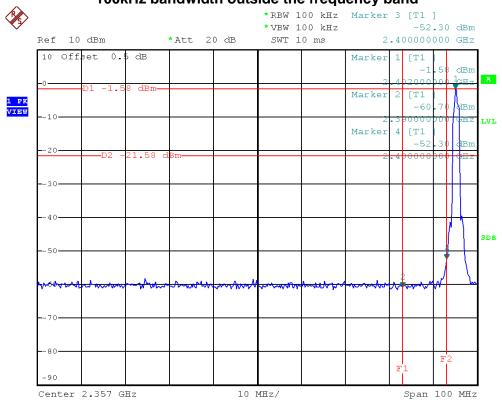


## Bluetooth/3 Mbps/The max. radio frequency power in any 100 kHz bandwidth within the frequency band

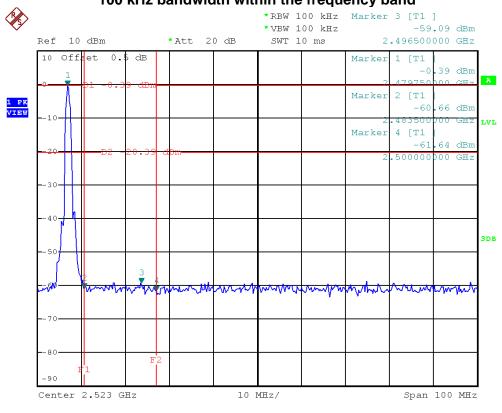




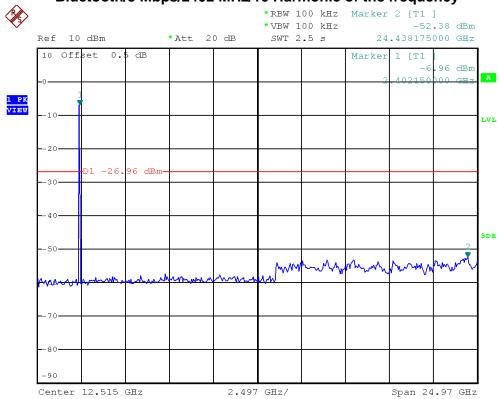

### Bluetooth/3 Mbps/2441 MHz/10 Harmonic of the frequency

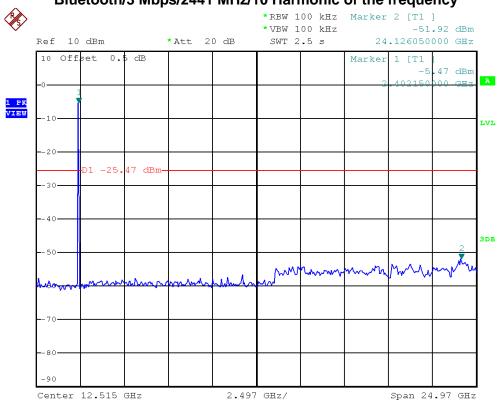

Report No.: NEI-FCCP-1-1209136 Page 23 of 101

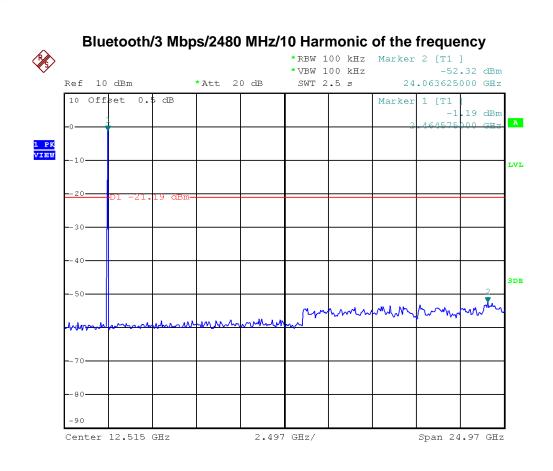

Report No.: NEI-FCCP-1-1209136 Page 24 of 101

### 5 HOPPING CHANNEL SEPARATION

### **5.1 LIMIT**

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

### 5.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: N/A: denotes No Model Name, No Serial No. or No Calibration specified.

#### 5.3 MEASURING INSTRUMENTS SETTING

EMI Test Receiver	Parameter Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 300 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### **5.4 TEST PROCEDURES**

- a. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode
- b. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
- c. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were utilised for channel separation measurement.

### 5.5 TEST SETUP LAYOUT

EUT	SPECTRUM
	ANALYZER

### 5.6 DEVIATION FROM TEST STANDARD

No deviation

### 5.7 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-1209136 Page 25 of 101

### 5.8 TEST RESULTS


E.U.T	Bluetooth Module	Model Name	BM81SPK01	
Temperature	26°C	Relative Humidity	46%	
Test Voltage	DC 5V			
Test Mode	Bluetooth/1 Mbps/2402 MHz, 2441 MHz, 2480 MHz			

Frequency	Channel Separation (MHz)	20 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Two-thirds of the 20 dB Bandwidth	Result
2402 MHz	1.00	0.943	0.885	0.629	PASS
2441 MHz	1.01	0.943	0.875	0.629	PASS
2480 MHz	1.01	0.938	0.870	0.625	PASS


NOTE: Ch. Separation Limits: >25 KHz or >2/3 of 20dB bandwidth

Report No.: NEI-FCCP-1-1209136 Page 26 of 101




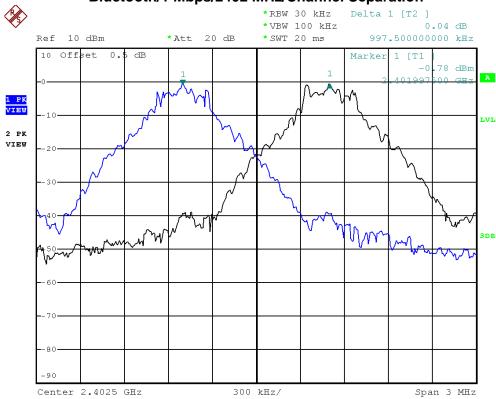


### Bluetooth/1 Mbps/2402 MHz/20dB Bandwidth

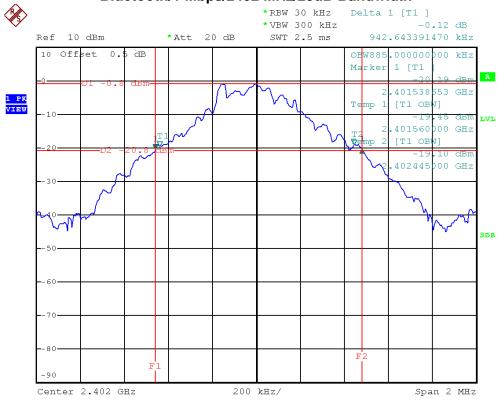




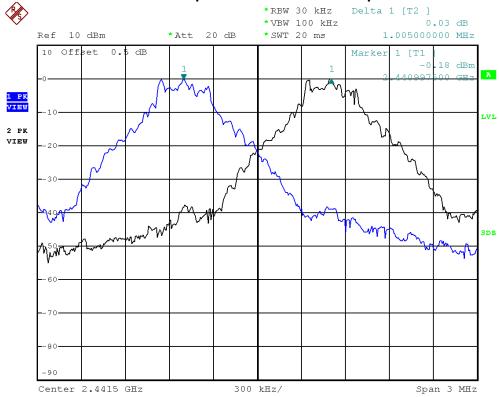


### Bluetooth/1 Mbps/2441 MHz/20dB Bandwidth

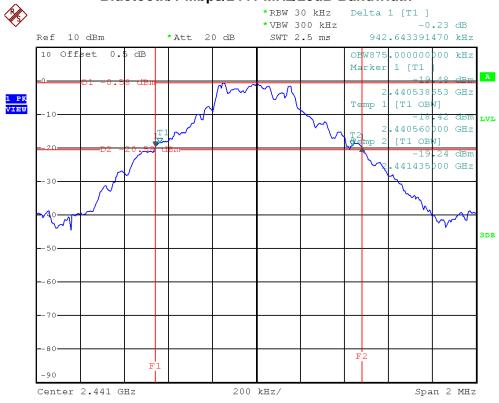



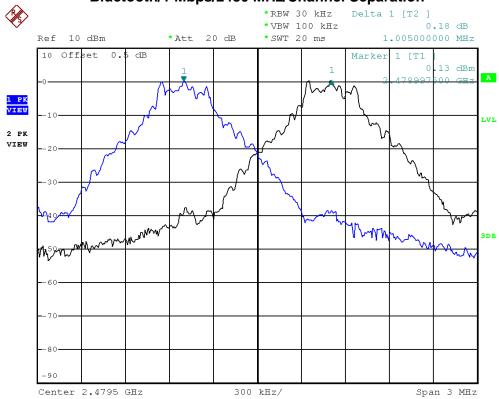

### Bluetooth/1 Mbps/2480 MHz/20dB Bandwidth

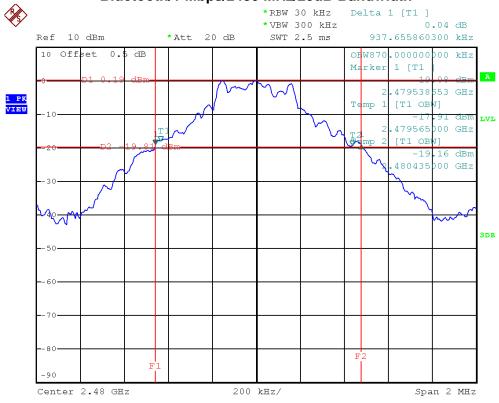




E.U.T	Bluetooth Module	Model Name	BM81SPK01	
Temperature	26°C	Relative Humidity	46%	
Test Voltage	DC 5V			
Test Mode	Bluetooth/3 Mbps/2402 MHz, 2441 MHz, 2480 MHz			

Frequency	Channel Separation (MHz)	20 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Two-thirds of the 20 dB Bandwidth	Result
2402 MHz	1.00	1.277	1.165	0.851	PASS
2441 MHz	1.01	1.252	1.155	0.835	PASS
2480 MHz	1.00	1.257	1.160	0.838	PASS


NOTE: Ch. Separation Limits: >25 KHz or >2/3 of 20dB bandwidth

Report No.: NEI-FCCP-1-1209136 Page 30 of 101



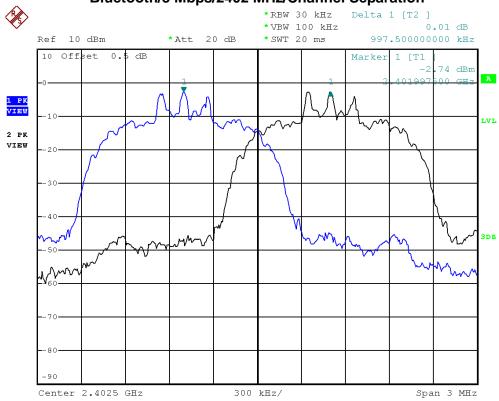


### Bluetooth/3 Mbps/2402 MHz/20dB Bandwidth

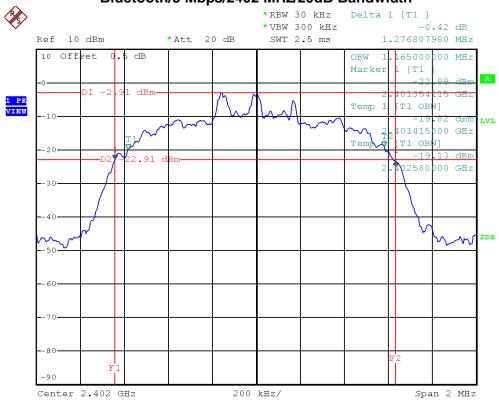


Report No.: NEI-FCCP-1-1209136 Page 31 of 101




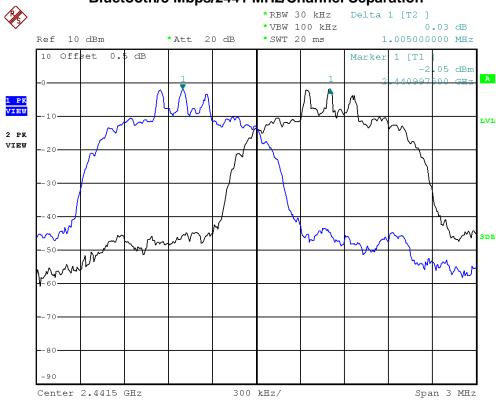


### Bluetooth/3 Mbps/2441 MHz/20dB Bandwidth

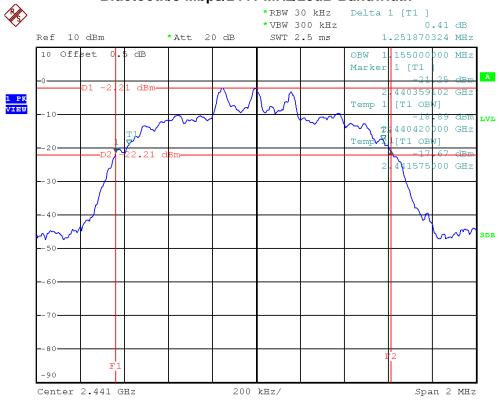



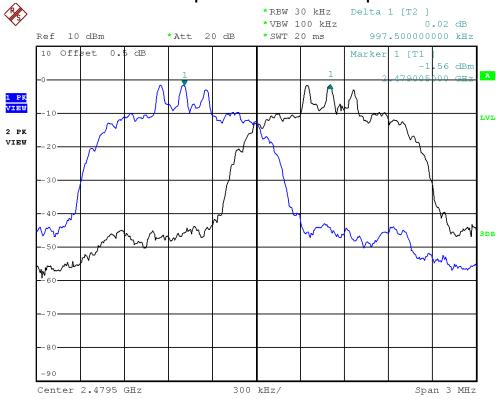

### Bluetooth/3 Mbps/2480 MHz/20dB Bandwidth

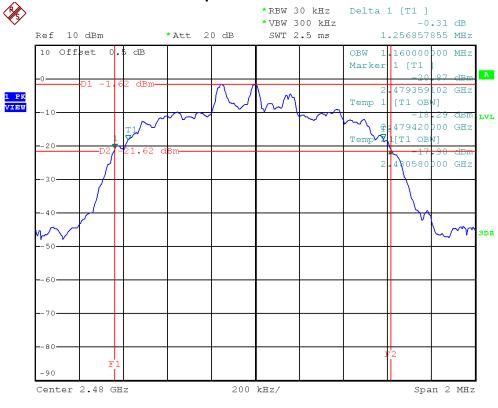

Report No.: NEI-FCCP-1-1209136 Page 33 of 101

### **6 MAXIMUM PEAK CONDUCTED OUTPUT POWER**

### 6.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Maximum Peak Conducted Output Power	2400-2483.5	1 watt or 30 dBm

### **6.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: N/A: denotes No Model Name, No Serial No. or No Calibration specified.

### **6.3 TEST PROCEDURES**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 3 MHz, VBW= 3 MHz, Sweep time = Auto.

### **6.4 TEST SETUP LAYOUT**

EUT	SPECTRUM
	ANALYZER

### 6.5 DEVIATION FROM TEST STANDARD

No deviation

### **6.6 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-1209136 Page 34 of 101

### 6.7 TEST RESULTS

E.U.T	Bluetooth Module	Model Name	BM81SPK01	
Temperature	26°C	Relative Humidity	46%	
Test Voltage	DC 5V			
Test Mode	Bluetooth/1 Mbps/2402 MHz, 2441 MHz, 2480 MHz			

Frequency	Peak Output Power (dBm)	LIMIT (dBm)	Result
2402 MHz	0.87	30	PASS
2441 MHz	1.50	30	PASS
2480 MHz	1.91	30	PASS

### Bluetooth/1 Mbps/2402 MHz/Peak Output Power




Report No.: NEI-FCCP-1-1209136 Page 35 of 101






### Bluetooth/1 Mbps/2480 MHz/Peak Output Power

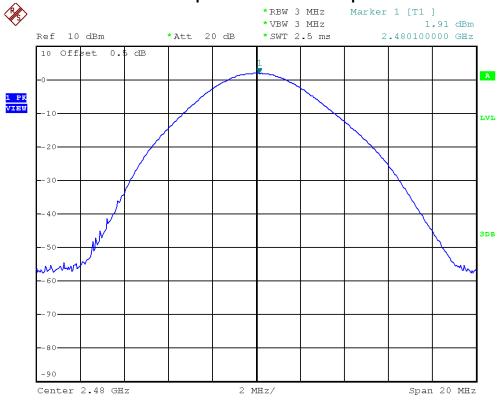

E.U.T	Bluetooth Module	Model Name	BM81SPK01			
Temperature	26°C	Relative Humidity	46%			
Test Voltage	DC 5V					
Test Mode	Bluetooth/3 Mbps/2402 MHz, 2441 MHz, 2480 MHz					

Frequency	Peak Output Power (dBm)	LIMIT (dBm)	Result
2402 MHz	-0.66	30	PASS
2441 MHz	-0.04	30	PASS
2480 MHz	0.47	30	PASS


## Bluetooth/3 Mbps/2402 MHz/Peak Output Power

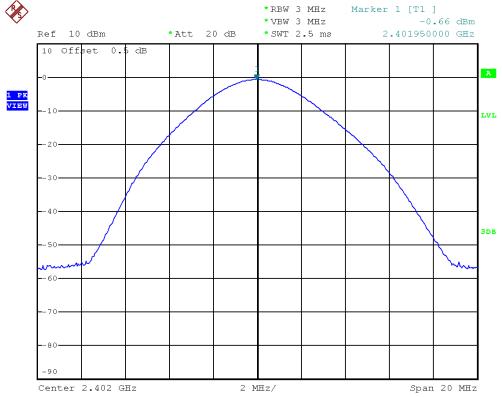


Report No.: NEI-FCCP-1-1209136 Page 37 of 101

# Neutron Engineering Inc.



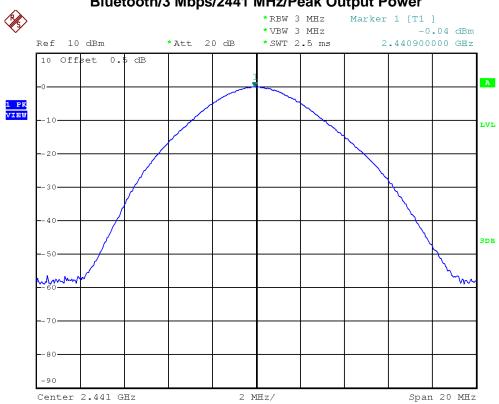

## Bluetooth/3 Mbps/2480 MHz/Peak Output Power

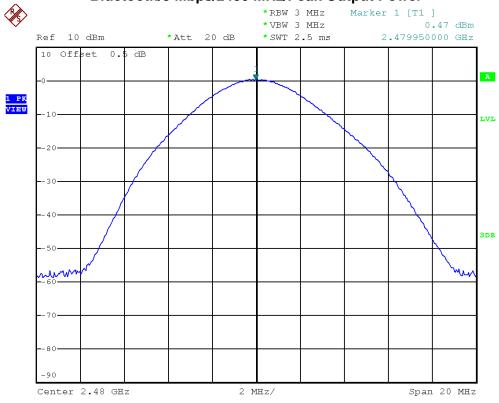



## 7 RADIATED SPURIOUS EMISSION (9 KHZ TO 1 GHZ)

#### **7.1 LIMIT**

20 dB in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency Range: 9 kHz to 1 GHz						
FREQUENCY (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)				
0.009~0.490	2400/F(kHz)	300				
0.490~1.705	24000/F(kHz)	30				
1.705~30.0	30	30				
30~88	100	3				
88~216	150	3				
216~960	200	3				
Above 960	500	3				

Frequency Range: above 1 GHz							
FREQUENCY	Class A (dBu	ıV/m) (at 3m)	Class B (dBuV/m) (at 3m)				
(MHz)	PEAK	AVERAGE	PEAK	AVERAGE			
above 1 GHz	80	60	74	54			

#### NOTE:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.(3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following: Measurement Value = Reading Level + Correct Factor Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use) Margin Level = Measurement Value - Limit Value

Report No.: NEI-FCCP-1-1209136 Page 39 of 101



## 7.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer R&S		FSP-40	100129	Oct. 01, 2013
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 16, 2013
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 17, 2013
4	Microflex Cable	N/A	N/A	1m	Apr. 14, 2013
5	Microflex Cable	AISI	S104-SMAP-1	10m	Apr. 14, 2013
6	Microflex Cable	N/A	N/A	3m	Apr. 14, 2013
7	Test Cable	N/A	LMR-400	966_12m	May. 15, 2013
8	Test Cable	N/A	LMR-400	966_3m	May. 15, 2013
9	Pre-Amplifier	EMC	EMC-330	980001	May. 31, 2013
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 12, 2013
11	Preamplifier With Adaptor	EMC	EMC2654045	980030	Feb. 19, 2013
12	Horn Antenna	Schwarzbeck	BBHA 9170	187	Dec. 24, 2013

Remark: "N/A" denotes No Model Name, No Serial No. or No Calibration specified.

## 7.3 MEASURING INSTRUMENTS SETTING

EMI Test Receiver	Parameter Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

Report No.: NEI-FCCP-1-1209136 Page 40 of 101

#### 7.4 TEST PROCEDURES

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1 GHz. For frequencies above 1 GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item -EUT Test Photos.
- g. The testing follows the guidelines in ANSI C63.4 and FCC Public Notice DA 00-705 Measurement Guidelines. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.


#### NOTE:

- a. Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode with Detector BW=120 kHz; SPA setting in RBW=100 kHz, VBW =100 kHz, Swp. Time = 0.3 sec./ MHz.
- b. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.


#### 7.5 DEVIATION FROM TEST STANDARD

No deviation

#### 7.6 TEST SETUP LAYOUT

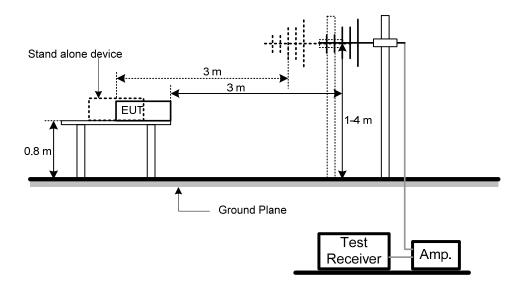

Report No.: NEI-FCCP-1-1209136 Page 41 of 101

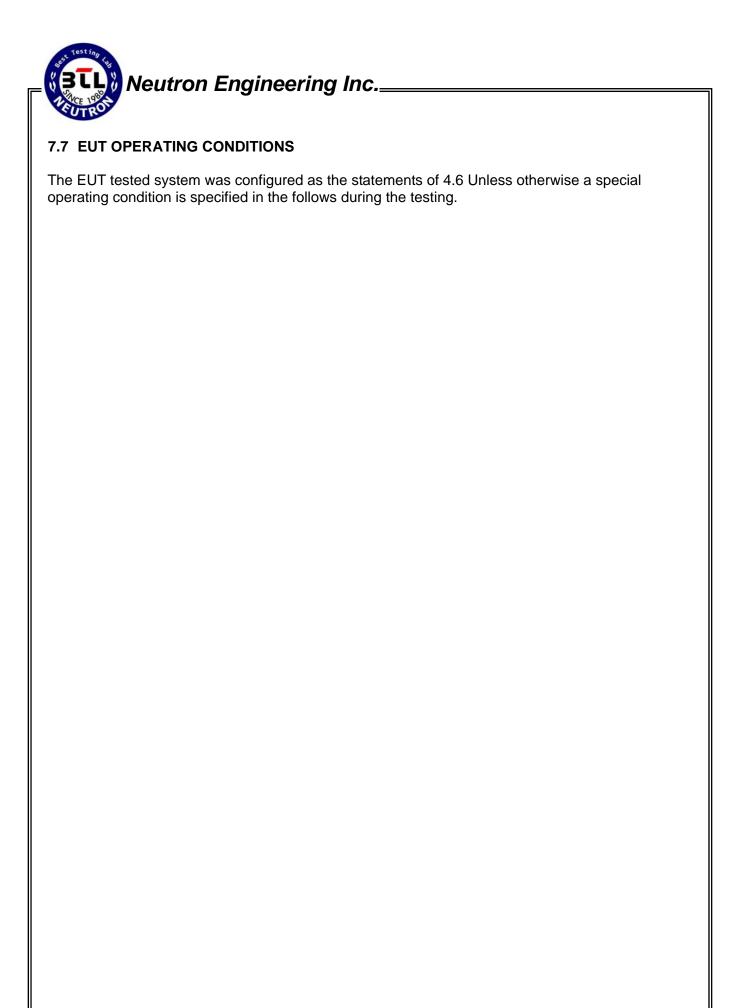


Report No.: NEI-FCCP-1-1209136 Page 42 of 101



# 7.8 TEST RESULTS

E.U.T	Bluetooth Module	Model Name	BM81SPK01			
Temperature	26°C	Relative Humidity	60%			
Test Voltage	DC 5V					
Test Mode	Bluetooth/1 Mbps/2441 MHz					


## **Polarization: Vertical**

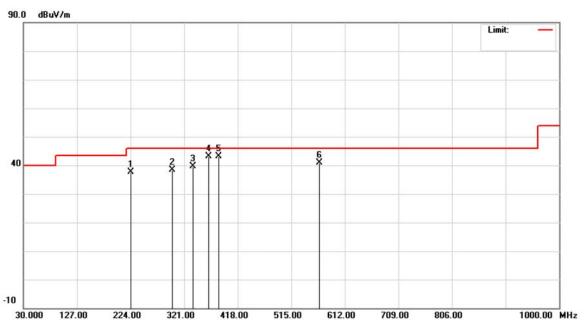

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		224.0000	58.91	-21.25	37.66	46.00	-8.34	peak	
2		299.6600	56.38	-18.07	38.31	46.00	-7.69	peak	
3		336.5199	57.01	-17.38	39.63	46.00	-6.37	peak	
4	*	365.6199	59.90	-16.68	43.22	46.00	-2.78	peak	
5		383.0799	59.35	-16.18	43.17	46.00	-2.83	peak	
6		565.4400	53.01	-12.16	40.85	46.00	-5.15	peak	

Report No.: NEI-FCCP-1-1209136 Page 43 of 101

E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

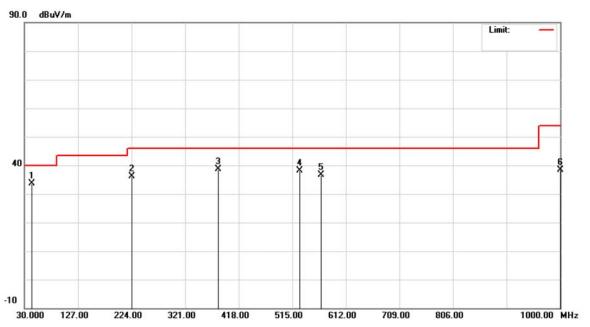

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	43.5800	52.52	-18.84	33.68	40.00	-6.32	peak	
2		224.0000	57.27	-21.25	36.02	46.00	-9.98	peak	
3		381.1400	54.98	-16.24	38.74	46.00	-7.26	peak	
4		528.5800	51.15	-13.06	38.09	46.00	-7.91	peak	
5		567.3800	48.78	-12.09	36.69	46.00	-9.31	peak	
6		1000.000	44.52	-6.06	38.46	54.00	-15.54	peak	

Report No.: NEI-FCCP-1-1209136 Page 44 of 101



## **8 RADIATED SPURIOUS EMISSION (ABOVE 1 GHZ)**

#### **8.1 LIMIT**

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency Range: 9 kHz to 1 GHz							
FREQUENCY (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)					
0.009~0.490	2400/F(kHz)	300					
0.490~1.705	24000/F(kHz)	30					
1.705~30.0	30	30					
30~88	100	3					
88~216	150	3					
216~960	200	3					
Above 960	500	3					

Frequency Range: above 1 GHz							
FREQUENCY	Class A (dBu	IV/m) (at 3m)	ıV/m) (at 3m)				
(MHz)	PEAK	AVERAGE	PEAK	AVERAGE			
above 1 GHz	80	60	74	54			

#### NOTE:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following: Measurement Value = Reading Level + Correct Factor Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain(if use) Margin Level = Measurement Value – Limit Value

Report No.: NEI-FCCP-1-1209136 Page 45 of 101



## **8.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013	
2	Horn Antenna	Horn Antenna Schwarzbeck BBHA 9120		D-325	Apr. 16, 2013	
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 17, 2013	
4	Microflex Cable	N/A	N/A	1m	Apr. 14, 2013	
5	Microflex Cable	AISI	S104-SMAP-1	10m	Apr. 14, 2013	
6	Microflex Cable	N/A	N/A	3m	Apr. 14, 2013	
7	Test Cable	N/A	LMR-400	966_12m	May. 15, 2013	
8	Test Cable	N/A	LMR-400	966_3m	May. 15, 2013	
9	Pre-Amplifier	EMC	EMC-330	980001	May. 31, 2013	
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 12, 2013	
11	Preamplifier With Adaptor	EMC	EMC2654045	980030	Feb. 19, 2013	
12	Horn Antenna	Schwarzbeck	BBHA 9170	187	Dec. 24, 2013	

Remark: "N/A" denotes No Model Name, No Serial No. or No Calibration specified.

## 8.3 MEASURING INSTRUMENTS SETTING

Spectrum Analyzer	Parameter Setting			
Attenuation	Auto			
Start Frequency	1000 MHz			
Stop Frequency	10th carrier harmonic			
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average			
RB / VB (other emission)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average			

Report No.: NEI-FCCP-1-1209136 Page 46 of 101

#### 8.4 TEST PROCEDURES

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1 GHz. For frequencies above 1 GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item -EUT Test Photos.
- g. The testing follows the guidelines in ANSI C63.4 and FCC Public Notice DA 00-705 Measurement Guidelines. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.


#### NOTE:

- a. Reading in which marked as Peak means measurements by using are Peak Mode with instrument setting in RBW= 1 MHz, VBW= 1 MHz, Swp. Time = Auto.
   Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW= 1 MHz, VBW= 10 Hz, Swp. Time = Auto.
- b. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.


#### 8.5 DEVIATION FROM TEST STANDARD

No deviation

#### 8.6 TEST SETUP LAYOUT

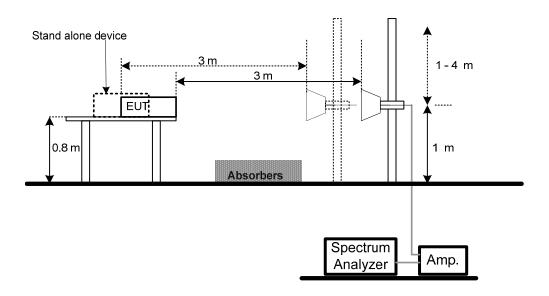

Report No.: NEI-FCCP-1-1209136 Page 47 of 101

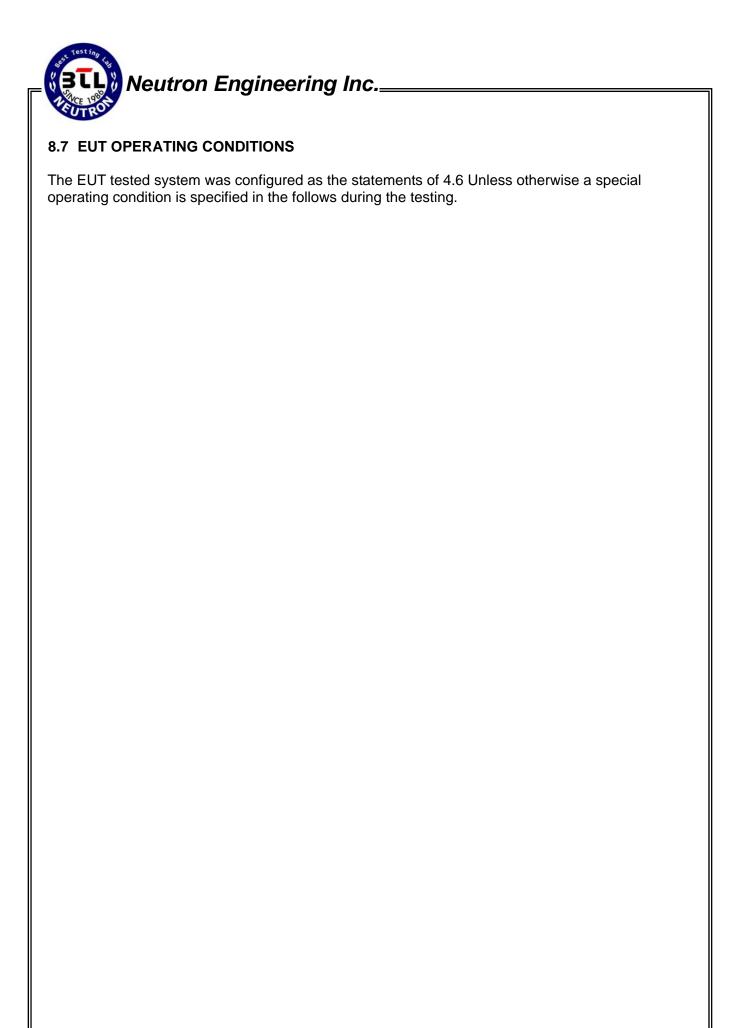


Report No.: NEI-FCCP-1-1209136 Page 48 of 101

## 8.8 TEST RESULTS

E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/1 Mbps/2402 MHz		


#### **Polarization: Vertical**

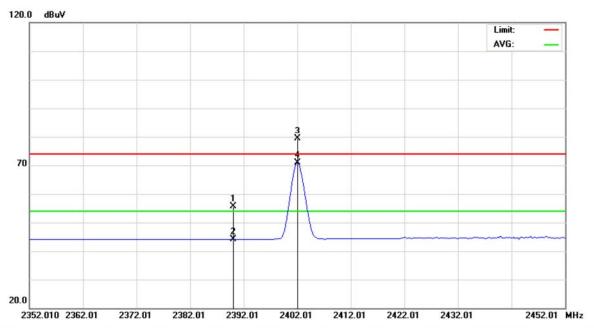

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1		2390.000	22.54	32.99	55.53	74.00	-18.47	peak		
2		2390.000	11.16	32.99	44.15	54.00	-9.85	AVG		
3	X	2402.010	46.21	33.06	79.27	74.00	5.27	peak		
4	*	2402.010	37.75	33.06	70.81	54.00	16.81	AVG		

Report No.: NEI-FCCP-1-1209136 Page 49 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01			
Temperature	26°C	Relative Humidity	60%			
Test Voltage	DC 5V					
Test Mode	Bluetooth/1 Mbps/2402 MHz					

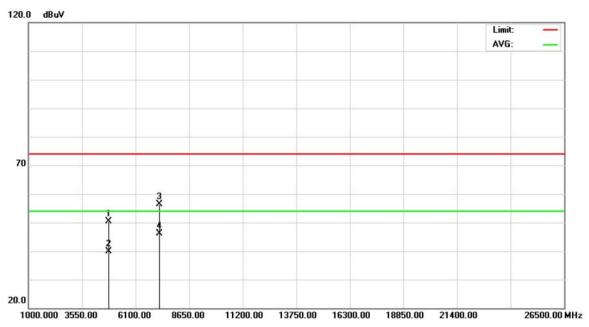

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		4804.050	42.95	7.41	50.36	74.00	-23.64	peak	
2		4804.050	32.38	7.41	39.79	54.00	-14.21	AVG	
3		7206.000	41.71	14.79	56.50	74.00	-17.50	peak	
4	*	7206.000	31.37	14.79	46.16	54.00	-7.84	AVG	

Report No.: NEI-FCCP-1-1209136 Page 50 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/1 Mbps/2402 MHz		

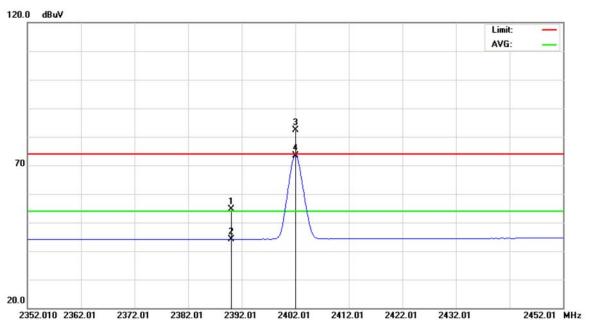

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1		2390.000	21.72	32.99	54.71	74.00	-19.29	peak		
2		2390.000	11.16	32.99	44.15	54.00	-9.85	AVG		
3	X	2402.010	49.30	33.06	82.36	74.00	8.36	peak		
4	*	2402.010	40.28	33.06	73.34	54.00	19.34	AVG		

Report No.: NEI-FCCP-1-1209136 Page 51 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/1 Mbps/2402 MHz		

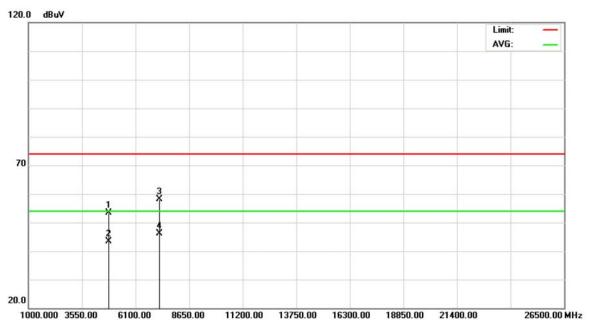

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1		4804.030	45.87	7.41	53.28	74.00	-20.72	peak		
2		4804.030	35.89	7.41	43.30	54.00	-10.70	AVG		
3		7206.070	43.23	14.79	58.02	74.00	-15.98	peak		
4	*	7206.070	31.30	14.79	46.09	54.00	-7.91	AVG		

Report No.: NEI-FCCP-1-1209136 Page 52 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

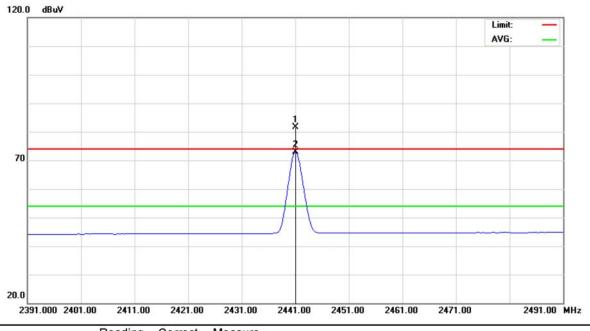

No.	Mk	. Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	Χ	2441.000	48.29	33.27	81.56	74.00	7.56	peak	
2	*	2441.000	39.52	33.27	72.79	54.00	18.79	AVG	

Report No.: NEI-FCCP-1-1209136 Page 53 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

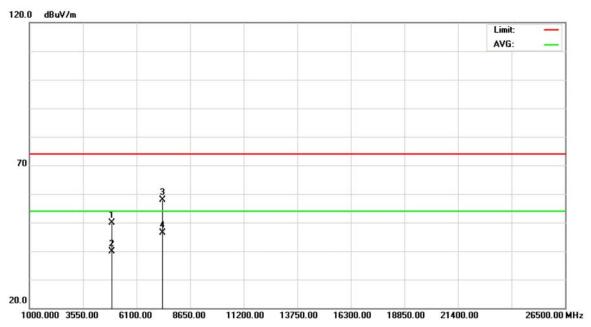

No. M	k. Free		eading evel	Factor	ment	Limit	Over			
	MHz		BuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	4881.99	0 4	2.28	7.70	49.98	74.00	-24.02	peak		
2	4881.99	0 3	2.06	7.70	39.76	54.00	-14.24	AVG		
3	7322.98	0 4	2.86	15.10	57.96	74.00	-16.04	peak		
4 *	7322.98	0 3	1.28	15.10	46.38	54.00	-7.62	AVG		

Report No.: NEI-FCCP-1-1209136 Page 54 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

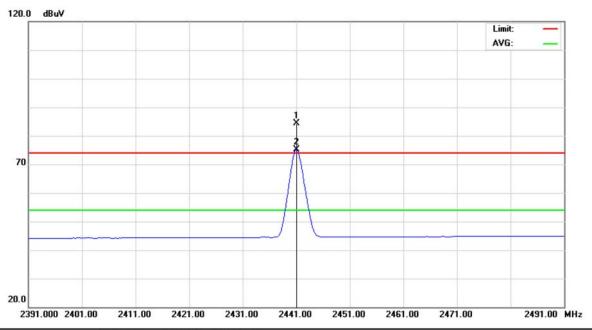

No.	M	k. Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	Χ	2441.000	51.00	33.27	84.27	74.00	10.27	peak	
2	*	2441.000	41.74	33.27	75.01	54.00	21.01	AVG	

Report No.: NEI-FCCP-1-1209136 Page 55 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

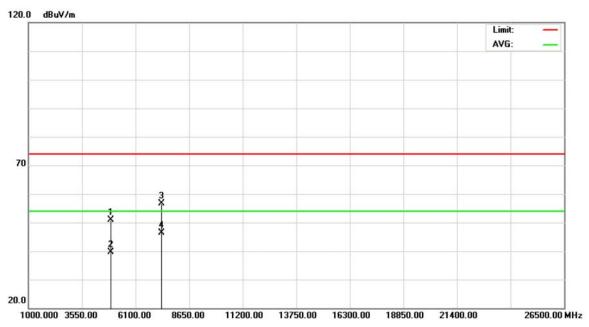

No. I	Mk.	Freq.	Level	Factor	ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4	882.070	43.07	7.70	50.77	74.00	-23.23	peak	
2	4	882.070	31.97	7.70	39.67	54.00	-14.33	AVG	
3	7	323.050	41.43	15.10	56.53	74.00	-17.47	peak	
4	* 7	323.050	31.26	15.10	46.36	54.00	-7.64	AVG	

Report No.: NEI-FCCP-1-1209136 Page 56 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/1 Mbps/2480 MHz		

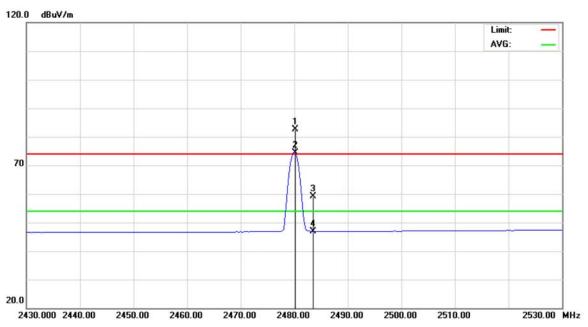

No.	Mk	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	Х	2480.175	49.24	33.48	82.72	74.00	8.72	peak		
2	*	2480.175	40.92	33.48	74.40	54.00	20.40	AVG		
3		2483.500	25.53	33.50	59.03	74.00	-14.97	peak		
4		2483.500	13.43	33.50	46.93	54.00	-7.07	AVG		

Report No.: NEI-FCCP-1-1209136 Page 57 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/1 Mbps/2480 MHz		

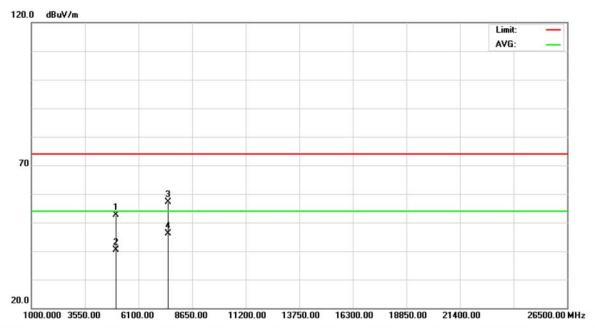

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	-	4960.038	44.72	7.98	52.70	74.00	-21.30	peak		
2	-	4960.038	32.33	7.98	40.31	54.00	-13.69	AVG		
3		7440.000	41.71	15.40	57.11	74.00	-16.89	peak		
4	* .	7440.000	30.66	15.40	46.06	54.00	-7.94	AVG		

Report No.: NEI-FCCP-1-1209136 Page 58 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/1 Mbps/2480 MHz		

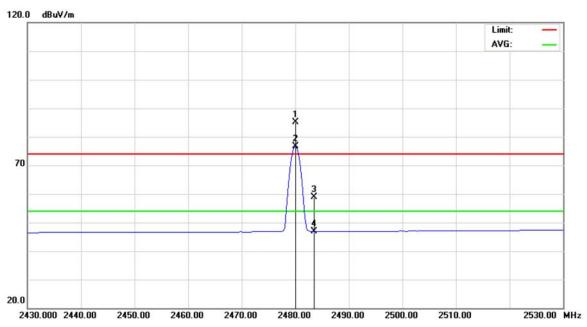

No.	Mk	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	Χ	2479.975	51.68	33.48	85.16	74.00	11.16	peak		
2	*	2479.975	43.09	33.48	76.57	54.00	22.57	AVG		
3		2483.500	25.32	33.50	58.82	74.00	-15.18	peak		
4		2483.500	13.40	33.50	46.90	54.00	-7.10	AVG		

Report No.: NEI-FCCP-1-1209136 Page 59 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/1 Mbps/2480 MHz		

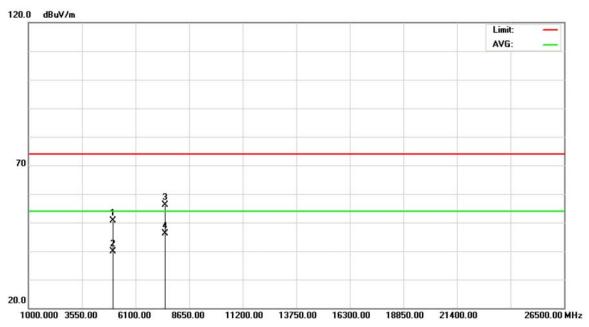

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	- 1	4959.950	42.72	7.98	50.70	74.00	-23.30	peak		
2		4959.950	31.82	7.98	39.80	54.00	-14.20	AVG		
3		7439.962	40.72	15.40	56.12	74.00	-17.88	peak		
4	*	7439.962	30.64	15.40	46.04	54.00	-7.96	AVG		

Report No.: NEI-FCCP-1-1209136 Page 60 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/3 Mbps/2402 MHz		

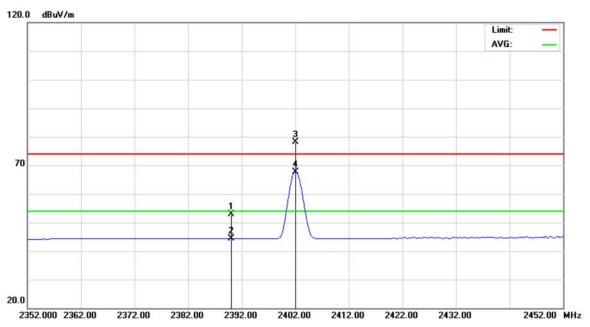

No.	Mk.	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		2390.000	19.83	32.99	52.82	74.00	-21.18	peak		
2		2390.000	11.31	32.99	44.30	54.00	-9.70	AVG		
3	Χ	2402.000	45.14	33.06	78.20	74.00	4.20	peak		
4	*	2402.000	34.59	33.06	67.65	54.00	13.65	AVG		

Report No.: NEI-FCCP-1-1209136 Page 61 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/3 Mbps/2402 MHz		

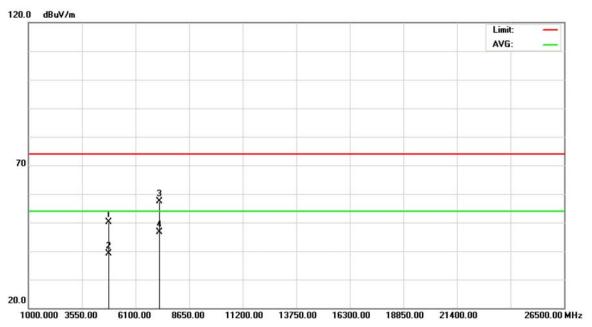

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	4	804.060	42.72	7.41	50.13	74.00	-23.87	peak		
2	4	804.060	31.69	7.41	39.10	54.00	-14.90	AVG		
3	7	206.050	42.52	14.79	57.31	74.00	-16.69	peak		
4	* 7	206.050	31.86	14.79	46.65	54.00	-7.35	AVG		

Report No.: NEI-FCCP-1-1209136 Page 62 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/3 Mbps/2402 MHz		

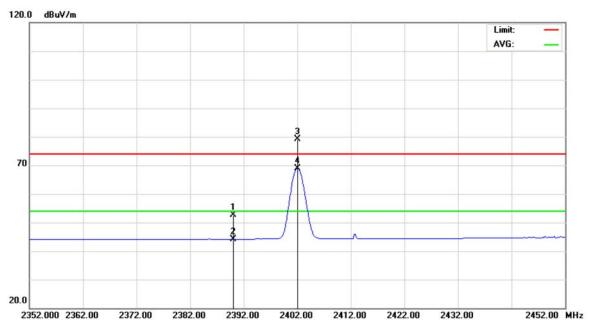

No.	Mk.	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		2390.000	19.75	32.99	52.74	74.00	-21.26	peak		
2		2390.000	11.23	32.99	44.22	54.00	-9.78	AVG		
3	Χ	2402.000	46.02	33.06	79.08	74.00	5.08	peak		
4	*	2402.000	35.75	33.06	68.81	54.00	14.81	AVG		

Report No.: NEI-FCCP-1-1209136 Page 63 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/3 Mbps/2402 MHz		

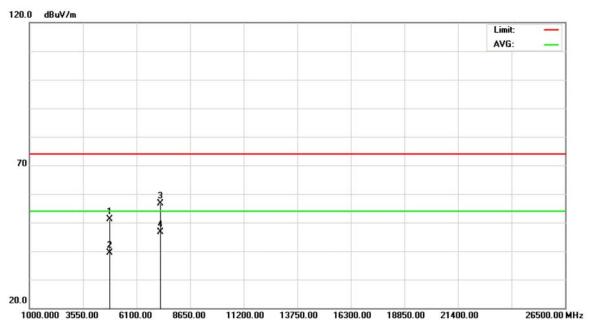

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	4	803.850	43.83	7.41	51.24	74.00	-22.76	peak		
2	4	1803.850	32.04	7.41	39.45	54.00	-14.55	AVG		
3	7	205.990	41.79	14.79	56.58	74.00	-17.42	peak		
4	* 7	205.990	31.75	14.79	46.54	54.00	-7.46	AVG		

Report No.: NEI-FCCP-1-1209136 Page 64 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/3 Mbps/2441 MHz		

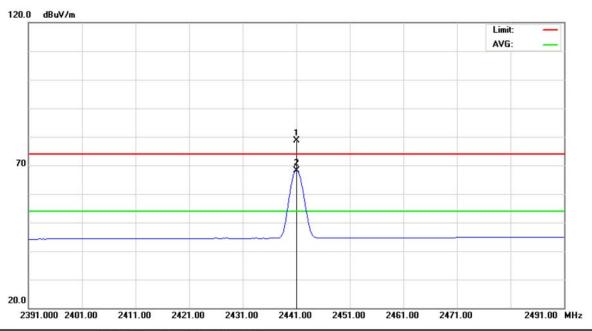

No.	Mk	c. Freq.	Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	Χ	2441.000	45.35	33.27	78.62	74.00	4.62	peak	
2	*	2441.000	34.83	33.27	68.10	54.00	14.10	AVG	

Report No.: NEI-FCCP-1-1209136 Page 65 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/3 Mbps/2441 MHz		

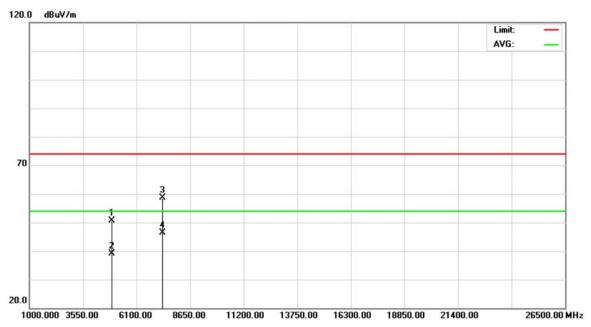

No. Mk	c. Freq.	Level	Factor	ment	Limit	Over		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4881.960	42.87	7.70	50.57	74.00	-23.43	peak	
2	4881.960	31.36	7.70	39.06	54.00	-14.94	AVG	
3	7322.970	43.64	15.10	58.74	74.00	-15.26	peak	
4 *	7322.970	31.38	15.10	46.48	54.00	-7.52	AVG	

Report No.: NEI-FCCP-1-1209136 Page 66 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/3 Mbps/2441 MHz		

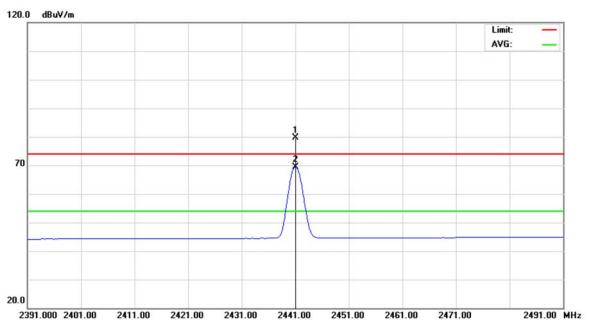

Mk	. Freq.	Level	Factor	ment	Limit	Over		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
Х	2441.000	46.24	33.27	79.51	74.00	5.51	peak	
*	2441.000	36.17	33.27	69.44	54.00	15.44	AVG	
	X	77.5	MHz dBuV X 2441.000 46.24	MHz dBuV dB X 2441.000 46.24 33.27	MHz dBuV dB dBuV/m X 2441.000 46.24 33.27 79.51	MHz dBuV dB dBuV/m dBuV/m X 2441.000 46.24 33.27 79.51 74.00	MHz dBuV dB dBuV/m dBuV/m dB X 2441.000 46.24 33.27 79.51 74.00 5.51	MHz dBuV dB dBuV/m dBuV/m dB Detector X 2441.000 46.24 33.27 79.51 74.00 5.51 peak

Report No.: NEI-FCCP-1-1209136 Page 67 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/3 Mbps/2441 MHz		

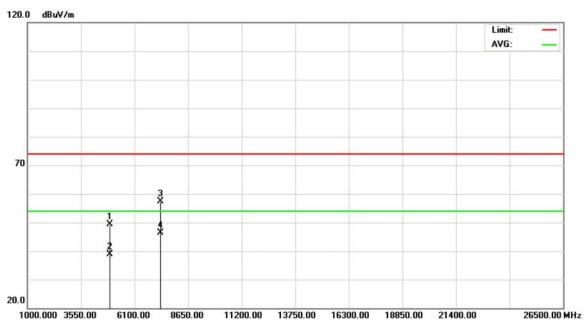

No. M	k. Freq.	Level	Factor	ment	Limit	Over			
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	4881.990	41.67	7.70	49.37	74.00	-24.63	peak		
2	4881.990	31.22	7.70	38.92	54.00	-15.08	AVG		
3	7322.950	42.22	15.10	57.32	74.00	-16.68	peak		
4 *	7322.950	31.37	15.10	46.47	54.00	-7.53	AVG		

Report No.: NEI-FCCP-1-1209136 Page 68 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/3 Mbps/2480 MHz		

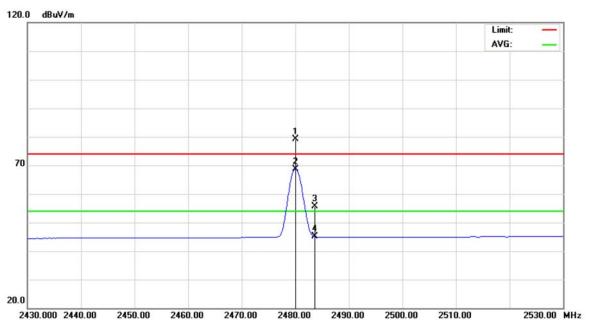

No.	Mk	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	Х	2480.000	45.73	33.48	79.21	74.00	5.21	peak		
2	*	2480.000	35.19	33.48	68.67	54.00	14.67	AVG		
3		2483.500	22.02	33.50	55.52	74.00	-18.48	peak		
4		2483.500	11.53	33.50	45.03	54.00	-8.97	AVG		

Report No.: NEI-FCCP-1-1209136 Page 69 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/3 Mbps/2480 MHz		

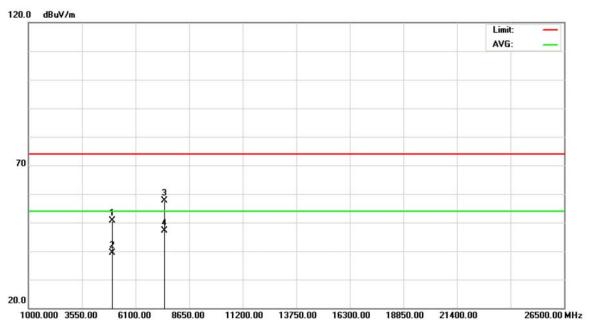

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		4960.050	42.76	7.98	50.74	74.00	-23.26	peak		
2		4960.050	31.51	7.98	39.49	54.00	-14.51	AVG		
3		7440.050	42.34	15.40	57.74	74.00	-16.26	peak		
4	*	7440.050	31.70	15.40	47.10	54.00	-6.90	AVG		

Report No.: NEI-FCCP-1-1209136 Page 70 of 101


E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/3 Mbps/2480 MHz		

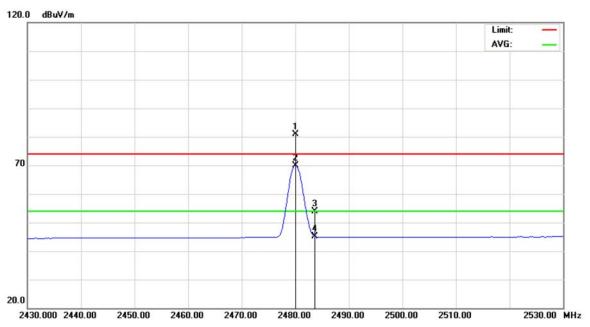

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1	Χ	2480.000	47.51	33.48	80.99	74.00	6.99	peak		
2	*	2480.000	36.51	33.48	69.99	54.00	15.99	AVG		
3		2483.500	20.36	33.50	53.86	74.00	-20.14	peak		
4		2483.500	11.70	33.50	45.20	54.00	-8.80	AVG		

Report No.: NEI-FCCP-1-1209136 Page 71 of 101

E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/3 Mbps/2480 MHz		

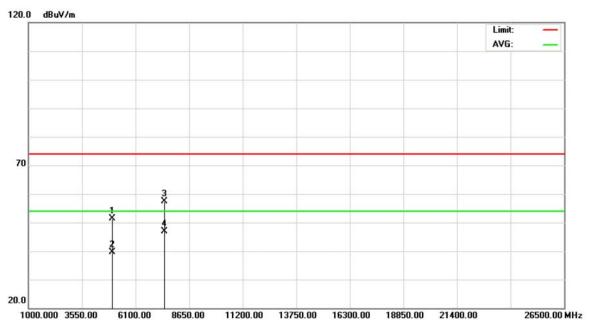


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		4959.910	43.39	7.98	51.37	74.00	-22.63	peak		
2		4959.910	31.75	7.98	39.73	54.00	-14.27	AVG		
3		7439.980	42.07	15.40	57.47	74.00	-16.53	peak		
4	*	7439.980	31.52	15.40	46.92	54.00	-7.08	AVG		

Report No.: NEI-FCCP-1-1209136 Page 72 of 101

## 8.9 TEST RESULTS (RESTRICTED BANDS)

E.U.T	Bluetooth Module	Model Name	BM81SPK01						
Temperature	Relative Humidity 46%								
Test Voltage	DC 5V	DC 5V							
Test Mode	Bluetooth/1 Mbps/2402 MHz								
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.								

## **Polarization: Vertical**

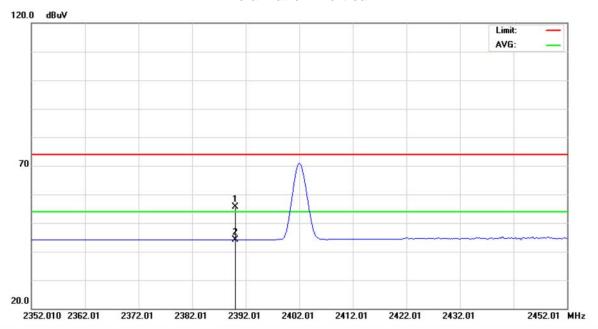


No.	Mk	. Freq.	Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		2390.000	22.54	32.99	55.53	74.00	-18.47	peak	
2	*	2390.000	11.16	32.99	44.15	54.00	-9.85	AVG	

Report No.: NEI-FCCP-1-1209136 Page 73 of 101

E.U.T	Bluetooth Module	Model Name	BM81SPK01						
Temperature	24°C	Relative Humidity	46%						
Test Voltage	DC 5V	DC 5V							
Test Mode	Bluetooth/1 Mbps/2480 MHz								
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.								

## **Polarization: Vertical**

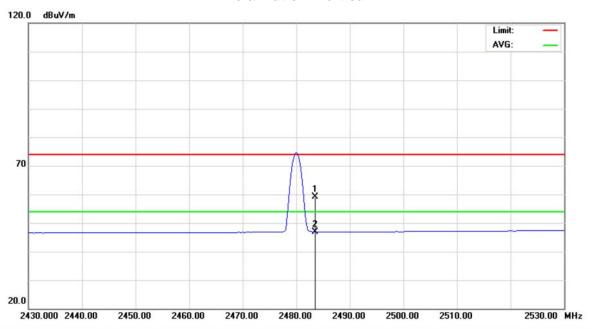


No.	М	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		2483.500	25.53	33.50	59.03	74.00	-14.97	peak		
2	*	2483.500	13.43	33.50	46.93	54.00	-7.07	AVG		

Report No.: NEI-FCCP-1-1209136 Page 74 of 101

E.U.T	Bluetooth Module	Model Name	BM81SPK01						
Temperature	24°C Relative Humidity 46%								
Test Voltage	DC 5V								
Test Mode	Bluetooth/1 Mbps/2402 MHz								
	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.								

## **Polarization: Horizontal**

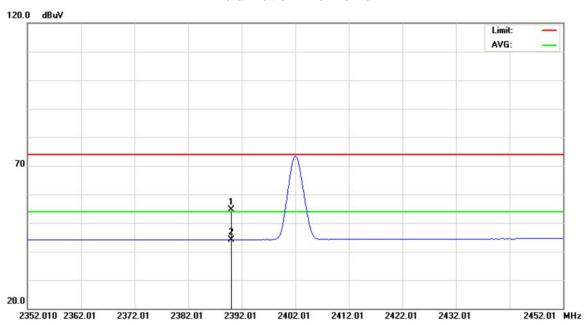


No.	M	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		2390.000	21.72	32.99	54.71	74.00	-19.29	peak	
2	*	2390.000	11.16	32.99	44.15	54.00	-9.85	AVG	

Report No.: NEI-FCCP-1-1209136 Page 75 of 101

E.U.T	Bluetooth Module	Model Name	BM81SPK01						
Temperature	24°C	Relative Humidity	46%						
Test Voltage	DC 5V	DC 5V							
Test Mode	Bluetooth/1 Mbps/2480 MHz								
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.								

## **Polarization: Horizontal**

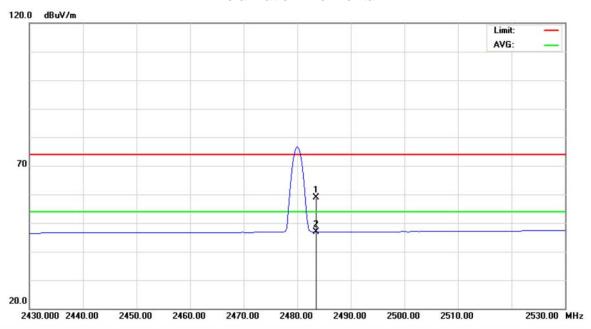


No.	M	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		2483.500	25.32	33.50	58.82	74.00	-15.18	peak		
2	*	2483.500	13.40	33.50	46.90	54.00	-7.10	AVG		

Report No.: NEI-FCCP-1-1209136 Page 76 of 101

E.U.T	Bluetooth Module	Model Name	BM81SPK01							
Temperature	24°C Relative Humidity 46%									
Test Voltage	DC 5V	DC 5V								
Test Mode	Bluetooth/3 Mbps/2402 MHz									
	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.									

## **Polarization: Vertical**

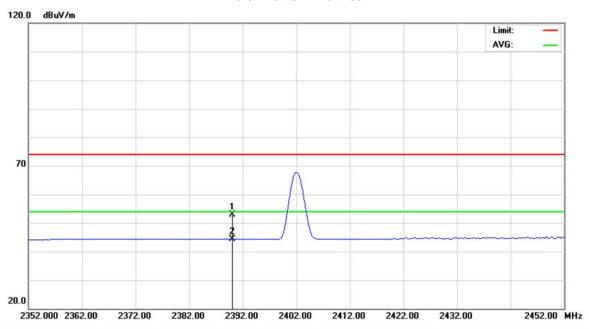


No.	Mk	c. Freq.	Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	19.83	32.99	52.82	74.00	-21.18	peak	
2	*	2390.000	11.31	32.99	44.30	54.00	-9.70	AVG	

Report No.: NEI-FCCP-1-1209136 Page 77 of 101

E.U.T	Bluetooth Module	Model Name	BM81SPK01						
Temperature	24°C	Relative Humidity	46%						
Test Voltage	DC 5V	DC 5V							
Test Mode	Bluetooth/3 Mbps/2480 MHz								
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.								

## **Polarization: Vertical**

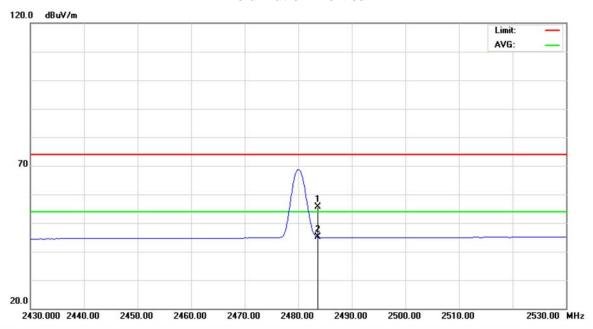


No.	М	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment	
1		2483.500	22.02	33.50	55.52	74.00	-18.48	peak		
2	*	2483.500	11.53	33.50	45.03	54.00	-8.97	AVG		

Report No.: NEI-FCCP-1-1209136 Page 78 of 101

E.U.T	Bluetooth Module	Model Name	BM81SPK01	
Temperature	24°C	Relative Humidity	46%	
Test Voltage	DC 5V			
Test Mode	Bluetooth/3 Mbps/2402 MHz			
	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.			

## **Polarization: Horizontal**

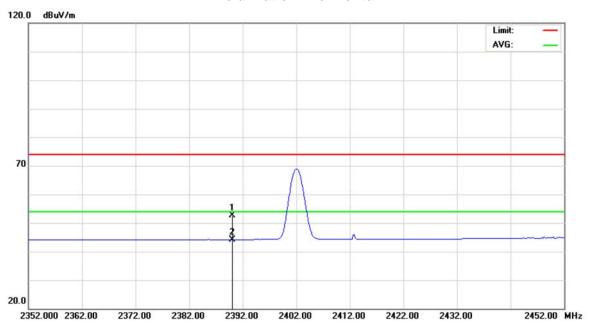


No.	M	k. Freq.	Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	19.75	32.99	52.74	74.00	-21.26	peak	
2	*	2390.000	11.23	32.99	44.22	54.00	-9.78	AVG	

Report No.: NEI-FCCP-1-1209136 Page 79 of 101

E.U.T	Bluetooth Module	Model Name	BM81SPK01	
Temperature	24°C	Relative Humidity	46%	
Test Voltage	DC 5V			
Test Mode	Bluetooth/3 Mbps/2480 MHz			
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.			

## **Polarization: Horizontal**

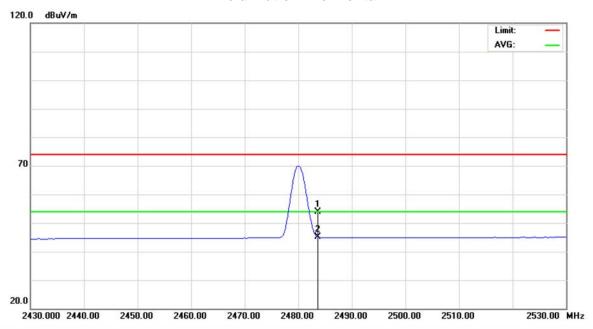

No.	M	k. Freq.	Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2483.500	20.36	33.50	53.86	74.00	-20.14	peak	
2	*	2483.500	11.70	33.50	45.20	54.00	-8.80	AVG	

Report No.: NEI-FCCP-1-1209136 Page 80 of 101

#### 9 NUMBER OF HOPPING FREQUENCY

#### **9.1 LIMIT**

Test Item	Frequency Range (MHz)	Limit
Number of Hopping Channel	2400-2483.5	shall use at least 15 channels

#### 9.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: N/A: denotes No Model Name, No Serial No. or No Calibration specified.

#### 9.3 MEASURING INSTRUMENTS SETTING

Spectrum Analyzer	Parameter Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 9.4 TEST PROCEDURES

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100 kHz, VBW=100 kHz, Sweep time = Auto.

#### 9.5 TEST SETUP LAYOUT



#### 9.6 DEVIATION FROM TEST STANDARD

No deviation

#### 9.7 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Report No.: NEI-FCCP-1-1209136 Page 81 of 101

## 9.8 TEST RESULTS

E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/1 Mbps		


Number of Hopping Channel	Limit	Result
79	15	Pass

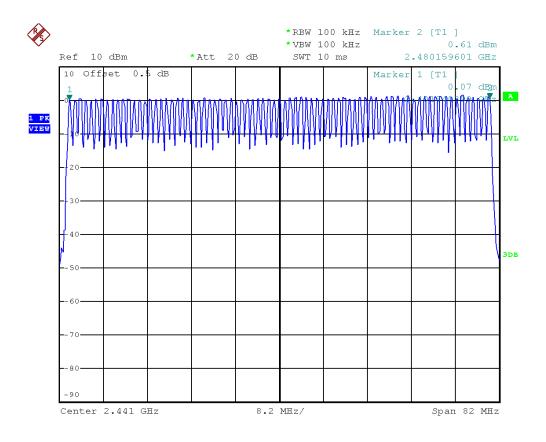

Report No.: NEI-FCCP-1-1209136 Page 82 of 101

E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 5V		
Test Mode	Bluetooth/3 Mbps		

Number of Hopping Channel	Limit	Result
79	15	Pass

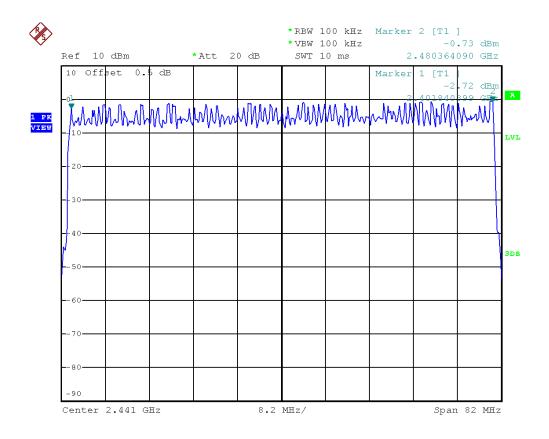

Report No.: NEI-FCCP-1-1209136 Page 83 of 101

#### 10 AVERAGE TIME OF OCCUPANCY

#### **10.1 LIMIT**

Test Item	Frequency Range (MHz)	Limit
Average time of occupancy	2400-2483.5	shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### 10.2MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: N/A: denotes No Model Name, No Serial No. or No Calibration specified.

#### 10.3TEST PROCEDURES

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 100 kHz and VBW to 100 kHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum 1600/79/6 = 3.37 hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds.
- j. DH3 Packet permit maximum 1600 / 79 / 4 = 5.06 hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds.
- k. DH1 Packet permit maximum 1600 / 79 / 2 = 10.12 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds.


#### **10.4TEST SETUP LAYOUT**

EUT	SPECTRUM
	ANALYZER

#### 10.5 DEVIATION FROM TEST STANDARD

No deviation

Report No.: NEI-FCCP-1-1209136 Page 84 of 101

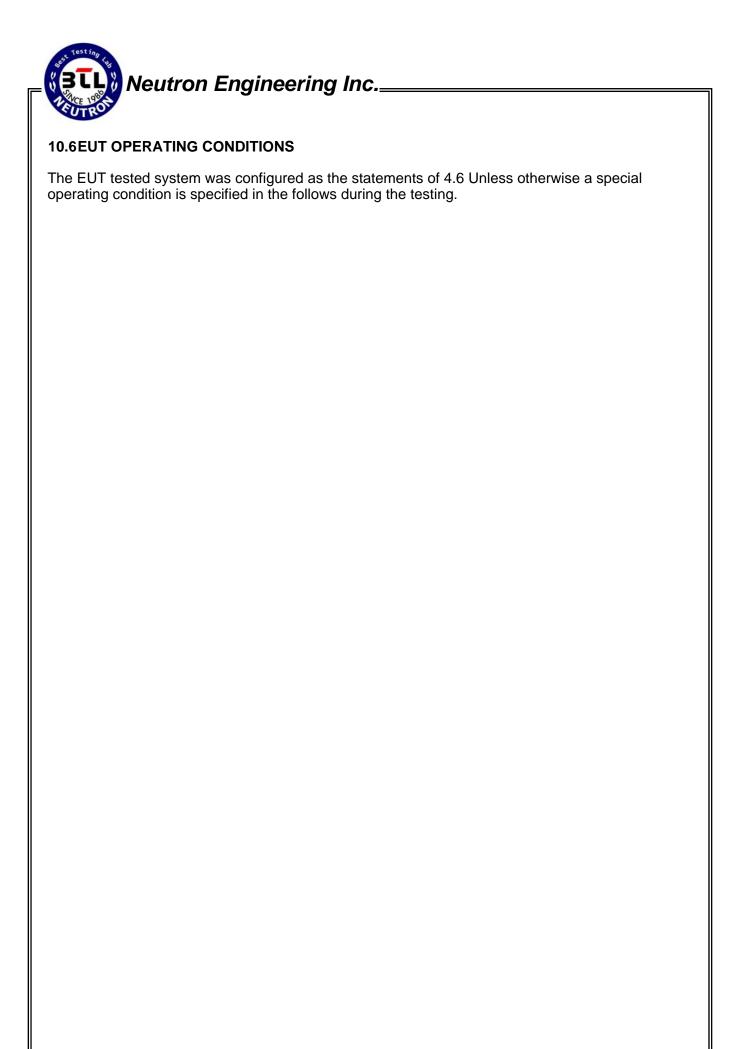


Report No.: NEI-FCCP-1-1209136 Page 85 of 101

## **10.7TEST RESULTS**

E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 5V		
Test Mode	Bluetooth/1 Mbps/2402 MHz		


Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Result
DH5	2402 MHz	3.0000	0.3200	0.4	PASS
DH3	2402 MHz	1.7400	0.2784	0.4	PASS
DH1	2402 MHz	0.4700	0.1504	0.4	PASS

## Bluetooth/1 Mbps/2402 MHz/DH5

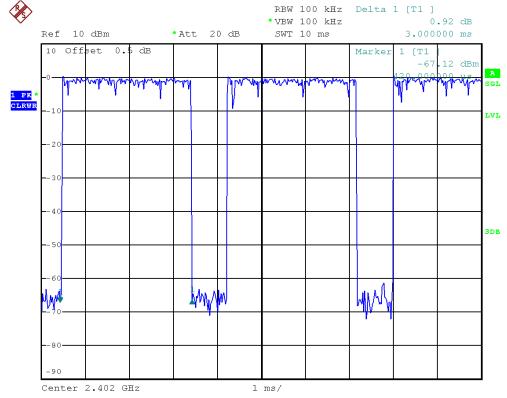


Report No.: NEI-FCCP-1-1209136 Page 86 of 101



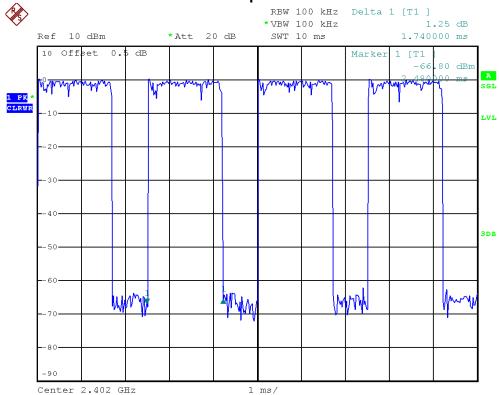


## Bluetooth/1 Mbps/2402 MHz/DH1

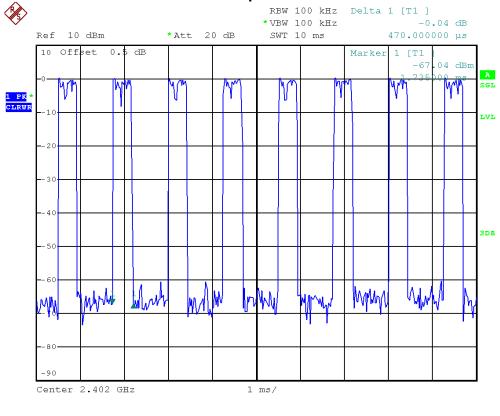

E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 5V		
Test Mode	Bluetooth/1 Mbps/2441 MHz		


Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Result
DH5	2441 MHz	3.0200	0.3221	0.4	PASS
DH3	2441 MHz	1.7600	0.2816	0.4	PASS
DH1	2441 MHz	0.5000	0.1600	0.4	PASS

## Bluetooth/1 Mbps/2441 MHz/DH5

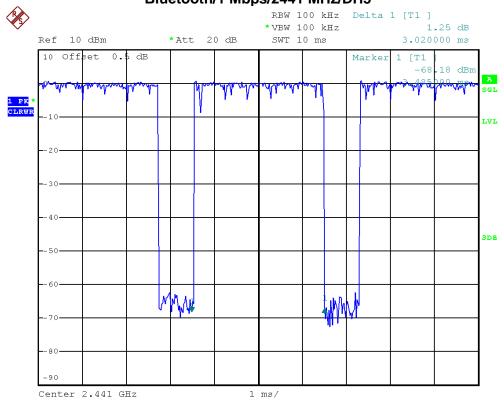


Report No.: NEI-FCCP-1-1209136 Page 88 of 101



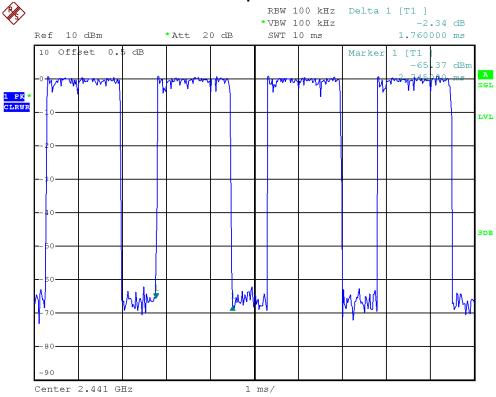

## Bluetooth/1 Mbps/2441 MHz/DH1

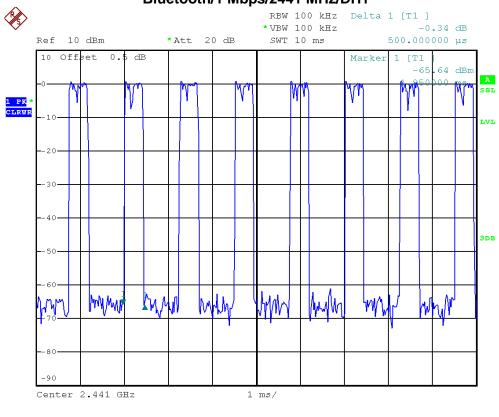


Report No.: NEI-FCCP-1-1209136 Page 89 of 101

E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 5V		
Test Mode	Bluetooth/1 Mbps/2480 MHz		


Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Result
DH5	2480 MHz	3.0000	0.3200	0.4	PASS
DH3	2480 MHz	1.7400	0.2784	0.4	PASS
DH1	2480 MHz	0.4800	0.1536	0.4	PASS

## Bluetooth/1 Mbps/2480 MHz/DH5

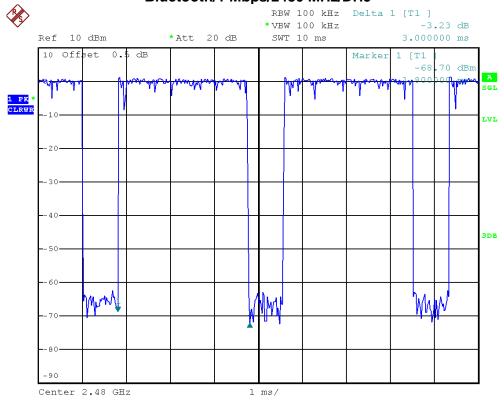


Report No.: NEI-FCCP-1-1209136 Page 90 of 101

Center 2.48 GHz

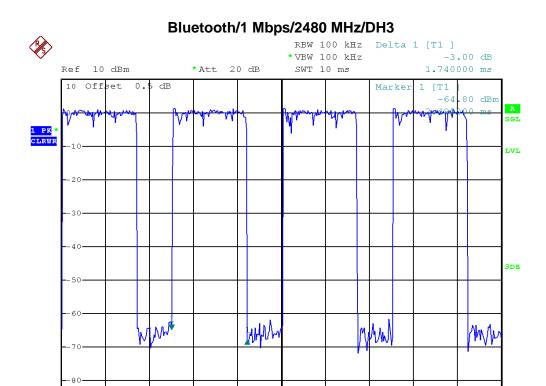

## Bluetooth/1 Mbps/2480 MHz/DH1

1 ms/

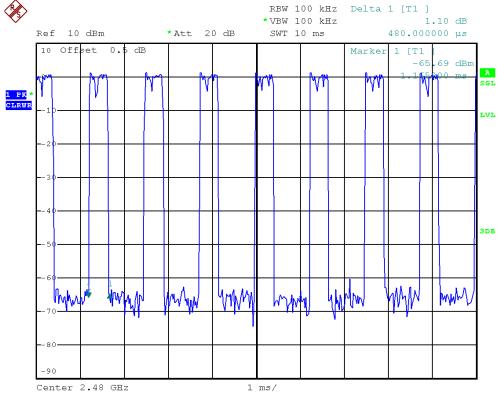


Report No.: NEI-FCCP-1-1209136 Page 91 of 101

E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 5V		
Test Mode	Bluetooth/3 Mbps/2402 MHz		


Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Result
DH5	2402 MHz	3.0200	0.3221	0.4	PASS
DH3	2402 MHz	1.7600	0.2816	0.4	PASS
DH1	2402 MHz	0.5200	0.1664	0.4	PASS

## Bluetooth/3 Mbps/2402 MHz/DH5

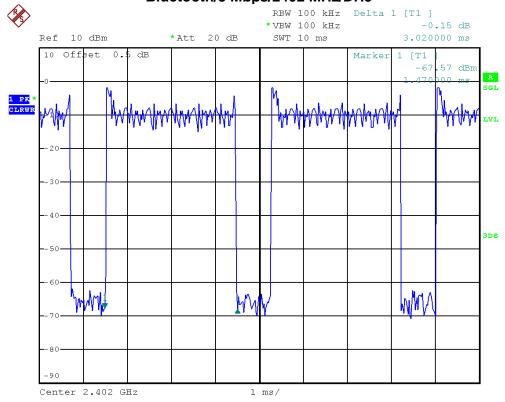


Report No.: NEI-FCCP-1-1209136 Page 92 of 101



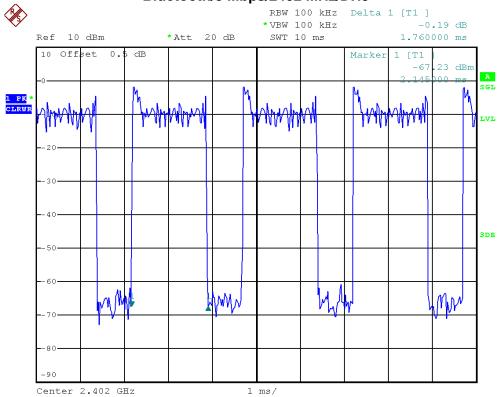

## Bluetooth/3 Mbps/2402 MHz/DH1

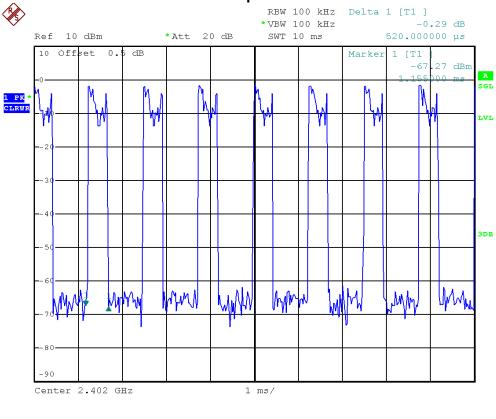


Report No.: NEI-FCCP-1-1209136 Page 93 of 101

E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 5V		
Test Mode	Bluetooth/3 Mbps/2441 MHz		


Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Result
DH5	2441 MHz	3.0200	0.3221	0.4	PASS
DH3	2441 MHz	1.7400	0.2784	0.4	PASS
DH1	2441 MHz	0.5200	0.1664	0.4	PASS

## Bluetooth/3 Mbps/2441 MHz/DH5

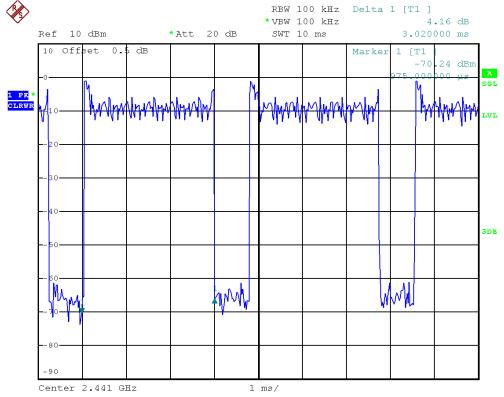


Report No.: NEI-FCCP-1-1209136 Page 94 of 101



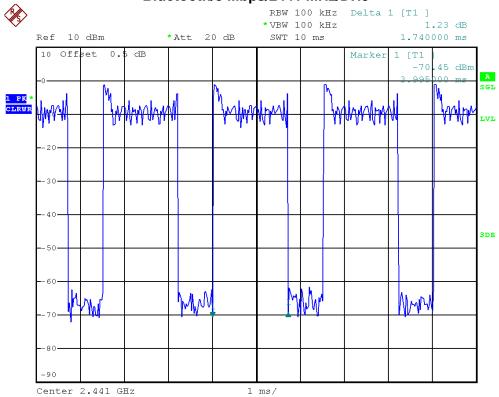

## Bluetooth/3 Mbps/2441 MHz/DH1

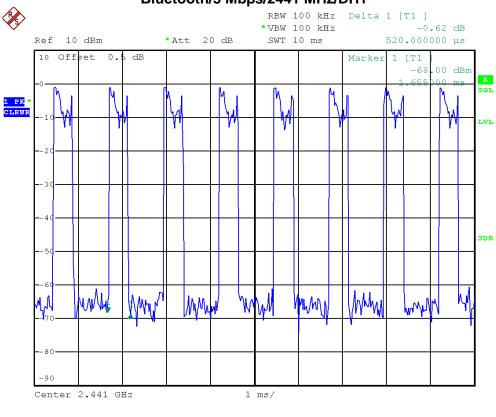


Report No.: NEI-FCCP-1-1209136 Page 95 of 101

E.U.T	Bluetooth Module	Model Name	BM81SPK01
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 5V		
Test Mode	Bluetooth/3 Mbps/2480 MHz		


Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Result
DH5	2480 MHz	3.0400	0.3243	0.4	PASS
DH3	2480 MHz	1.7800	0.2848	0.4	PASS
DH1	2480 MHz	0.5000	0.1600	0.4	PASS

## Bluetooth/3 Mbps/2480 MHz/DH5

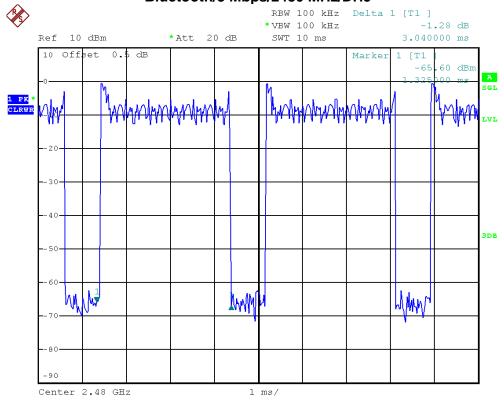


Report No.: NEI-FCCP-1-1209136 Page 96 of 101



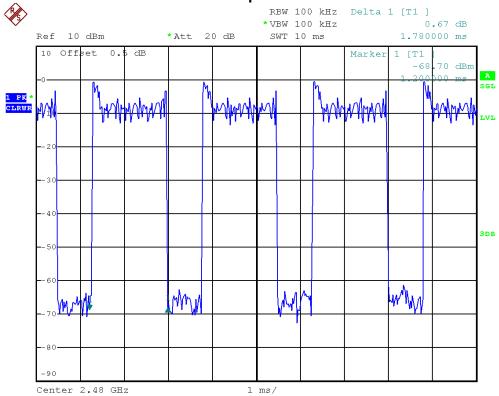

## Bluetooth/3 Mbps/2480 MHz/DH1

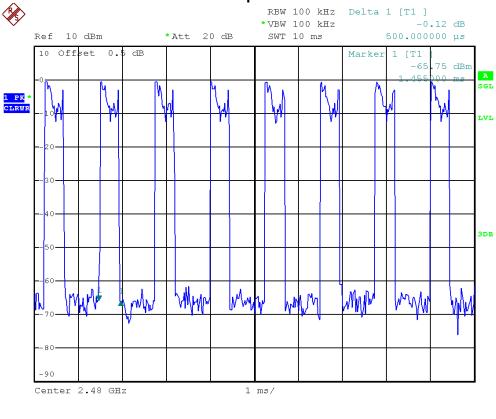

Report No.: NEI-FCCP-1-1209136 Page 97 of 101



#### 11 RF EXPOSURE COMPLIANCE

#### **11.1 LIMIT**

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)		Magnetic Field Strength (H) (A/m)	Power Density (3)	Averaging Time  E ², H ²or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)		Magnetic Field Strength (H) (A/m)	Power Density (3)	Averaging Time $ E ^2$ , $ H ^2$ or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

NOTE: f = frequency in MHz; \*Plane-wave equivalent power density.

#### 11.2MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2495A	1128008	Feb,20,2013
2	Power Meter Sensor	Anritsu	MA2411B	1126001	Feb,20,2013

NOTE: N/A: denotes No Model Name, No Serial No. or No Calibration specified.

#### 11.3MPE CALCULATION METHOD

E (V/m) = 
$$\frac{\sqrt{30 \times P \times G}}{d}$$
 Power Density:  $Pd$  (W/m²) =  $\frac{E^2}{377}$ 

**E** = Electric field (V/m)

**P** = Peak RF output power (W)

**G** = EUT Antenna numeric gain (numeric)

**d** = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained

Report No.: NEI-FCCP-1-1209136 Page 98 of 101



#### **11.4TEST SETUP LAYOUT**

EUT	Power Meter
EUI	Fower Meter

#### 11.5 DEVIATION FROM TEST STANDARD

No deviation

#### 11.6EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

#### **11.7TEST RESULTS**

The power is so low so there is no need for RF calculations.

Report No.: NEI-FCCP-1-1209136 Page 99 of 101