

- Follow requirements outlined in standard:
- UL Category Control Number (CNN) PGDQ2

System

background 2. Text to be permanent Black on White

3. Label to contain Part Number and Serial Number- S/N 6 digit sequential number

("XXXXXX"). Both to be printed by vendor.

4. Barcode specifications: Code 128, module

width 10 mils, human readable printout (6 digit

length 1.20 inches. Bar code information is max). Maximum height 0.16 inches, maximum to be

supplied by Sicel Technologies with each for Serial Numbers, Serial Numbers


purchase order,

intact". 5. Adhesive to render label "non-removable

easily defaced per the 60601-1 Section 7.1.3(b). 6. Label print must not smudge, smear or be easily defaced per the test specified in IEC

- Border does <u>NOT</u> print.
- Inspection: Inspect 1 unit 100%
- 494-00001-00 for Storage information. Reference label handling Specification

Textj 5 pt., Arial

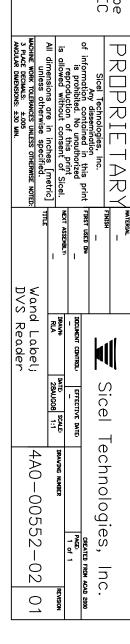







Label Location for the DVS Reader Base Station

Sicel Technologies, Inc. 3800 Gateway Centre Blvd. Suite 308 Morrisville, NC 27560





Label Location for the DVS Reader Wand

Sicel Technologies, Inc. 3800 Gateway Centre Blvd. Suite 308 Morrisville, NC 27560