



**ETS Dr.GenZ Taiwan PS Co., Ltd.**

**FCC Registration No.: 930600**

**Industry Canada filed test laboratory Reg. No. IC 5679**

**Accredited Testing Laboratory**



**A2LA Cert.No.: 2300.01**

**PTCRB Accredited Type Certification Test House**

# **FCC**

# **TEST - REPORT**

**FCC PART 15 for U-NII devices**

**FCC ID: TSTWV100**

**Test report no.: W6M20511-6291-E-54**

## TABLE OF CONTENTS

|          |  |           |
|----------|--|-----------|
| <b>1</b> | <b>GENERAL INFORMATION .....</b>   | <b>4</b>  |
| 1.1      | NOTES .....  | 4         |
| 1.2      | TESTING LABORATORY .....   | 5         |
| 1.2.1    | <i>Location .....</i>  | 5         |
| 1.2.2    | <i>Details of accreditation status .....</i>   | 5         |
| 1.3      | DETAILS OF APPROVAL HOLDER .....   | 5         |
| 1.4      | APPLICATION DETAILS .....  | 6         |
| 1.5      | GENERAL INFORMATION OF TEST ITEM .....   | 6         |
| 1.6      | TEST STANDARDS .....   | 8         |
| <b>2</b> | <b>TECHNICAL TEST .....</b>  | <b>9</b>  |
| 2.1      | SUMMARY OF TEST RESULTS .....  | 9         |
| 2.2      | TEST ENVIRONMENT .....   | 9         |
| 2.3      | TEST EQUIPMENT LIST .....  | 10        |
| 2.4      | TEST PROCEDURE .....   | 13        |
| 2.4.1    | <i>Emission Bandwidth, FCC 15.407 (a) .....</i>  | 13        |
| 2.4.2    | <i>Peak Transmit Power, FCC 15.407 (a) (1,2,3,4) .....</i>                               | 13        |
| 2.4.3    | <i>Peak Power Spectral Density, FCC 15.407 (a) (1,2,4,5) .....</i>                       | 13        |
| 2.4.4    | <i>Ratio of the Peak Excursion of the modulation envelope, FCC 15.407 (a)(6) .....</i>   | 14        |
| 2.4.5    | <i>Peak Emission outside the frequency bands of operation, FCC 15.205, 15.209, .....</i> | 14        |
|          | <i>15.407 (b) .....</i>  | 14        |
| 2.4.6    | <i>Automatic Discontinuation of transmission, FCC 15.407 (c) .....</i>                   | 14        |
| 2.4.7    | <i>Reserved, FCC 15.407 (d) .....</i>  | 15        |
| 2.4.8    | <i>Indoor Operation, Restriction, FCC 15.407 (e) .....</i>                               | 15        |
| 2.4.9    | <i>Radio Frequency Radiation Exposure, FCC 15.407 (f) .....</i>                          | 15        |
| 2.4.10   | <i>Frequency Stability, FCC 15.407 (g) .....</i>   | 15        |
| 2.4.11   | <i>Spurious Emission related to AC power line, FCC 15.107, 15.207 .....</i>              | 15        |
| <b>3</b> | <b>TEST RESULTS (ENCLOSURE) .....</b>  | <b>16</b> |
| 3.1      | EMISSION BANDWIDTH, FCC 15.407 (A) .....   | 17        |
| 3.2      | PEAK TRANSMIT POWER, FCC 15.407 (A) (1,2,3,4) .....                                      | 18        |
| 3.3      | PEAK POWER SPECTRAL DENSITY, FCC 15.407 (A) (1,2,4,5) .....                              | 19        |
| 3.4      | RATIO OF THE PEAK EXCURSION OF THE MODULATION ENVELOPE, FCC 15.407 (A)(6) .....          | 20        |
| 3.5      | PEAK EMISSION OUTSIDE THE FREQUENCY BANDS OF OPERATION, FCC 15.205, 15.209, .....        | 21        |
|          | 15.407 (B) .....   | 21        |
| 3.6      | AUTOMATIC DISCONTINUATION OF TRANSMISSION, FCC 15.407 (C) .....                          | 23        |
| 3.7      | RESERVED, FCC 15.407 (D) .....   | 23        |
| 3.8      | INDOOR OPERATION RESTRICTION, FCC 15.407 (E) .....                                       | 23        |
| 3.9      | RADIO FREQUENCY RADIATION EXPOSURE, FCC 15.407 (F) .....                                 | 24        |
| 3.10     | FREQUENCY STABILITY, FCC 15.407 (G) .....  | 25        |
| 3.11     | RADIATED EMISSIONS FROM RECEIVER SECTION OF TRANSCEIVER .....                            | 26        |
| 3.12     | SPURIOUS EMISSIONS RELATED TO AC POWER LINE, FCC 15.107, 15.207 .....                    | 31        |
|          | <b>APPENDIX .....</b>  | <b>35</b> |
|          | APPENDIX A .....   | 36        |



Registration number: W6M20511-6291-E-54  
FCC ID: TSTWV100

APPENDIX B.....37

APPENDIX C.....38

APPENDIX D.....39

APPENDIX E .....40

APPENDIX F .....41

APPENDIX G.....42

APPENDIX H.....43

APPENDIX I .....44

APPENDIX J .....45

Registration number: W6M20511-6291-E-54

FCC ID: TSTWV100

## **1 General Information**

### **1.1 Notes**

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has Passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the ETS DR. GENZ TAIWAN PS CO., LTD.

#### **Specific Conditions:**

Usage of the hereunder tested device in combination with other integrated or external antennas requires at least additional output power measurements, spurious emission measurements, conducted emission measurements (AC supply lines) and radio frequency exposure evaluations for each individual configuration performed, for certification by FCC.


The test sample is able to work according IEEE 802.11 a,b,g.

This report is related to FCC Part 15 E (UNII device, IEEE 802.11a) only and does not cover requirements for other parts like FCC Part 15 C (e.g. for IEEE 802.11 b,g).

#### **Tester:**

19.12.2005

Jay Chaing



Date

ETS-Lab.

Name

Signature

#### **Technical responsibility for area of testing:**

19.12.2005

Steven Chung



Date

ETS

Name

Signature

Registration number: W6M20511-6291-E-54  
FCC ID: TSTWV100

## **1.2 Testing laboratory**

### **1.2.1 Location**

OATS  
No.5-1, Shuang Sing Village,  
LiShuei Rd., Wanli Township,  
Taipei County 207, Taiwan (R.O.C.)

Company  
ETS Dr.Genx Taiwan PS Co., Ltd.  
6F, NO. 58, LANE 188, RUEY-KUANG RD.  
NEIHU, TAIPEI 114, TAIWAN R.O.C.  
Tel : 886-2-66068877  
Fax : 886-2-66068879

### **1.2.2 Details of accreditation status**

**Accredited testing laboratory**

**A2LA-registration number: 2300.01**

**FCC filed test laboratory Reg. No. 930600**

**Industry Canada filed test laboratory Reg. No. IC 5679**

**PTCRB Accredited Type Certification Test House**

## **1.3 Details of approval holder**

|           |  |
|-----------|--|
| Name      | : YUAN High-Tech Development Co., Ltd. |
| Street    | : 18F, No.88, Sec.2, Chung Hsiao E.Rd. |
| Town      | : Taipei                               |
| Country   | : Taiwan, R.O.C.                       |
| Telephone | : +886-2-23921233#252                  |
| Fax       | : +886-2-23921358                      |

|           |                   |
|-----------|-------------------|
| Contact   | : Mr. Kevin Chang |
| Telephone | : +886-2-23921233 |

Registration number: W6M20511-6291-E-54

FCC ID: TSTWV100

**1.4 Application details**

Date of receipt of application : 08.11.2005

Date of receipt of test item : 08.11.2005

Date of test : from 08.11.2005 to 19.12.2005

**1.5 General information of Test item**

Type of test item : Wireless Multimedia System

Model Number : WMS 100 Receiver

Serial number : without

Photos : see Annex

**Technical data**

Frequency band :

| Band (GHz)                                   | Operating Channel numbers | Channel center Frequency (MHz) | Supported by Test item  |
|--|---------------------------|--------------------------------|---|
| U-NII lower band<br>(5.15 – 5.25)            | 36                        | 5180                           | <input checked="" type="checkbox"/> Yes / <input type="checkbox"/> No |
|  | 40                        | 5200                           |   |
|  | 44                        | 5220                           |   |
|  | 48                        | 5240                           |   |
| U-NII middle band<br>(5.25 – 5.35)           | 52                        | 5260                           | <input type="checkbox"/> Yes / <input checked="" type="checkbox"/> No |
|  | 56                        | 5280                           |   |
|  | 60                        | 5300                           |   |
|  | 64                        | 5320                           |   |
| U-NII (new) band<br>(5.470 – 5.725)          | 100                       | 5500                           | <input type="checkbox"/> Yes / <input checked="" type="checkbox"/> No |
|  | 104                       | 5520                           |   |
|  | 108                       | 5540                           |   |
|  | 112                       | 5560                           |   |
|  | 116                       | 5580                           |   |
|  | 120                       | 5600                           |   |
|  | 124                       | 5620                           |   |
|  | 128                       | 5640                           |   |
|  | 132                       | 5660                           |   |
|  | 136                       | 5680                           |   |
|  | 140                       | 5700                           |   |
| U-NII upper band<br>(5.725 – 5.825)          | 149                       | 5745                           | <input type="checkbox"/> Yes / <input checked="" type="checkbox"/> No |
|  | 153                       | 5765                           |   |
|  | 157                       | 5785                           |   |
|  | 161                       | 5805                           |   |
| U-NII lower and middle band<br>(5.15 – 5.35) | 42                        | 5210                           | <input type="checkbox"/> Yes / <input checked="" type="checkbox"/> No |
|  | 50                        | 5250                           |   |
|  | 58                        | 5290                           |   |



Registration number: W6M20511-6291-E-54  
FCC ID: TSTWV100

Operating modes : duplex  
Type of modulation : DSSS/ OFDM

| Date rate (Mbits / s ) | Modulation | Supported by Test item  |
|------------------------|------------|---|
| 6                      | BPSK       | <input checked="" type="checkbox"/> Yes / <input type="checkbox"/> No |
| 18                     | QPSK       | <input checked="" type="checkbox"/> Yes / <input type="checkbox"/> No |
| 36                     | 16-QAM     | <input checked="" type="checkbox"/> Yes / <input type="checkbox"/> No |
| 54                     | 64-QAM     | <input checked="" type="checkbox"/> Yes / <input type="checkbox"/> No |

Fixed point to point operation : Yes / No

Antenna : Flying Lead Swivel Antenna

Antenna gain : 2 dBi

Input : 120 VAC ( ac/dc adaptor )

Power supply

Output : 5 VDC

Emission designator : 25M2W7D

Host device: none

Classification :

|  |                                     |
|--|-------------------------------------|
| Fixed Device                                 | <input checked="" type="checkbox"/> |
| Mobile Device (Human Body distance > 20cm)   | <input type="checkbox"/>            |
| Portable Device (Human Body distance < 20cm) | <input type="checkbox"/>            |

**Manufacturer:**  
(if applicable)

Name : ./.

Street : ./.

Town : ./.

Country : ./.

Registration number: W6M20511-6291-E-54  
FCC ID: TSTWV100


## 1.6 Test standards

Technical standard : FCC RULES PART 15 E

Additional information:

For this report the function according IEEE 802.11a is considered only. The scheme for frequency generation, spectrum spreading, receiver parameters, synchronization procedure, and other parameters are determined by the mentioned standard above. This test report is according to customer's request. A shield cable ,“SUNF PU E132276-A (UL) CM 75 °C 4PR 24AWG CSA LL64151-A CMG FTA CAT.5E PATCH CORD” with two ferrite cores was employed during this test. These two cores information are as followings: Manufacturer Name: King Core Electronics Inc. Model Number A: KCF-130-B  
Model Number B: KCF-100-B





Registration number: W6M20511-6291-E-54  
FCC ID: TSTWV100

## 2 Technical test

### 2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.



or

The deviations as specified in 2.5 were ascertained in the course of the tests performed.



### 2.2 Test environment

Temperature : 23 °C

Relative humidity content : 20 ... 75 %

Air pressure : 86 ... 103 kPa

Details of power supply : 120 VAC ( ac/dc adaptor )

: 5 VDC

Extreme conditions parameters : test voltage / temp extreme    min : 102VAC / -10°C  
max : 138VAC / 40°C

Registration number: W6M20511-6291-E-54

FCC ID: TSTWV100

### 2.3 Test Equipment List

| No.          | Test equipment                                     | Type                | Serial No.                | Manufacturer                          | Next Cal. Date |
|--------------|--|---------------------|---------------------------|---------------------------------------|----------------|
| ETSTW-CE 001 | EMI TEST RECEIVER                                  | ESHS10              | 842121/013                | R&S                                   | 2005/11/8      |
| ETSTW-CE 002 | PREREULATOR MODE DC POWER SUPPLY                   |                     |                           |                                       |                |
| ETSTW-CE 003 | AC POWER SOURCE                                    | APS-9102            | D161137                   | GW                                    |                |
| ETSTW-CE 004 | ZWEILEITER-V-NETZNACHBILDUNG<br>TWO-LINE V-NETWORK | ESH3-Z5             | 840731/011                | R&S                                   | 2006/11/8      |
| ETSTW-CE 005 | Line-Impedance Stabilisation Network               | NNBM 8126D          | 137                       | Schwarzbeck                           | 2006/11/3      |
| ETSTW-CE 006 | IMPULS-BEGRENZER PULSE LIMITER                     | ESH3-Z2             | 100226                    | R&S                                   | 2006/11/10     |
| ETSTW-CE 007 | SPECTRUM ANALYZER 5GHz                             | FSB                 | 849670/001                | R&S                                   |                |
| ETSTW-CE 008 | ABSORBING CLAMP                                    | MDS 21              | 3469                      | ABSORPTIONS-<br>MESSWANDLER-<br>ZANGE | 2006/11/4      |
| ETSTW-CE 009 | TEMP.&HUMIDITY CHAMBER                             | GTH-225-40-1P-U     | MAA0305-009               | GIANT FORCE                           | 2005/5/10      |
| ETSTW-CE 010 | Comb Generator-conducted                           |                     |                           | ETS                                   |                |
| ETSTW-CE 011 | Power Line Conducted Emission Only                 |                     |                           | ETS                                   |                |
| ETSTW-CE 012 | Dual-Phase-V-Network                               | NNB-2/16Z           | 03/10201                  | Telemeter                             | 2006/4/11      |
| ETSTW-CS 001 | SIGNAL GENERATOR                                   | SMX                 | 849254/003                | R&S                                   | 2005/10/31     |
| ETSTW-CS 002 | COUPLING AND DECOUPLING NETWORK                    | CDN S751            | 19263                     | SCHAFFNER                             | 2006/11/3      |
| ETSTW-CS 003 | COUPLING AND DECOUPLING NETWORK                    | CDN T400            | 19820                     | SCHAFFNER                             | 2006/11/3      |
| ETSTW-CS 004 | COUPLING AND DECOUPLING NETWORK                    | CDN M016            | 20053                     | SCHAFFNER                             | 2006/11/3      |
| ETSTW-CS 005 | RF Power Amplifier                                 | 100A250A            | 306547                    | AR                                    | 2005/11/3      |
| ETSTW-CS 006 | Terminal 50Ω Load                                  | 50T-116 M           |                           | JFW                                   |                |
| ETSTW-CS 007 | Terminal 50Ω Load                                  | 50T-116 F           |                           | JFW                                   |                |
| ETSTW-CS 008 | 6 dB Attenuator                                    | HFP-5100-3/06 N M/F | 2010876106                |                                       |                |
| ETSTW-RE 001 | Controller   | CD 1000             | C01000/154/867<br>/004/L  | Heinrich Deisel                       |                |
| ETSTW-RE 002 | Function Generator                                 | 33220A              | MY43004982                | Agilent                               | 2005/11/3      |
| ETSTW-RE 003 | EMI TEST RECEIVER                                  | ESI                 | 831438/001                | R&S                                   | 2005/11/16     |
| ETSTW-RE 004 | EMI TEST RECEIVER                                  | ESI                 | 831459/012                | R&S                                   | 2005/11/9      |
| ETSTW-RE 005 | EMI TEST RECEIVER                                  | ESVS10              | 843207/020                | R&S                                   | 2005/11/1      |
| ETSTW-RE 008 | Controller   | HD100               | C0100-L/047/<br>6670703/L | Heinrich Deisel                       |                |
| ETSTW-RE 009 | Controller   | HD100               | 100/341                   | Heinrich Deisel                       |                |
| ETSTW-RE 010 | PROGRAMMABLE LINEAR POWER<br>SUPPLY                | LPS-305             | 30503070181               | MOTECH                                |                |
| ETSTW-RE 011 | PROGRAMMABLE LINEAR POWER<br>SUPPLY                | LPS-305             | 30503070165               | MOTECH                                |                |
| ETSTW-RE 012 | TUNABLE BANDREJECT FILTER                          | D.C 0309            | 146                       | K&L                                   |                |
| ETSTW-RE 013 | TUNABLE BANDREJECT FILTER                          | D.C 0036            | 397                       | K&L                                   |                |
| ETSTW-RE 014 | DUAL TRACKING WITH 5V FIXED                        | GPC-3030D           |                           | GW                                    |                |
| ETSTW-RE 015 | ANTENNA  | HK116               | 841489/003                | R&S                                   |                |
| ETSTW-RE 016 | ANTENNA  | HL223               | 848953/006                | R&S                                   |                |
| ETSTW-RE 017 | ANTENNA  | HL025               | 352886/001                | R&S                                   |                |
| ETSTW-RE 018 | ANTENNA  | AT4560              | 27212                     | AR                                    | 2006/11/7      |
| ETSTW-RE 019 | ANTENNA , HORN                                     | 22240-25            | 121074                    | FM                                    |                |

Registration number: W6M20511-6291-E-54

FCC ID: TSTWV100

|               |                                       |                  |                |             |            |
|---------------|---------------------------------------|------------------|----------------|-------------|------------|
| ETSTW-RE 020  | MICROWAVE HORN ANTENNA                | AT4002A          | 306915         | AR          |            |
| ETSTW-RE 021  | SWEEP GENERATOR                       | SWM05            | 835130/010     | R&S         | 2005/11/10 |
| ETSTW-RE 022  | AMPLIFIER                             | 8447D            | 2944A09837     | Agilent     | 2005/11/1  |
| ETSTW-RE 023  | Shielded room                         | SR 1             |                | Frankonia   |            |
| ETSTW-RE 024  | Anechoic Chamber                      | CHC 1            |                | Frankonia   |            |
| ETSTW-RE 025  | Anechoic Chamber                      | CHC 2            |                | Frankonia   |            |
| ETSTW-RE 026  | Open Area Test Site                   | 10m              |                | ETS         |            |
| ETSTW-RE 027  | Passive Loop Antenna                  | 6512             | 34563          | EMCO        | 2006/6/29  |
| ETSTW-RE 028  | Log-Periodic DipoleArray Antenna      | 3148             | 34429          | EMCO        | 2006/6/14  |
| ETSTW-RE 029  | Biconical Antenna                     | 3109             | 33524          | EMCO        | 2006/6/16  |
| ETSTW-RE 030  | Double-Ridged Waveguide Horn Antenna  | 3117             | 35224          | EMCO        | 2006/5/4   |
| ETSTW-RE 031  | Comb Generator-radiated               |                  |                | ETS         |            |
| ETSTW-RE 032  | Millivoltmeter                        | URV 55           | 849086/013     | R&S         | 2005/11/17 |
| ETSTW-RE 033  | 4CH 1GHz 5GS/s DSO                    | WAVERUNNER 6100A | LCRY0604P14508 | LeCory      |            |
| ETSTW-RE 034  | Power Sensor                          | URV5-Z4          | 839313/006     | R&S         | 2005/11/17 |
| ETSTW-RE 035  | 1.5GHz Active Voltage Probe           | HFP1500          | 2332           | LeCory      |            |
| ETSTW-RE 036  | 100MHz High Voltage Diff Probe        | ADP305           | 3305           | LeCory      |            |
| ETSTW-RE 037  | Log-Periodic DipoleArray Antenna      | 3148             | 00034546       | EMCO        | 2006/11/17 |
| ETSTW-RE 038  | Log-Periodic DipoleArray Antenna      | 3148             | 00034547       | EMCO        | 2006/11/17 |
| ETSTW-RE 039  | Biconical Antenna                     | 3110B            | 41760          | EMCO        | 2006/11/17 |
| ETSTW-RE 040  | Biconical Antenna                     | 3110B            | 41761          | EMCO        | 2006/11/17 |
| ETSTW-RE 041  | Anechoic Chamber                      | CHC 3            |                | Frankonia   |            |
| ETSTW-RE 042  | ANTENNA                               | HK116            | 100172         | R&S         | 2007/1/13  |
| ETSTW-RE 043  | ANTENNA                               | HL223            | 100166         | R&S         | 2006/4/15  |
| ETSTW-RE 044  | ANTENNA                               | HL050            | 100094         | R&S         |            |
| ETSTW-RE 048  | Triple Loop Antenna                   | HXYZ 9170        | HXYZ 9170-134  | Schwarzbeck | 2006/3/21  |
| ETSTW-RE 049  | TRILOG Super Broadband test Antenna   | VULB 9160        | 9160-3185      | Schwarzbeck | 2007/5/18  |
| ETSTW-EMI 001 | HARMONICS 1000                        | HAR1000-1P       | 93             | EMC-PARTNER | 2005/11/17 |
| ETSTW-EMS 001 | Clamp BASELSTRASSE 160 CH-4242 LAUFEN | CN-EFT1000       | 354            | EMC-PARTNER | 2005/11/1  |
| ETSTW-EMS 002 | Frequency Converter                   | YF-6020          | 0308014        |             |            |
| ETSTW-EMS 003 | EMC Immunity Test System              | TRA2000IN6       | 579            | EMC-PARTNER | 2005/11/1  |
| ETSTW-EMS 004 | ESD generator minizap                 | ESD2000          | 016            | EMC-PARTNER | 2005/11/1  |
| ETSTW-EMS 005 | Attenautor (50Ω)                      | VERI50           | 051            | EMC-PARTNER | 2006/8/30  |
| ETSTW-EMS 006 | Attenautor (1 KΩ)                     | VERI1K           | 019            | EMC-PARTNER | 2006/10/20 |
| ETSTW-EMS 007 | 20GΩ Divider                          | ESD-VERI-V       | 021            | EMC-PARTNER | 2006/3/16  |
| ETSTW-RS 001  | 14" COLOR VIDEO MONITOR               | TP-1480HR        | P009799        | TOPICA      |            |
| ETSTW-RS 002  | 14" COLOR VIDEO MONITOR               | TP-1480HR        | P009814        | TOPICA      |            |
| ETSTW-RS 003  | RF Power Amplifier                    | 30S1G3           | 306933         | AR          |            |
| ETSTW-RS 004  | RF Power Amplifier                    | 150W1000         | 307009         | AR          | 2005/11/18 |
| ETSTW-RS 005  | Electric Field Probe Type 8.3         | EMR-20           | BN 2244/20     | GW          | 2005/9/3   |
| ETSTW-RS 006  | SIGNAL GENERATOR                      | SML03            | 101551         | R&S         | 2005/11/15 |
| ETSTW-RS 007  | AUDIO ANALYZER                        | UPA3             | 843458/029     | R&S         | 2005/11/15 |

Registration number: W6M20511-6291-E-54

FCC ID: TSTWV100

|               |                                      |  |             |                |            |
|---------------|--------------------------------------|--|-------------|----------------|------------|
| ETSTW-EMS 008 | Safety Test Solutions                | ELT-400                                      | E-0039      | Narda          | 2006/1/3   |
| ETSTW-EMS 009 | Magnetic Field Antenna               | MF1000-1                                     | 104         | EMC-PARTNER    | 2006/12/2  |
| ETSTW-GSM 01  | SIM Simulator                        | IT3  | B2004-50106 | ORGA           |            |
| ETSTW-GSM 02  | Universal Radio Communication Tester | CMU 200                                      | 103489      | R&S            |            |
| ETSTW-GSM 03  | Agilent 8960 Test Set 1              | E5515C                                       | GB44052675  | Agilent        | 2006/7/13  |
| ETSTW-GSM 04  | Agilent 8960 Test Set 2              | E5515C                                       | GB44052665  | Agilent        | 2006/7/13  |
| ETSTW-GSM 05  | Agilent 8960 Test Set 3              | E5515C                                       | GB44052652  | Agilent        | 2006/7/16  |
| ETSTW-GSM 06  | Agilent 8960 Test Set 4              | E5515C                                       | GB44052684  | Agilent        | 2006/7/15  |
| ETSTW-GSM 07  | Agilent 8960 Test Set 5              | E5515C                                       | GB44052658  | Agilent        | 2006/7/13  |
| ETSTW-GSM 08  | Agilent 8960 Test Set 6              | E5515C                                       | GB44052666  | Agilent        | 2006/7/15  |
| ETSTW-GSM 09  | Controler PC                         | Dell GX 270                                  | 700F61J     | Dell           |            |
| ETSTW-GSM 10  | Combiner Wessex / Anite              | B4605/100                                    | 053         | Wessex / Anite | 2006/7/13  |
| ETSTW-GSM 11  | GSM 850,900,1800,1900 Test system    | TS8950G                                      |             | R&S            | 2005/10/31 |
| ETSTW-GSM 12  | Acoustical Calibrator                | 4231   | 2463874     | Brüel&Kjær     | 2005/11/17 |
| ETSTW-GSM 13  | Conditioning Amplifier               | 2690--0S2                                    | 2437856     | Brüel&Kjær     |            |
| ETSTW-GSM 14  | Telephone Test Head                  | 4602B  | 2465324     | Brüel&Kjær     |            |
| ETSTW-GSM 15  | Mouth Simulator                      | 4227   | 2462516     | Brüel&Kjær     |            |
| ETSTW-GSM 16  | TEMP.&HUMIDITY CHAMBER               | GTH-120-40-1P-U                              | MAA0501002  | GIANT FORCE    | 2005/12/29 |
| ETSTW-GSM 17  | ANTENNT COPLER                       | CMU-Z10                                      | 100988      | R&S            |            |
| ETSTW-GSM 18  | AUDIO ANALYZER                       | UPL16  | 100173      | R&S            | 2005/9/23  |
| ETSTW-GSM 19  | Band Reject Filter                   | WRCTF824/<br>849-822/851-40<br>/12+9SS       | 3           | WI             |            |
| ETSTW-GSM 20  | Band Reject Filter                   | WRCD1747/1748-<br>1743/1752-32/5SS           | 1           | WI             |            |
| ETSTW-GSM 21  | Band Reject Filter                   | WRCD1879.5/ 1880.5-<br>1875.5/ 1884.5-32/5SS | 3           | WI             |            |
| ETSTW-GSM 22  | Band Reject Filter                   | WRCT901.9/903.1 -<br>904.25-50/8SS           | 1           | WI             |            |


## 2.4 Test Procedure

The test procedures are performed following the test stands ANSI STANDARD C63.4 and Public Notice DA 02-2138 “Measurement Procedure for Peak Transmit Power in the Unlicensed National Information Infrastructure (U-NII) Bands”.

### 2.4.1 Emission Bandwidth, FCC 15.407 (a)

The Emission Bandwidth “B” is the bandwidth at 26dB down relative to the maximum level of the modulated carrier. The result “B” is used for determining of Peak Power Transmit limits. The measurement is performed according FCC Public Notice DA 02-2138.

The test are performed at frequency (low and high channels of EUT operating band), full rated power levels and all applicable data rates of the transmitter.

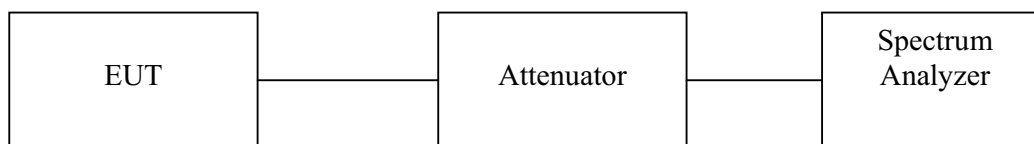

### 2.4.2 Peak Transmit Power, FCC 15.407 (a) (1,2,3,4)

Peak Transmit Power is the maximum transmit power as measured over an interval of time of at most 30/B or the transmission pulse duration of the device, whichever is less, under all conditions of modulation.

The applied FCC Public Notice DA 02-2138 describes three different methods to measure Peak Transmit Power.

If transmitting antenna of directional gain AG greater than 6 dBi are used, the Peak Transmit Power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Fixed point-to-point U-NII devices operating in the band 5.725 – 5.825 GHz may employ transmitting antennas with directional gain AG up to 23 dBi without any corresponding reduction.

For antenna gains greater than 23 dBi, a 1 dB reduction in Peak Transmit Power for each 1 dB of antenna gain in excess of 23 dBi would be required.

### 2.4.3 Peak Power Spectral Density, FCC 15.407 (a) (1,2,4,5)

The Peak Power Spectral Density is the maximum power spectral density, measured with a specified bandwidth, within the U-NII device operating band.

FCC Public Notice DA 02-2138 specifies two different methods for this conducted measuring at the antenna port. If the device can not be connected directly, alternative techniques can be used.

If transmitting antennas of directional gain greater than 6 dBi are used, the Peak Power Spectral Density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Fixed point-to-point U-NII devices operating in the band 5.725 – 5.825 GHz may employ transmitting antennas with directional gain up to 23 dBi without any corresponding reduction. For antenna gains greater than 23 dBi, a 1 dB reduction in Peak Transmit Power for each 1 dB of antenna gain in excess of 23 dBi would be required.

#### **2.4.4 Ratio of the Peak Excursion of the modulation envelope, FCC 15.407 (a)(6)**

The Ratio of the Peak Excursion of the modulation envelope to the Peak Transmit Power shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

The used measured method is described in FCC Public Notice DA 02-2138.

#### **2.4.5 Peak Emission outside the frequency bands of operation, FCC 15.205, 15.209, 15.407 (b)**

Peak Emission outside the frequency band of operation are called Spurious Emission in this test report. Here the spurious emissions are measured as field strength values. The given power value limits of -27 dBm and -17 dBm are calculated to field strength values of 68.23 dB $\mu$ V/m and 78.23 dB $\mu$ V/m for 3 m measuring distance. This procedure can simplify the necessary comparison with field strength based limits for the restricted band according 15.205; 15.209.

For frequencies above 26 GHz a measuring distance of 1 m is used with values corrected accordingly.

The test procedure used is ANSI STANDARD C63.4-2003 using a spectrum analyzer. The bandwidth of the spectrum analyzer is 100 kHz for the frequency range of 30 MHz to 1 GHz and 1 dB above a microvolt at the output of the antenna.

The Field Strength is established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB $\mu$ V) to the antenna correction factors supplied by the antenna manufacturer.

The antenna correction factors are stated in terms of dB.

Example :

|            |  |
|------------|--|
| Freq (MHz) | METER READING + ACF + CABLELOSS (to the receiver) = FS   |
| 33         | 20 dB $\mu$ V + 10.36 dB + 6 dB = 36.36 dB $\mu$ V/m @3m |

ANSI STANDARD C63.4-2003 10.1.7 MEASUREMENT PROCEDURES: The test sample is Placed on a table 80 cm high and with dimension of 1 m by 1.5 m (non metallic table). The test sample is placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum is scanned from 30 MHz to 10<sup>th</sup> harmonic of the fundamental or 40 GHz, whichever is over.

Peak reading is taken in three (3) orthogonal planes and highest reading.

When an emission is found, the table is rotated to produce the maximum signal strength. At this point, the antenna is raised and lowered from 1m to 4m. the antenna is placed in both the horizontal and vertical planes.

#### **2.4.6 Automatic Discontinuation of transmission, FCC 15.407 (c)**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. Applications shall include in their application for equipment authorization a description of how this requirement is met.

#### 2.4.7 Reserved, FCC 15.407 (d)

#### 2.4.8 Indoor Operation, Restriction, FCC 15.407 (e)

U-NII device that operates in the band 5.15 – 5.25 GHz band will be restricted to indoor operations to reduce any potential for harmful interference to co-channel MSS operations.


#### 2.4.9 Radio Frequency Radiation Exposure, FCC 15.407 (f)

U-NII device are subject to the radio frequency exposure requirements specified in FCC Part 1.1307(b), Part 2.1091 and Part 2.1093, as appropriate. All equipment shall be considered to operate in a “general population/uncontrolled” environment.

Applicants shall include in their application of how this requirement is met.

#### 2.4.10 Frequency Stability, FCC 15.407 (g)

Frequency Stability of a U-NII device means that an intended emission is maintained within the band of operation under all conditions of operation as specified in the user manual.

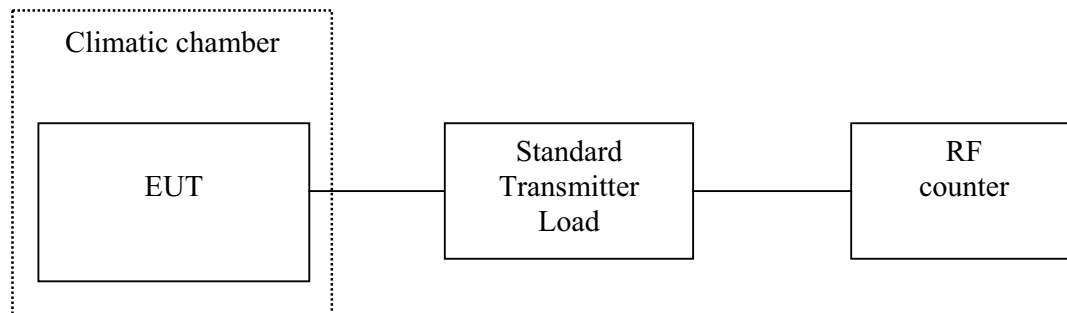

A plot of the emission at the band edge, with the transmitting frequency tuned to band edge channel, may be required for devices which do not utilize a standard carrier that may be measured.

#### 2.4.11 Spurious Emission related to AC power line, FCC 15.107, 15.207

The power line conducted interference measurement follows ANSI STANDARD C63.4- using a 50  $\mu$ H LISN. The bandwidth of the measurement receiver is 10 kHz. Both lines are observed in the frequency range 150 kHz to 30 MHz.

Registration number: W6M20511-6291-E-54

FCC ID: TSTWV100

**3 Test results (enclosure)**

| TEST CASE   | Para. Number            | Required                            | Customer Declaration                | Test passed                         | Test failed              |
|---|-------------------------|-------------------------------------|-------------------------------------|-------------------------------------|--------------------------|
| Emission Bandwidth                                    | 15.407(a)               | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Peak Transmit Power                                   | 15.407(a)(1,2,3,4)      | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Peak Power Spectral Density                           | 15.407(a)(1,2,4,5)      | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Ratio of Peak Excursion of the modulation envelope    | 15.407(a)(6)            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Band edge   | 15.407(b) (1,2,3,4)     | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Peak Emission outside the frequency band of operation | 15.205,15.209,15.407(b) | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Automatic Discontinuation of transmission             | 15.407(c)               | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> |
| Indoor Operation Restriction                          | 15.407(e)               | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> |
| Radio Frequency Exposure                              | 15.407(f)               | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/> |
| Frequency Stability                                   | 15.407(g)               | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Radiated Emission from Digital Part And Receiver L.O. | 15.109                  | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Spurious Emission related to AC power line            | 15.107, 15.207          | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/> |

The follows is intended to leave blank.



Registration number: W6M20511-6291-E-54

FCC ID: TSTWV100

**3.1 Emission Bandwidth. FCC 15.407 (a)**

|                  | <b>Emission Bandwidth<br/>(MHz)</b> |             |             |    |     |     |
|------------------|-------------------------------------|-------------|-------------|----|-----|-----|
| <b>Data rate</b> | <b>Channel</b>                      |             |             |    |     |     |
| Mbit/s           | 36                                  | 40          | 48          | 64 | 149 | 161 |
| 6                | 25.25050100                         | 24.44889780 | 23.40681363 | -- | --  | --  |
| 18               | 24.04809619                         | 23.72745491 | 24.04809619 | -- | --  | --  |
| 36               | 24.20841683                         | 23.32665331 | 23.08617234 | -- | --  | --  |
| 54               | 23.56713427                         | 23.08617234 | 23.00601202 | -- | --  | --  |

Test equipment used: ETSTW-RE004

Comments: See attached diagrams for examples.

Registration number: W6M20511-6291-E-54  
FCC ID: TSTWV100

### 3.2 Peak Transmit Power, FCC 15.407 (a) (1,2,3,4)

This measurement is performed according Method 3 of Public Notice DA 02-2138 for Peak Transmit Power measurement.

|           | Peak Transmit Power<br>(dBm) |       |       |    |     |     |
|-----------|------------------------------|-------|-------|----|-----|-----|
| Data rate | Channel                      |       |       |    |     |     |
| Mbit/s    | 36                           | 40    | 48    | 64 | 149 | 161 |
| 6         | 16.62                        | 16.47 | 16.27 | -- | --  | --  |
| 18        | 16.24                        | 16.20 | 15.89 | -- | --  | --  |
| 36        | 16.13                        | 15.88 | 15.96 | -- | --  | --  |
| 54        | 15.91                        | 15.88 | 15.56 | -- | --  | --  |

| Limits for Peak Transmit Power |                   |                   |                   |
|--------------------------------|-------------------|-------------------|-------------------|
| Frequency f (GHz)              | dBm               | dBm               | Remarks           |
|                                | Fix value         | B related value   | For B = 20 MHz    |
| 5.15 – 5.25                    | 17                | 17                | 4 dBm + 10log B   |
| 5.25 – 5.35                    | 24                | 24                | 11 dBm + 10log B  |
| 5.725 – 5.825                  | 30                | 30                | 17 dBm + 10log B  |
| 5.15 – 5.35                    | 17 - (AG – 6 dB)  | 17 - (AG – 6 dB)  | For AG > 6 dBi    |
| 5.25 – 5.35                    | 24 - (AG – 6 dB)  | 24 - (AG – 6 dB)  | For AG > 6 dBi    |
| 5.725 – 5.825                  | 30 - (AG – 23 dB) | 30 - (AG – 23 dB) | For AG > 23 dBi   |
|                                |                   |                   | AG – antenna gain |

Test equipment used: ETSTW-RE004

Comments: See attached diagrams for examples.

Registration number: W6M20511-6291-E-54

FCC ID: TSTWV100

**3.3 Peak Power Spectral Density, FCC 15.407 (a) (1,2,4,5)**

This measurement is performed according Method 2 of Public Notice DA 02-2138 for Peak Power Spectral Density measurement.

|                  | <b>Peak Power Spectral Density<br/>(dBm)</b> |      |      |    |     |     |
|------------------|--|------|------|----|-----|-----|
| <b>Data rate</b> | <b>Channel</b>                               |      |      |    |     |     |
| Mbit/s           | 36   | 40   | 48   | 64 | 149 | 161 |
| 6                | 2.99   | 2.72 | 3.08 | -- | --  | --  |
| 18               | 3.16   | 3.09 | 3.21 | -- | --  | --  |
| 36               | 3.64   | 3.09 | 3.05 | -- | --  | --  |
| 54               | 3.75   | 3.22 | 3.25 | -- | --  | --  |

| <b>Limits Power Spectral Density</b> |                   |                   |
|--------------------------------------|-------------------|-------------------|
| Frequency f (GHz)                    | dBm/MHz           | Remarks           |
| 5.15 – 5.25                          | 4                 | Conducted         |
| 5.25 – 5.35                          | 11                | Conducted         |
| 5.725 – 5.825                        | 17                | Conducted         |
| 5.15 – 5.35                          | 4 - (AG – 6 dB)   | For AG > 6 dBi    |
| 5.25 – 5.35                          | 11 - (AG – 6 dB)  | For AG > 6 dBi    |
| 5.725 – 5.825                        | 17 - (AG – 23 dB) | For AG > 23 dBi   |
|                                      |                   | AG – antenna gain |

Test equipment used: ETSTW-RE004

Comments: See attached diagrams for examples.

Registration number: W6M20511-6291-E-54

FCC ID: TSTWV100

**3.4 Ratio of the Peak Excursion of the modulation envelope, FCC 15.407 (a)(6)**

|           | Ratio of the Peak Excursion of the modulation envelope<br>(dBm) |       |       |    |     |     |
|-----------|---|-------|-------|----|-----|-----|
| Data rate | Channel   |       |       |    |     |     |
| Mbit/s    | 36  | 40    | 48    | 64 | 149 | 161 |
|           |   |       |       |    |     |     |
| 6         | 11.41   | 10.31 | 10.30 | -- | --  | --  |
| 18        | 9.16  | 9.31  | 9.19  | -- | --  | --  |
| 36        | 9.08  | 9.51  | 9.57  | -- | --  | --  |
| 54        | 10.21   | 9.07  | 10.40 | -- | --  | --  |

| Limit                   |    |   |
|-------------------------|----|---|
|                         | dB | Remarks                                       |
| Ratio of Peak Excursion | 13 | Across any 1 MHz BW or the emission bandwidth |

Test equipment used: ETSTW-RE004

Comments: See attached diagrams for examples.

### 3.5 Peak Emission outside the frequency bands of operation, FCC 15.205, 15.209, 15.407 (b)

Summary table with radiated data of the test plots

| Freq | Used Ch | Frequency Marker [MHz] | Polarization | corrections dB | Corrected Reading [dBuV/m] | Compliance Limit [dBuV/m] | Detector | BW [MHz] | Margin |
|------|---------|------------------------|--------------|----------------|----------------------------|---------------------------|----------|----------|--------|
| 1    | 36      | 65.771                 | V            | --             | 34.14                      | 68.23                     | PK       | 0.1      | 34.09  |
| 1    | 36      | 132.204                | V            | --             | 32.91                      | 43.5                      | PK       | 0.1      | 10.59  |
| 2    | 36      | 329.859                | V            | --             | 31.73                      | 46                        | PK       | 0.1      | 14.27  |
| 2    | 36      | 725.851                | V            | --             | 39.93                      | 68.23                     | PK       | 0.1      | 28.3   |
| 3    | 36      | 1318.637               | V            | --             | 40.57                      | 54                        | PK       | 1        | 13.43  |
| 3    | 36      | 1384.769               | V            | --             | 38.42                      | 54                        | PK       | 1        | 15.58  |
| 3    | 36      | 1517.034               | V            | --             | 38.55                      | 54                        | PK       | 1        | 15.45  |
| 1    | 36      | 119.939                | H            | --             | 33.19                      | 43.5                      | PK       | 0.1      | 10.31  |
| 1    | 36      | 131.863                | H            | --             | 32.10                      | 43.5                      | PK       | 0.1      | 11.4   |
| 2    | 36      | 725.851                | H            | --             | 44.37                      | 68.23                     | PK       | 0.1      | 23.86  |
| 2    | 36      | 749.899                | H            | --             | 43.62                      | 68.23                     | PK       | 0.1      | 24.61  |
| 3    | 36      | 1054.108               | H            | --             | 36.40                      | 54                        | PK       | 1        | 17.6   |
| 3    | 36      | 1318.637               | H            | --             | 35.10                      | 54                        | PK       | 1        | 18.9   |
| 3    | 36      | 1384.769               | H            | --             | 33.35                      | 54                        | PK       | 1        | 20.65  |
| 1    | 40      | 49.759                 | V            | --             | 33.8                       | 68.23                     | PK       | 0.1      | 34.43  |
| 1    | 40      | 65.771                 | V            | --             | 33.73                      | 68.23                     | PK       | 0.1      | 34.5   |
| 2    | 40      | 329.859                | V            | --             | 30.1                       | 46                        | PK       | 0.1      | 15.9   |
| 2    | 40      | 725.851                | V            | --             | 38.77                      | 68.23                     | PK       | 0.1      | 29.46  |
| 3    | 40      | 1318.637               | V            | --             | 42.11                      | 54                        | PK       | 1        | 11.89  |
| 3    | 40      | 1384.769               | V            | --             | 38.91                      | 54                        | PK       | 1        | 15.09  |
| 3    | 40      | 1517.034               | V            | --             | 39.54                      | 54                        | PK       | 1        | 14.46  |
| 1    | 40      | 119.939                | H            | --             | 32.62                      | 68.23                     | PK       | 0.1      | 35.61  |
| 1    | 40      | 131.863                | H            | --             | 32.45                      | 43.5                      | PK       | 0.1      | 11.05  |
| 2    | 40      | 725.851                | H            | --             | 44.38                      | 68.23                     | PK       | 0.1      | 23.85  |
| 2    | 40      | 775.551                | H            | --             | 42.61                      | 68.23                     | PK       | 0.1      | 25.62  |
| 3    | 40      | 1054.108               | H            | --             | 39.13                      | 54                        | PK       | 1        | 14.87  |
| 3    | 40      | 1252.505               | H            | --             | 35.59                      | 68.23                     | PK       | 1        | 32.64  |
| 3    | 40      | 1318.637               | H            | --             | 36.55                      | 54                        | PK       | 1        | 17.45  |
| 1    | 48      | 65.771                 | V            | --             | 32.99                      | 68.23                     | PK       | 0.1      | 35.24  |
| 1    | 48      | 131.863                | V            | --             | 32.17                      | 43.5                      | PK       | 0.1      | 11.33  |
| 2    | 48      | 329.859                | V            | --             | 30.85                      | 46                        | PK       | 0.1      | 15.15  |
| 2    | 48      | 725.851                | V            | --             | 39.49                      | 68.23                     | PK       | 0.1      | 28.74  |

Registration number: W6M20511-6291-E-54

FCC ID: TSTWV100

|   |    |          |   |    |       |       |    |     |       |
|---|----|----------|---|----|-------|-------|----|-----|-------|
| 3 | 48 | 1318.637 | V | -- | 41.21 | 54    | PK | 1   | 12.79 |
| 3 | 48 | 1384.769 | V | -- | 39.9  | 54    | PK | 1   | 14.1  |
| 3 | 48 | 1517.034 | V | -- | 39.28 | 54    | PK | 1   | 14.72 |
| 1 | 48 | 119.939  | H | -- | 32.11 | 43.5  | PK | 0.1 | 11.39 |
| 1 | 48 | 131.863  | H | -- | 32.39 | 43.5  | PK | 0.1 | 11.11 |
| 2 | 48 | 725.851  | H | -- | 44.41 | 68.23 | PK | 0.1 | 23.82 |
| 2 | 48 | 749.899  | H | -- | 43.16 | 68.23 | PK | 0.1 | 25.07 |
| 3 | 48 | 1054.108 | H | -- | 37.38 | 54    | PK | 1   | 16.62 |
| 3 | 48 | 1318.637 | H | -- | 38.61 | 54    | PK | 1   | 15.39 |
| 3 | 48 | 1384.769 | H | -- | 35.93 | 54    | PK | 1   | 18.07 |

Freq. – Frequency Range:

- 1: 30 - 200 MHz
- 2: 200 - 1000 MHz
- 3: 1 - 4 GHz
- 4: 4 - 8 GHz
- 5: 8 - 12 GHz
- 6: 12 - 17 GHz
- 7: 17 - 26.5 GHz

All not in the table noted test results are more than 20 dB below the relevant limits.

All other not noted test polts do not contain significant test results in relation to the limits.

**TEST RESULT (Transmitter):** The unit DOES meet the FCC requirements.

| Limits                         |         |               |                                    |
|--------------------------------|---------|---------------|------------------------------------|
| Frequency f (GHz)              | dBm/MHz | dBμV/m        | Remarks                            |
| Restricted bands below 960 MHz |         | acc. § 15.209 |                                    |
| Restricted bands above 960 MHz |         | 54            | for 5.15 – 5.25 GHz transmitters   |
| $f < 5.15 - 5.25 < f$          | -27     | (68.23)       | for 5.25 – 5.35 GHz Transmitters   |
| $f < 5.25 - 5.35 < f$          | -27     | (68.23)       | for 5.725 – 5.825 GHz transmitters |
| $f < 5.715 - 5.725 < f$        | -27     | (68.23)       | for 5.725 – 5.825 GHz              |
| $5.715 < f < 5.725$            | -17     | (88.23)       | transmitters                       |
| $5.825 < f < 5.835$            | -17     | (88.23)       | for 5.725 – 5.825 GHz              |

Comment: see attached diagrams

Test equipment used: ETSTW-RE 003, ETSTW-RE 015, ETSTW-RE 016, ETSTW-RE 017, ETSTW-RE 024



Registration number: W6M20511-6291-E-54  
FCC ID: TSTWV100

**3.6 Automatic Discontinuation of transmission, FCC 15.407 (c)**

This function will be declared by manufacturer.

**3.7 Reserved, FCC 15.407 (d)**

**3.8 Indoor Operation Restriction, FCC 15.407 (e)**

This equipment has to be declared by manufacturer of the final product as content of the technical description.

Registration number: W6M20511-6291-E-54

FCC ID: TSTWV100

### 3.9 Radio Frequency Radiation Exposure, FCC 15.407 (f)

Because the intended use of the test sample as a fixed device a theoretical MPE related evaluation

As an example is done below, for information purposes.

FCC OET Bulletin 65 Edition 97.01 determines the equations for predicting RF field and applicable limits.

The prediction for power density in the far-field of the antenna can be made by the general equation below.

The equation is generally accurate in the far-field but will over-predict power density in the near field, where it could be used for walking a “worst case” or conservative prediction.

$$S = \frac{PG}{4\pi R^2}$$

S – Power Density

P – Output power ERP

R – Distance

D – Cable Loss

AG – Antenna Gain G = AG-D

| Item | Unit               | Value     | Remarks          |
|------|--------------------|-----------|------------------|
| P    | mW                 | 45.9198   | Peak value       |
| D    | dB                 |           |                  |
| AG   | dBi                | 1.6       |                  |
| G    |                    | 2         | Calculated Value |
| R    | cm                 | 20        | Assumed value    |
| S    | mW/cm <sup>2</sup> | 0.0146166 | Calculated value |

Limits:

| Limit for General Population / Uncontrolled Exposure |  |
|--|--|
| Frequency<br>(MHz)                                   | Power Density<br>(mW/cm <sup>2</sup> ) |
| 1500 – 100.000                                       | 1,0                                    |



Registration number: W6M20511-6291-E-54

FCC ID: TSTWV100

**3.10 Frequency Stability, FCC 15.407 (g)**

| Voltage (%)        | Voltage (V) | Temperature (°C) | measured frequency (GHz) |            |            |         |
|--------------------|-------------|------------------|--------------------------|------------|------------|---------|
|                    |             |                  | Ch.: 36                  | Ch.: 40    | Ch.: 48    | Ch.: 64 |
| 100 %              | 120         | +20 (Tnom)       | 5.17991483               | 5.19991232 | 5.23991420 | --      |
| 115 % (1)          | 138         | +40 (Tmax)       | 5.17991483               | 5.19991045 | 5.23991358 | --      |
| 85 % (1)           | 102         | +40 (Tmax)       | 5.17994238               | 5.19991232 | 5.23991358 | --      |
| 115 % (1)          | 138         | -10 (Tmin)       | 5.17993362               | 5.19992861 | 5.23992861 | --      |
| 85 % (1)           | 102         | -10 (Tmin)       | 5.17993236               | 5.19993737 | 5.29392986 | --      |
| Max. deviation KHz |             |                  | +87.68                   | +89.55     | +86.42     | --      |
| %                  |             |                  | 0.0016927                | 0.0017221  | 0.0016493  | --      |
| battery endpoint   | --          | --               | --                       | --         | --         | --      |

The displayed frequency stability will ensure that emission is maintained within the band of operation.

Test equipment used: ETSTW-CE 009, ETSTW-RE004

Comment: Temperature range is determined by manufacturer

Registration number: W6M20511-6291-E-54

FCC ID: TSTWV100

**3.11 Radiated Emissions from Receiver Section of Transceiver**

FCC Rule: 15.109

**Summary table with radiated data of the test plots**  
(RX)

| Freq | Used Ch | Frequency Marker [MHz] | Polarization | corrections dB | Corrected Reading [dBuV/m] | Compliance Limit [dBuV/m] | Detector | BW [MHz] | Margin |
|------|---------|------------------------|--------------|----------------|----------------------------|---------------------------|----------|----------|--------|
| 1    | 36      | 65.771                 | V            | --             | 34.61                      | 40                        | PK       | 0.1      | 5.39   |
| 1    | 36      | 131.863                | V            | --             | 33.05                      | 43.5                      | PK       | 0.1      | 10.45  |
| 2    | 36      | 280.1603               | V            | --             | 32.12                      | 46                        | PK       | 0.1      | 13.88  |
| 2    | 36      | 329.859                | V            | --             | 34.02                      | 46                        | PK       | 0.1      | 11.98  |
| 2    | 36      | 725.851                | V            | --             | 40.99                      | 46                        | PK       | 0.1      | 5.01   |
| 3    | 36      | 1204.408               | V            | --             | 36.57                      | 54                        | PK       | 1        | 17.43  |
| 3    | 36      | 1318.637               | V            | --             | 39.75                      | 54                        | PK       | 1        | 14.25  |
| 3    | 36      | 1384.769               | V            | --             | 38.26                      | 54                        | PK       | 1        | 15.74  |
| 4    | 36      | 5150                   | V            | --             | 45.66                      | 54                        | PK       | 1        | 8.34   |
| 1    | 36      | 65.771                 | H            | --             | 28.93                      | 40                        | PK       | 0.1      | 11.07  |
| 1    | 36      | 119.939                | H            | --             | 32.90                      | 43.5                      | PK       | 0.1      | 10.6   |
| 2    | 36      | 280.1603               | H            | --             | 33.00                      | 46                        | PK       | 0.1      | 13     |
| 2    | 36      | 494.989                | H            | --             | 38.81                      | 46                        | PK       | 0.1      | 7.19   |
| 2    | 36      | 725.851                | H            | --             | 45.13                      | 46                        | PK       | 0.1      | 0.87   |
| 3    | 36      | 1054.108               | H            | --             | 36.45                      | 54                        | PK       | 1        | 17.55  |
| 3    | 36      | 1318.637               | H            | --             | 35.64                      | 54                        | PK       | 1        | 18.36  |
| 1    | 40      | 65.771                 | V            | --             | 34.09                      | 40                        | PK       | 0.1      | 5.91   |
| 1    | 40      | 131.863                | V            | --             | 32.66                      | 43.5                      | PK       | 0.1      | 10.84  |
| 2    | 40      | 278.557                | V            | --             | 31.72                      | 46                        | PK       | 0.1      | 14.28  |
| 2    | 40      | 329.859                | V            | --             | 34.24                      | 46                        | PK       | 0.1      | 11.76  |
| 2    | 40      | 725.851                | V            | --             | 40.23                      | 46                        | PK       | 0.1      | 5.77   |
| 3    | 40      | 1318.637               | V            | --             | 39.93                      | 54                        | PK       | 1        | 14.07  |
| 3    | 40      | 1384.769               | V            | --             | 40.51                      | 54                        | PK       | 1        | 13.49  |
| 3    | 40      | 1517.034               | V            | --             | 39.27                      | 54                        | PK       | 1        | 14.73  |
| 4    | 40      | 5437.374               | V            | --             | 45.55                      | 54                        | PK       | 1        | 8.45   |
| 1    | 40      | 65.771                 | H            | --             | 28.39                      | 40                        | PK       | 0.1      | 11.61  |
| 1    | 40      | 119.939                | H            | --             | 32.48                      | 43.5                      | PK       | 0.1      | 11.02  |
| 2    | 40      | 280.1603               | H            | --             | 32.92                      | 46                        | PK       | 0.1      | 13.08  |
| 2    | 40      | 461.322                | H            | --             | 36.83                      | 46                        | PK       | 0.1      | 9.17   |
| 2    | 40      | 725.851                | H            | --             | 45.68                      | 46                        | PK       | 0.1      | 0.32   |
| 3    | 40      | 1054.108               | H            | --             | 37.47                      | 54                        | PK       | 1        | 16.53  |
| 3    | 40      | 1318.637               | H            | --             | 35.94                      | 54                        | PK       | 1        | 18.06  |

Registration number: W6M20511-6291-E-54

FCC ID: TSTWV100

|   |    |          |   |    |       |      |    |     |       |
|---|----|----------|---|----|-------|------|----|-----|-------|
| 1 | 48 | 65.771   | V | -- | 31.95 | 40   | PK | 0.1 | 8.05  |
| 1 | 48 | 131.863  | V | -- | 32.1  | 43.5 | PK | 0.1 | 11.4  |
| 2 | 48 | 329.859  | V | -- | 33.96 | 46   | PK | 0.1 | 12.04 |
| 2 | 48 | 395.591  | V | -- | 32.89 | 46   | PK | 0.1 | 13.11 |
| 2 | 48 | 725.851  | V | -- | 40.91 | 46   | PK | 0.1 | 5.09  |
| 3 | 48 | 1318.637 | V | -- | 42.68 | 54   | PK | 1   | 11.32 |
| 3 | 48 | 1384.769 | V | -- | 42.52 | 54   | PK | 1   | 11.48 |
| 3 | 48 | 1517.034 | V | -- | 40.16 | 54   | PK | 1   | 13.84 |
| 4 | 48 | 5260     | V | -- | 41.96 | 56   | PK | 1   | 14.04 |
| 1 | 48 | 65.771   | H | -- | 27.96 | 40   | PK | 0.1 | 12.04 |
| 1 | 48 | 119.939  | H | -- | 32.93 | 43.5 | PK | 0.1 | 10.57 |
| 2 | 48 | 461.322  | H | -- | 36.62 | 46   | PK | 0.1 | 9.38  |
| 2 | 48 | 725.851  | H | -- | 45.12 | 46   | PK | 0.1 | 0.88  |
| 2 | 48 | 749.899  | H | -- | 45.07 | 46   | PK | 0.1 | 0.93  |
| 3 | 48 | 1054.108 | H | -- | 37.56 | 54   | PK | 1   | 16.44 |
| 3 | 48 | 1318.637 | H | -- | 36.98 | 54   | PK | 1   | 17.02 |

Registration number: W6M20511-6291-E-54

FCC ID: TSTWV100

**Digital**

(Line Mode)

| Polarization | Frequency Marker (MHz) | C.R. (dBuv) | C.F. (dB) | Detector AV/QP | T.R. (dBuV/m) | C.L. (dBuV/m) | Margin (dB) | Azimuth (degree) | A.H. (cm) |
|--------------|------------------------|-------------|-----------|----------------|---------------|---------------|-------------|------------------|-----------|
| 1-V          | 165.931864             | 22.98       | 12.85     | PK             | 39.83         | 43.5          | 3.67        | 275              | 106       |
|              | 180.9218144            | 23.68       | 11.71     | PK             | 35.39         | 43.5          | 8.11        | 265              | 173       |
|              | 193.867735             | 26.33       | 10.10     | PK             | 36.43         | 43.5          | 7.07        | 288              | 145       |
|              | 198.296593             | 27.15       | 9.8       | QP             | 36.95         | 43.5          | 6.55        | 286              | 141       |

| Polarization | Frequency Marker (MHz) | C.R. (dBuv) | C.F. (dB) | Detector AV/QP | T.R. (dBuV/m) | C.L. (dBuV/m) | Margin (dB) | Azimuth (degree) | A.H. (cm) |
|--------------|------------------------|-------------|-----------|----------------|---------------|---------------|-------------|------------------|-----------|
| 1-H          | 119.939880             | 22.53       | 11.3      | PK             | 33.83         | 43.5          | 9.67        | 352              | 118       |
|              | 131.863727             | 22.05       | 11.9      | PK             | 33.95         | 43.5          | 9.55        | 357              | 131       |
|              | 146.853707             | 23.36       | 12.85     | PK             | 36.21         | 43.5          | 7.29        | 292              | 107       |
|              | 198.296593             | 25.17       | 9.8       | QP             | 35.37         | 43.5          | 8.13        | 281              | 114       |

| Polarization | Frequency Marker (MHz) | C.R. (dBuv) | C.F. (dB) | Detector AV/QP | T.R. (dBuV/m) | C.L. (dBuV/m) | Margin (dB) | Azimuth (degree) | A.H. (cm) |
|--------------|------------------------|-------------|-----------|----------------|---------------|---------------|-------------|------------------|-----------|
| 2-V          | 374.749499             | 25.56       | 14.76     | PK             | 40.32         | 46            | 5.68        | 210              | 149       |
|              | 461.322645             | 21.73       | 16.74     | PK             | 38.47         | 46            | 7.53        | 255              | 169       |
|              | 650.501002             | 21.07       | 20.03     | PK             | 41.10         | 46            | 4.9         | 259              | 148       |
|              | 700.200401             | 21.96       | 20.61     | QP             | 42.57         | 46            | 3.43        | 349              | 126       |
|              | 749.899800             | 23.04       | 21.85     | QP             | 44.89         | 46            | 3.43        | 349              | 102       |
|              | 775.551102             | 21.23       | 21.93     | QP             | 43.16         | 46            | 2.84        | 320              | 148       |

| Polarization | Frequency Marker (MHz) | C.R. (dBuv) | C.F. (dB) | Detector AV/QP | T.R. (dBuV/m) | C.L. (dBuV/m) | Margin (dB) | Azimuth (degree) | A.H. (cm) |
|--------------|------------------------|-------------|-----------|----------------|---------------|---------------|-------------|------------------|-----------|
| 2-H          | 374.749499             | 29.41       | 14.76     | QP             | 44.17         | 46            | 1.83        | 208              | 145       |
|              | 700.200401             | 23.75       | 20.61     | QP             | 44.36         | 46            | 1.64        | 355              | 118       |
|              | 749.899800             | 23.17       | 21.85     | QP             | 45.02         | 46            | 0.98        | 345              | 108       |
|              | 775.551102             | 22.75       | 21.93     | QP             | 44.68         | 46            | 1.32        | 315              | 139       |
|              | 828.250501             | 21.4        | 22.47     | QP             | 43.87         | 46            | 2.13        | 295              | 165       |
|              | 874.949900             | 21.49       | 22.60     | QP             | 44.09         | 46            | 1.91        | 281              | 207       |

Registration number: W6M20511-6291-E-54

FCC ID: TSTWV100

(Wireless Mode)

| Polarization | Frequency Marker (MHz) | C.R. (dBuv) | C.F. (dB) | Detector AV/QP | T.R. (dBuV/m) | C.L. (dBuV/m) | Margin (dB) | Azimuth (degree) | A.H. (cm) |
|--------------|------------------------|-------------|-----------|----------------|---------------|---------------|-------------|------------------|-----------|
| 1-V          | 65.771543              | 22.43       | 11.61     | PK             | 34.04         | 40            | 5.96        | 289              | 143       |
|              | 172.064128             | 22.82       | 12.7      | PK             | 35.52         | 43.5          | 7.98        | 334              | 205       |
|              | 198.296593             | 28.06       | 9.9       | PK             | 37.96         | 43.5          | 5.54        | 290              | 138       |

| Polarization | Frequency Marker (MHz) | C.R. (dBuv) | C.F. (dB) | Detector AV/QP | T.R. (dBuV/m) | C.L. (dBuV/m) | Margin (dB) | Azimuth (degree) | A.H. (cm) |
|--------------|------------------------|-------------|-----------|----------------|---------------|---------------|-------------|------------------|-----------|
| 1-H          | 131.863727             | 22.91       | 11.95     | PK             | 34.86         | 43.5          | 8.64        | 353              | 109       |
|              | 134.589178             | 23.9        | 11.99     | PK             | 35.89         | 43.5          | 7.61        | 351              | 114       |
|              | 198.296593             | 29.21       | 9.9       | PK             | 39.11         | 43.5          | 4.39        | 281              | 126       |

| Polarization | Frequency Marker (MHz) | C.R. (dBuv) | C.F. (dB) | Detector AV/QP | T.R. (dBuV/m) | C.L. (dBuV/m) | Margin (dB) | Azimuth (degree) | A.H. (cm) |
|--------------|------------------------|-------------|-----------|----------------|---------------|---------------|-------------|------------------|-----------|
| 2-V          | 329.859719             | 22.26       | 13.8      | PK             | 36.06         | 46            | 9.94        | 270              | 192       |
|              | 360.320641             | 21.23       | 14.43     | PK             | 35.66         | 46            | 10.34       | 190              | 172       |
|              | 499.799599             | 20.39       | 17.34     | PK             | 37.73         | 46            | 8.27        | 219              | 135       |
|              | 725.851703             | 17.03       | 21.09     | PK             | 38.12         | 46            | 7.88        | 185              | 232       |

| Polarization | Frequency Marker (MHz) | C.R. (dBuv) | C.F. (dB) | Detector AV/QP | T.R. (dBuV/m) | C.L. (dBuV/m) | Margin (dB) | Azimuth (degree) | A.H. (cm) |
|--------------|------------------------|-------------|-----------|----------------|---------------|---------------|-------------|------------------|-----------|
| 2-H          | 461.322645             | 23.35       | 16.74     | PK             | 40.09         | 46            | 5.91        | 249              | 165       |
|              | 494.989980             | 22.96       | 17.28     | PK             | 40.24         | 46            | 5.76        | 215              | 148       |
|              | 725.851703             | 20.44       | 21.09     | QP             | 41.53         | 46            | 4.47        | 180              | 248       |
|              | 759.519038             | 19.98       | 21.89     | QP             | 41.87         | 46            | 4.131       | 168              | 189       |

**Note 1. Correction Factor = Antennal factor + Cable loss + Preamplifier gain****2. Test Result = Correction reading + Correction Factor****3. P = Peak , QP = Qusai Peak .****4. C.R.=Corrected Reading; C.F.= Correction Factor; T.R.= Test Result;  
C.L.=Compliance Limit; A.H.=Antenna Height**

Registration number: W6M20511-6291-E-54  
FCC ID: TSTWV100

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency of Emission<br>(MHz) | Field Strength<br>(microvolts/meter) | Field Strength<br>(dBmicrovolts/meter) |
|--------------------------------|--------------------------------------|--|
| 30 – 88                        | 100                                  | 40.0                                   |
| 88 – 216                       | 150                                  | 43.5                                   |
| 216 – 960                      | 200                                  | 46.0                                   |
| Above 960                      | 500                                  | 54.0                                   |

Test equipment used: ETSTW-RE 015, ETSTW-RE 016, ETSTW-RE 017, ETSTW-CS 001,  
ETSTW-RE 026, ETSTW-RE 003, ETSTW-RE 025

Comment: see attached diagram

Registration number: W6M20511-6291-E-54

FCC ID: TSTWV100

**3.12 Spurious Emissions related to AC power line, FCC 15.107, 15.207**

Conducted :

| Frequency | Level            |                  |
|-----------|------------------|------------------|
|           | quasi-peak       | average          |
| 150 kHz   | lower limit line | lower limit line |

**Measurement Result: “\_ Fin AV”**

(Line mode)

| Frequency Marker [MHz] | Type | Corrected Reading [dBuV] | Compliance AVLlimit [dBuV] | BW [MHz] | Margin(AV) |
|------------------------|------|--------------------------|----------------------------|----------|------------|
| 0.375                  | N    | 47.7                     | 49.5                       | 0.01     | 1.87       |
| 0.525                  | N    | 45                       | 46                         | 0.01     | 1.00       |
| 0.53                   | N    | 45.3                     | 46                         | 0.01     | 0.70       |
| 0.6                    | N    | 45.3                     | 46                         | 0.01     | 0.70       |
| 0.67                   | N    | 45.8                     | 46                         | 0.01     | 0.20       |
| 0.755                  | N    | 44.2                     | 46                         | 0.01     | 1.80       |
| 1.425                  | N    | 43.1                     | 46                         | 0.01     | 2.90       |
| 1.3                    | N    | 40.5                     | 46                         | 0.01     | 5.50       |
| 1.370                  | N    | 41.6                     | 46                         | 0.01     | 4.40       |
| 1.385                  | N    | 39.5                     | 46                         | 0.01     | 6.50       |
| 1.430                  | N    | 38.4                     | 46                         | 0.01     | 7.60       |
| 1.480                  | N    | 38.8                     | 46                         | 0.01     | 7.20       |
| 1.495                  | N    | 37.3                     | 46                         | 0.01     | 8.70       |
| 1.530                  | N    | 34.5                     | 46                         | 0.01     | 11.50      |
| 1.780                  | N    | 39.9                     | 46                         | 0.01     | 6.10       |

| Frequency Marker [MHz] | Type | Corrected Reading [dBuV] | Compliance AVLlimit [dBuV] | BW [MHz] | Margin(AV) |
|------------------------|------|--------------------------|----------------------------|----------|------------|
| 0.45                   | L1   | 46.1                     | 47.4                       | 0.01     | 1.33       |
| 0.525                  | L1   | 45.8                     | 46                         | 0.01     | 0.20       |
| 0.6                    | L1   | 45.7                     | 46                         | 0.01     | 0.30       |
| 0.605                  | L1   | 45.7                     | 46                         | 0.01     | 0.30       |
| 0.68                   | L1   | 45.2                     | 46                         | 0.01     | 0.80       |

Registration number: W6M20511-6291-E-54

FCC ID: TSTWV100

|       |    |      |    |      |      |
|-------|----|------|----|------|------|
| 1.355 | L1 | 45.1 | 46 | 0.01 | 0.90 |
| 1.275 | L1 | 40.6 | 46 | 0.01 | 5.40 |
| 1.335 | L1 | 41.8 | 46 | 0.01 | 4.20 |
| 1.370 | L1 | 39.4 | 46 | 0.01 | 6.60 |
| 1.390 | L1 | 39.8 | 46 | 0.01 | 6.20 |
| 1.400 | L1 | 40.6 | 46 | 0.01 | 5.40 |
| 1.430 | L1 | 41.1 | 46 | 0.01 | 4.90 |
| 1.495 | L1 | 43.2 | 46 | 0.01 | 2.80 |
| 1.505 | L1 | 40.8 | 46 | 0.01 | 5.20 |
| 1.78  | L1 | 41.6 | 46 | 0.01 | 4.40 |

(Wireless mode)

| Frequency Marker [MHz] | Type | Corrected Reading [dBuV] | Compliance AVLimit [dBuV] | BW [MHz] | Margin(AV) |
|------------------------|------|--------------------------|---------------------------|----------|------------|
| 0.22                   | N    | 31.7                     | 54                        | 0.01     | 22.30      |
| 0.375                  | N    | 20.3                     | 49.5                      | 0.01     | 29.27      |
| 1.515                  | N    | 26.3                     | 46                        | 0.01     | 19.70      |
| 3.445                  | N    | 21.3                     | 46                        | 0.01     | 24.70      |

| Frequency Marker [MHz] | Type | Corrected Reading [dBuV] | Compliance AVLimit [dBuV] | BW [MHz] | Margin(AV) |
|------------------------|------|--------------------------|---------------------------|----------|------------|
| 0.220                  | L1   | 31.2                     | 54                        | 0.01     | 22.80      |
| 1.510                  | L1   | 22.6                     | 46                        | 0.01     | 23.40      |
| 3.440                  | L1   | 20.4                     | 46                        | 0.01     | 25.60      |

**Measurement Result: “\_ Fin QP”**

(Line mode)

| Frequency Marker [MHz] | Type | Corrected Reading [dBuV] | Compliance AVLimit [dBuV] | BW [MHz] | Margin(QP) |
|------------------------|------|--------------------------|---------------------------|----------|------------|
| 0.375                  | N    | 51.8                     | 59.5                      | 0.01     | 7.77       |
| 0.525                  | N    | 52.5                     | 56                        | 0.01     | 3.50       |
| 0.53                   | N    | 53.1                     | 56                        | 0.01     | 2.90       |
| 0.6                    | N    | 52.6                     | 56                        | 0.01     | 3.40       |
| 0.67                   | N    | 53.5                     | 56                        | 0.01     | 2.50       |
| 0.755                  | N    | 52.8                     | 56                        | 0.01     | 3.20       |



Registration number: W6M20511-6291-E-54

FCC ID: TSTWV100

|       |   |      |    |      |      |
|-------|---|------|----|------|------|
| 1.425 | N | 51.9 | 56 | 0.01 | 4.10 |
| 1.3   | N | 55.4 | 56 | 0.01 | 0.60 |
| 1.370 | N | 55.8 | 56 | 0.01 | 0.20 |
| 1.385 | N | 55.2 | 56 | 0.01 | 0.80 |
| 1.430 | N | 55.6 | 56 | 0.01 | 0.40 |
| 1.480 | N | 55.4 | 56 | 0.01 | 0.60 |
| 1.495 | N | 55.5 | 56 | 0.01 | 0.50 |
| 1.530 | N | 56.0 | 56 | 0.01 | 0.00 |
| 1.780 | N | 55.1 | 56 | 0.01 | 0.90 |

| Frequency Marker [MHz] | Type | Corrected Reading [dBuV] | Compliance AVLimit [dBuV] | BW [MHz] | Margin(QP) |
|------------------------|------|--------------------------|---------------------------|----------|------------|
| 0.45                   | L1   | 53.6                     | 57.4                      | 0.01     | 3.83       |
| 0.525                  | L1   | 51.8                     | 56                        | 0.01     | 4.20       |
| 0.6                    | L1   | 50.6                     | 56                        | 0.01     | 5.40       |
| 0.605                  | L1   | 51.4                     | 56                        | 0.01     | 4.60       |
| 0.68                   | L1   | 53.9                     | 56                        | 0.01     | 2.10       |
| 1.355                  | L1   | 54.8                     | 56                        | 0.01     | 1.20       |
| 1.275                  | L1   | 55.4                     | 56                        | 0.01     | 0.60       |
| 1.335                  | L1   | 55.5                     | 56                        | 0.01     | 0.50       |
| 1.370                  | L1   | 55.4                     | 56                        | 0.01     | 0.60       |
| 1.390                  | L1   | 56.0                     | 56                        | 0.01     | 0.00       |
| 1.400                  | L1   | 55.7                     | 56                        | 0.01     | 0.30       |
| 1.430                  | L1   | 55.1                     | 56                        | 0.01     | 0.90       |
| 1.495                  | L1   | 55.5                     | 56                        | 0.01     | 0.50       |
| 1.505                  | L1   | 55.5                     | 56                        | 0.01     | 0.50       |
| 1.78                   | L1   | 55.3                     | 56                        | 0.01     | 0.70       |

(Wireless mode)

| Frequency Marker [MHz] | Type | Corrected Reading [dBuV] | Compliance QPLimit [dBuV] | BW [MHz] | Margin(QP) |
|------------------------|------|--------------------------|---------------------------|----------|------------|
| 0.22                   | L1   | 41                       | 64                        | 0.01     | 23.00      |
| 0.375                  | L1   | 38.1                     | 59.5                      | 0.01     | 21.47      |
| 1.515                  | L1   | 41.6                     | 56                        | 0.01     | 14.40      |
| 3.445                  | L1   | 36.2                     | 56                        | 0.01     | 19.80      |

Registration number: W6M20511-6291-E-54

FCC ID: TSTWV100

| Frequency<br>Marker<br>[MHz] | Type | Corrected<br>Reading<br>[dBuV] | Compliance<br>QPLimit<br>[dBuV] | BW<br>[MHz] | Margin(QP) |
|------------------------------|------|--------------------------------|---------------------------------|-------------|------------|
| 0.260                        | L1   | 41.3                           | 62.8                            | 0.01        | 21.56      |
| 0.270                        | L1   | 42.6                           | 62.5                            | 0.01        | 19.97      |
| 0.280                        | L1   | 34.9                           | 62.2                            | 0.01        | 27.39      |

Limits:


| Frequency of Emission (MHz) | Conducted Limit (dB $\mu$ V) |          |
|-----------------------------|------------------------------|----------|
|                             | quasi-peak                   | average  |
| 0.15-0.5                    | 66 to 56                     | 56 to 46 |
| 0.5-5                       | 56                           | 46       |
| 5-30                        | 60                           | 50       |

Test equipment used: ETSTW-CE 004, ETSTW-CE 001, ETSTW-RE 023

Comment: see attached diagram

## **Appendix**

- A Emission Bandwidth
- B Peak Transmit Power
- C Peak Power Spectral Density
- D Ratio of Peak Excursion of the modulation envelope
- E Band edge
- F Peak Emission outside the frequency band of operation
- G Frequency Stability
- H Radiated Emissions from Receiver Section of Transceiver
- I Spurious Emission related to AC power line
- J Pictures




Registration number: W6M20511-6291-E-54  
FCC ID: TSTWV100

## **Appendix A**

### Emission Bandwidth




Ref Lvl 37.5 dBm Marker 1 [T1 ndB] 26.00 dB RBW 300 kHz RF Att 40 dB  
BW 25.25050100 MHz VBW 500 kHz Unit dBm  
SWT 1 s

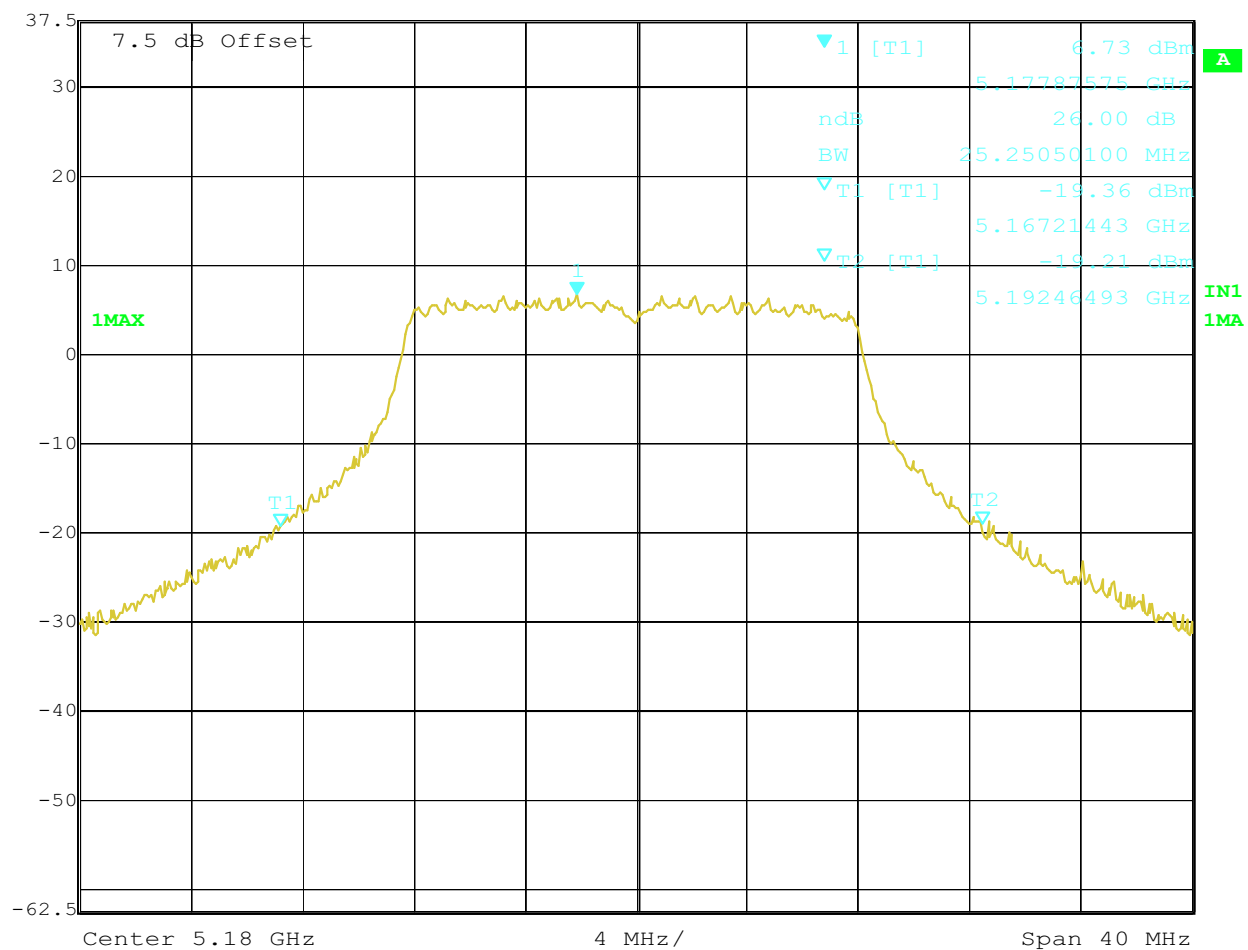

Title: 11A CH36 EMISSION BANDWIDTH 6Mbps  
Date: 18.NOV.2005 17:04:09




Ref Lvl 37.5 dBm Marker 1 [T1 ndB] 26.00 dB RBW 300 kHz RF Att 40 dB  
BW 24.04809619 MHz VBW 500 kHz Unit dBm  
SWT 1 s

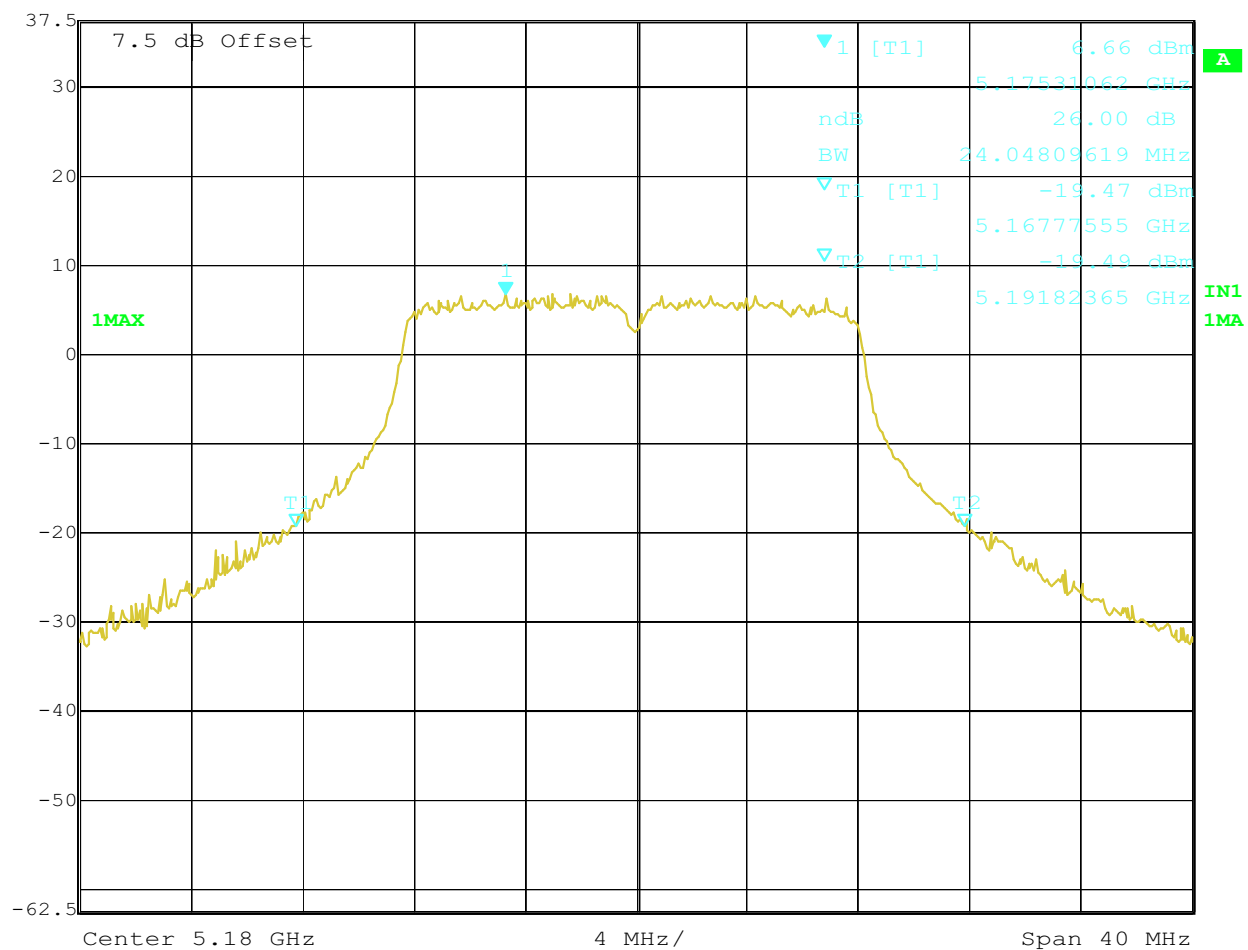

Title: 11A CH36 EMISSION BANDWIDTH 18Mbps  
Date: 18.NOV.2005 17:05:03




|          |                    |     |         |        |       |
|----------|--------------------|-----|---------|--------|-------|
| Ref Lvl  | Marker 1 [T1 ndB]  | RBW | 300 kHz | RF Att | 40 dB |
| 37.5 dBm | ndB 26.00 dB       | VBW | 500 kHz |        |       |
|          | BW 24.20841683 MHz | SWT | 1 s     | Unit   | dBm   |

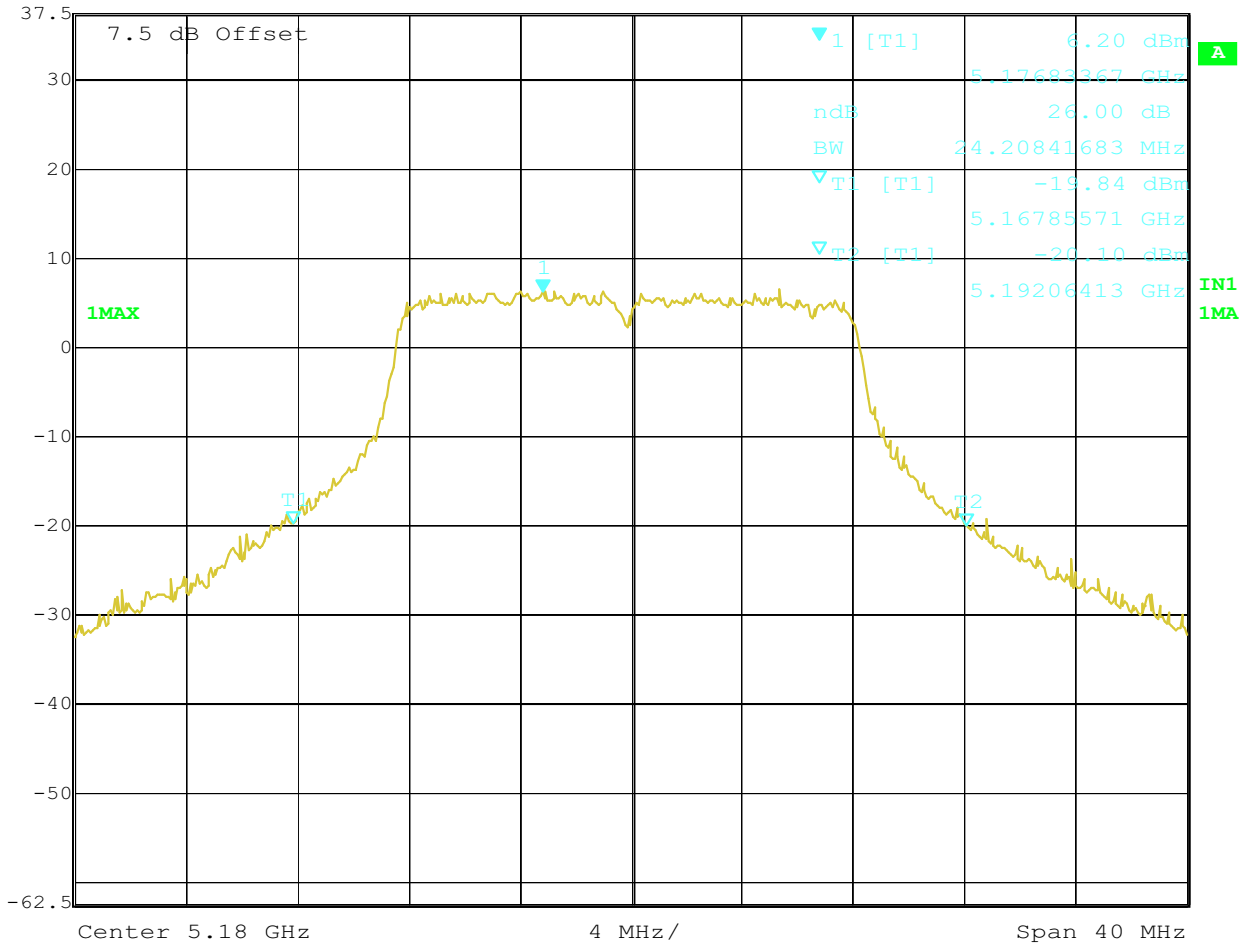

Title: 11A CH36 EMSSON BANDWIDTH 36Mbps  
Date: 18.NOV.2005 17:06:05



Ref Lvl 37.5 dBm Marker 1 [T1 ndB] 26.00 dB RBW 300 kHz RF Att 40 dB  
BW 23.56713427 MHz VBW 500 kHz Unit dBm  
SWT 1 s

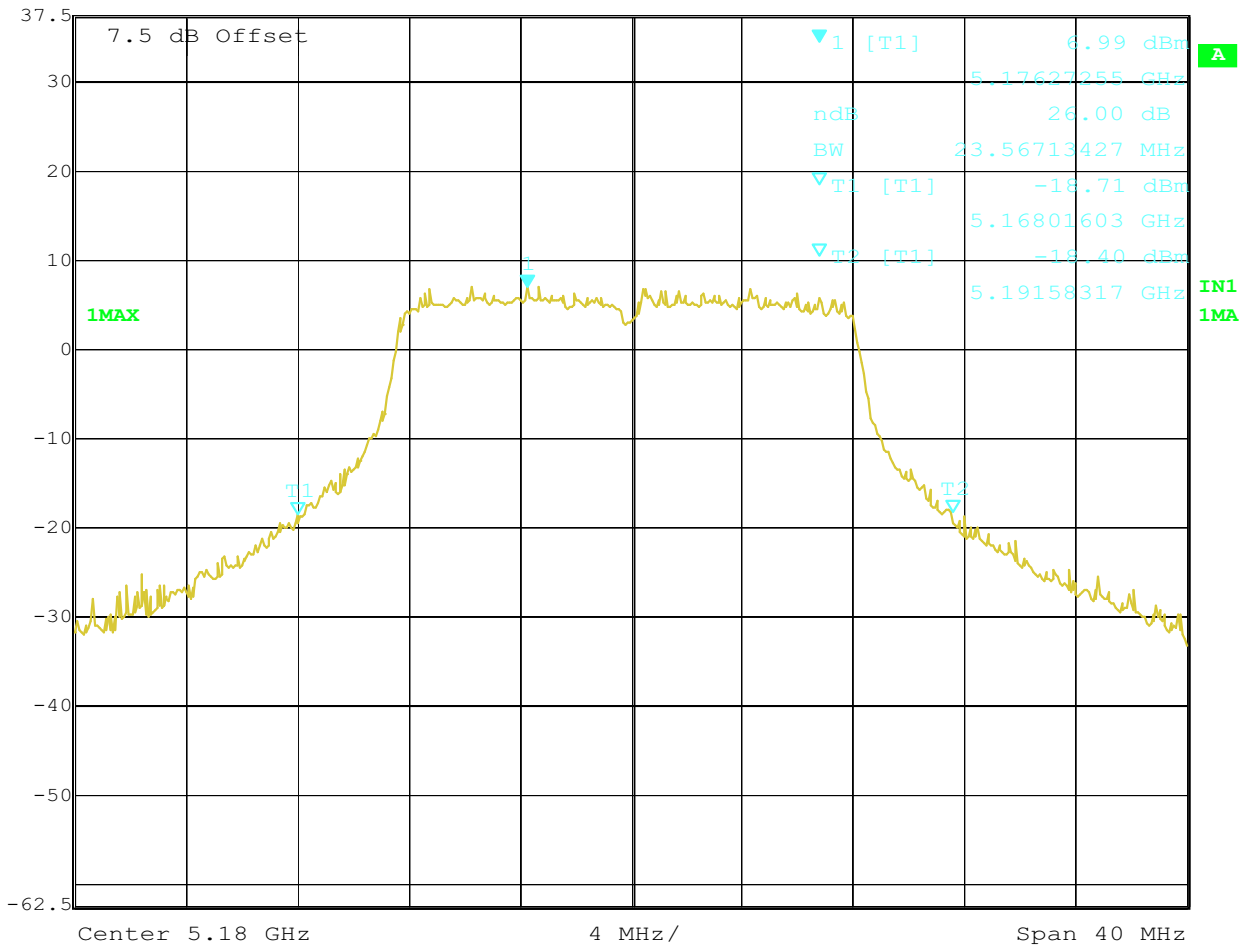


Title: 11A CH36 EMSSON BANDWIDTH 54Mbps  
Date: 18.NOV.2005 17:07:06






Ref Lvl 37.5 dBm  
Marker 1 [T1 ndB] 26.00 dB  
BW 24.44889780 MHz  
RBW 300 kHz  
VBW 500 kHz  
RF Att 40 dB  
SWT 1 s  
Unit dBm

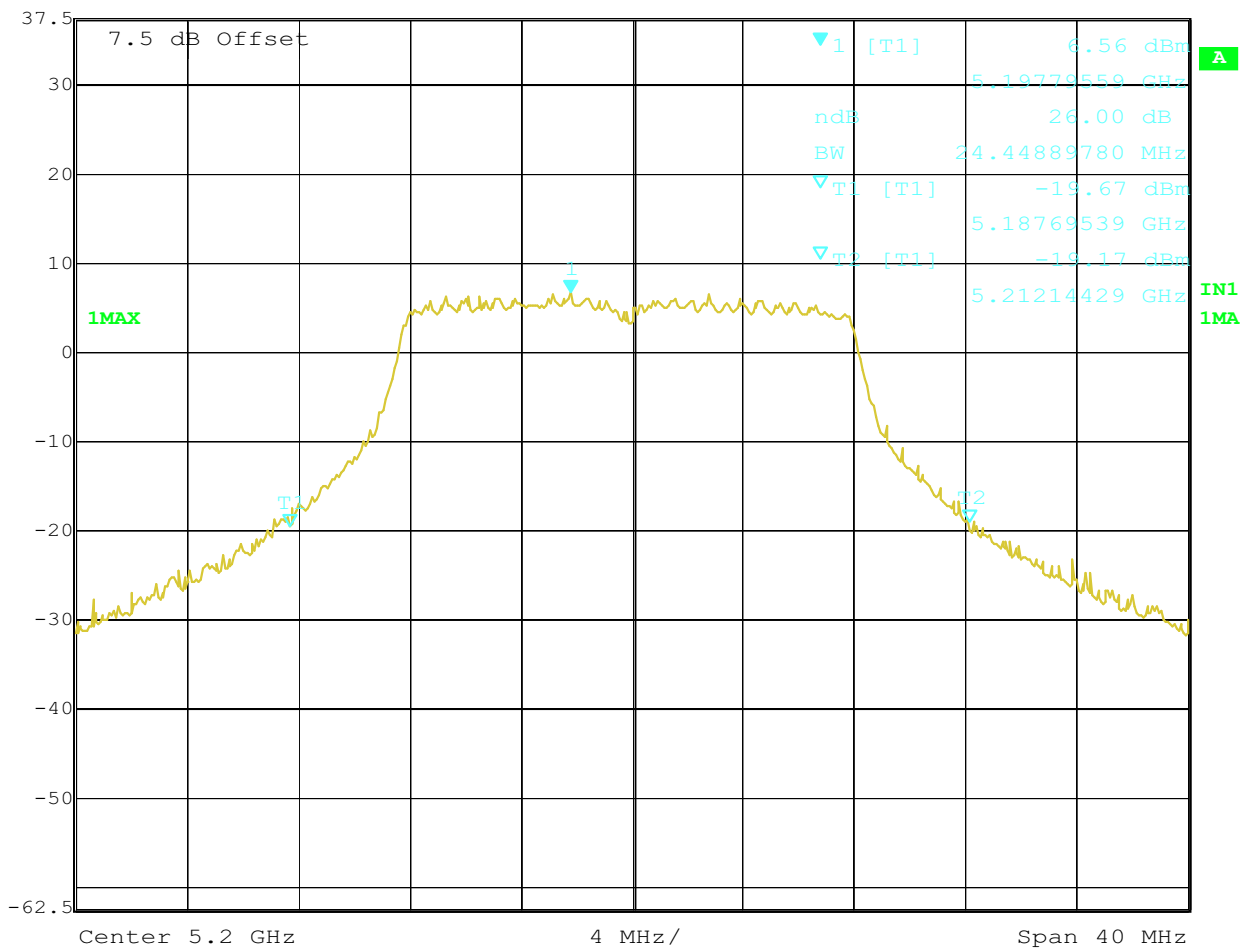

Title: 11A CH40 EMSSON BANDWIDTH 6Mbps  
Date: 18.NOV.2005 17:08:54




Ref Lvl 37.5 dBm  
Marker 1 [T1 ndB] 26.00 dB  
BW 23.72745491 MHz  
RBW 300 kHz  
VBW 500 kHz  
RF Att 40 dB  
SWT 1 s  
Unit dBm

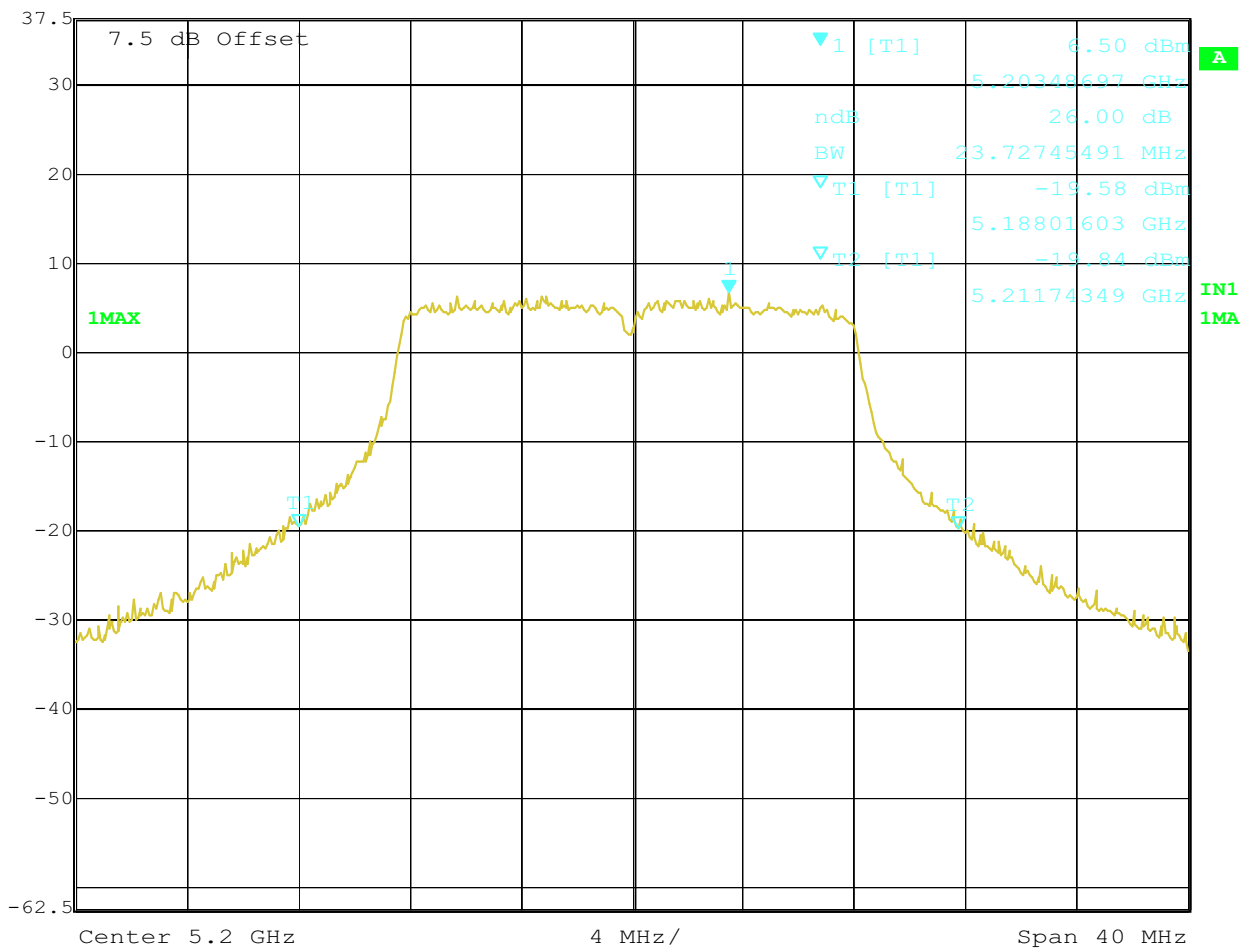

Title: 11A CH40 EMSSON BANDWIDTH 18Mbps  
Date: 18.NOV.2005 17:09:58




Ref Lvl 37.5 dBm Marker 1 [T1 ndB] 26.00 dB RBW 300 kHz RF Att 40 dB  
BW 23.32665331 MHz VBW 500 kHz Unit dBm  
SWT 1 s

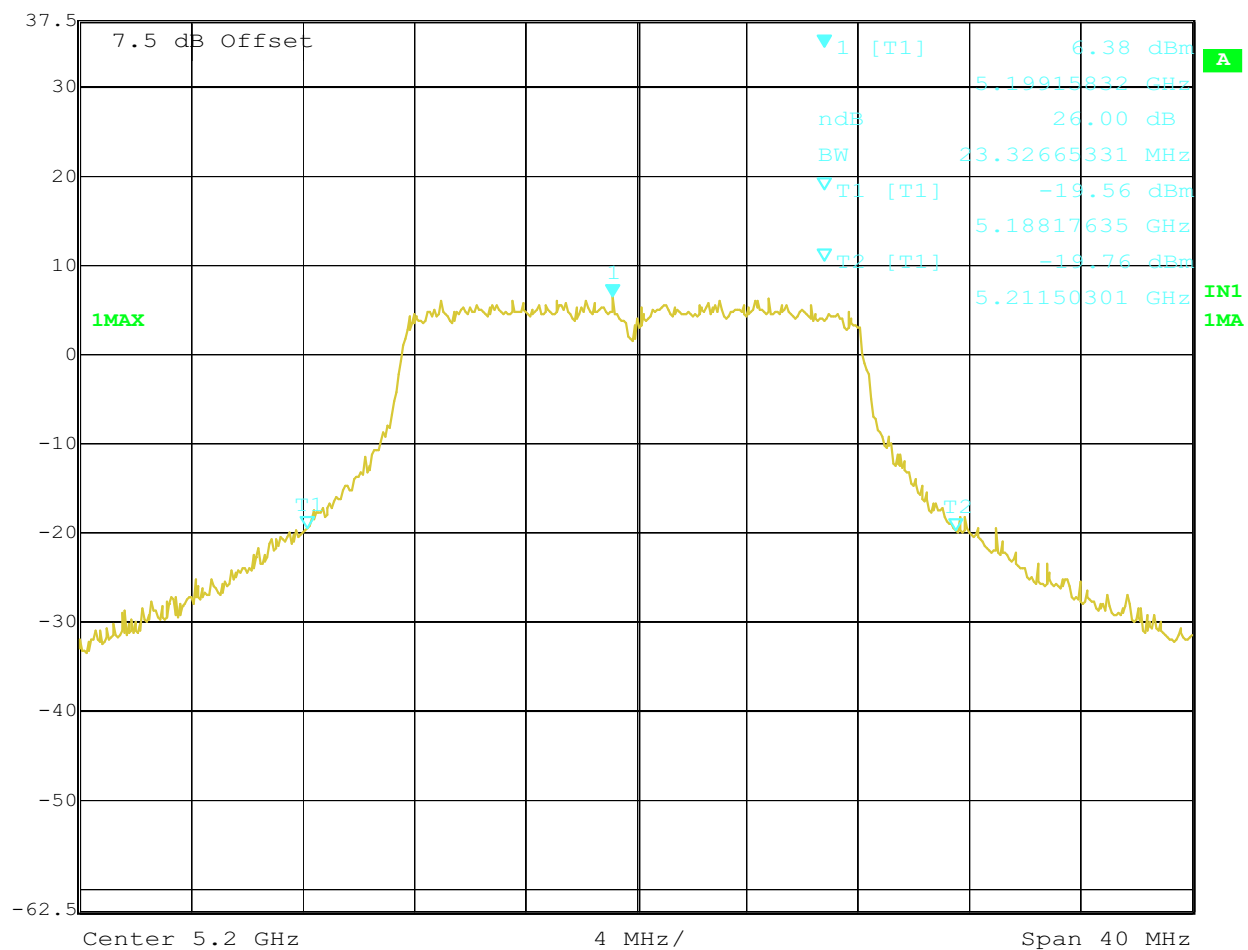

Title: 11A CH40 EMSSON BANDWIDTH 36Mbps  
Date: 18.NOV.2005 17:10:59




Ref Lvl 37.5 dBm Marker 1 [T1 ndB] 26.00 dB RBW 300 kHz RF Att 40 dB  
BW 23.08617234 MHz VBW 500 kHz Unit dBm  
SWT 1 s

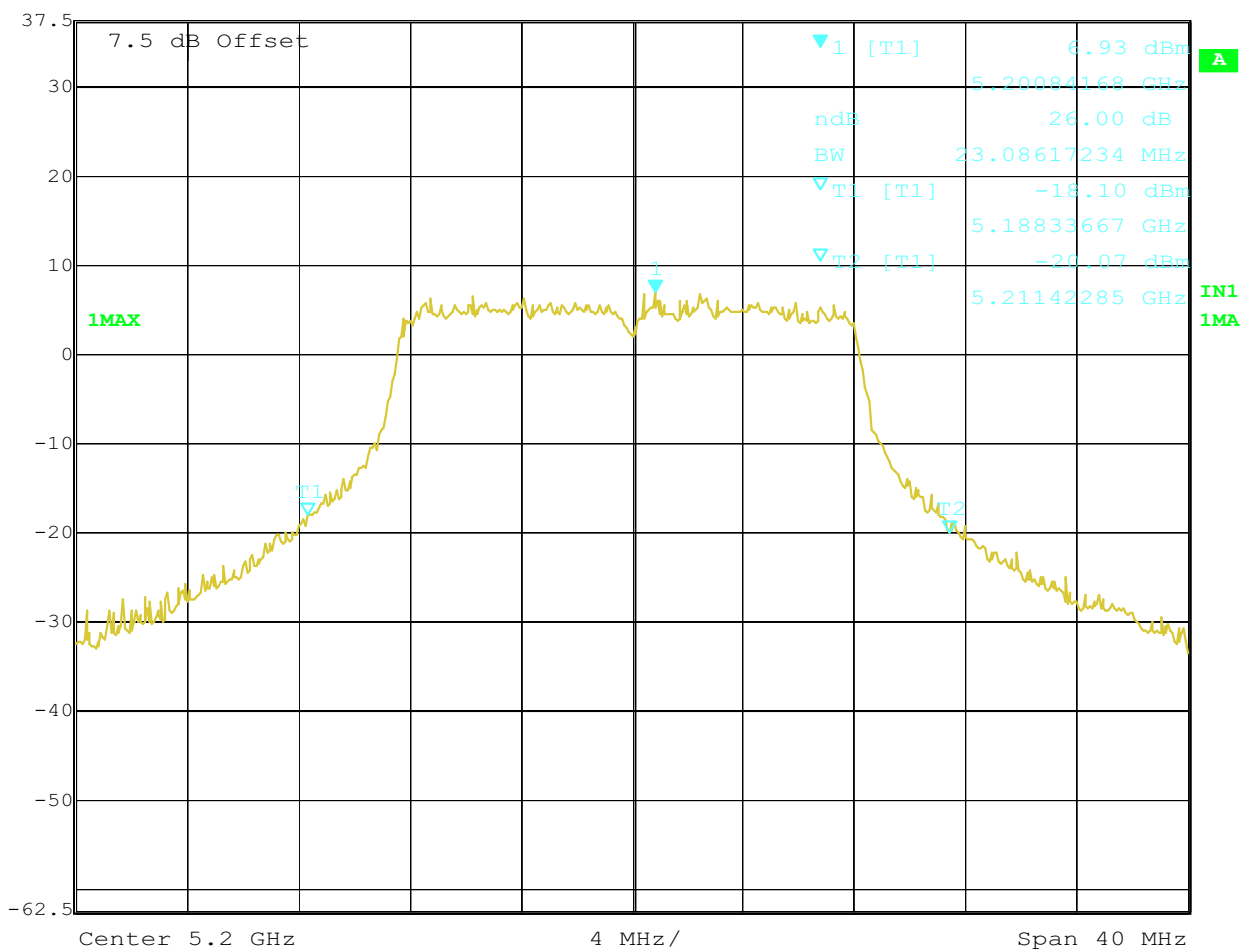

Title: 11A CH40 EMSSON BANDWIDTH 54Mbps  
Date: 18.NOV.2005 17:12:24




Ref Lvl 37.5 dBm Marker 1 [T1 ndB] 26.00 dB RBW 300 kHz RF Att 40 dB  
BW 23.40681363 MHz VBW 500 kHz Unit dBm  
SWT 1 s

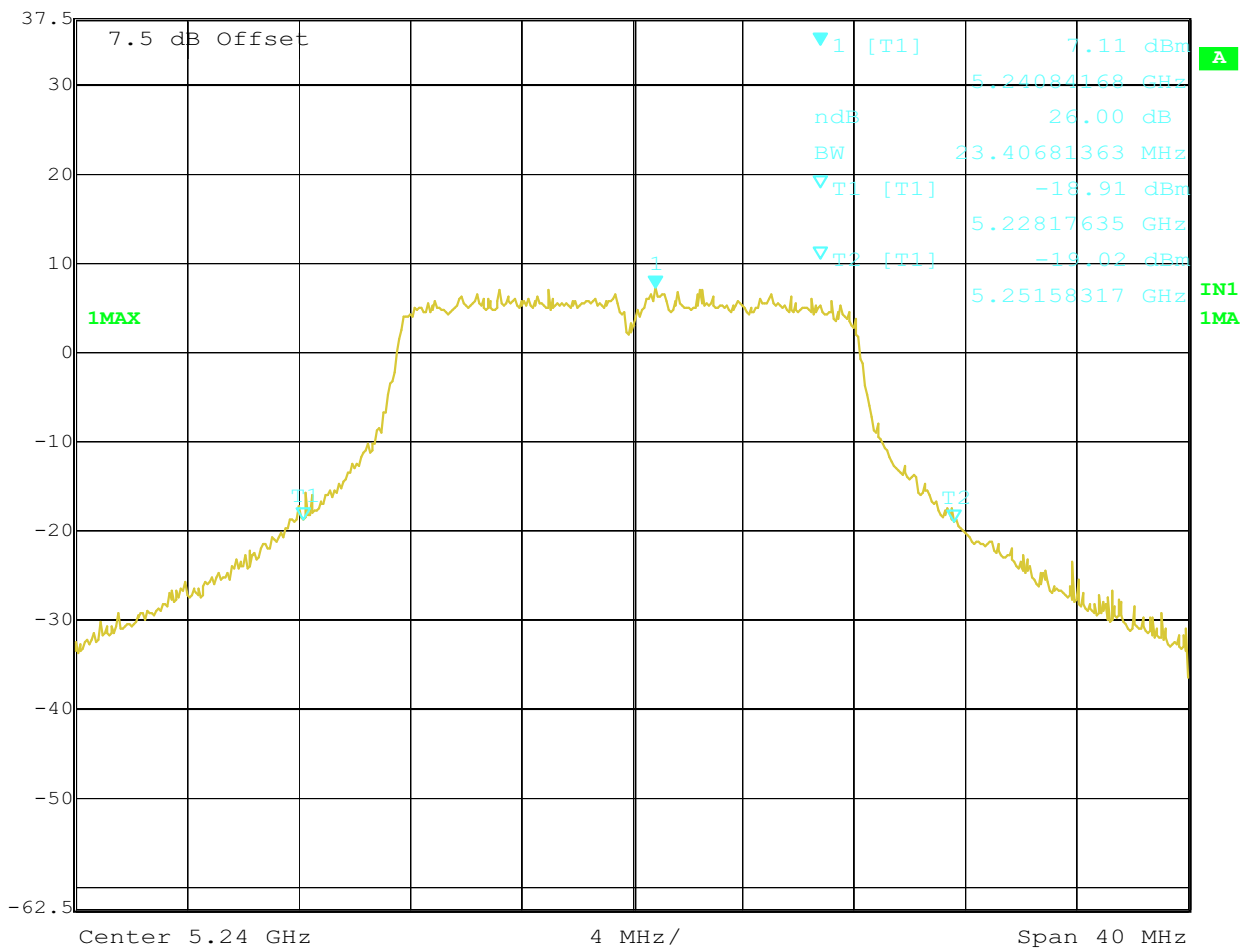

Title: 11A CH48 EMSSON BANDWIDTH 6Mbps  
Date: 18.NOV.2005 17:16:36




Ref Lvl 37.5 dBm Marker 1 [T1 ndB] 26.00 dB RBW 300 kHz RF Att 40 dB  
BW 24.04809619 MHz VBW 500 kHz Unit dBm  
SWT 1 s

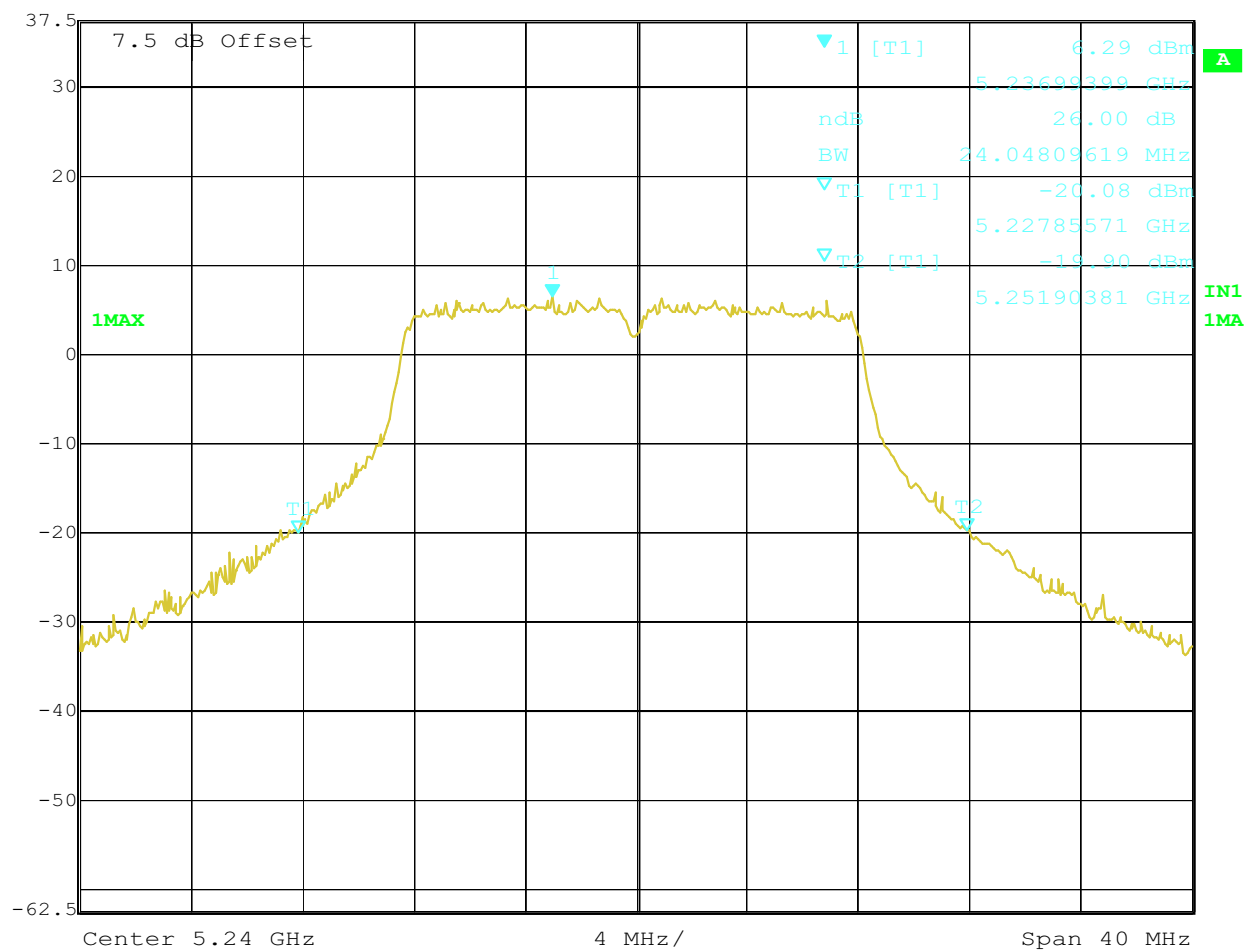

Title: 11A CH48 EMSSON BANDWIDTH 18Mbps  
Date: 18.NOV.2005 17:17:35




Ref Lvl 37.5 dBm Marker 1 [T1 ndB] 26.00 dB RBW 300 kHz RF Att 40 dB  
BW 23.08617234 MHz VBW 500 kHz Unit dBm  
SWT 1 s

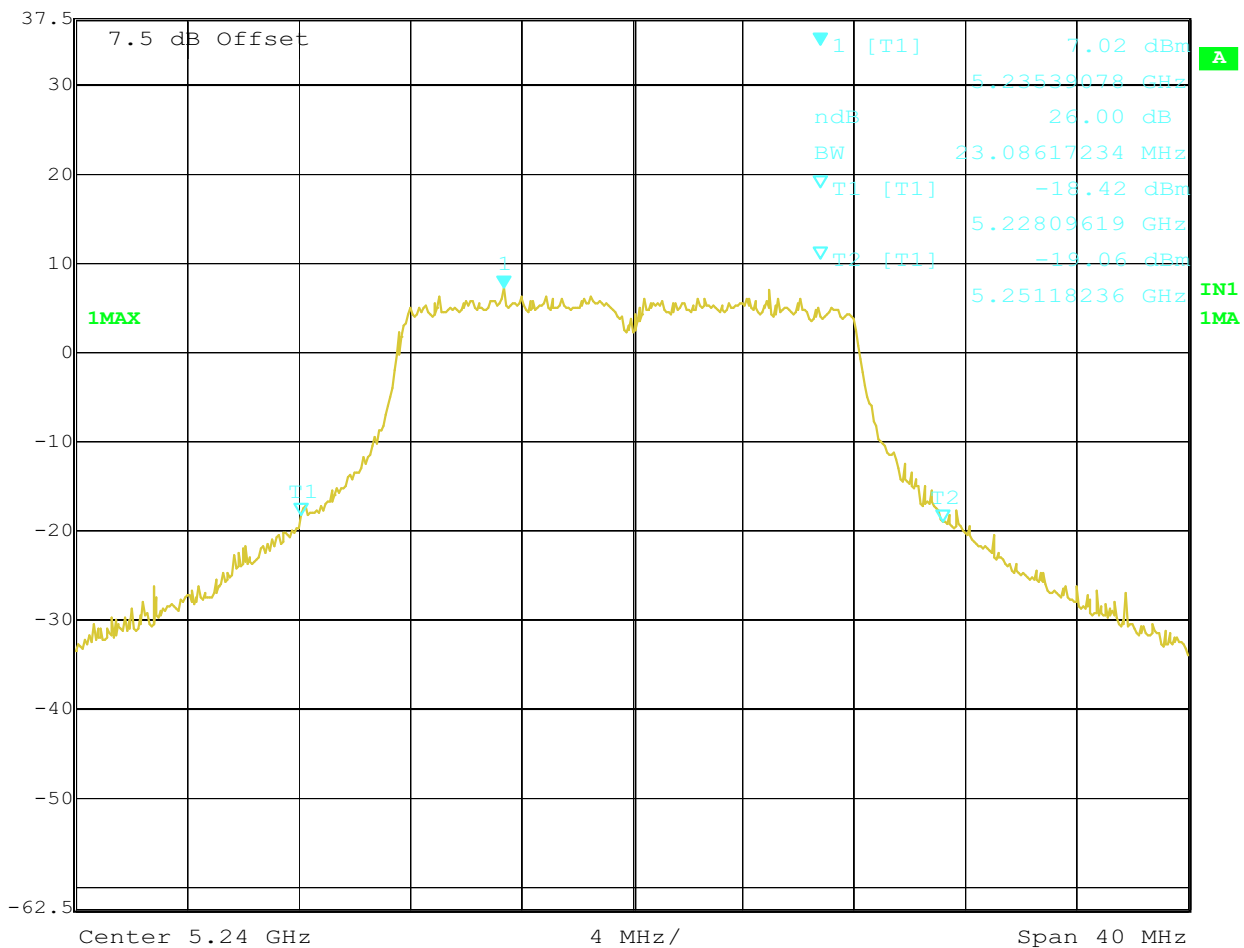

Title: 11A CH48 EMSSON BANDWIDTH 36Mbps  
Date: 18.NOV.2005 17:20:10



Ref Lvl 37.5 dBm Marker 1 [T1 ndB] 26.00 dB RBW 300 kHz RF Att 40 dB  
BW 23.00601202 MHz VBW 500 kHz Unit dBm  
SWT 1 s

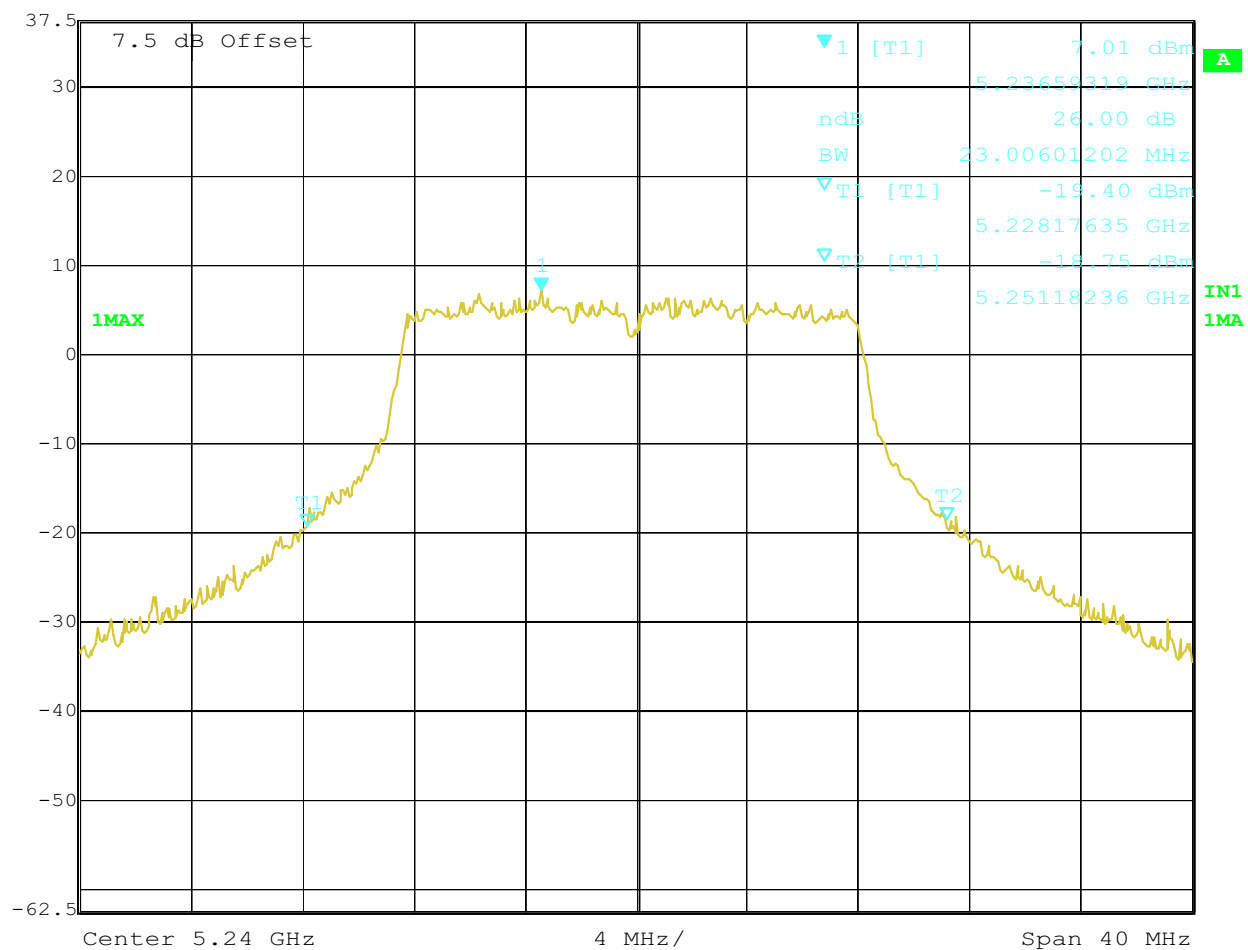


Title: 11A CH48 EMSSON BANDWIDTH 54Mbps  
Date: 18.NOV.2005 17:19:09



Registration number: W6M20511-6291-E-54  
FCC ID: TSTWV100

## Appendix B


### Peak Transmit Power

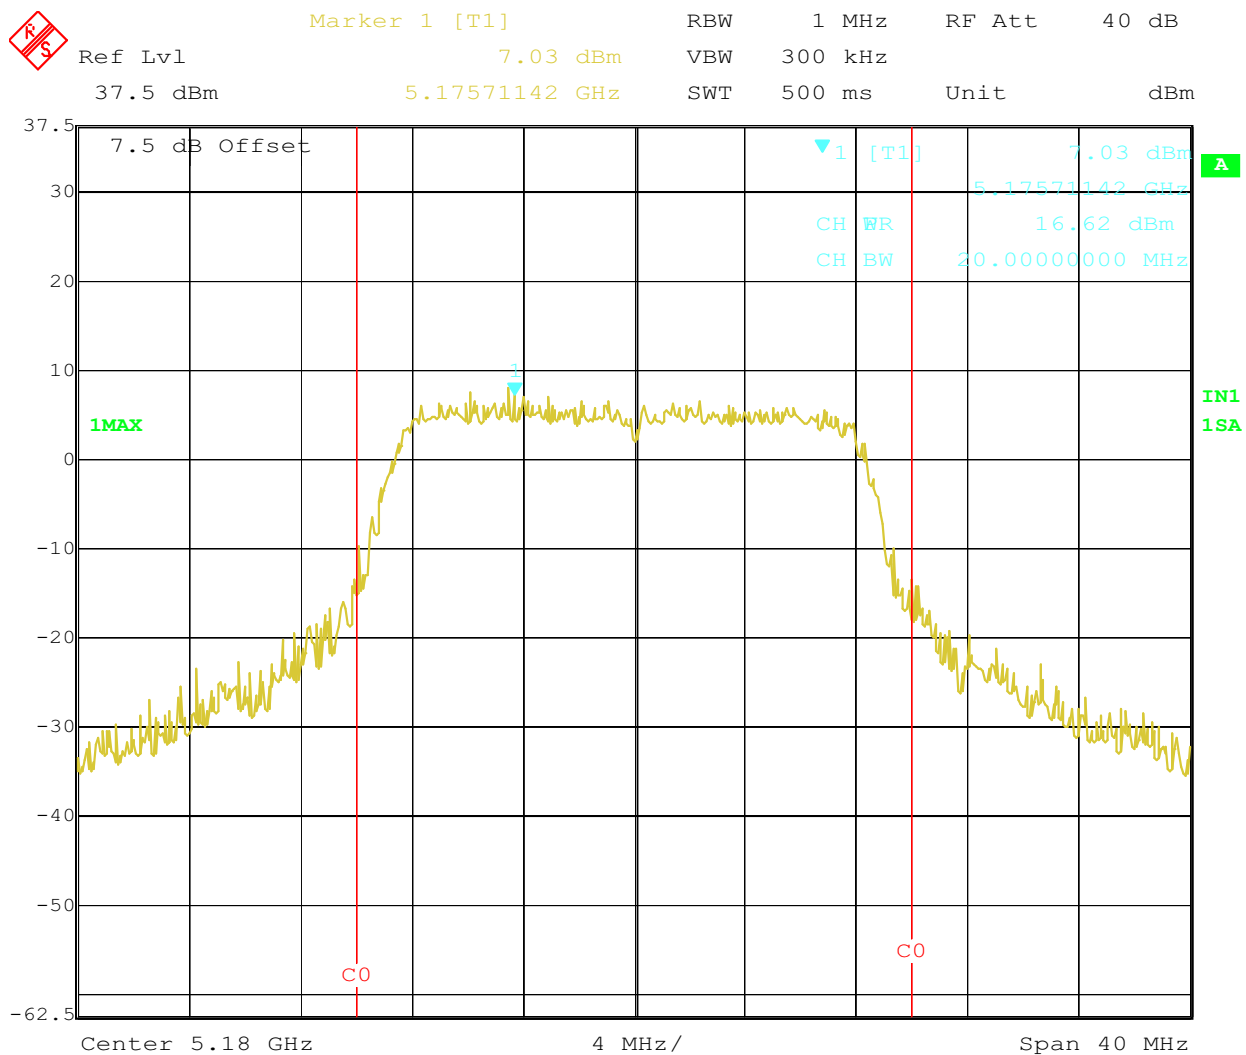

Title: 11A CH36 PEAK TRANSMIT POWER 6Mbps  
Date: 18.NOV.2005 15:53:18




Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 7.89 dBm VBW 300 kHz  
37.5 dBm 5.18324649 GHz SWT 500 ms Unit dBm

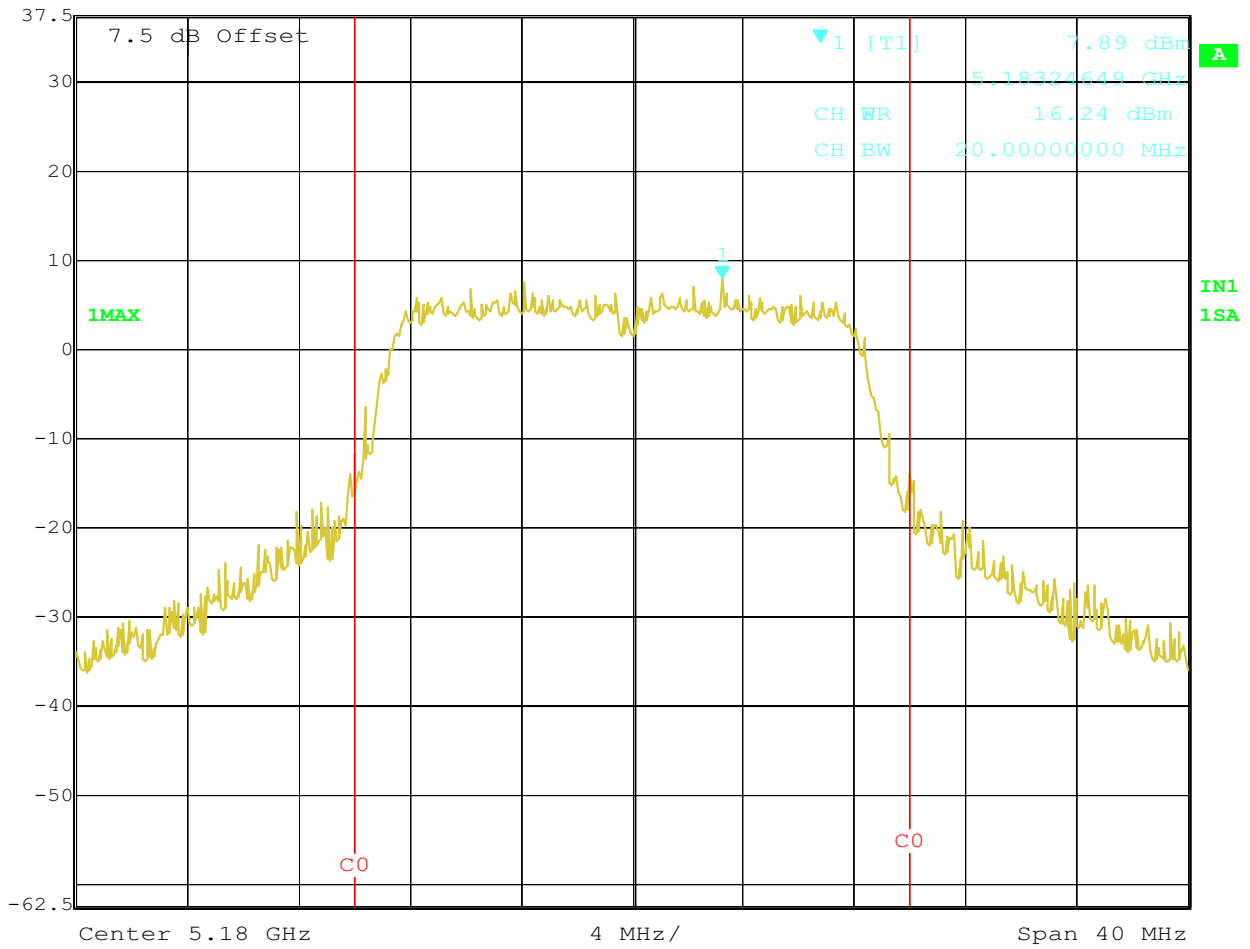

Title: 11A CH36 BAKTRANSMT POWER 18Mbps  
Date: 18.NOV.2005 15:56:14




Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 7.03 dBm VBW 300 kHz  
37.5 dBm 5.18148297 GHz SWT 500 ms Unit dBm

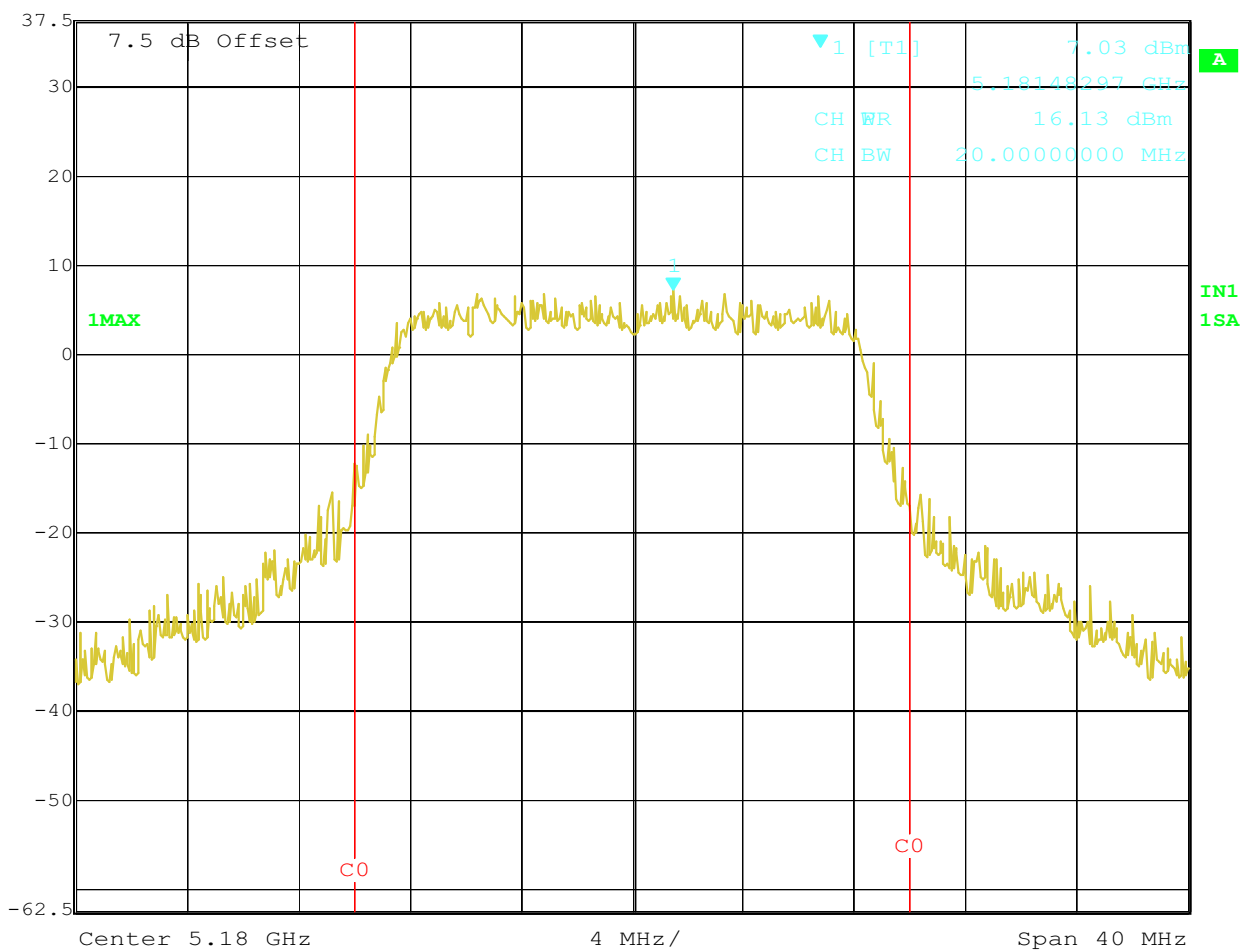

Title: 11A CH36 BAKTRANSMT 0WER 36Mbps  
Date: 18.NOV.2005 15:57:34




Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 5.13 dBm VBW 300 kHz  
37.5 dBm 5.18372745 GHz SWT 500 ms Unit dBm

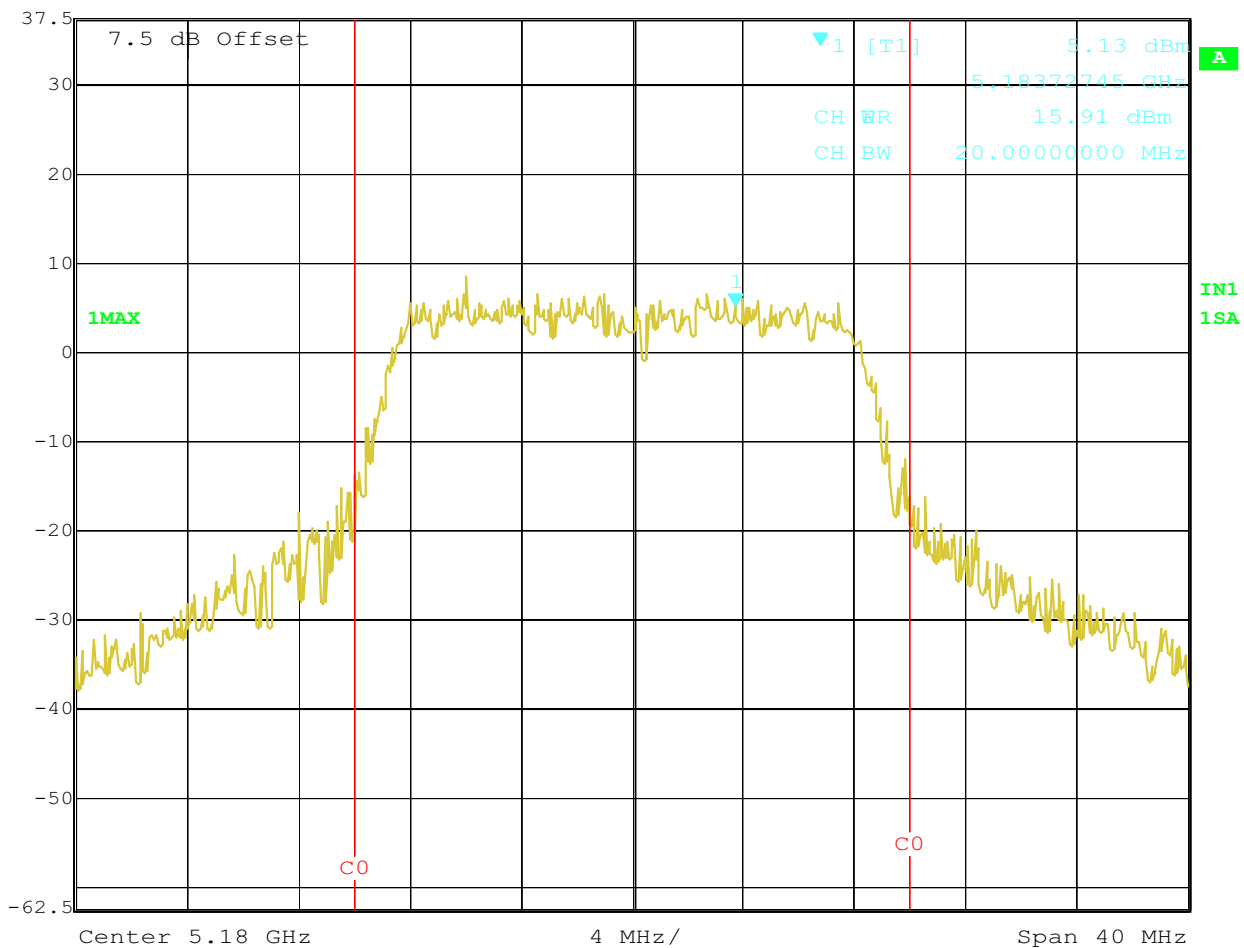

Title: 11A CH36 BAKTRANSMT POWER 54Mbps  
Date: 18.NOV.2005 16:01:14




Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 7.69 dBm VBW 300 kHz  
37.5 dBm 5.19771543 GHz SWT 500 ms Unit dBm

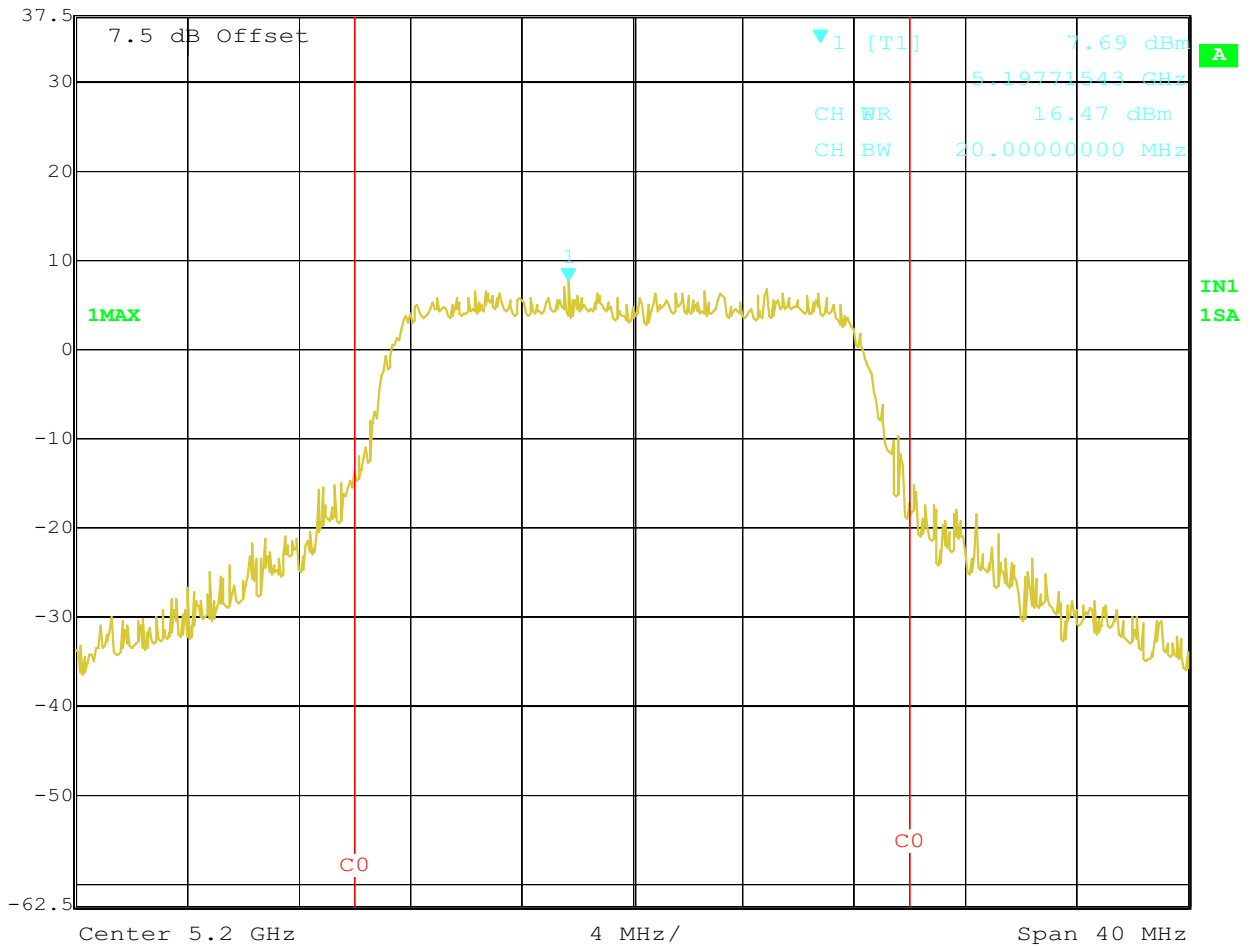

Title: 11A CH40 BAKTRANSMT POWER 6Mbps  
Date: 18.NOV.2005 16:02:52




Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 6.83 dBm VBW 300 kHz  
37.5 dBm 5.19595190 GHz SWT 500 ms Unit dBm

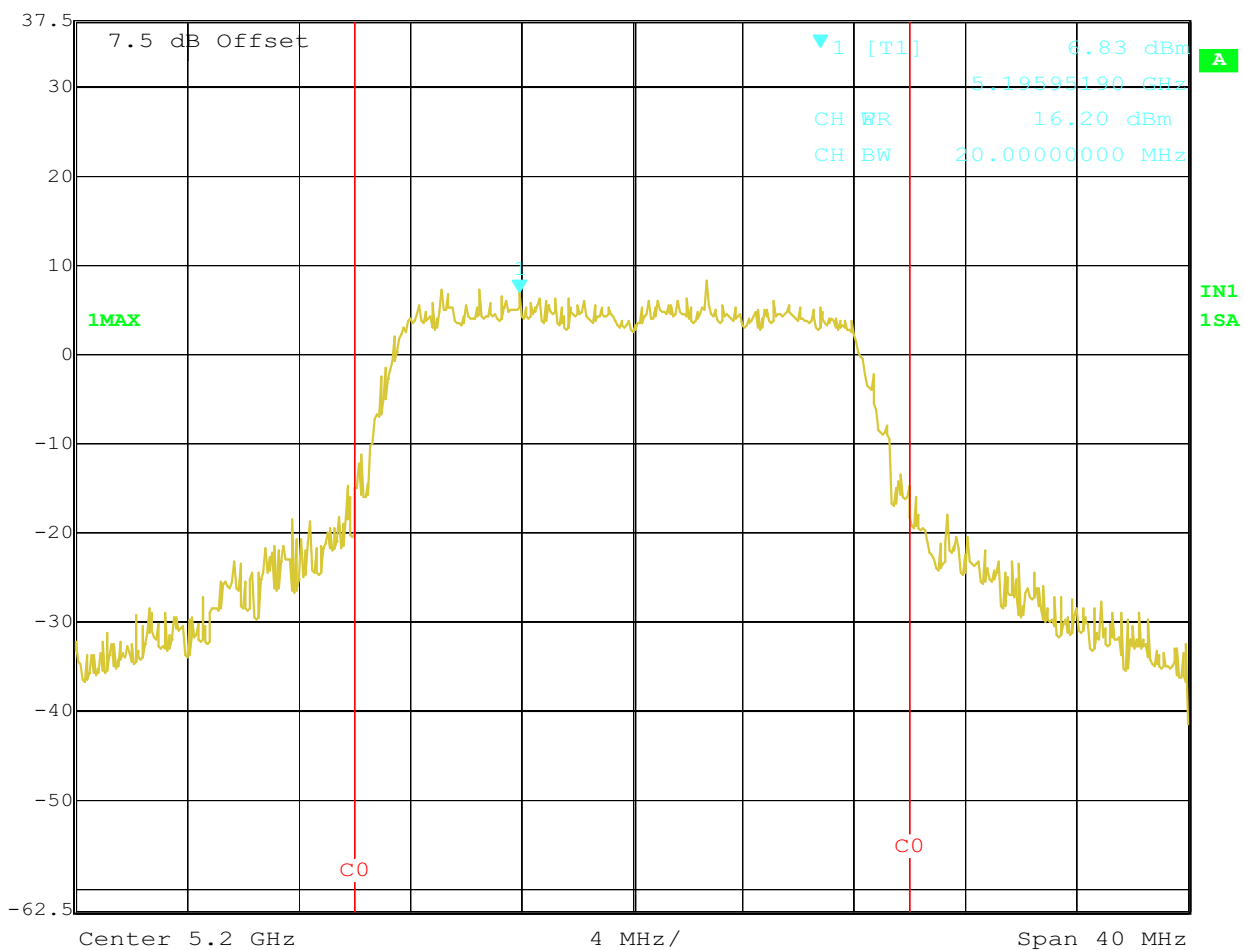

Title: 11A CH40 BAKTRANSMT POWER 18Mbps  
Date: 18.NOV.2005 16:04:47



Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 8.16 dBm VBW 300 kHz  
37.5 dBm 5.19891784 GHz SWT 500 ms Unit dBm

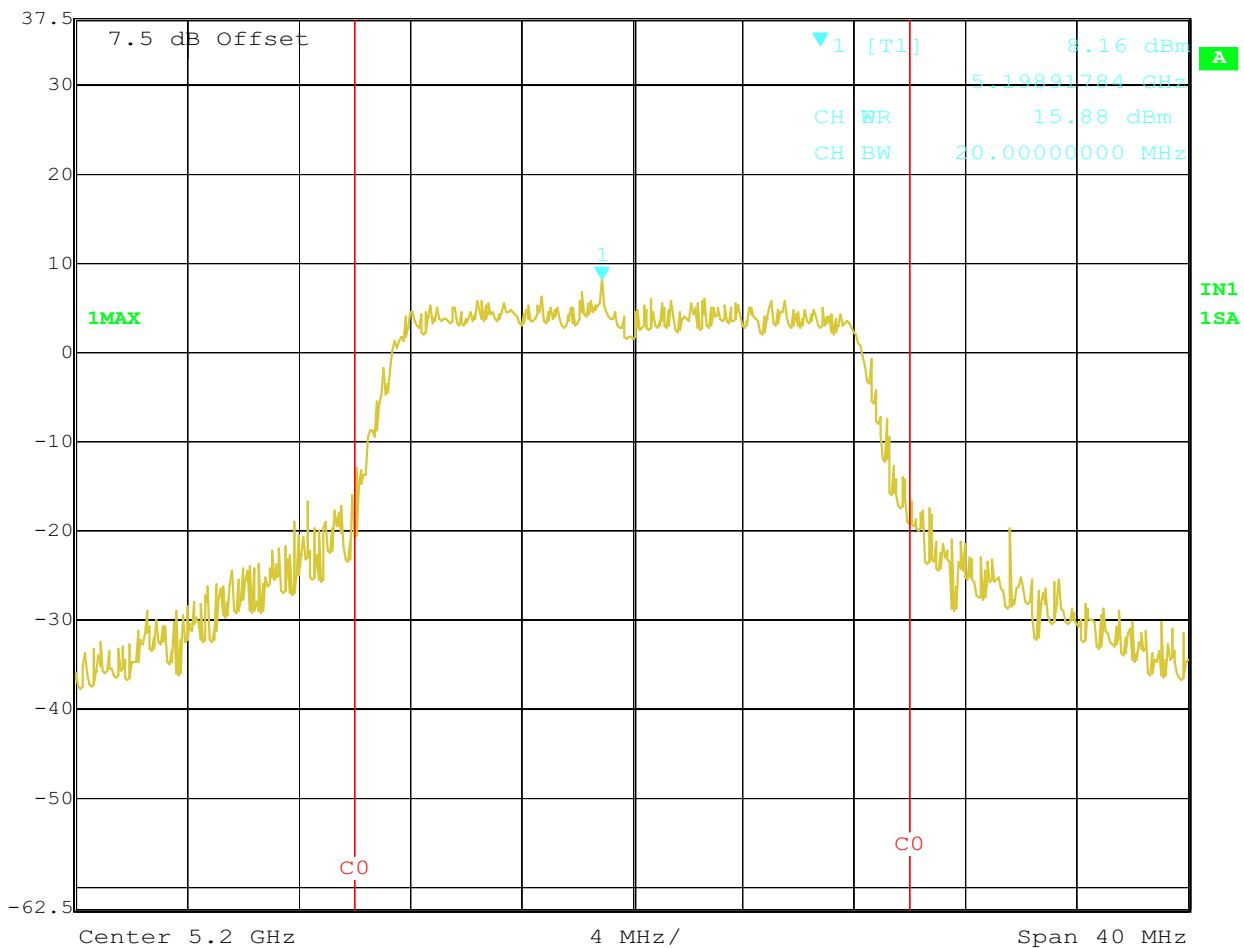


Title: 11A CH40 BAKTRANSMT POWER 36Mbps  
Date: 18.NOV.2005 16:06:01






Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 7.19 dBm VBW 300 kHz  
37.5 dBm 5.19555110 GHz SWT 500 ms Unit dBm

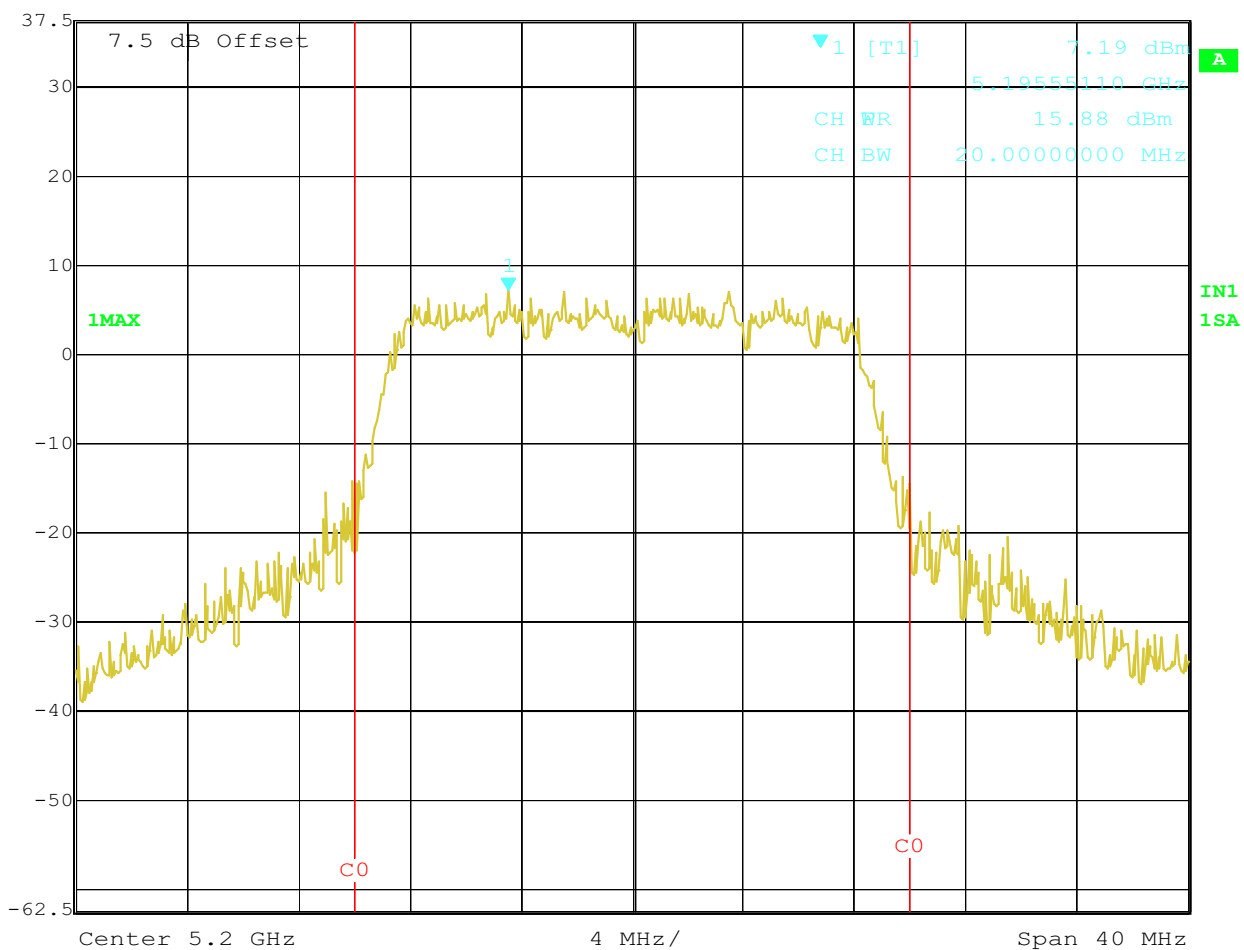

Title: 11A CH40 BAKTRANSMT POWER 54Mbps  
Date: 18.NOV.2005 16:07:23




Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 6.64 dBm VBW 300 kHz  
37.5 dBm 5.23715431 GHz SWT 500 ms Unit dBm

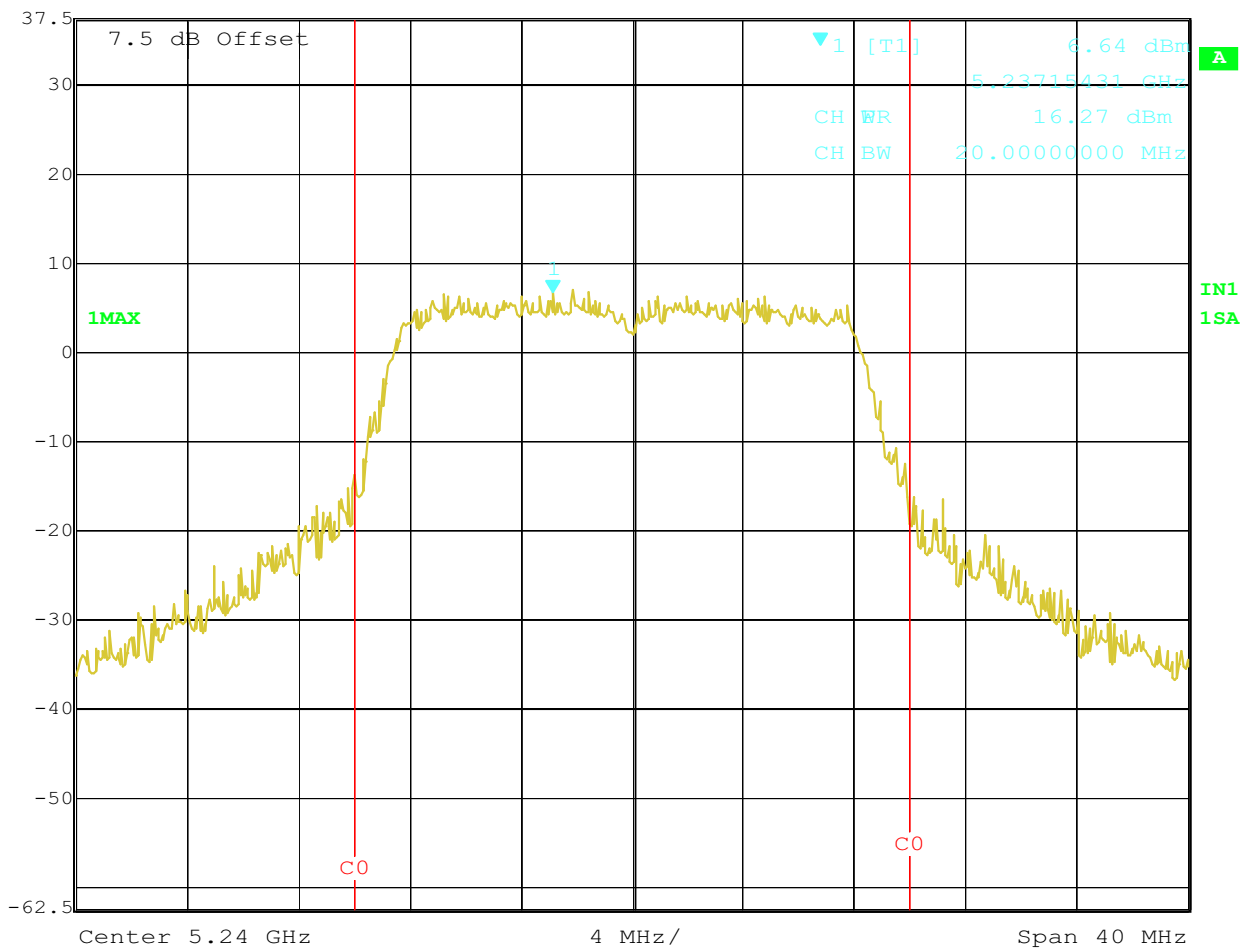

Title: 11A CH48 BAKTRANSMT POWER 6Mbps  
Date: 18.NOV.2005 16:13:15




Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 6.79 dBm VBW 300 kHz  
37.5 dBm 5.23619238 GHz SWT 500 ms Unit dBm

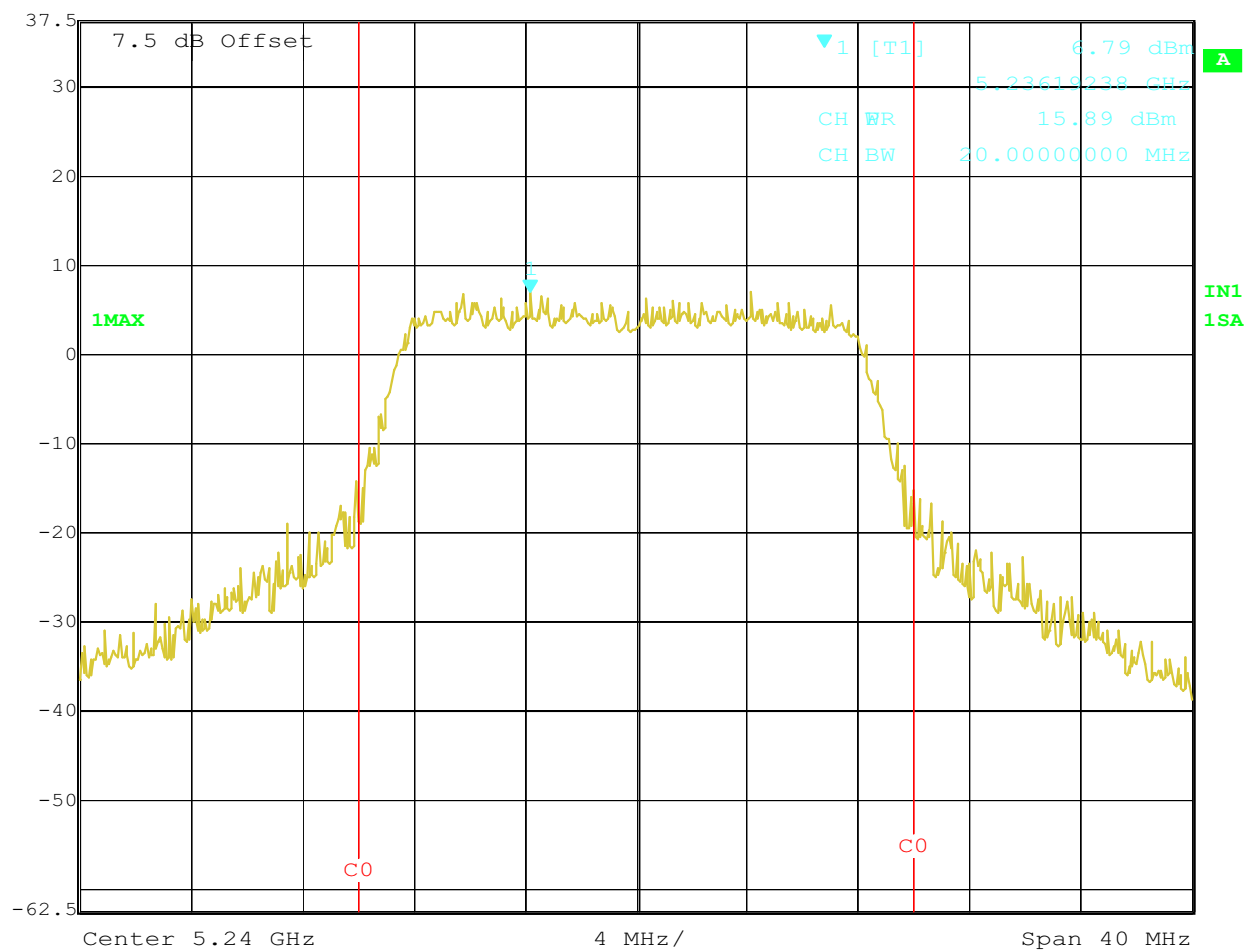

Title: 11A CH48 BAKTRANSMT POWER 18Mbps  
Date: 18.NOV.2005 16:14:36




Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 6.40 dBm VBW 300 kHz  
37.5 dBm 5.24252505 GHz SWT 500 ms Unit dBm

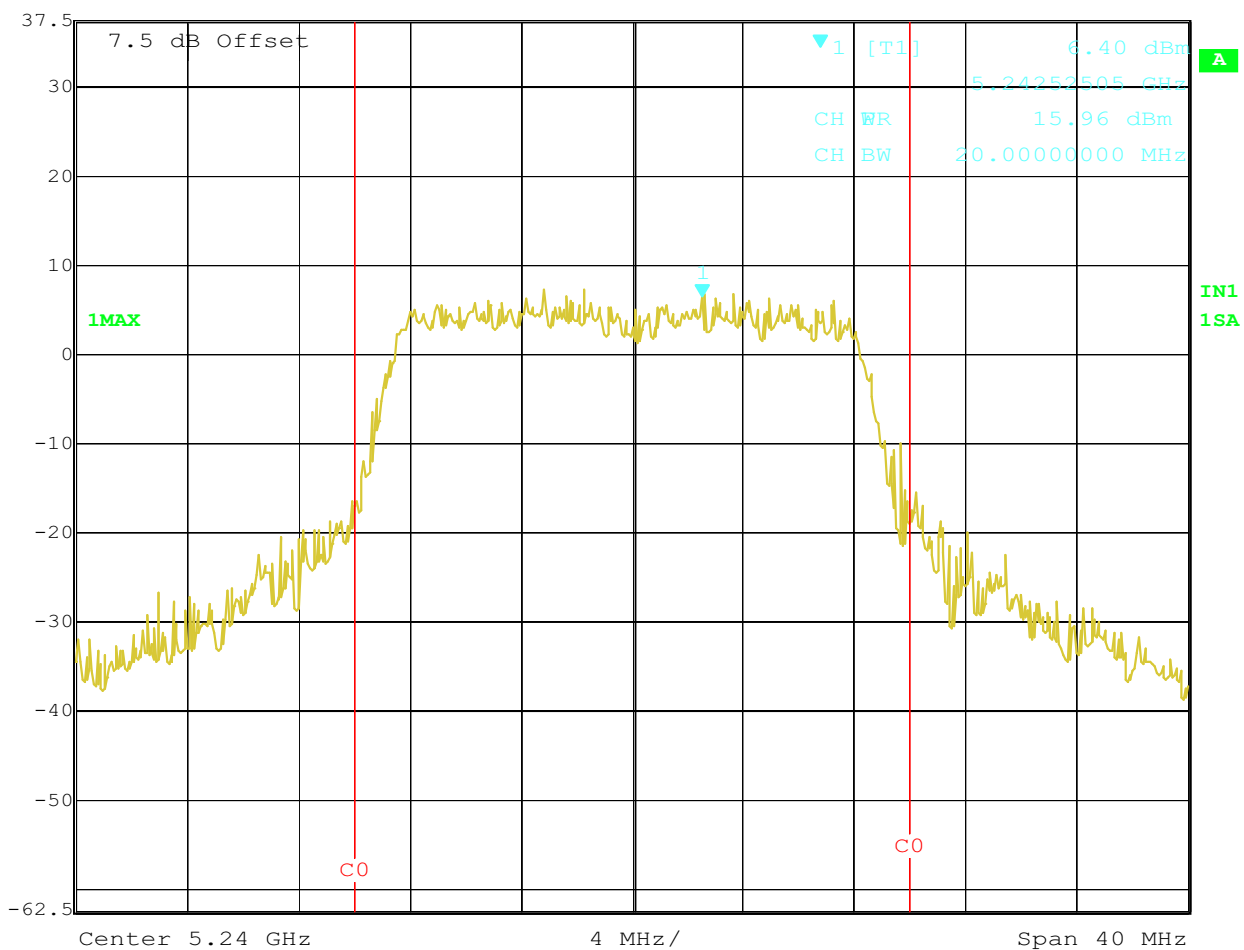

Title: 11A CH48 BAKTRANSMT POWER 36Mbps  
Date: 18.NOV.2005 16:16:31



Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 7.08 dBm VBW 300 kHz  
37.5 dBm 5.23274549 GHz SWT 500 ms Unit dBm

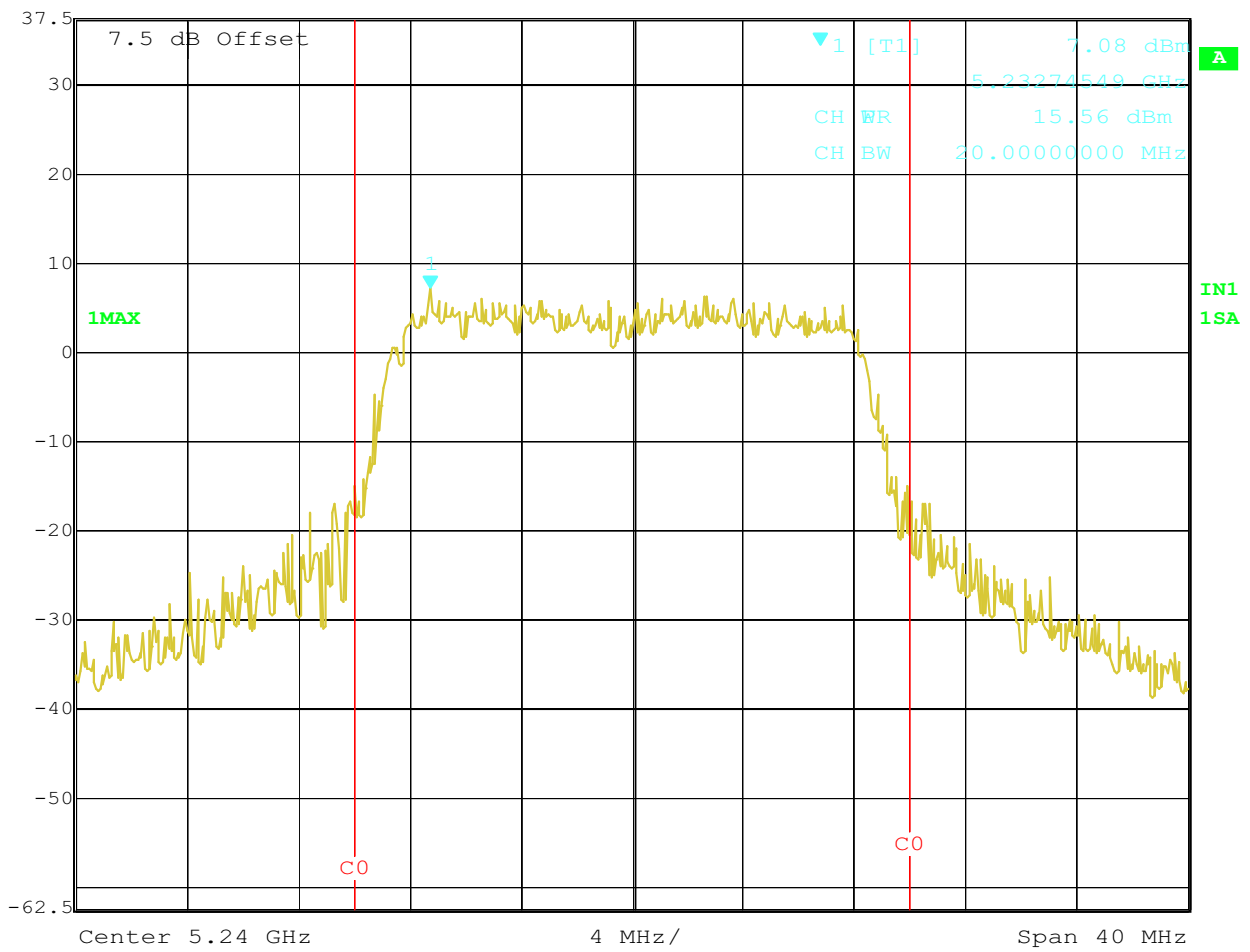

Title: 11A CH48 BAKTRANSMT 0WER 54Mbps  
Date: 18.NOV.2005 16:18:12


Registration number: W6M20511-6291-E-54  
FCC ID: TSTWV100

## Appendix C

### Peak Power Spectral Density




Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 2.99 dBm VBW 3 MHz  
27.5 dBm 5.17741483 GHz SWT 20 ms Unit dBm

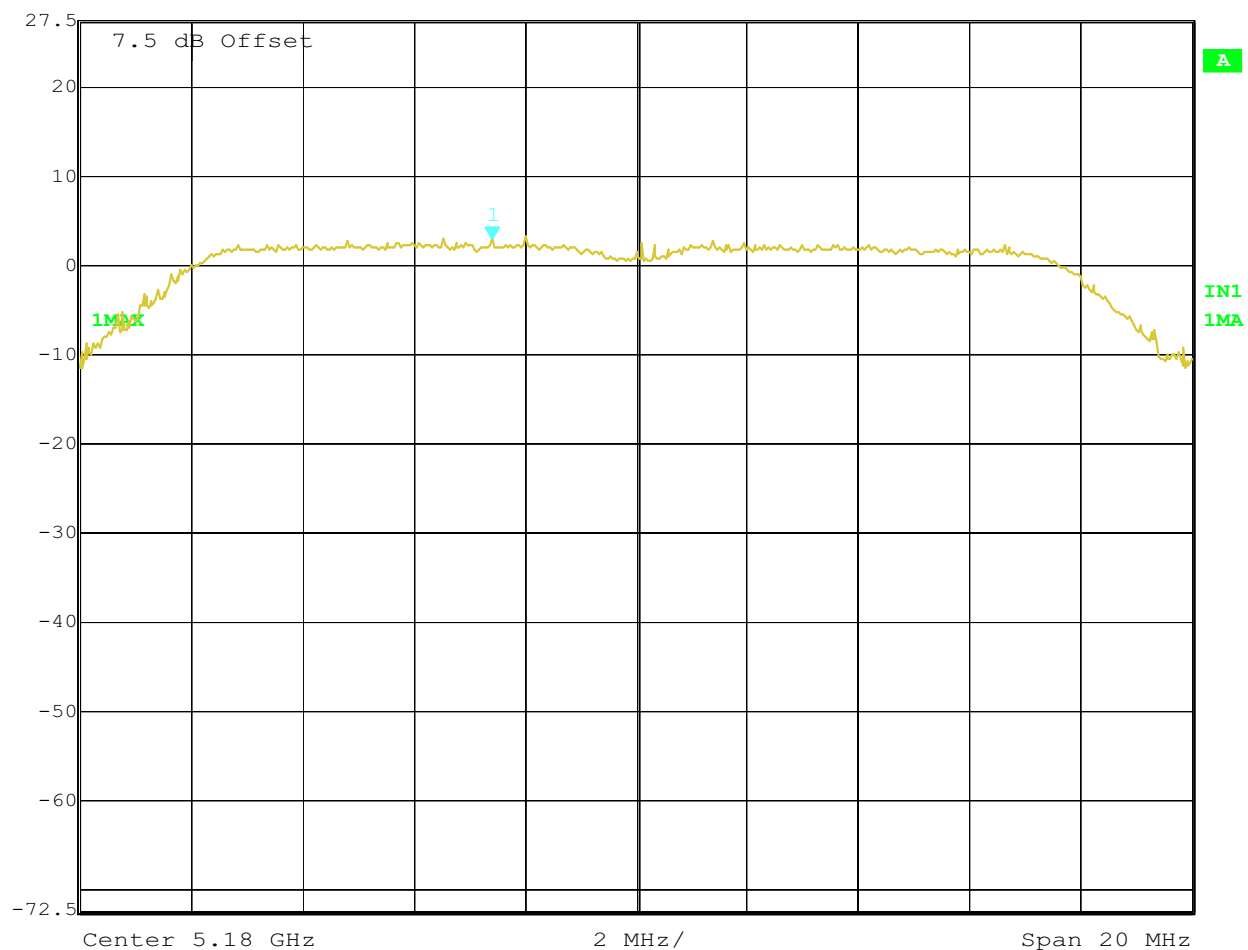

Title: 11A CH36 EAKSECTRAL DENSITY6Mbps  
Comment A: VAN HiTehDevelopment Co.,Ltd.  
Date: 15.DEC.2005 18:12:00



Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 3.16 dBm VBW 3 MHz  
27.5 dBm 5.17376754 GHz SWT 20 ms Unit dBm

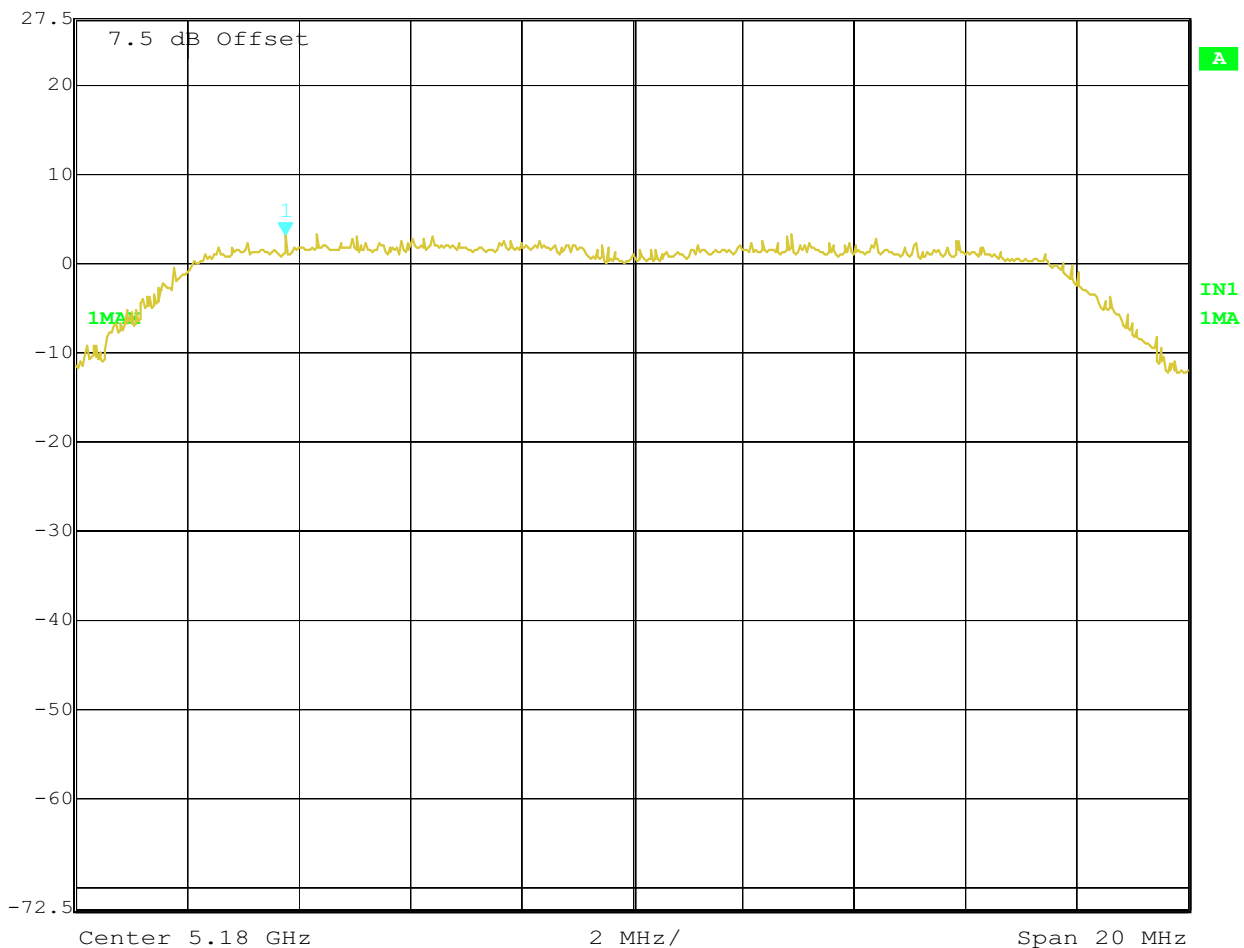


Title: 11A CH36 EAKSECTRAL DENSITY18Mbps  
Comment A: VAN HightechDevelopment Co.,Ltd.  
Date: 15.DEC.2005 18:13:03






Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 3.64 dBm VBW 3 MHz  
27.5 dBm 5.18202405 GHz SWT 20 ms Unit dBm

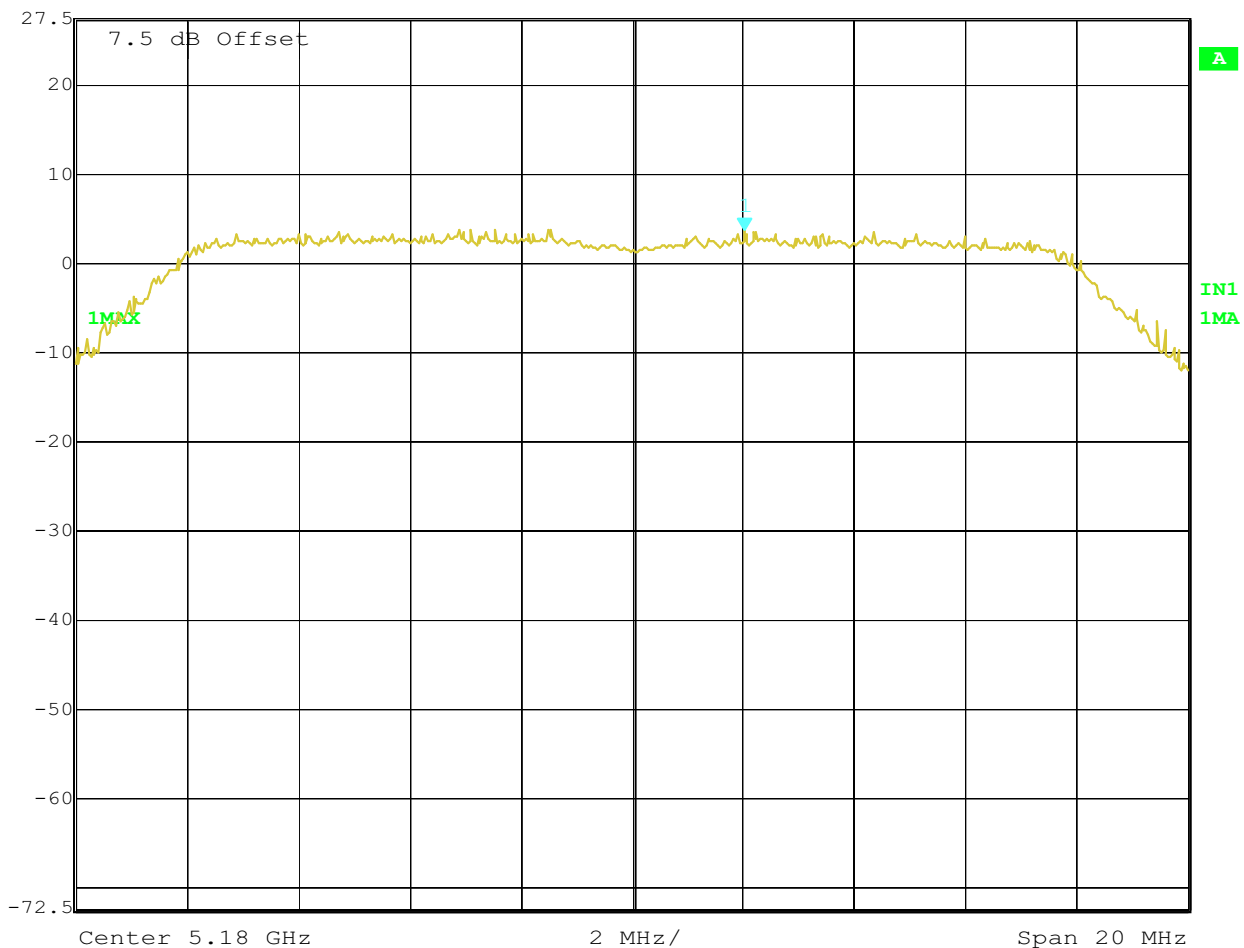

Title: 11A CH36 EAKSECTRAL DENSTY36Mps  
Comment A: VAN HightechDevelopment Co.,Ltd.  
Date: 15.DEC.2005 18:13:43




Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 3.75 dBm VBW 3 MHz  
27.5 dBm 5.18118236 GHz SWT 20 ms Unit dBm

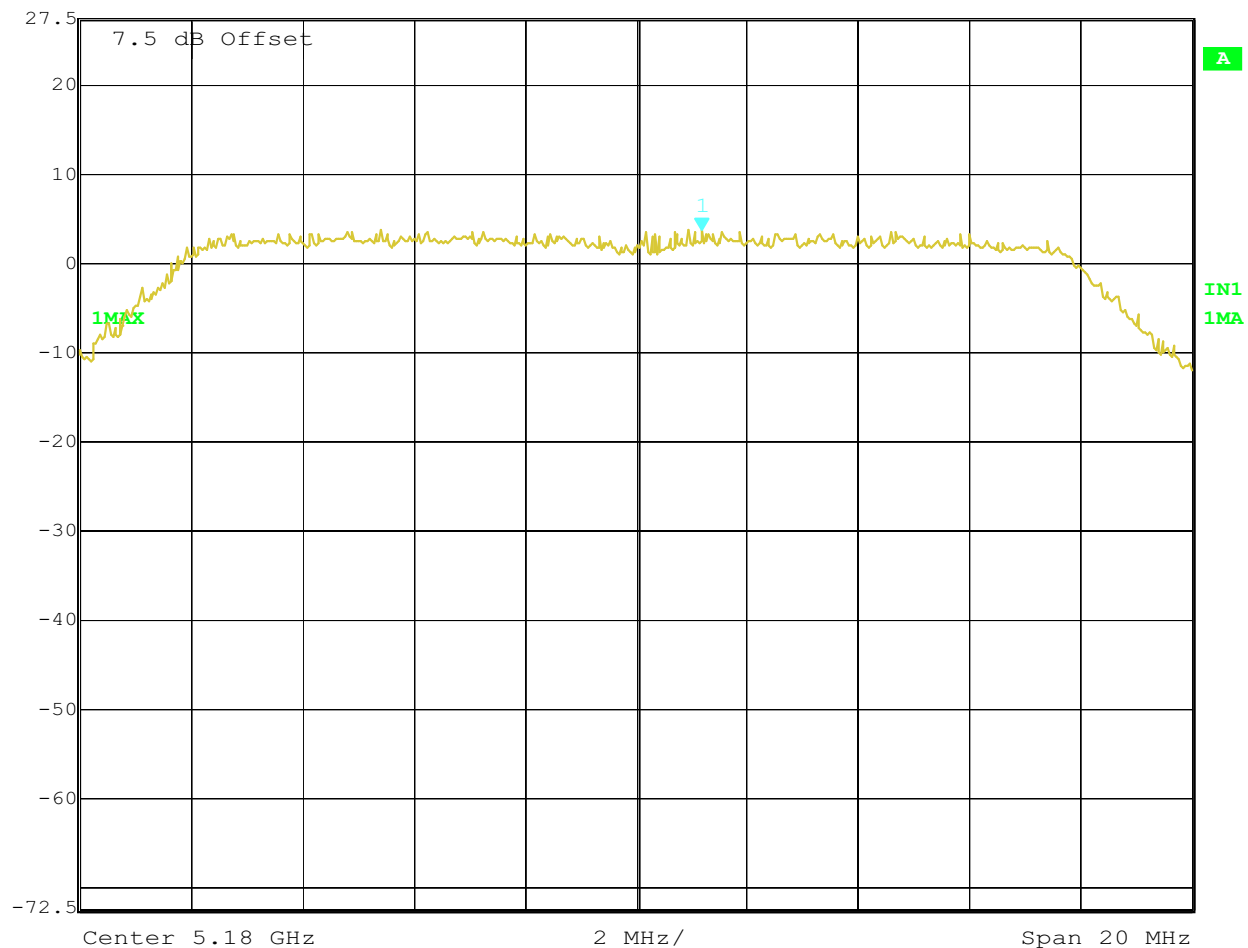

Title: 11A CH36 EAKSECTRAL DENSTY54Mps  
Comment A: VAN HightechDevelopment Co.,Ltd.  
Date: 15.DEC.2005 18:14:22




Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 2.72 dBm VBW 3 MHz  
27.5 dBm 5.19589178 GHz SWT 20 ms Unit dBm

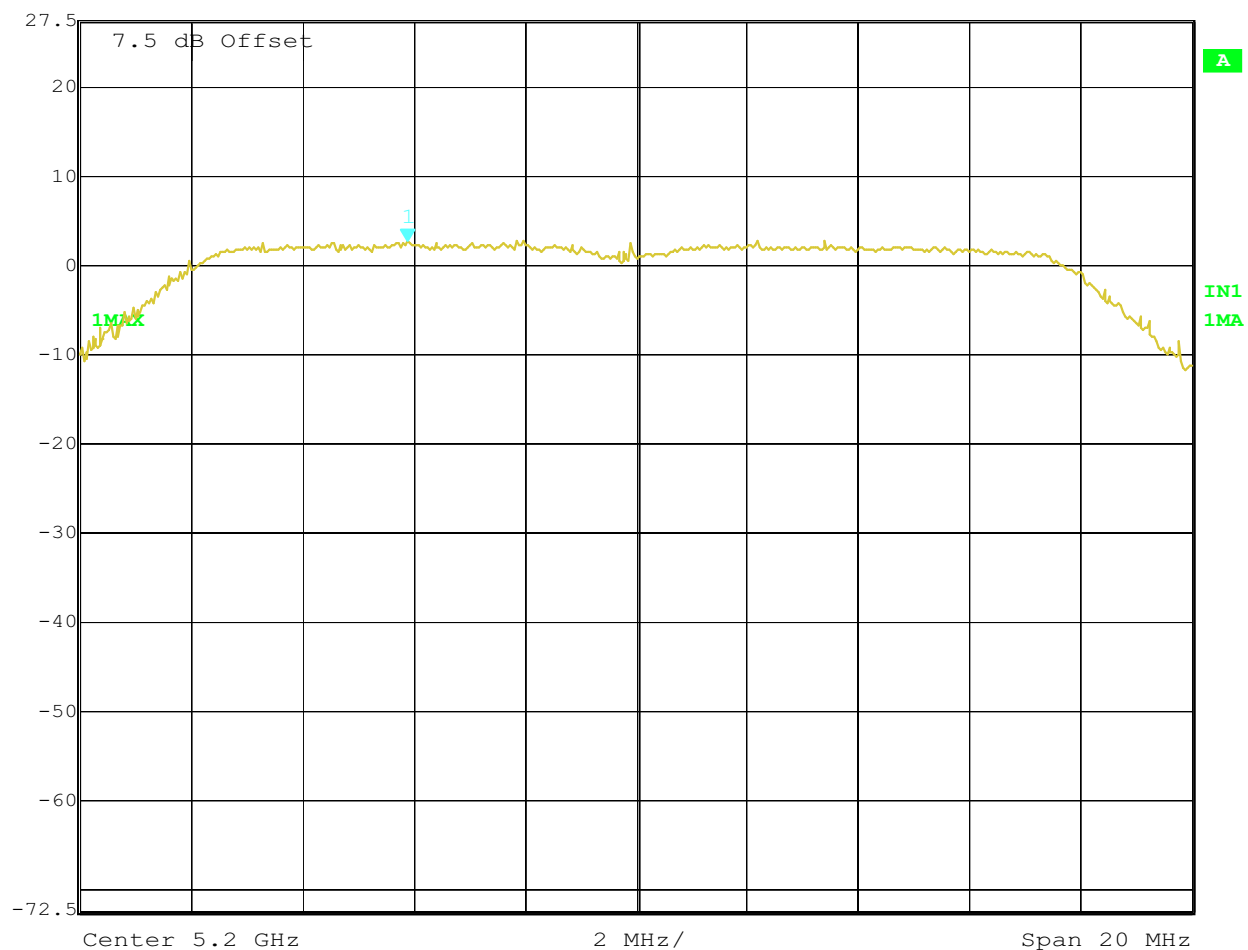

Title: 11A CH40 EAKSECTRAL DENSTY6Mps  
Comment A: VAN HighTehDevelopment Co,Ltd.  
Date: 15.DEC.2005 18:17:31




Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 3.09 dBm VBW 3 MHz  
27.5 dBm 5.19625251 GHz SWT 20 ms Unit dBm

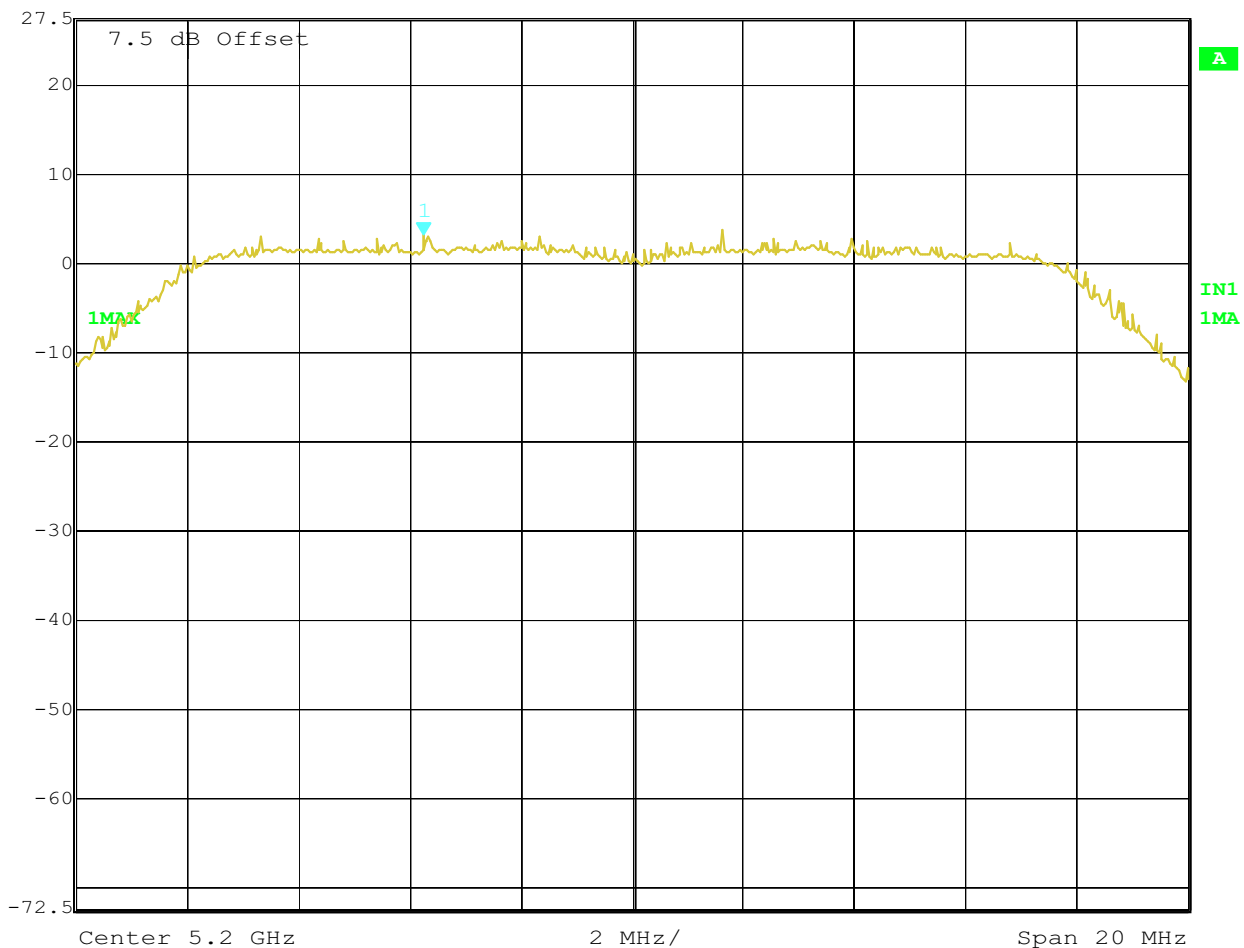

Title: 11A CH40 EAKSECTRAL DENSTY18Mps  
Comment A: VAN HiTehDevelopment Co,Ltd.  
Date: 15.DEC.2005 18:16:51




Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 3.09 dBm VBW 3 MHz  
27.5 dBm 5.20166333 GHz SWT 20 ms Unit dBm

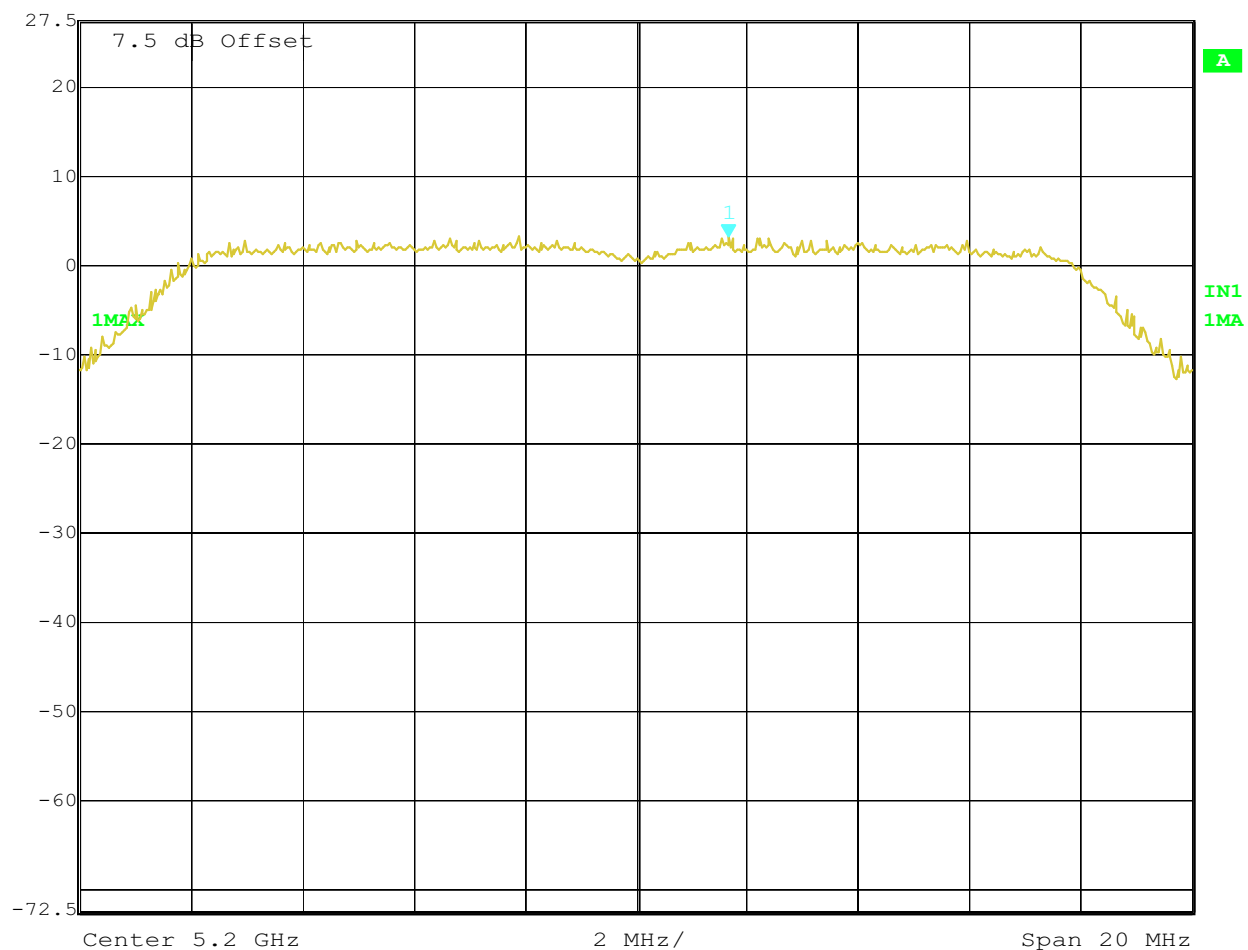

Title: 11A CH40 EAKSECTRAL DENSTY36Mps  
Comment A: VAN HightechDevelopment Co.,Ltd.  
Date: 15.DEC.2005 18:15:54




Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 3.22 dBm VBW 3 MHz  
27.5 dBm 5.20382766 GHz SWT 20 ms Unit dBm

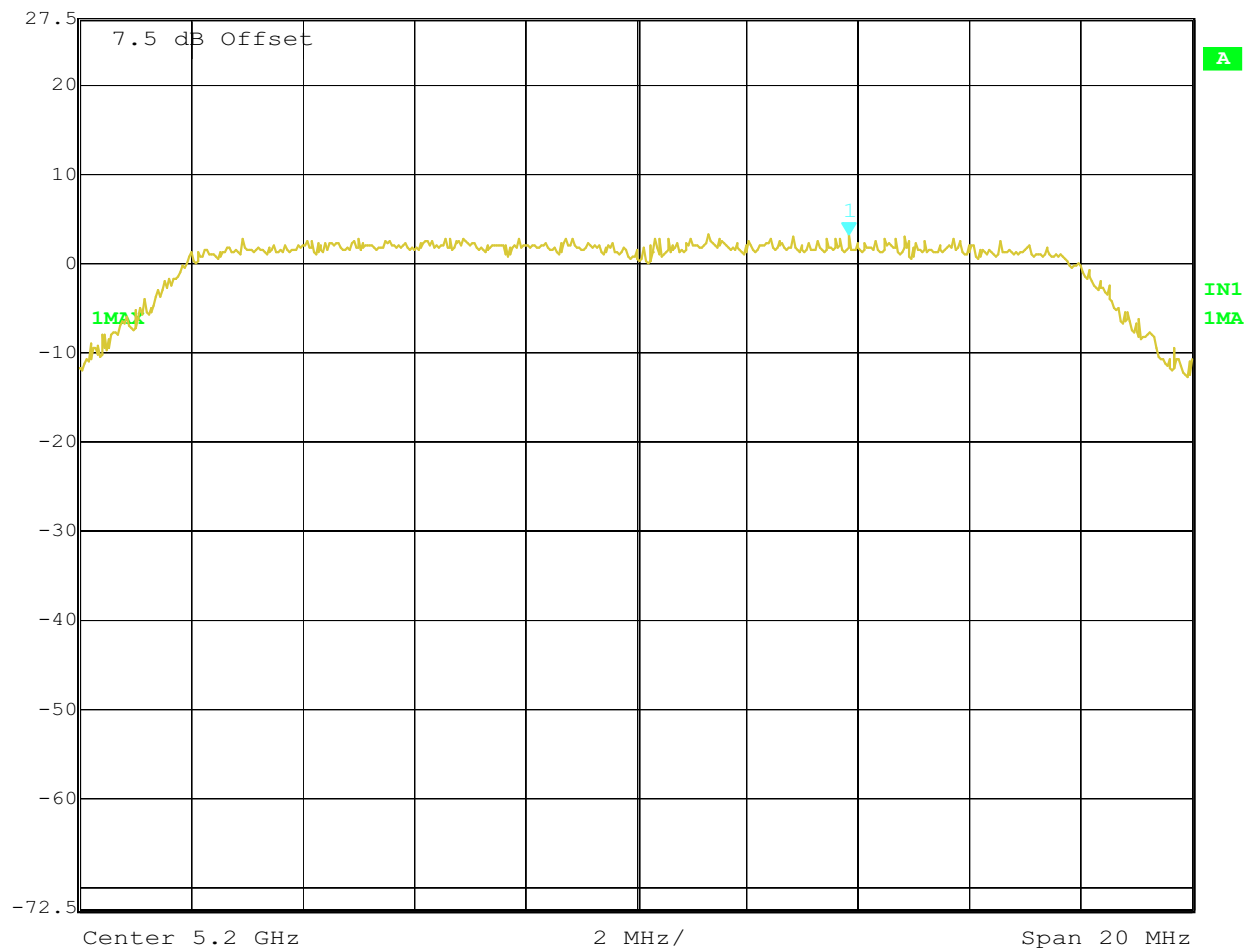

Title: 11A CH40 EAKSECTRAL DENSTY54Mps  
Comment A: VAN HiTehDevelopment Co,Ltd.  
Date: 15.DEC.2005 18:15:06




Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 3.08 dBm VBW 3 MHz  
27.5 dBm 5.23721443 GHz SWT 20 ms Unit dBm

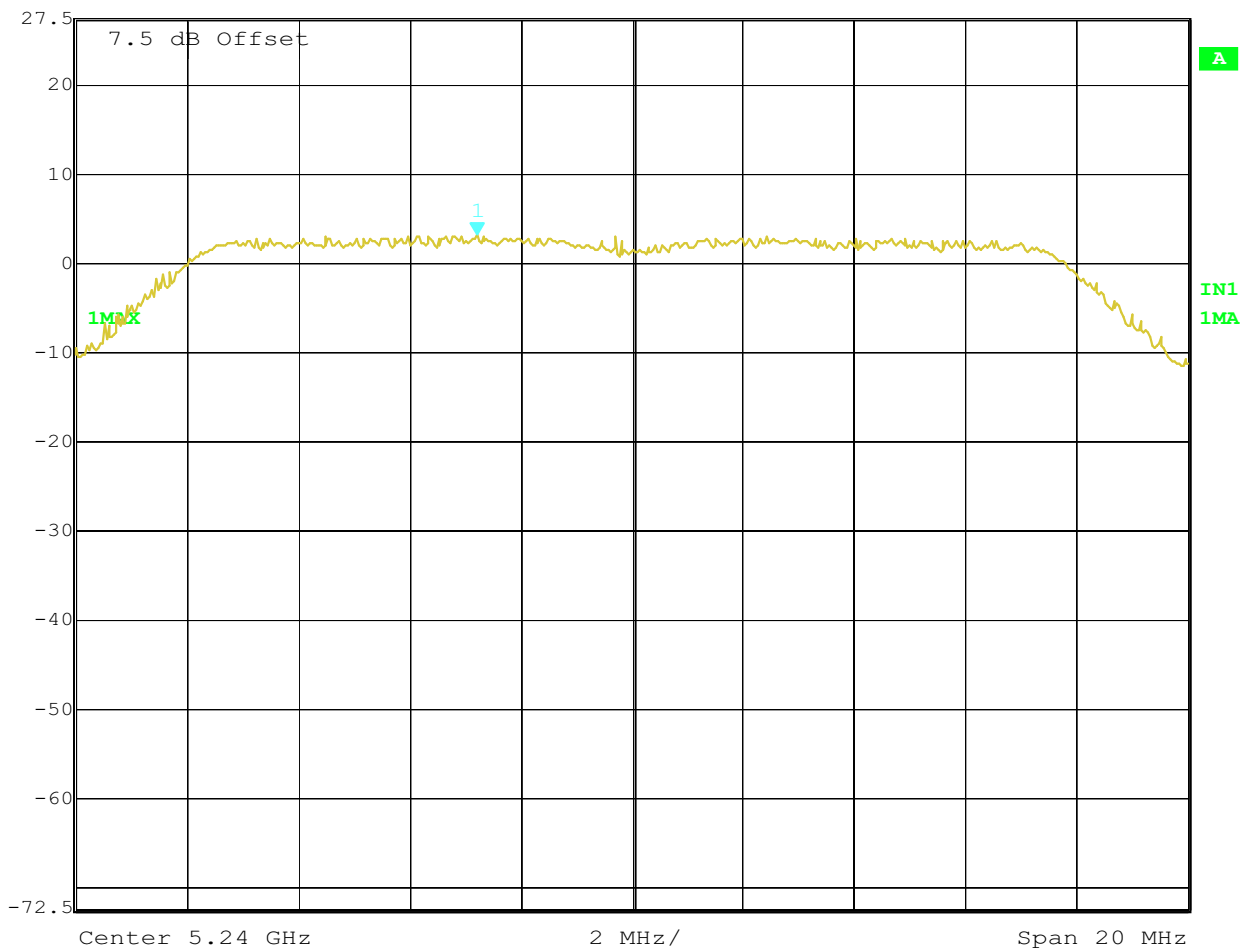

Title: 11A CH48 EAKSECTRAL DENSTY6Mps  
Comment A: VAN HightechDevelopment Co,Ltd.  
Date: 15.DEC.2005 18:19:53



Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 3.21 dBm VBW 3 MHz  
27.5 dBm 5.24074148 GHz SWT 20 ms Unit dBm

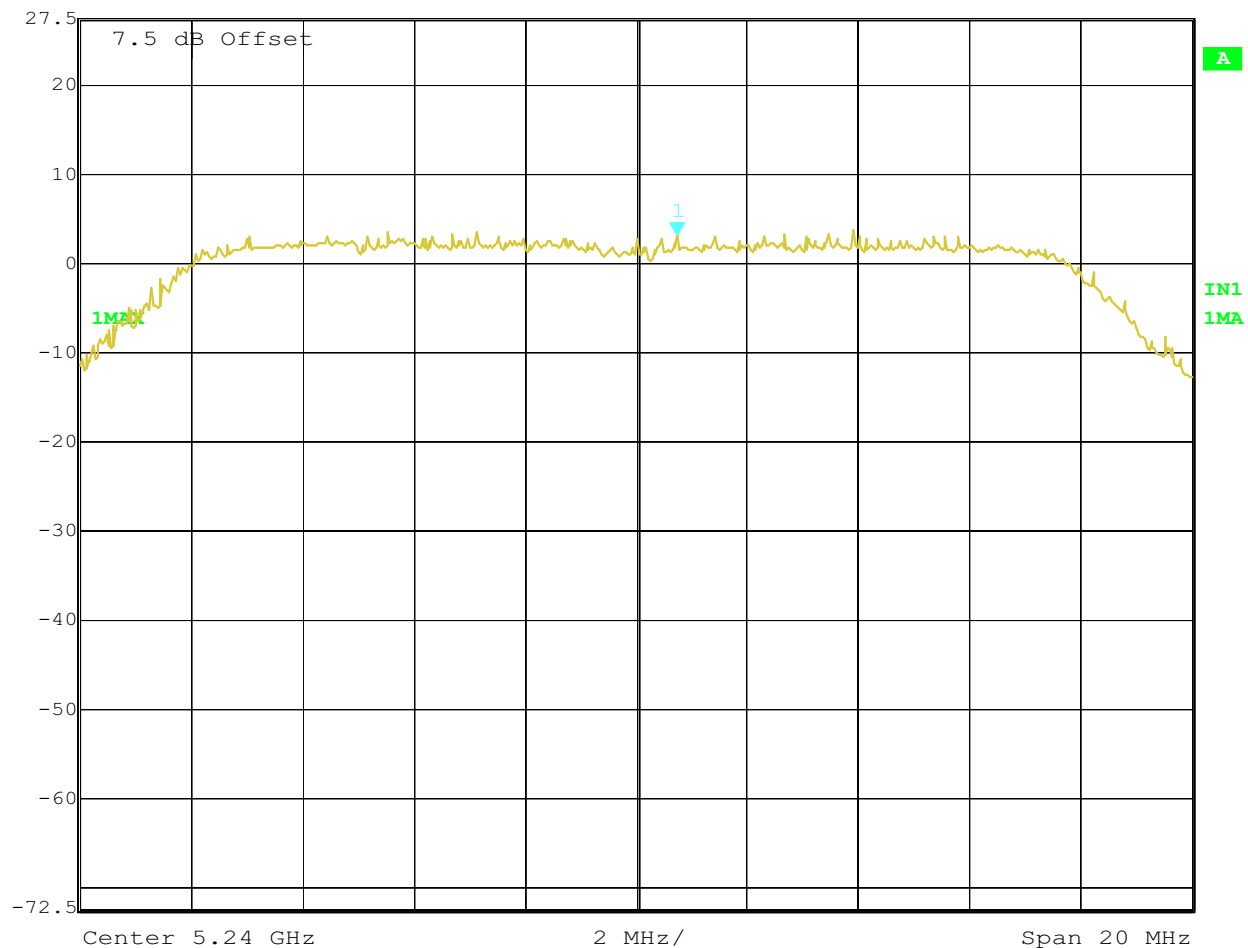


Title: 11A CH48 EAKSECTRAL DENSTY18Mps  
Comment A: VAN HiTehDevelopment Co,Ltd.  
Date: 15.DEC.2005 18:20:52






Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 3.05 dBm VBW 3 MHz  
27.5 dBm 5.24418838 GHz SWT 20 ms Unit dBm

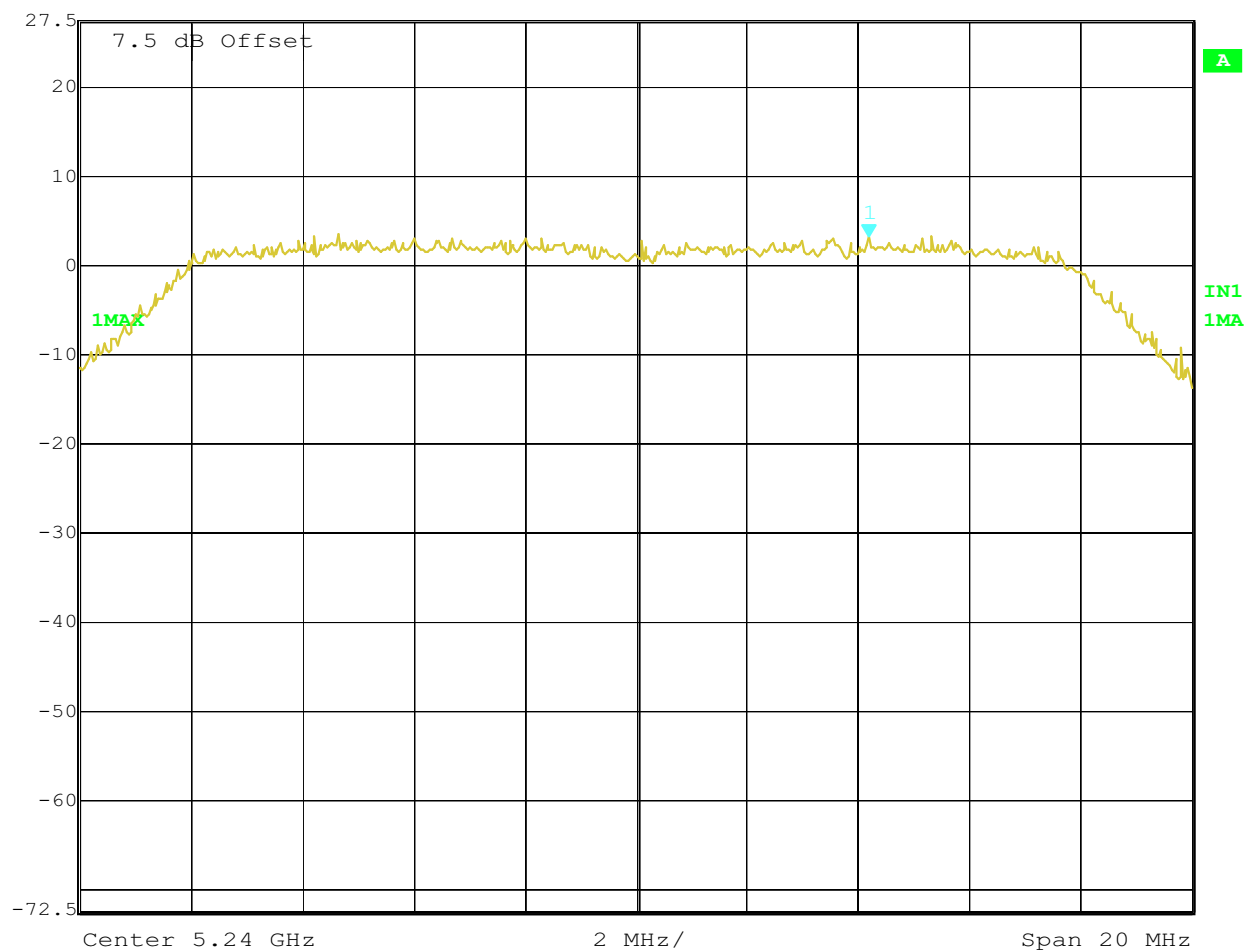


Title: 11A CH48 EAKSECTRAL DENSTY36Mps  
Comment A: VAN HiTehDevelopment Co,Ltd.  
Date: 15.DEC.2005 18:21:41



Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 3.25 dBm VBW 3 MHz  
27.5 dBm 5.23885772 GHz SWT 20 ms Unit dBm

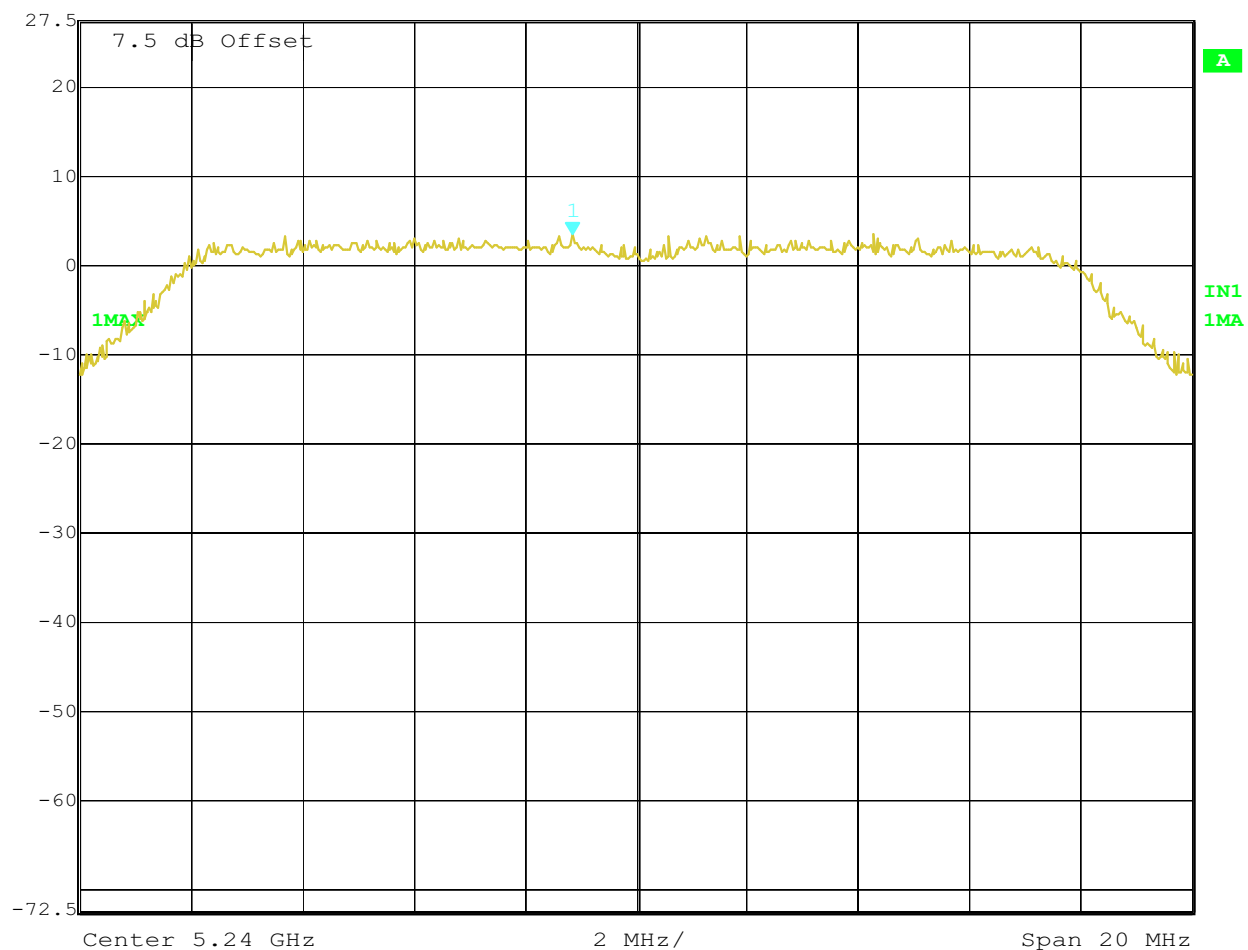

Title: 11A CH48 EAKSECTRAL DENSITY54Mbps  
Comment A: VAN HightechDevelopment Co.,Ltd.  
Date: 15.DEC.2005 18:22:20




Registration number: W6M20511-6291-E-54  
FCC ID: TSTWV100

## **Appendix D**

Ratio of Peak Excursion of the modulation envelope




Delta 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 11.41 dB VBW 3 MHz  
37.5 dBm 5.72204590 MHz SWT 500 ms Unit dBm

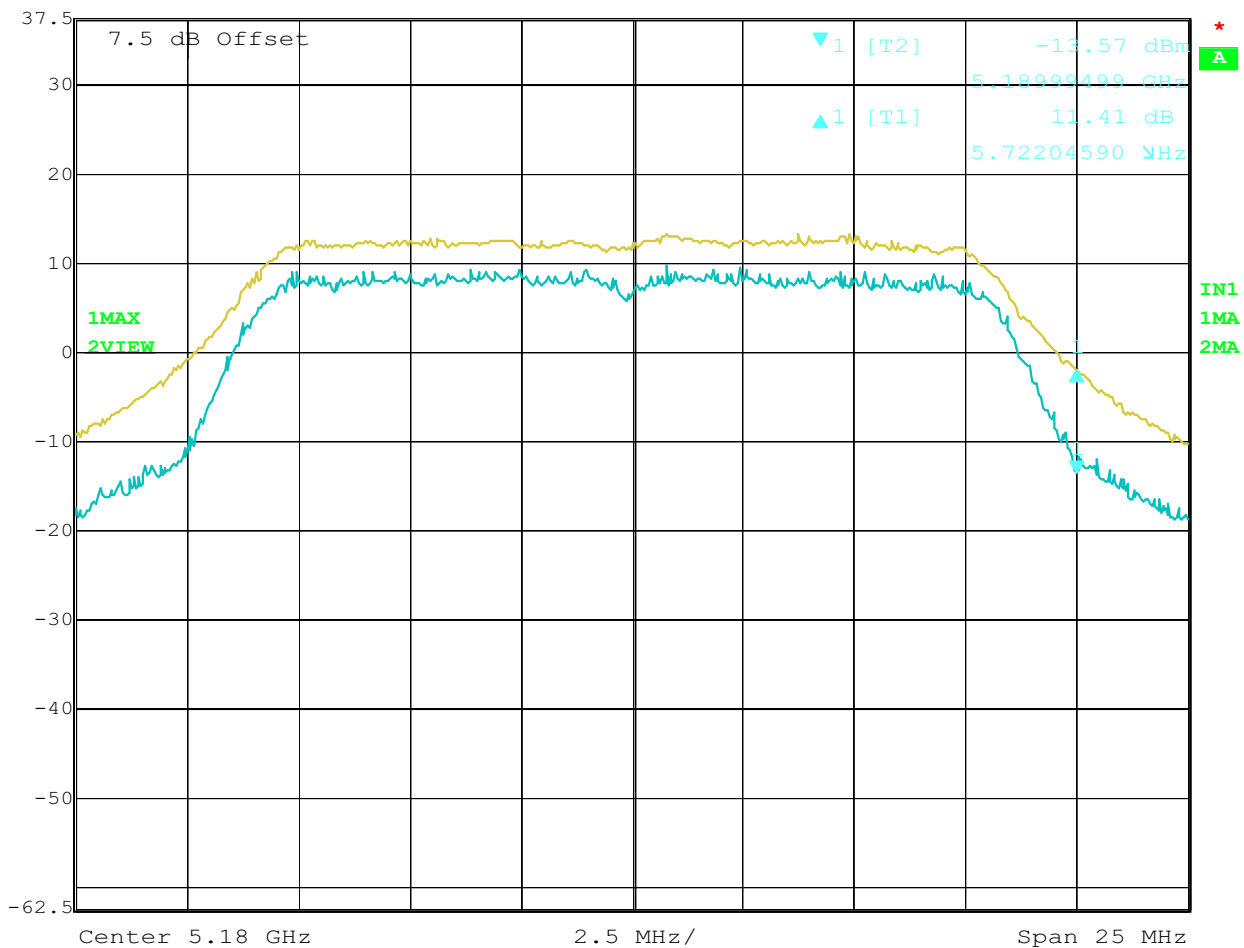

Title: 11A CH36 BAKOWER EXCURSION 6Mbps  
Date: 18.NOV.2005 18:50:43




Marker 1 [T2] RBW 1 MHz RF Att 40 dB  
Ref Lvl -14.85 dBm VBW 3 MHz  
37.5 dBm 5.16860220 GHz SWT 500 ms Unit dBm

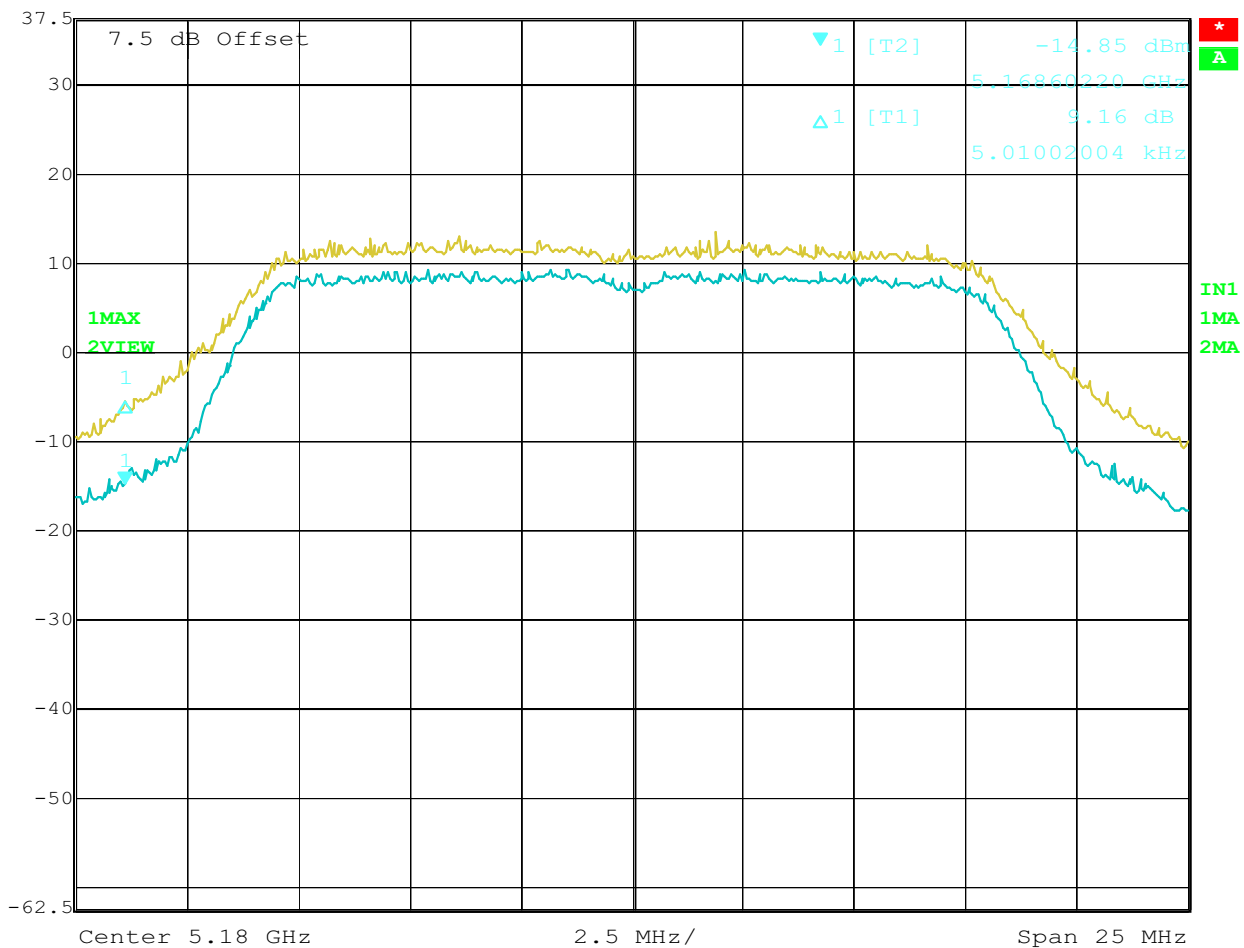

Title: 11A CH36 BAKOWER E&URSON 18Mbps  
Date: 18.NOV.2005 18:57:45




Delta 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 9.08 dB VBW 300 kHz  
37.5 dBm 2.86102295 MHz SWT 500 ms Unit dBm

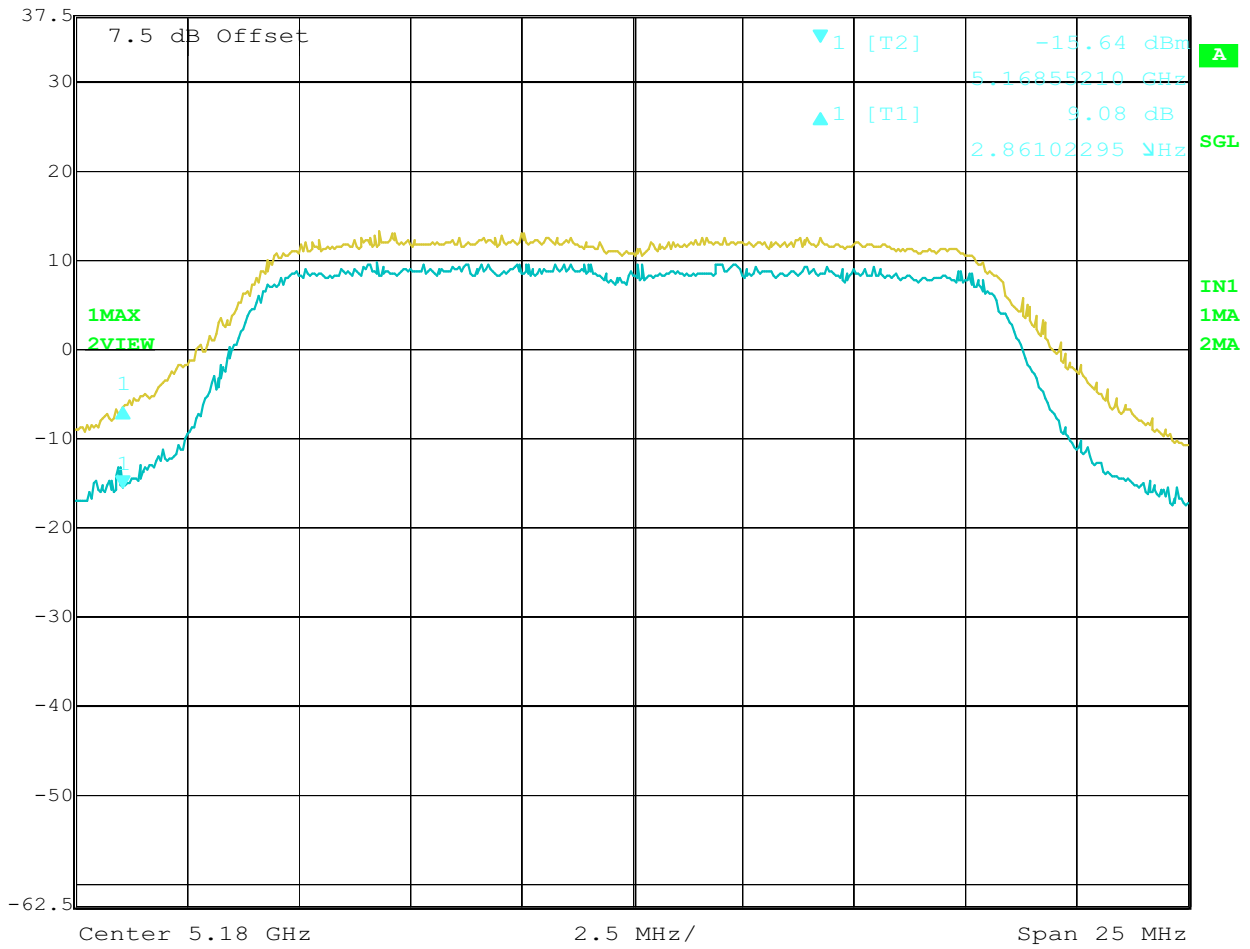

Title: 11A CH36 BAKOWER EKURSON 36Mbps  
Date: 18.NOV.2005 19:08:01




Marker 1 [T2] RBW 1 MHz RF Att 40 dB  
Ref Lvl -13.21 dBm VBW 300 kHz  
37.5 dBm 5.16766877 GHz SWT 500 ms Unit dBm

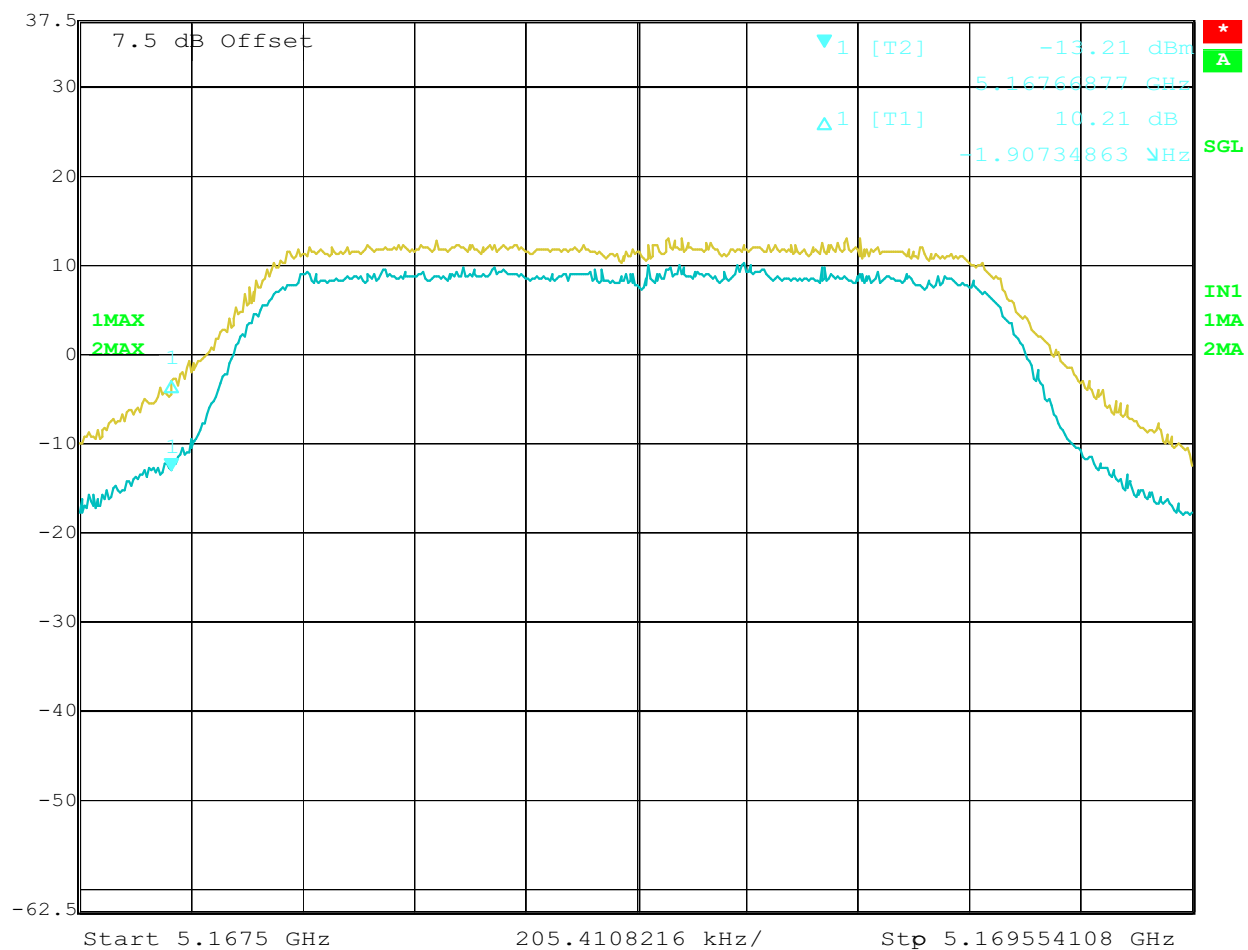

Title: 11A CH36 BAKOWER EXCURSION 54Mbps  
Date: 18.NOV.2005 19:14:28



Delta 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 10.31 dB VBW 3 MHz  
37.5 dBm 3.81469727 MHz SWT 500 ms Unit dBm

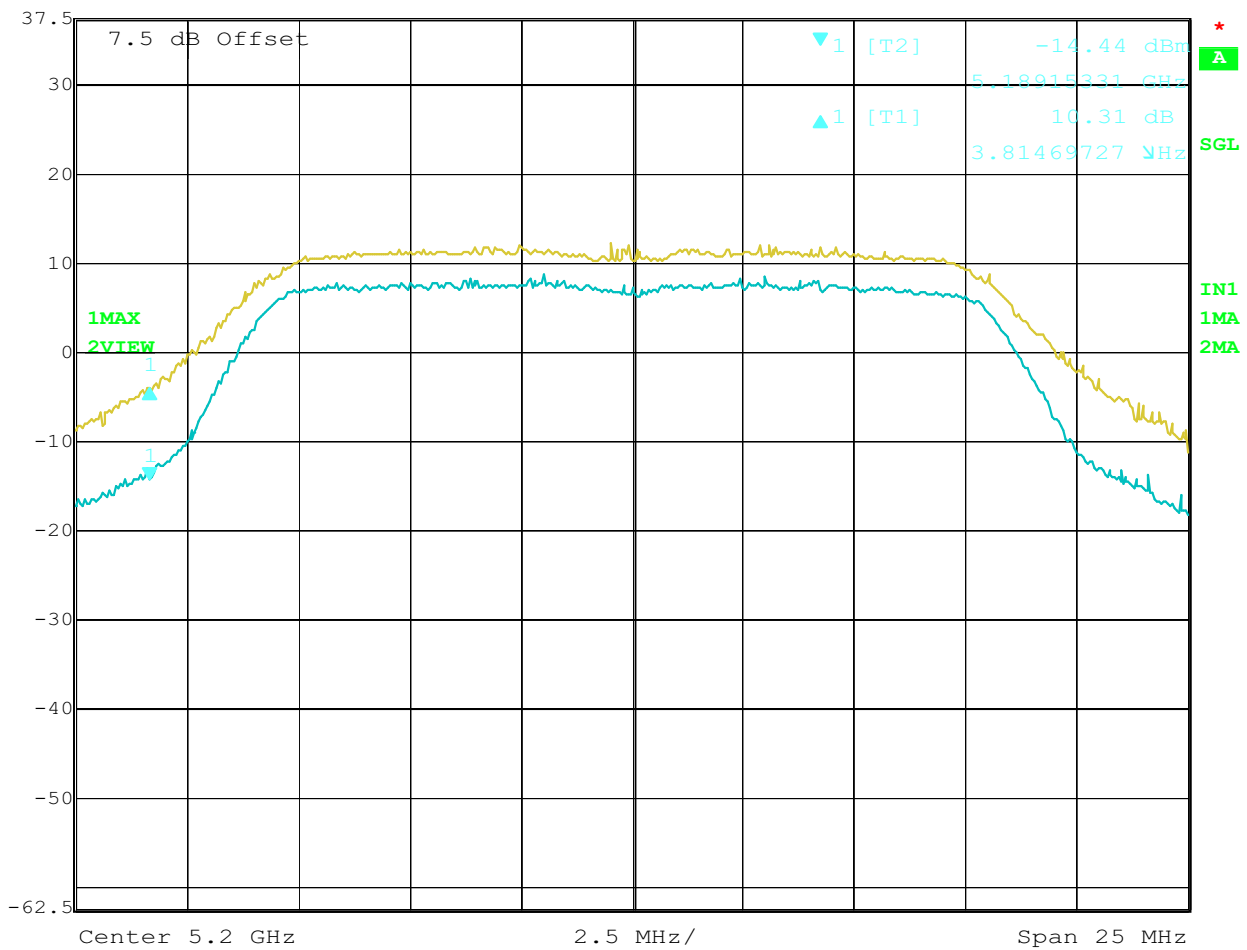


Title: 11A CH40 EAKOWER EEURSON 6Mps  
Date: 18.NOV.2005 19:21:01






Delta 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 9.31 dB VBW 3 MHz  
37.5 dBm 1.90734863 MHz SWT 500 ms Unit dBm

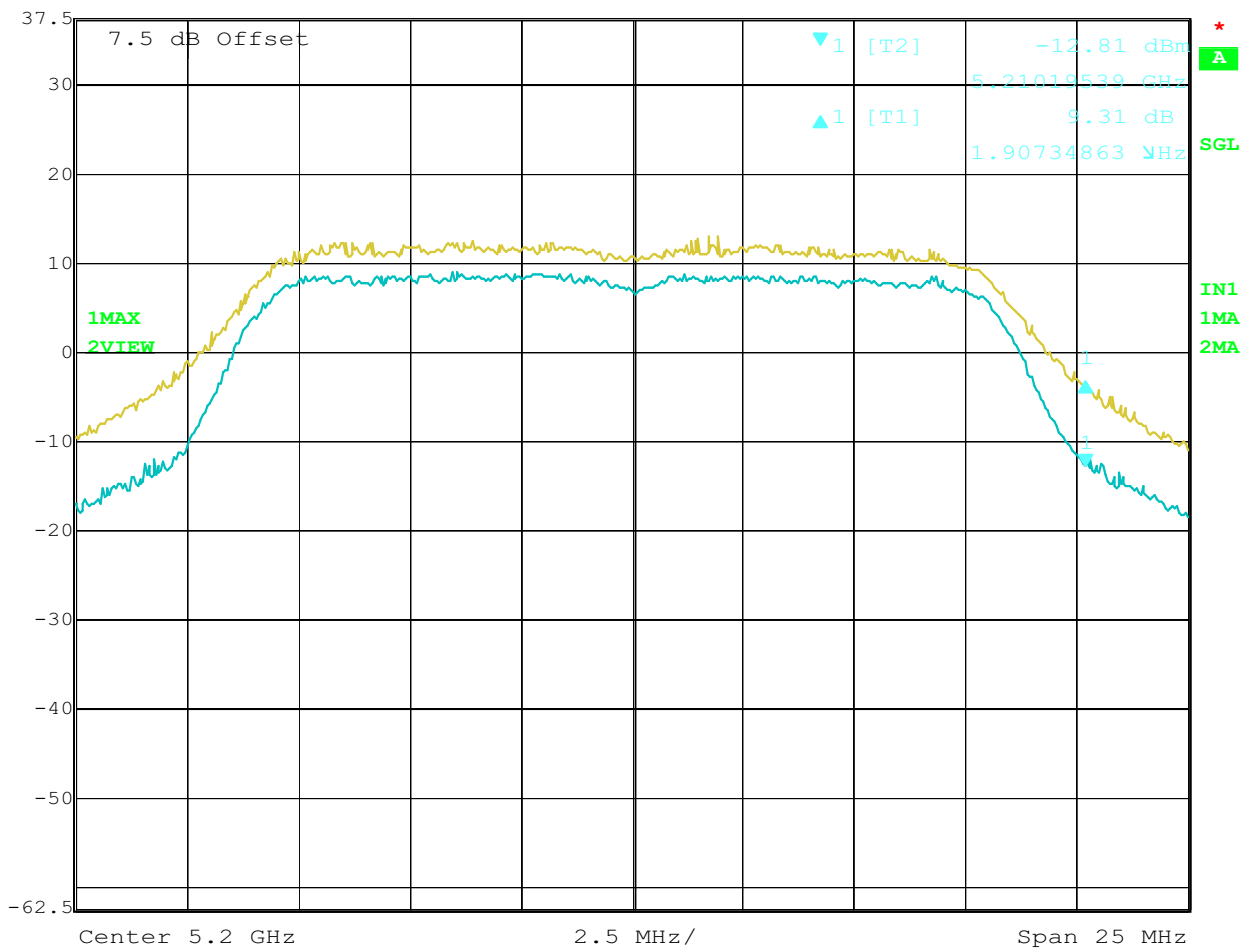


Title: 11A CH40 BAKOWER E&URSON 18Mbps  
Date: 18.NOV.2005 19:26:14



Delta 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 9.51 dB VBW 3 MHz  
37.5 dBm 3.81469727 MHz SWT 500 ms Unit dBm

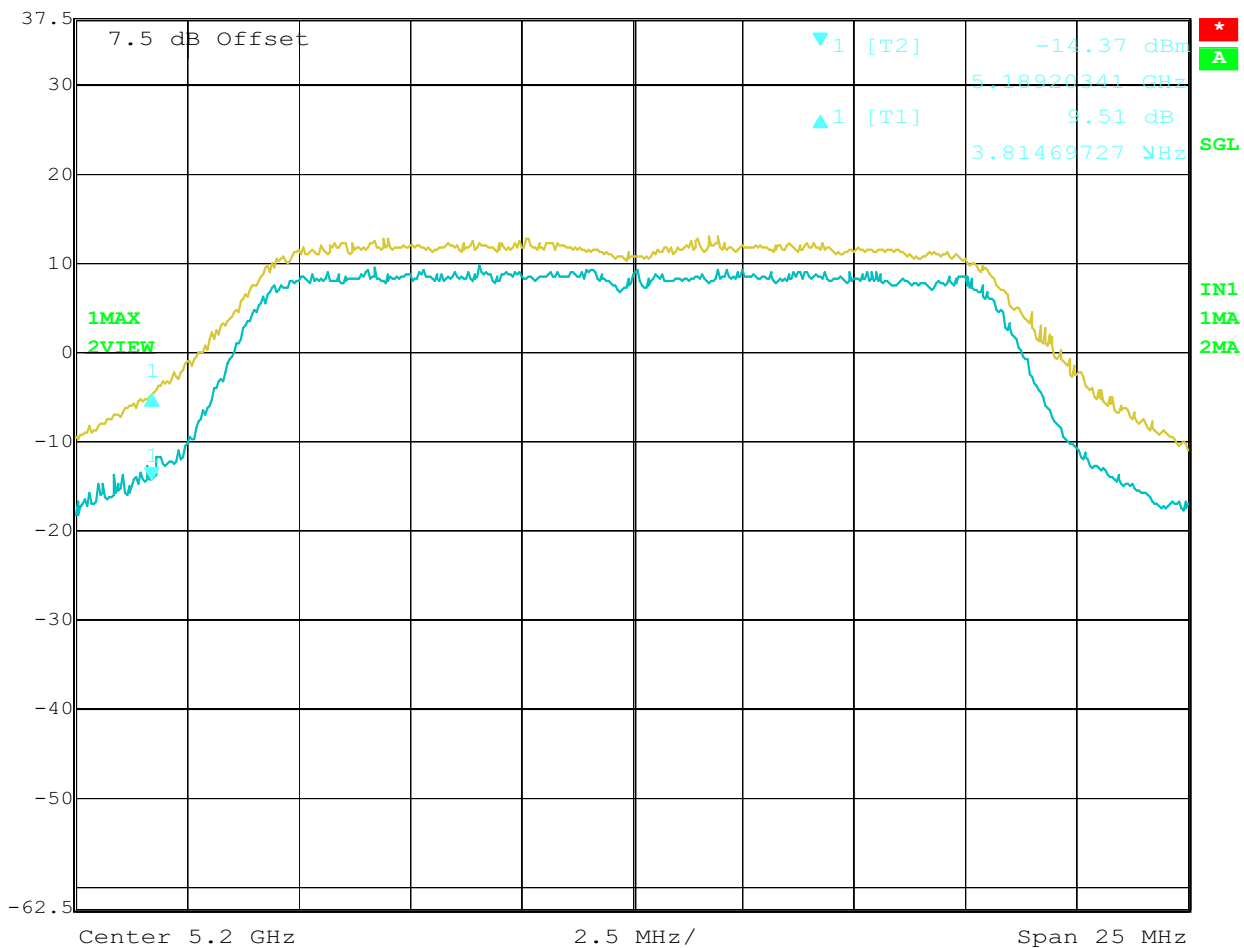


Title: 11A CH40 BAKOWER ECKURSON 36 Mps  
Date: 18.NOV.2005 19:54:50

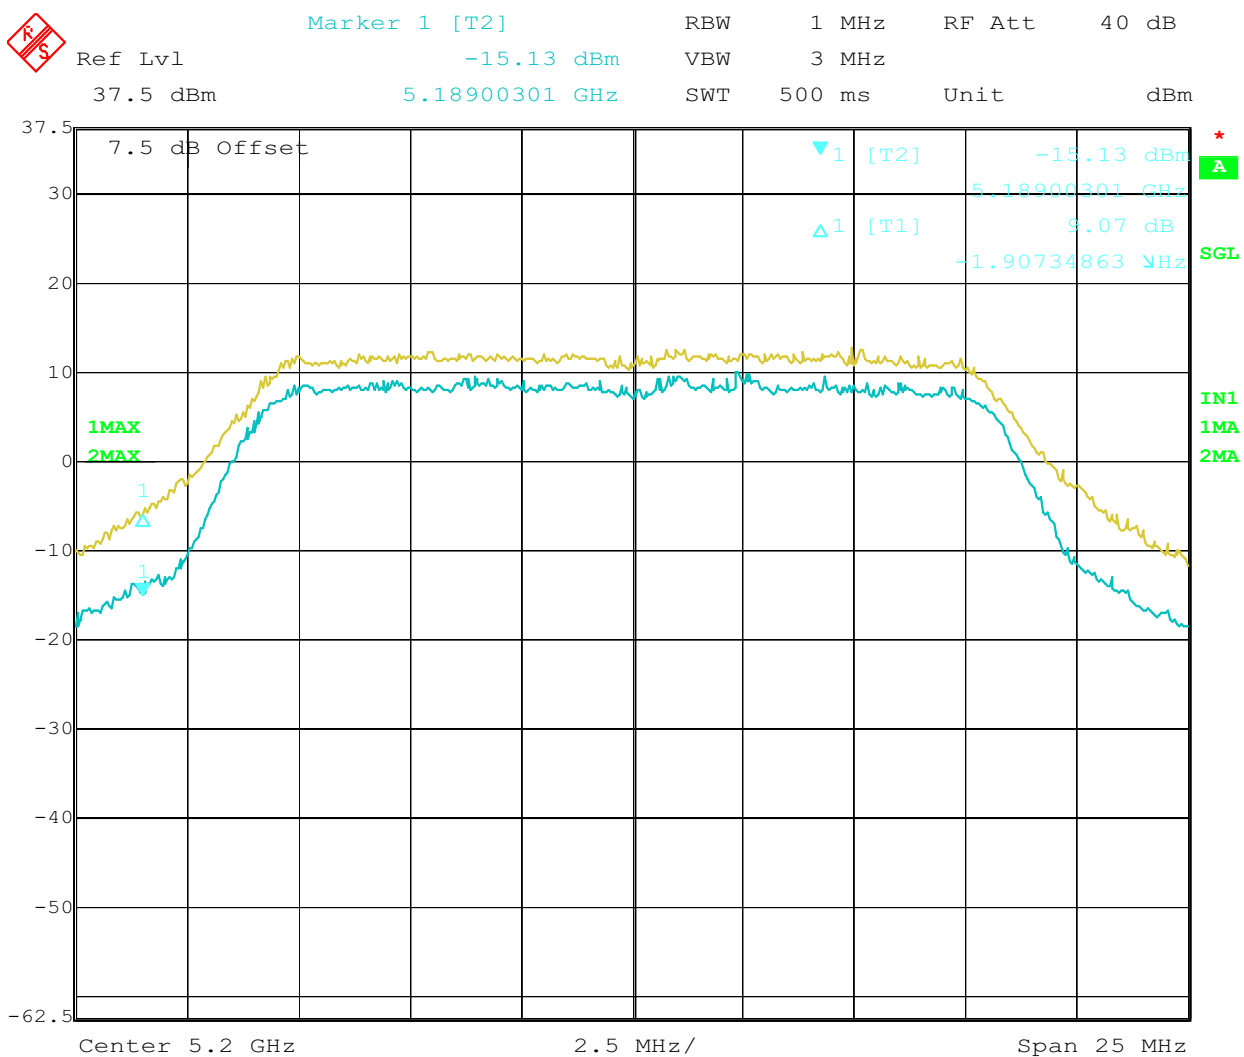

Title: 11A CH40 EAKOWER EEURSON 54Mbps  
Date: 18.NOV.2005 19:59:33




Delta 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 10.30 dB VBW 300 kHz  
37.5 dBm -953.67431641 MHz SWT 500 ms Unit dBm

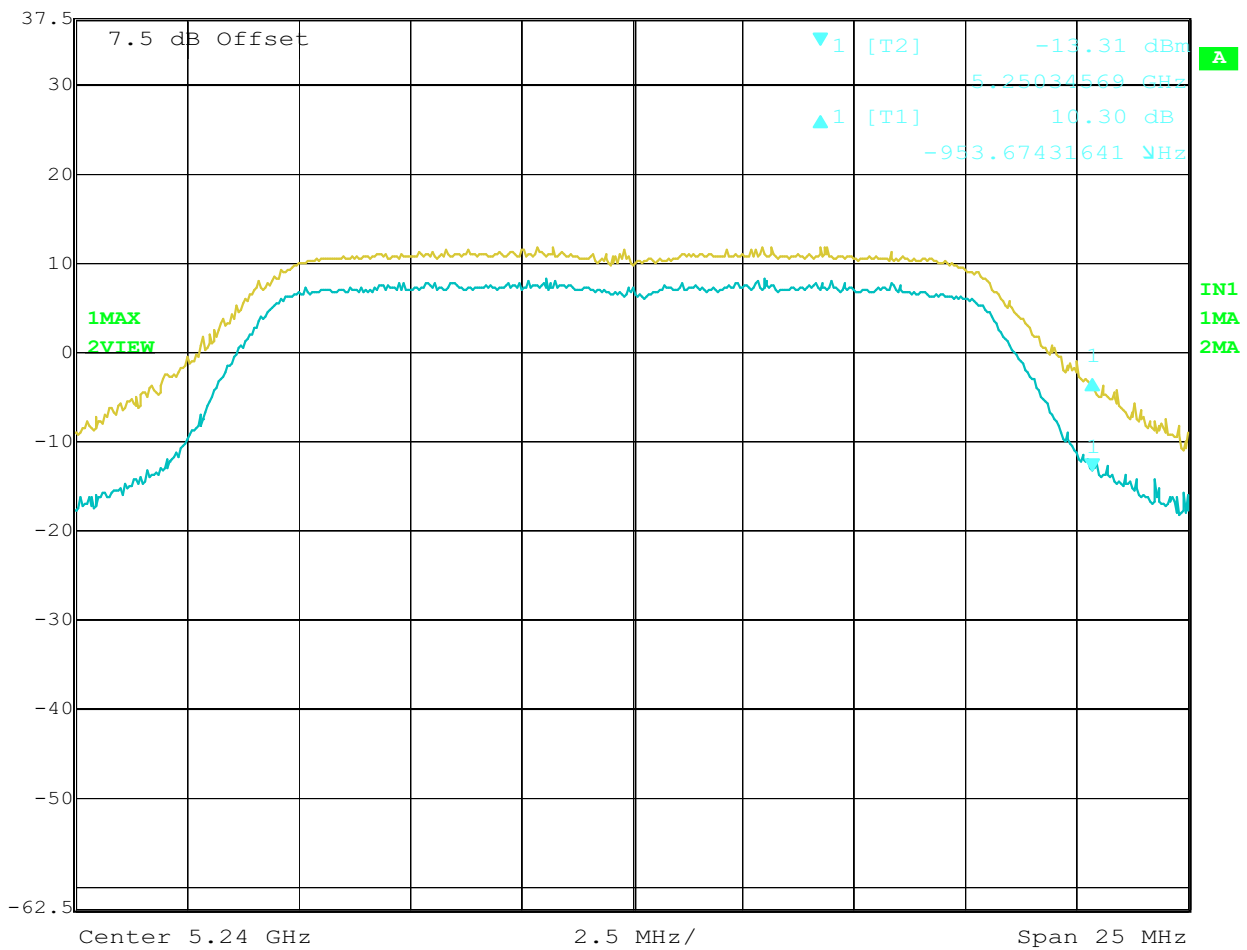

Title: 11A CH48 BAKOWER EXCURSION 6Mbps  
Date: 19.NOV.2005 13:25:02




Delta 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 37.5 dBm 9.19 dB VBW 300 kHz  
3.81469727 MHz SWT 500 ms Unit dBm

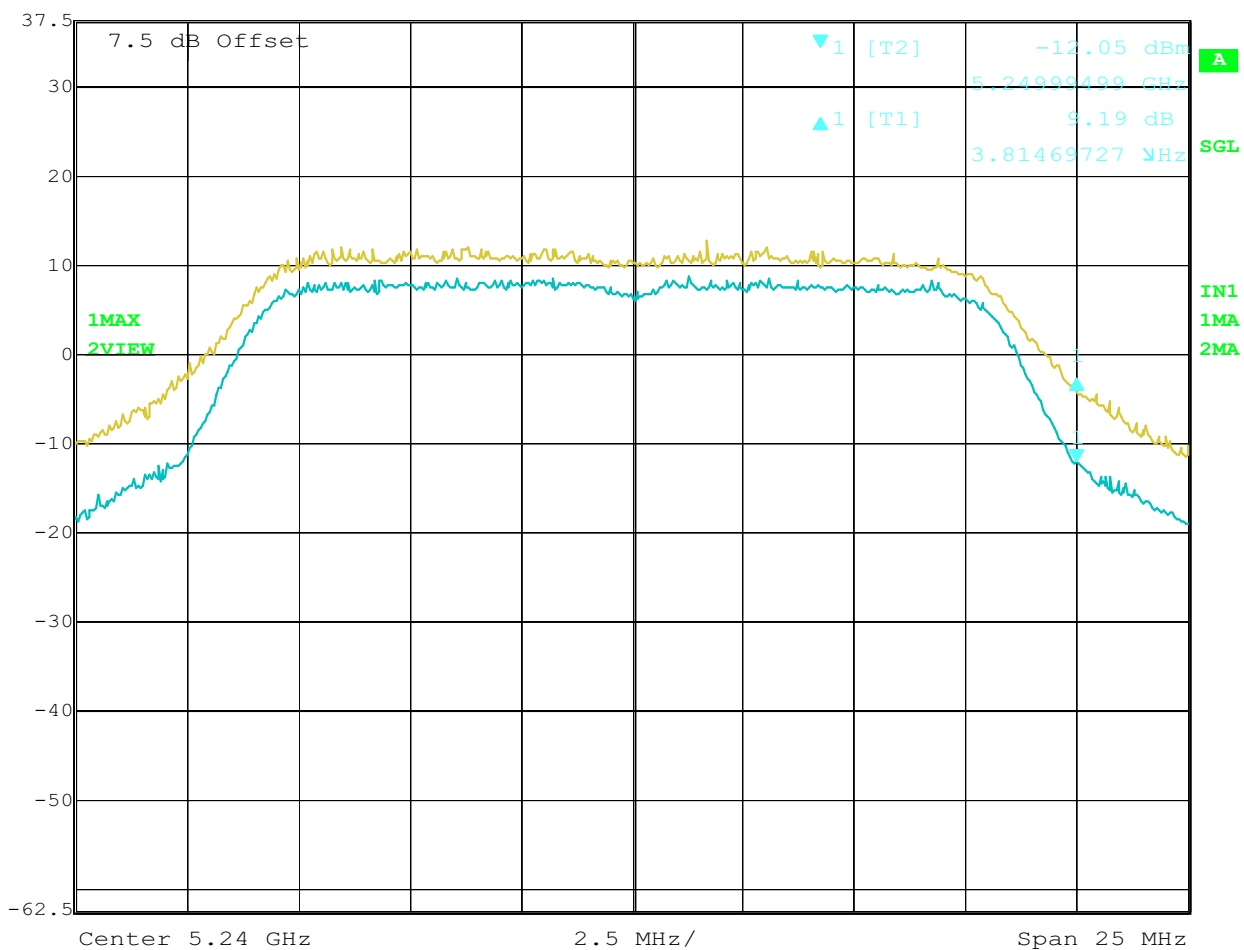

Title: 11A CH48 BAKOWER E&URSON 18Mbps  
Date: 19.NOV.2005 13:40:24




Delta 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 9.57 dB VBW 3 MHz  
37.5 dBm -50.10020040 kHz SWT 500 ms Unit dBm

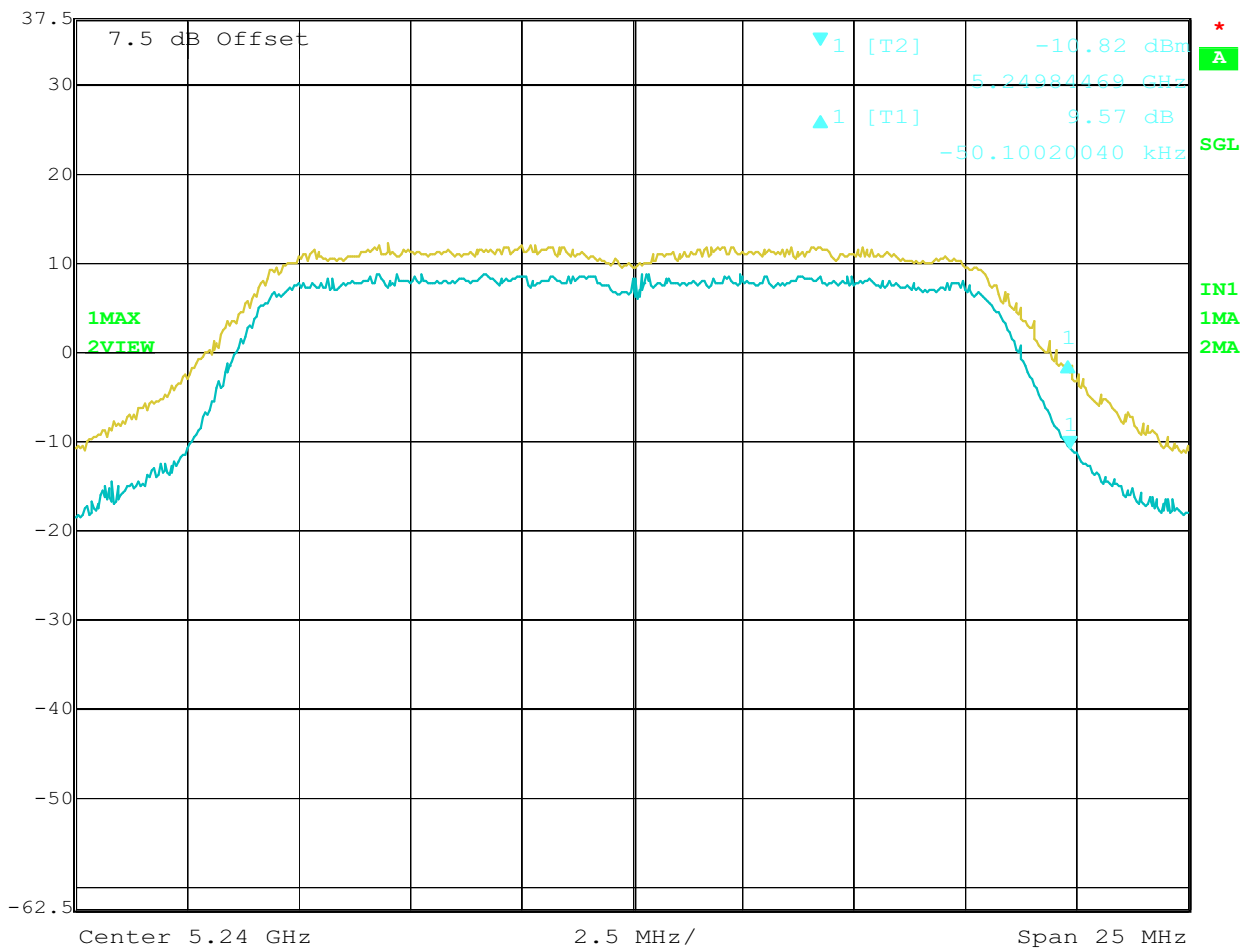

Title: 11A CH48 EAKOWER EEURSON 36Mbps  
Date: 19.NOV.2005 13:46:26



Delta 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 10.40 dB VBW 3 MHz  
37.5 dBm -1.90734863 MHz SWT 500 ms Unit dBm

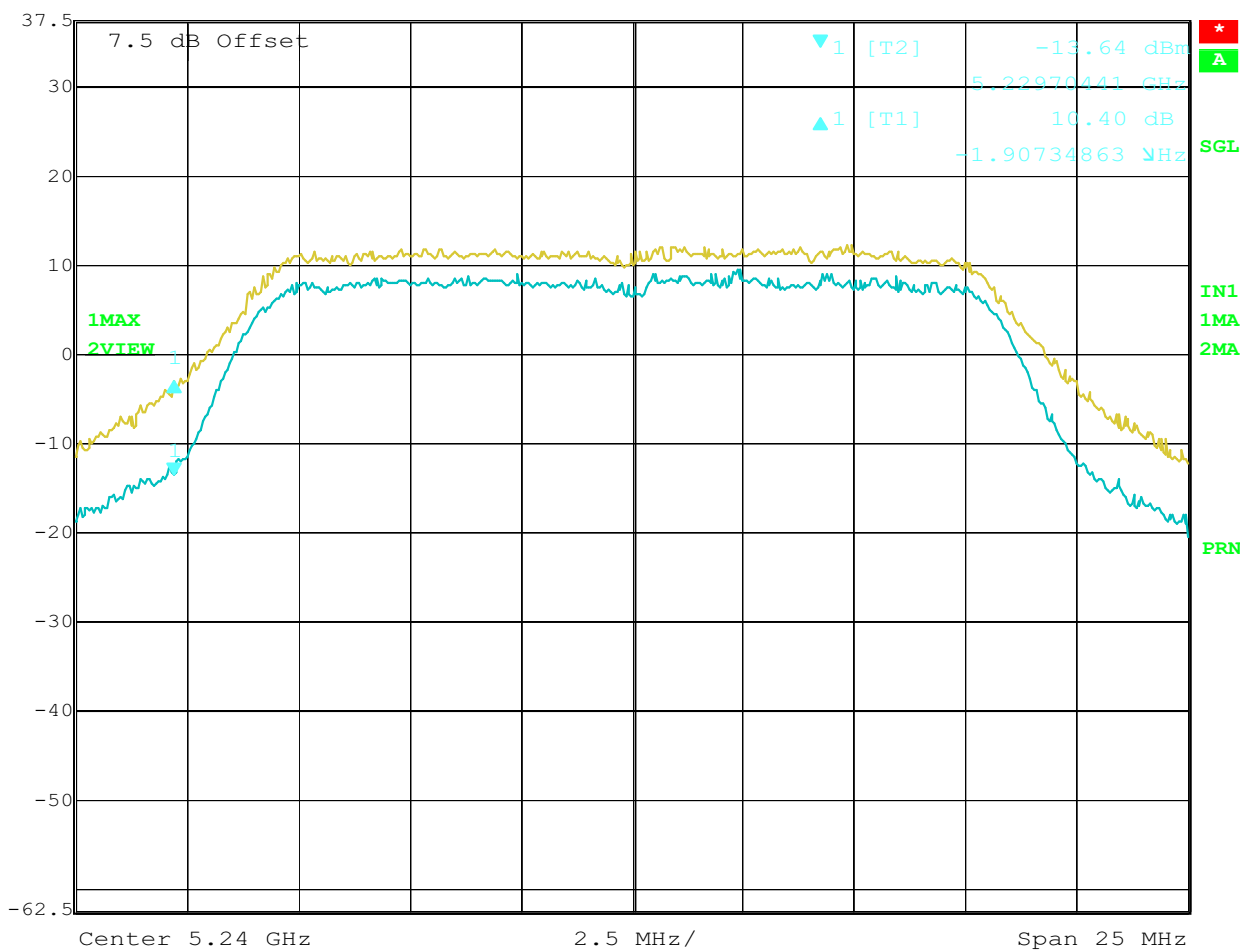

Title: 11A CH48 EAKOWER EEURSON 54Mbps  
Date: 19.NOV.2005 13:50:51



Registration number: W6M20511-6291-E-54  
FCC ID: TSTWV100

## **Appendix E**


### Band edge

Remark: The operating frequency range of this EUT is 5150MHz to 5250MHz.

Due to the last channel 5240MHz is far from 5350MHz, we only choose the last channel for testing channel.







Registration number: W6M20511-6291-E-54  
FCC ID: TSTWV100


## **Appendix F**

Peak Emission outside the frequency band of operation

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to Section 15.407  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq: 65.772MHz, Emax: 34.61dBμV/m, RBW: 100kHz

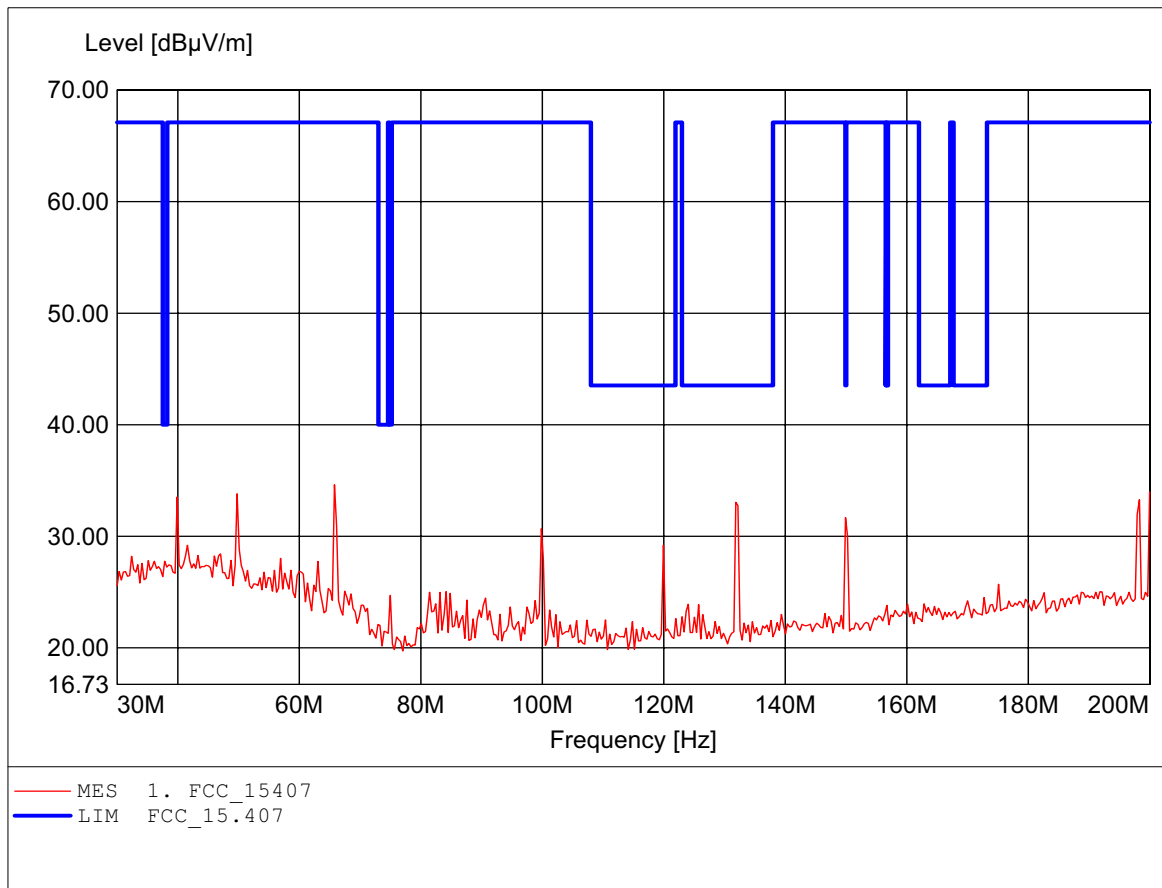

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to Section 15.407  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq: 198.297MHz, Emax: 34.89dBμV/m, RBW: 100kHz

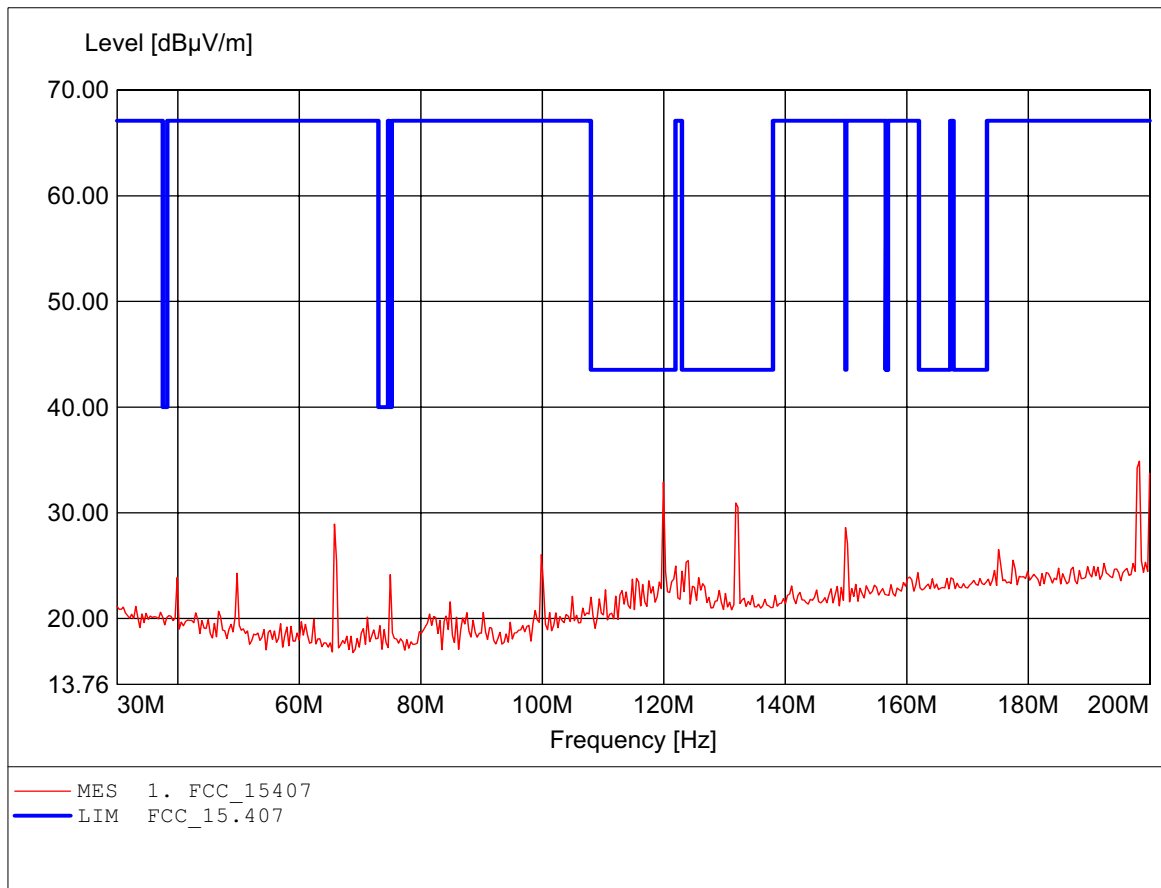

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to Section 15.407  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Freq: 725.852MHz, Emax: 40.99dBμV/m, RBW: 100kHz

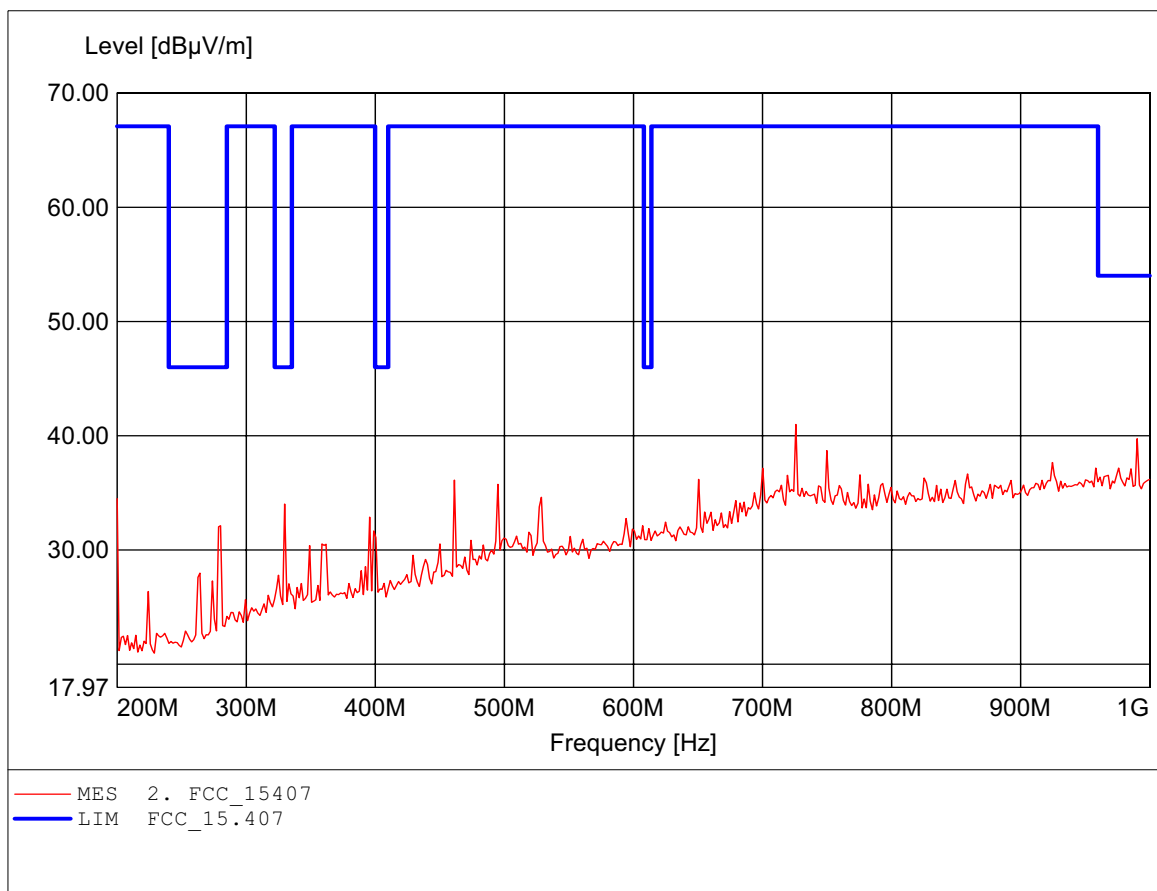

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to Section 15.407  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Freq: 725.852MHz, Emax: 45.13dBμV/m, RBW: 100kHz

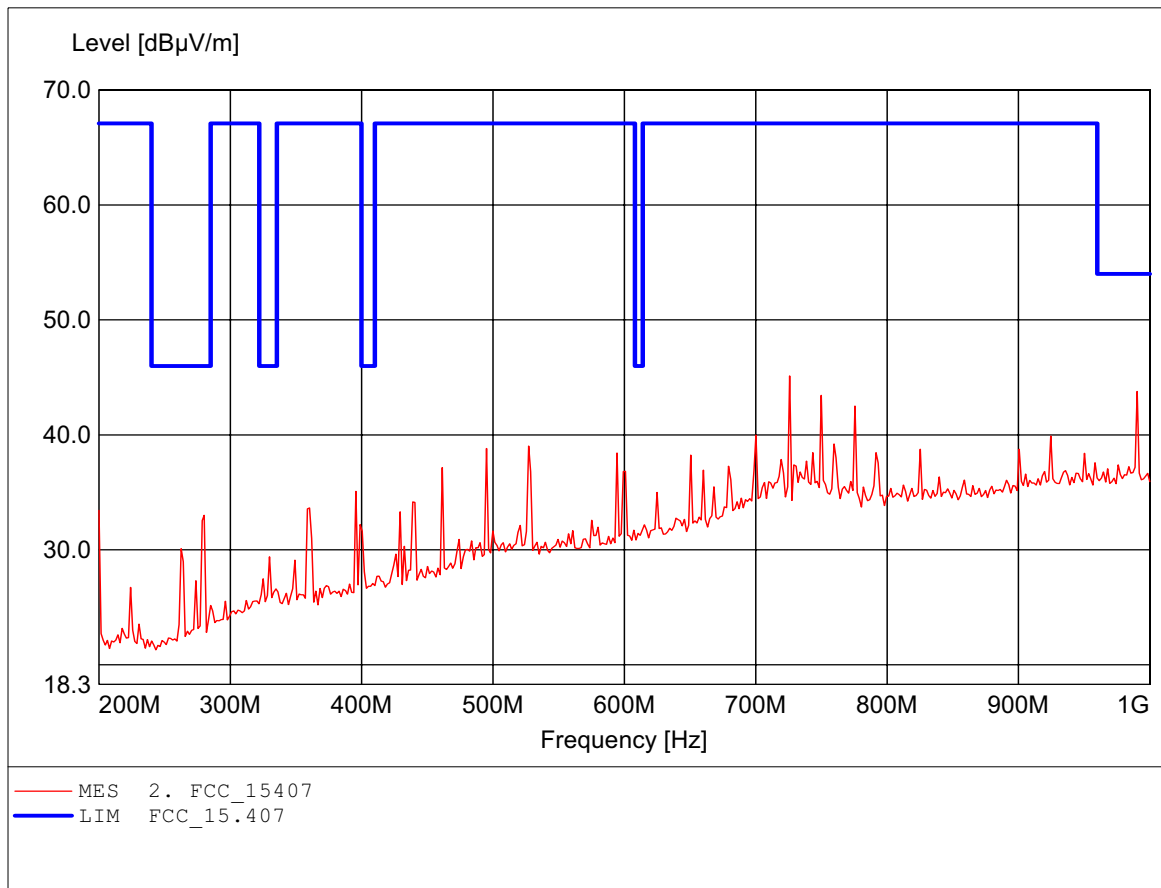

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 3.453GHz, Emax: 43.44dBμV/m, RBW: 1MHz

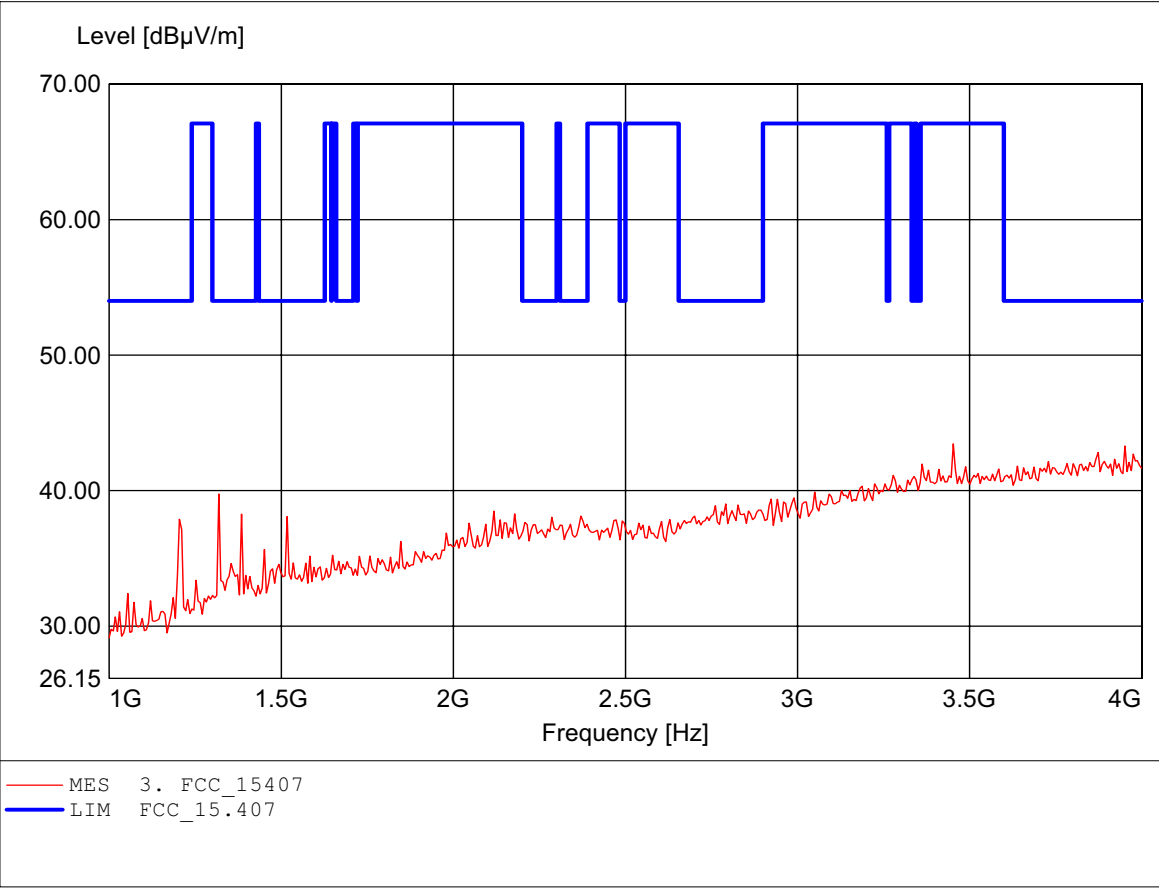

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E

EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 3.982GHz, Emax: 42.77dBμV/m, RBW: 1MHz

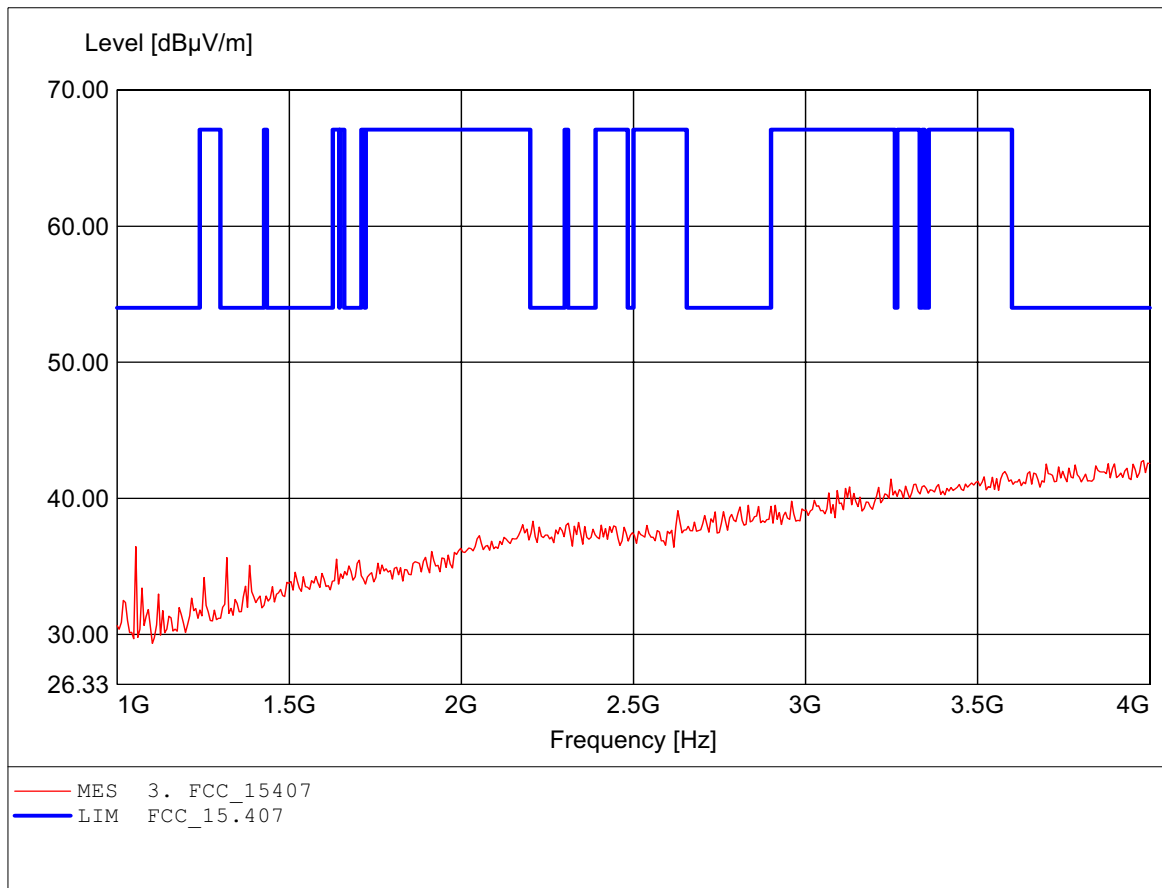




## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 7.983GHz, Emax: 45.88dBμV/m, RBW: 1MHz

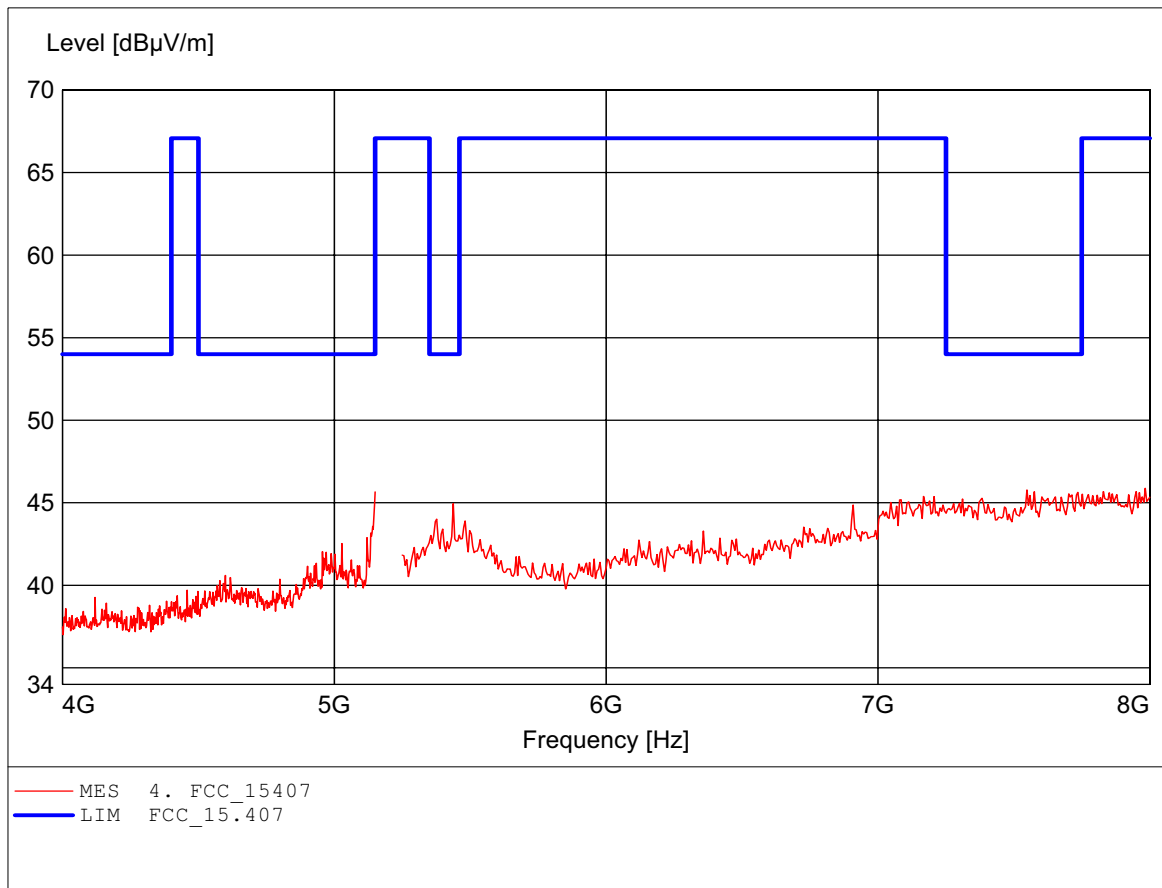

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 7.989GHz, Emax: 46.14dBμV/m, RBW: 1MHz

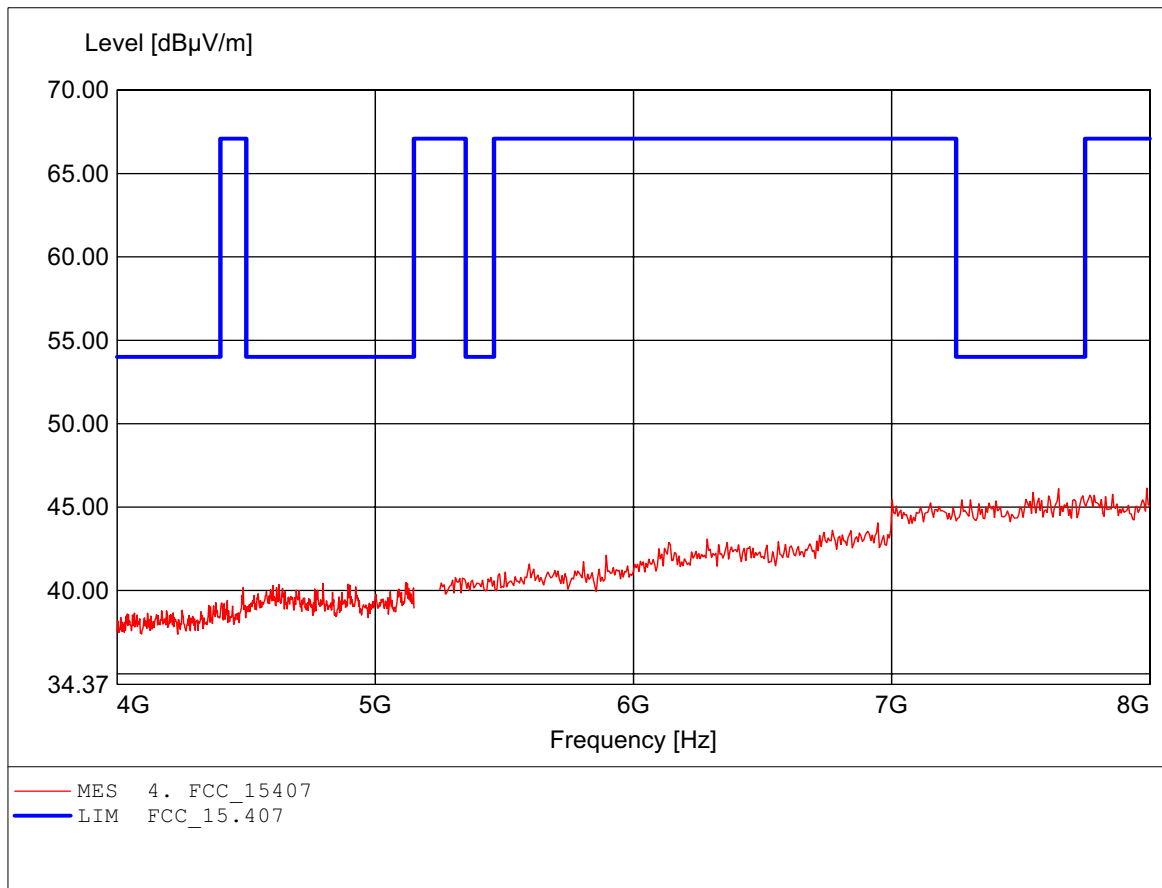

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 11.992GHz, Emax: 52.58dBμV/m, RBW: 1MHz

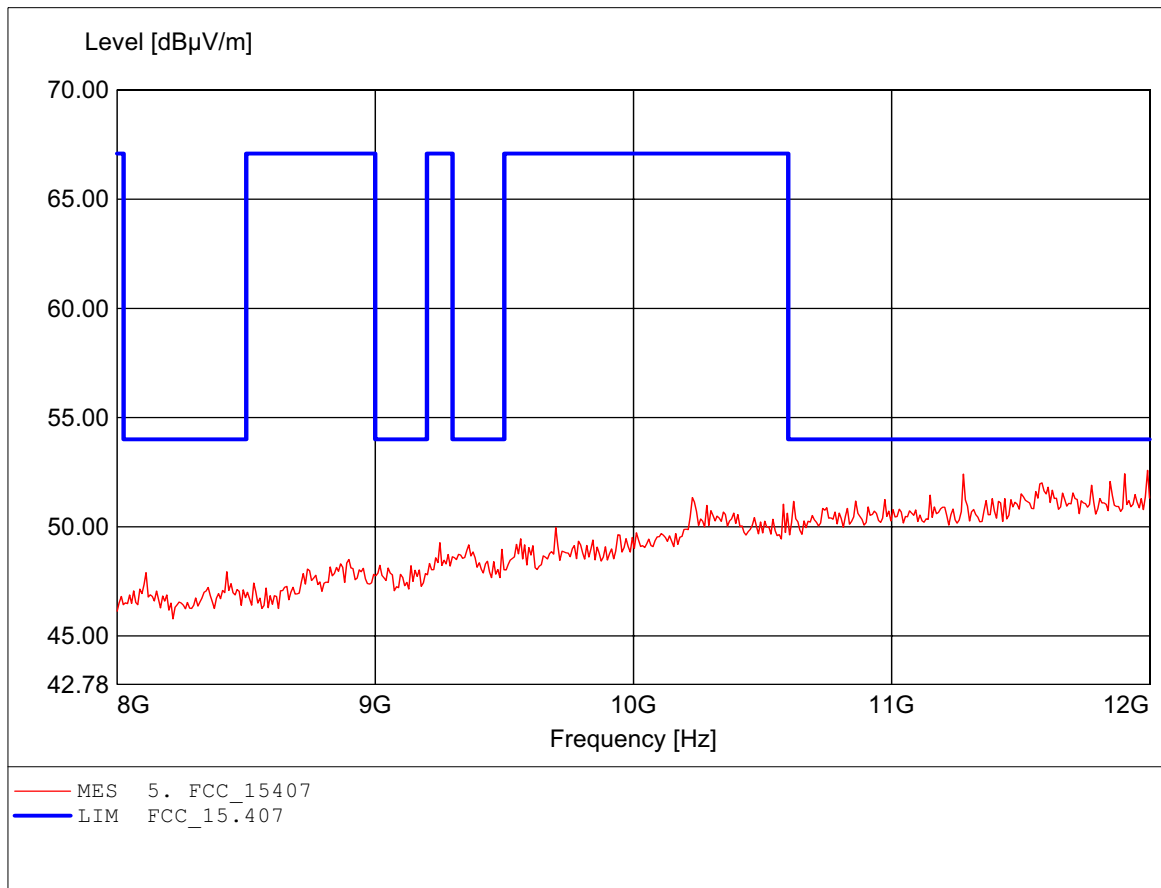

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 11.631GHz, Emax: 52.24dBμV/m, RBW: 1MHz

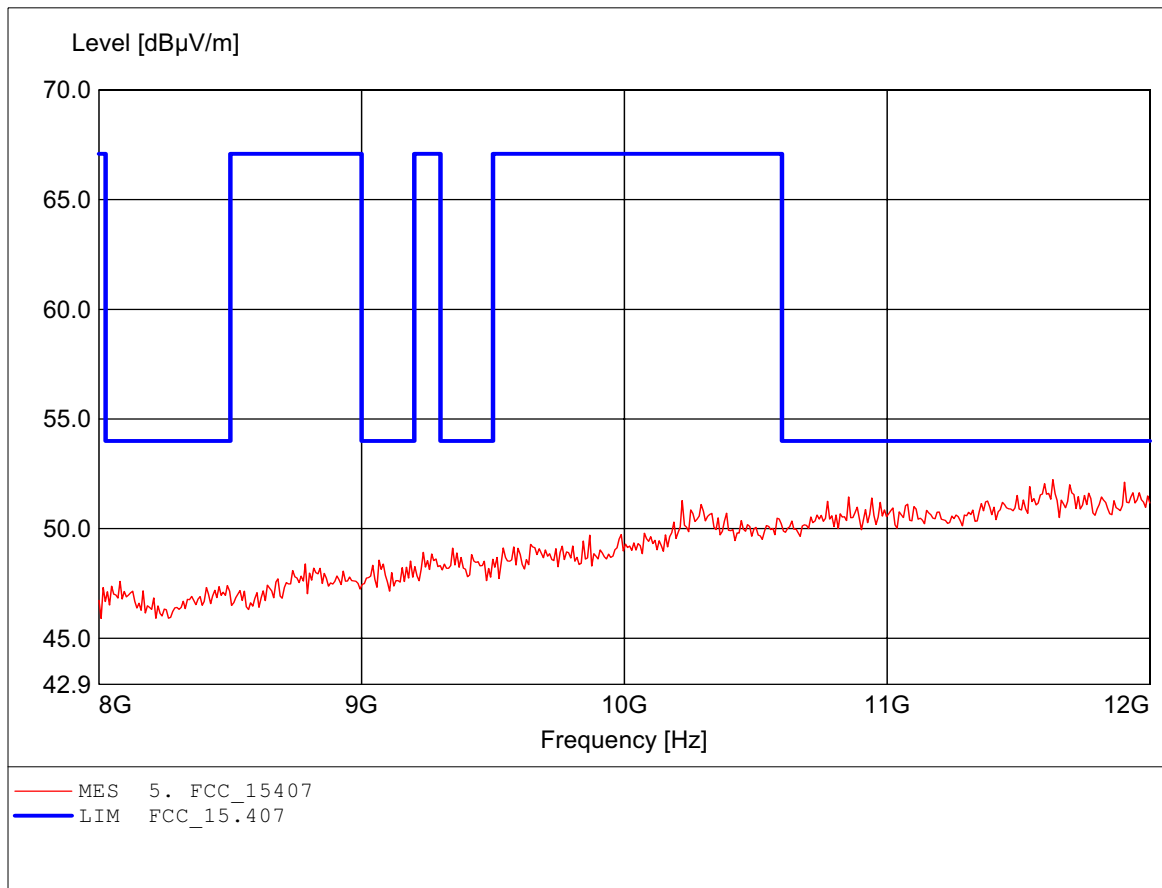

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 17.651GHz, Emax: 50.65dBμV/m, RBW: 1MHz

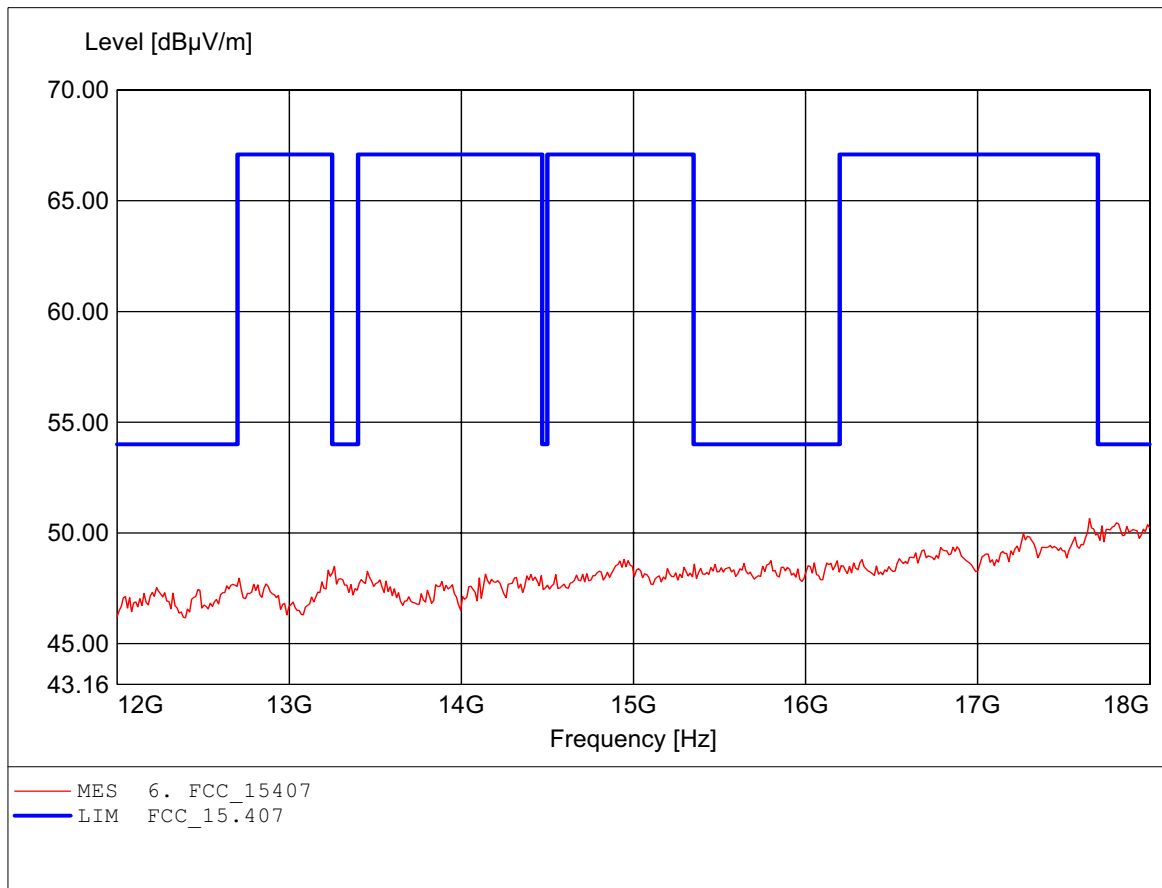

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 17.796GHz, Emax: 50.73dBμV/m, RBW: 1MHz

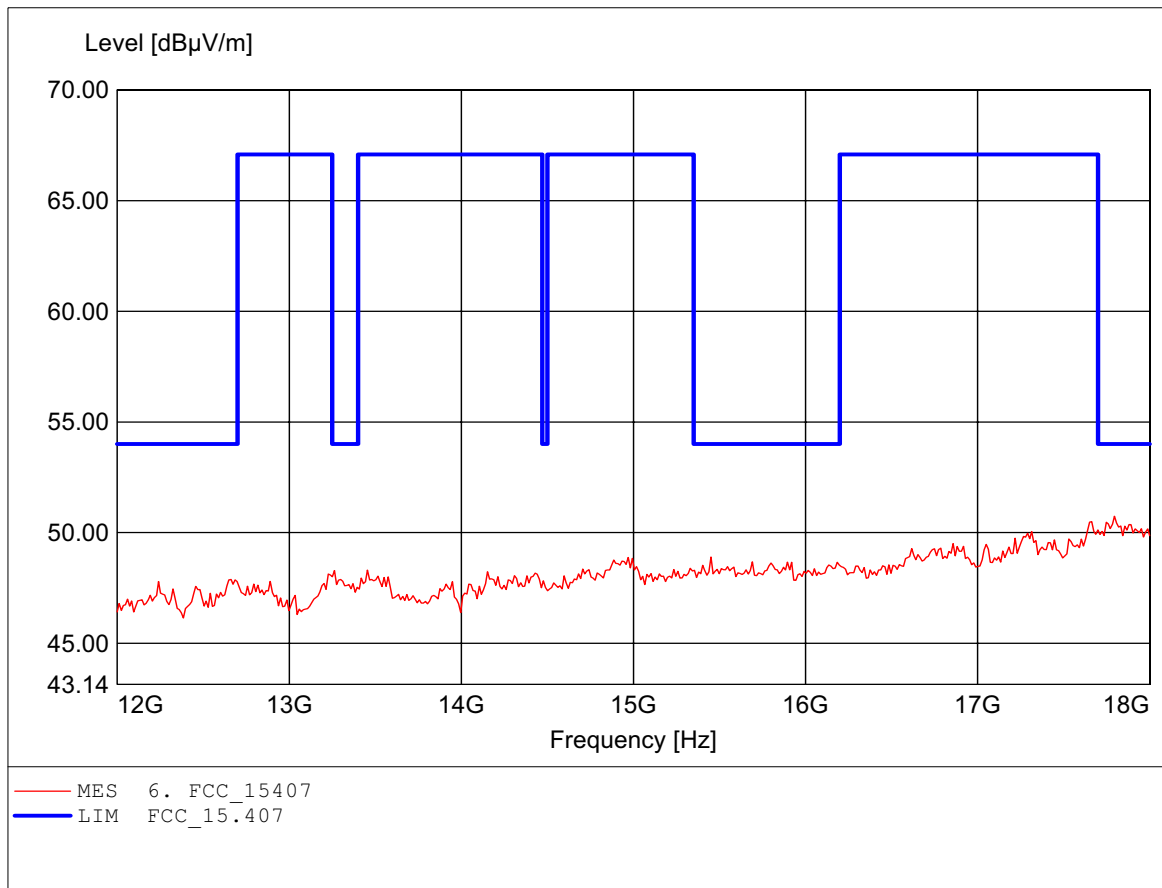

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 25.580GHz, Emax: 54.02dBμV/m, RBW: 1MHz

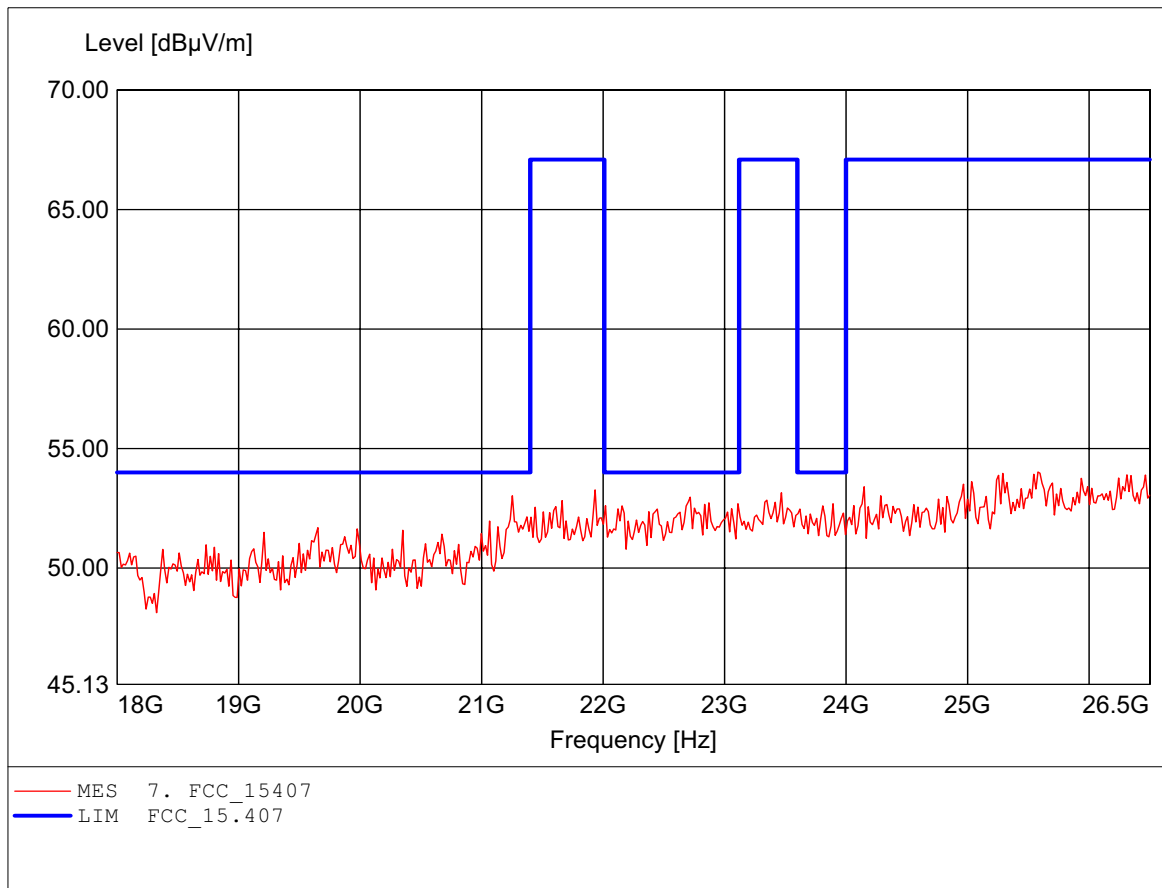

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E

EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 26.500GHz, Emax: 54.70dBμV/m, RBW: 1MHz

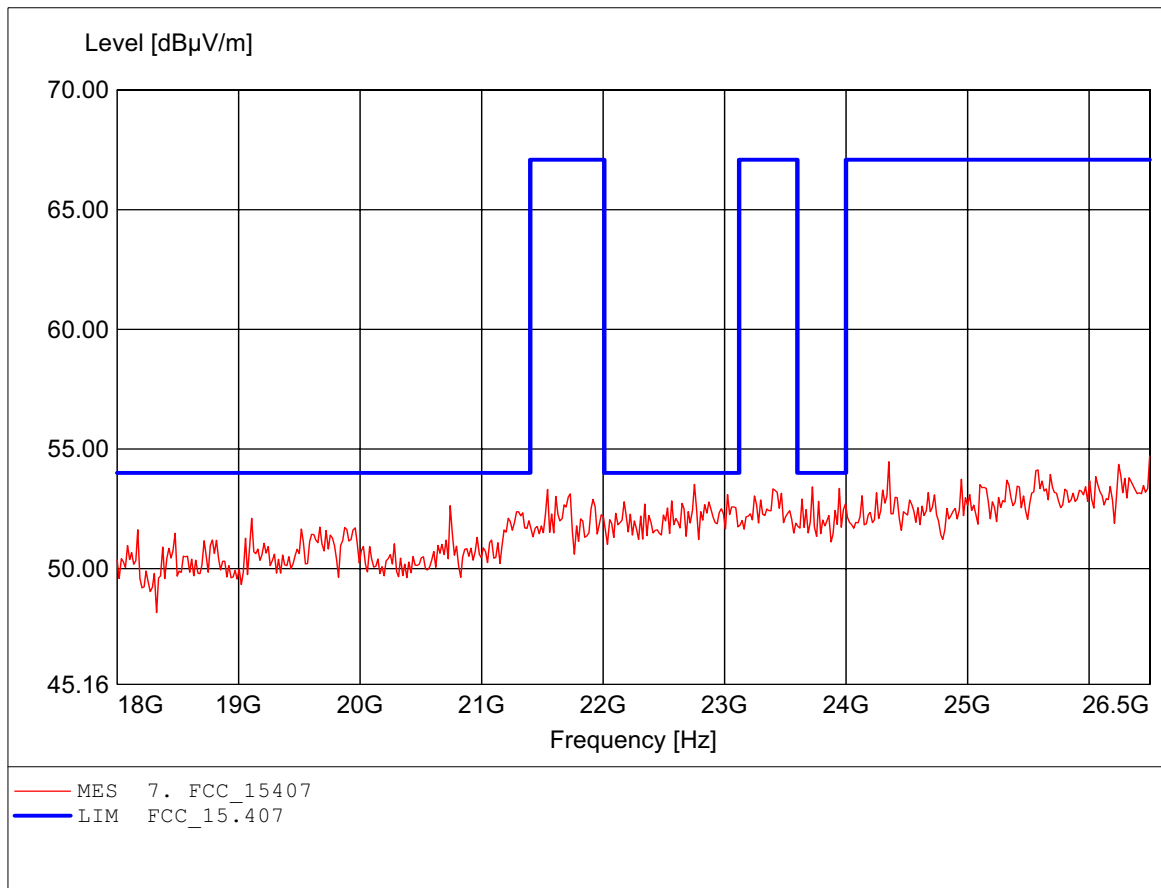




## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to Section 15.407  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq: 200.000MHz, Emax: 34.53dBμV/m, RBW: 100kHz

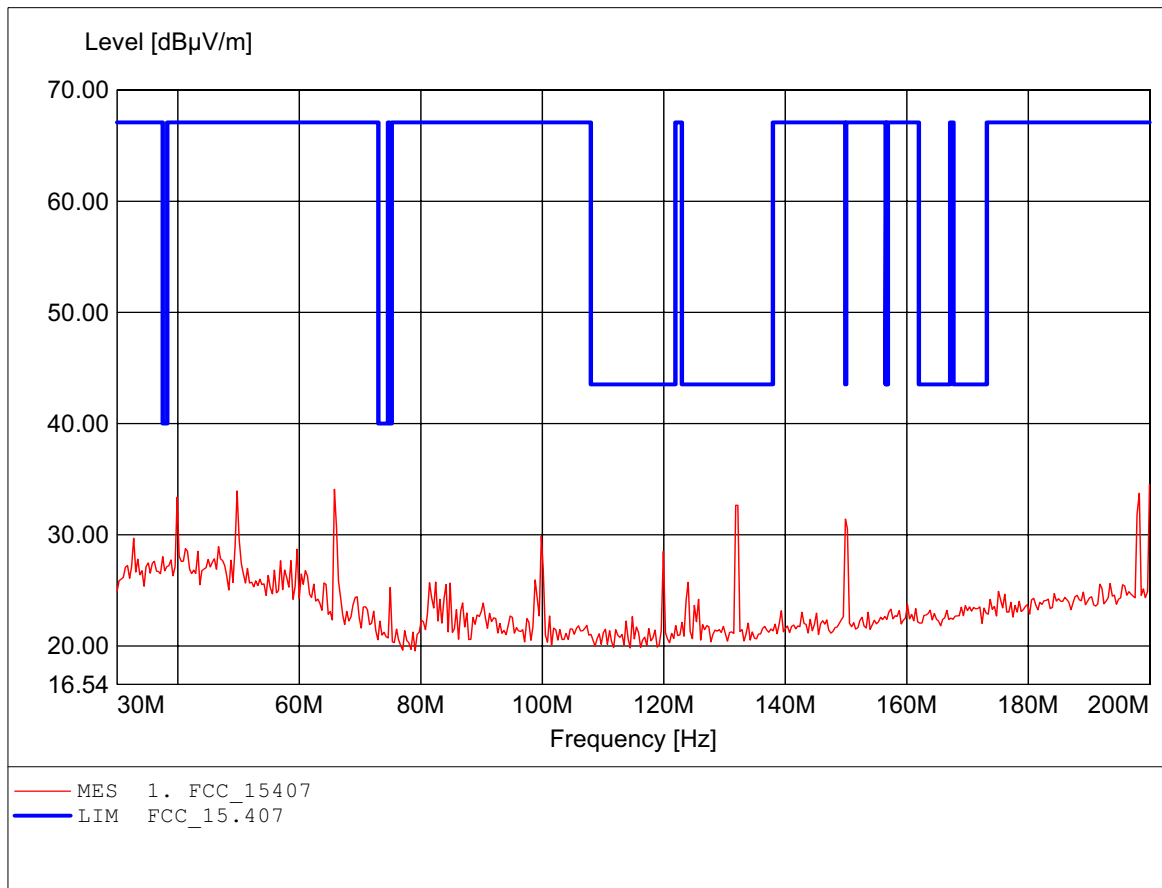

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to Section 15.407  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq: 200.000MHz, Emax: 35.44dBμV/m, RBW: 100kHz

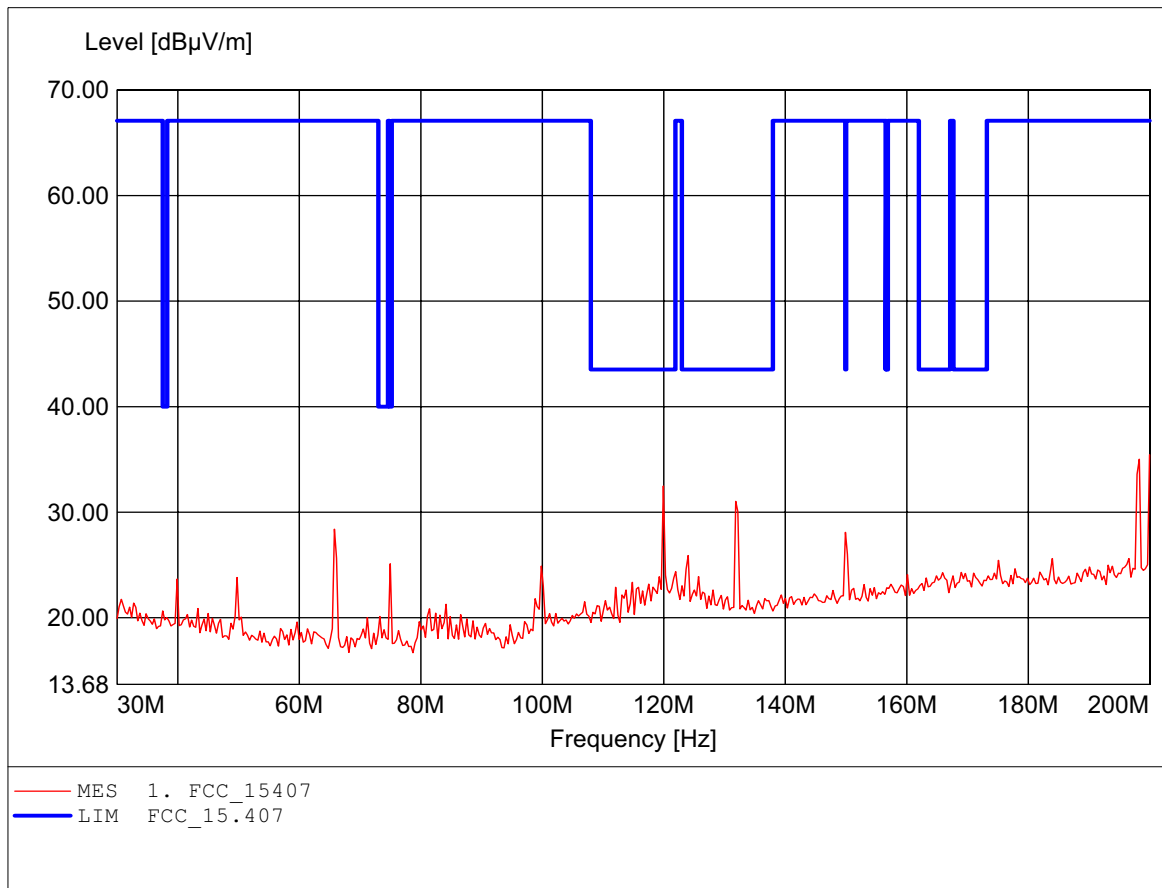

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to Section 15.407  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Freq: 725.852MHz, Emax: 40.23dBμV/m, RBW: 100kHz

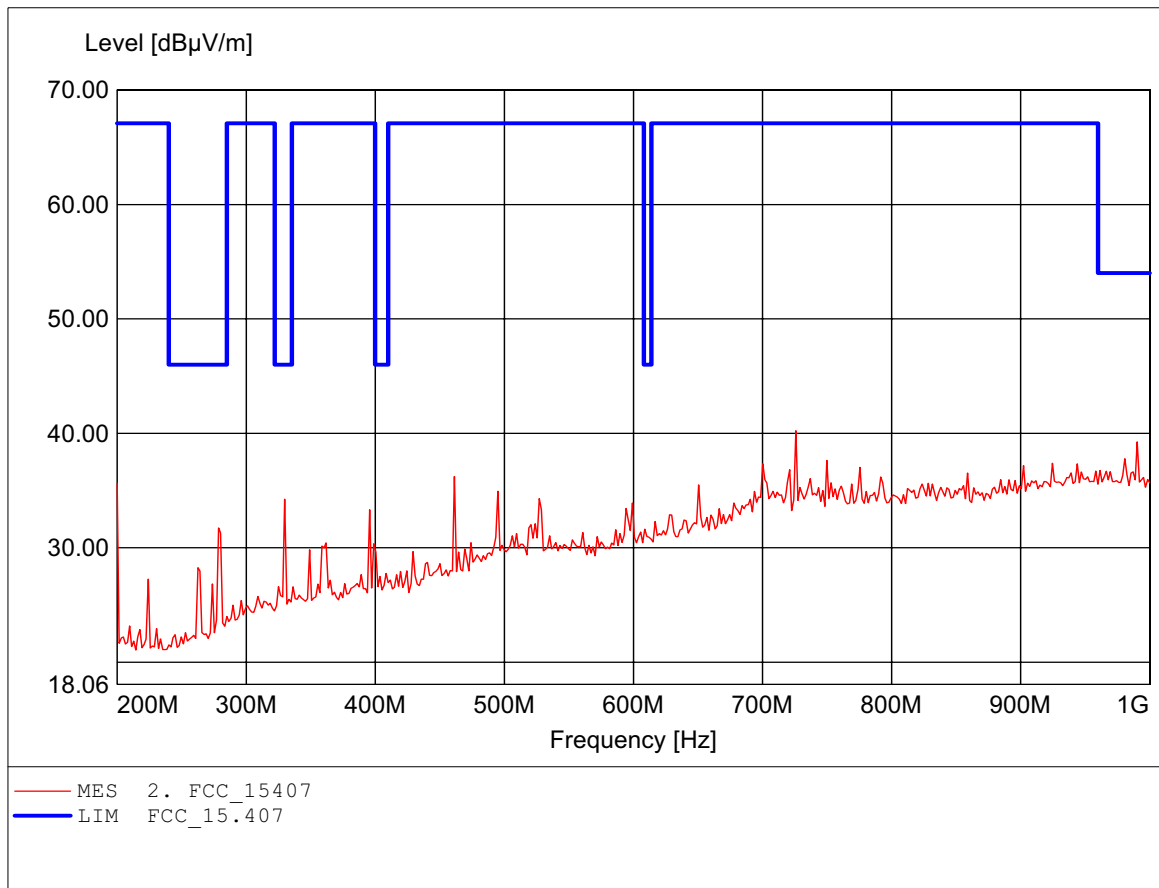

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to Section 15.407  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Freq: 725.852MHz, Emax: 45.68dBμV/m, RBW: 100kHz

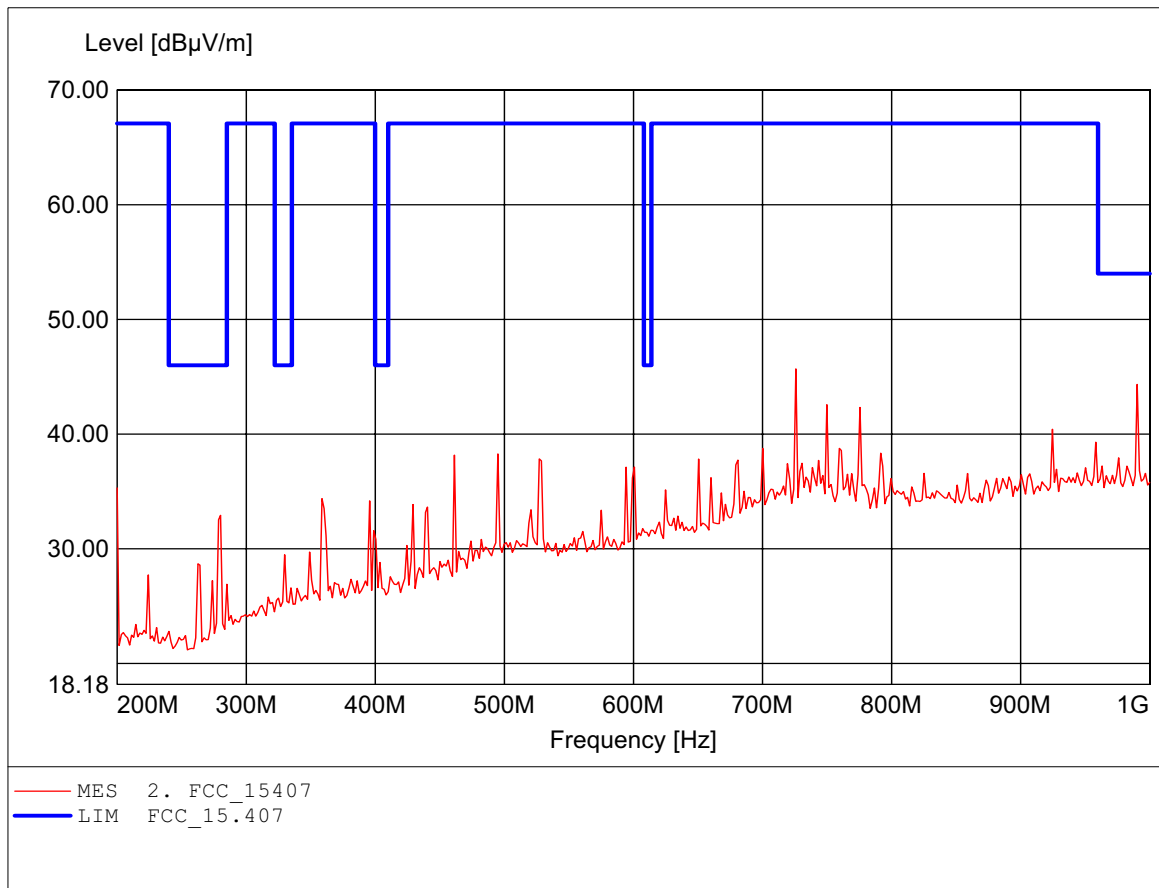

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 3.471GHz, Emax: 44.47dBμV/m, RBW: 1MHz

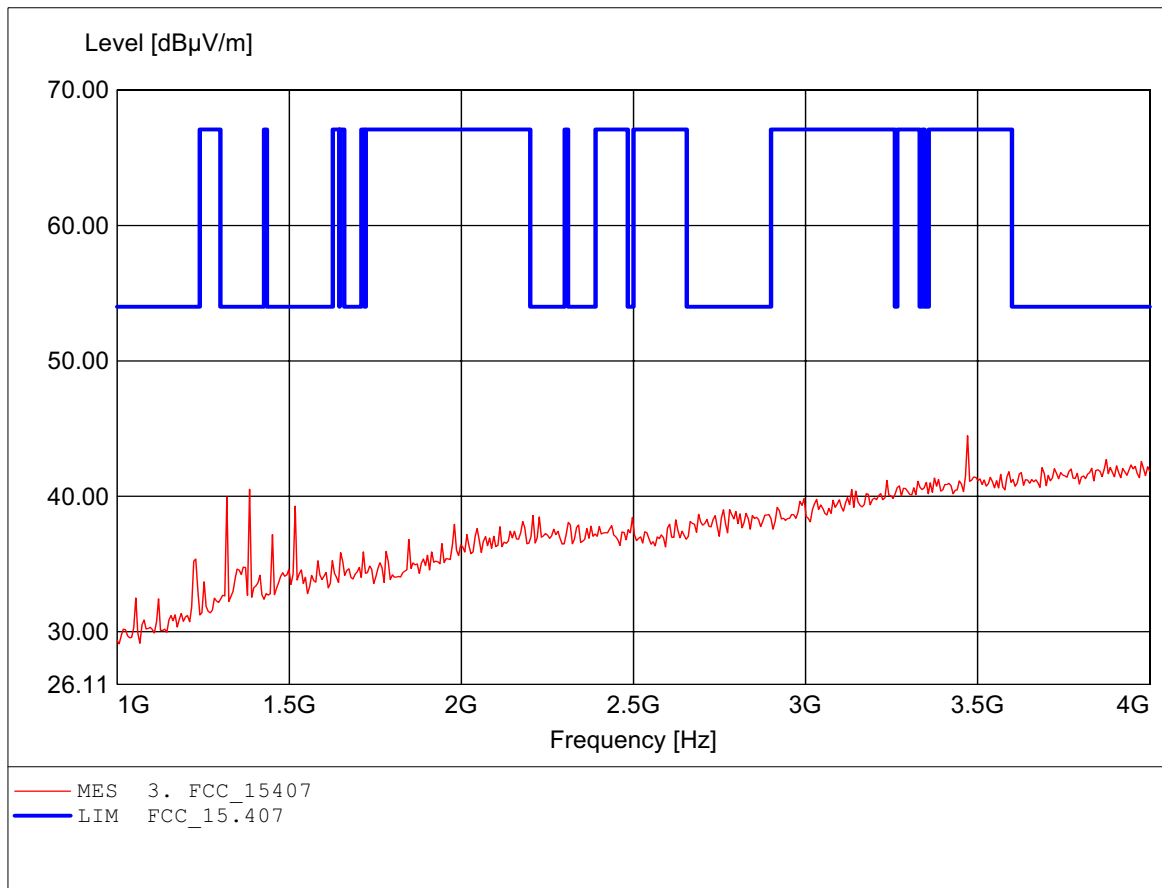

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 3.982GHz, Emax: 43.02dBµV/m, RBW: 1MHz

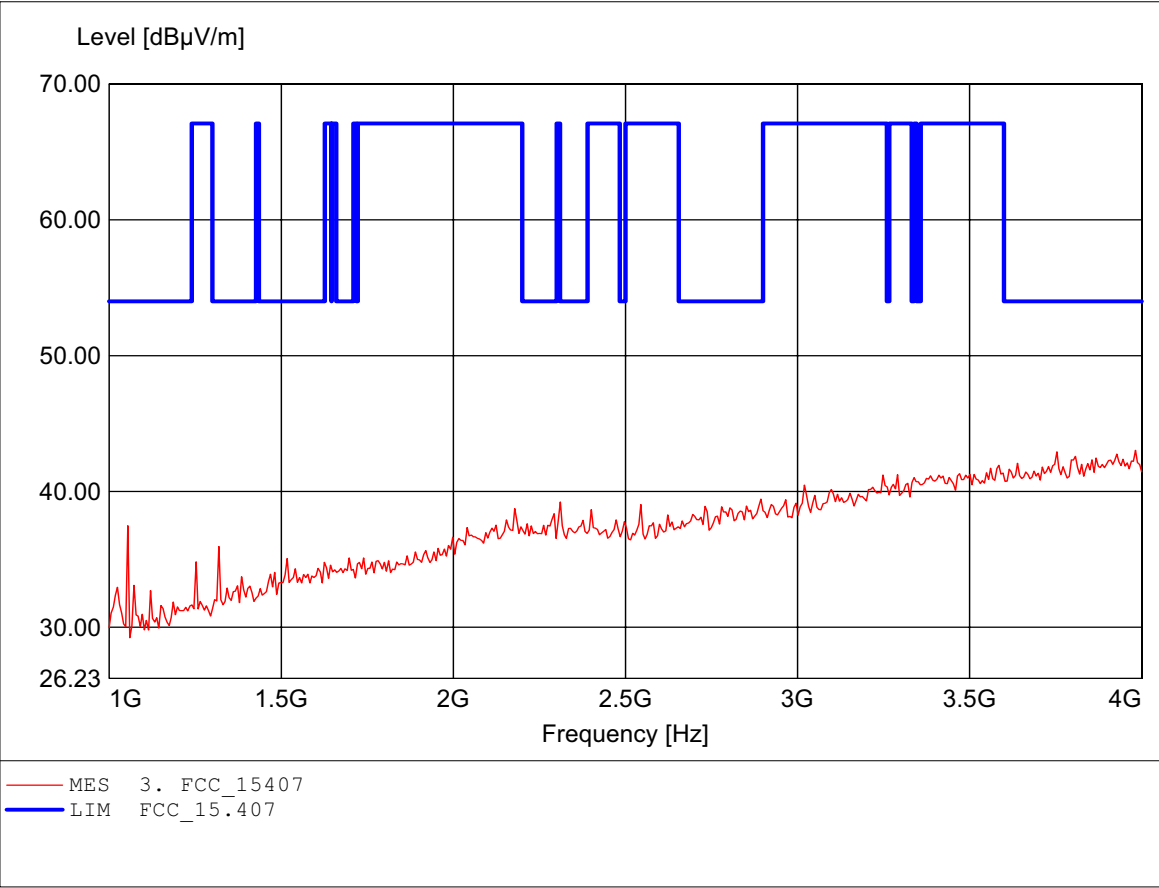

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 8.000GHz, Emax: 46.04dBμV/m, RBW: 1MHz

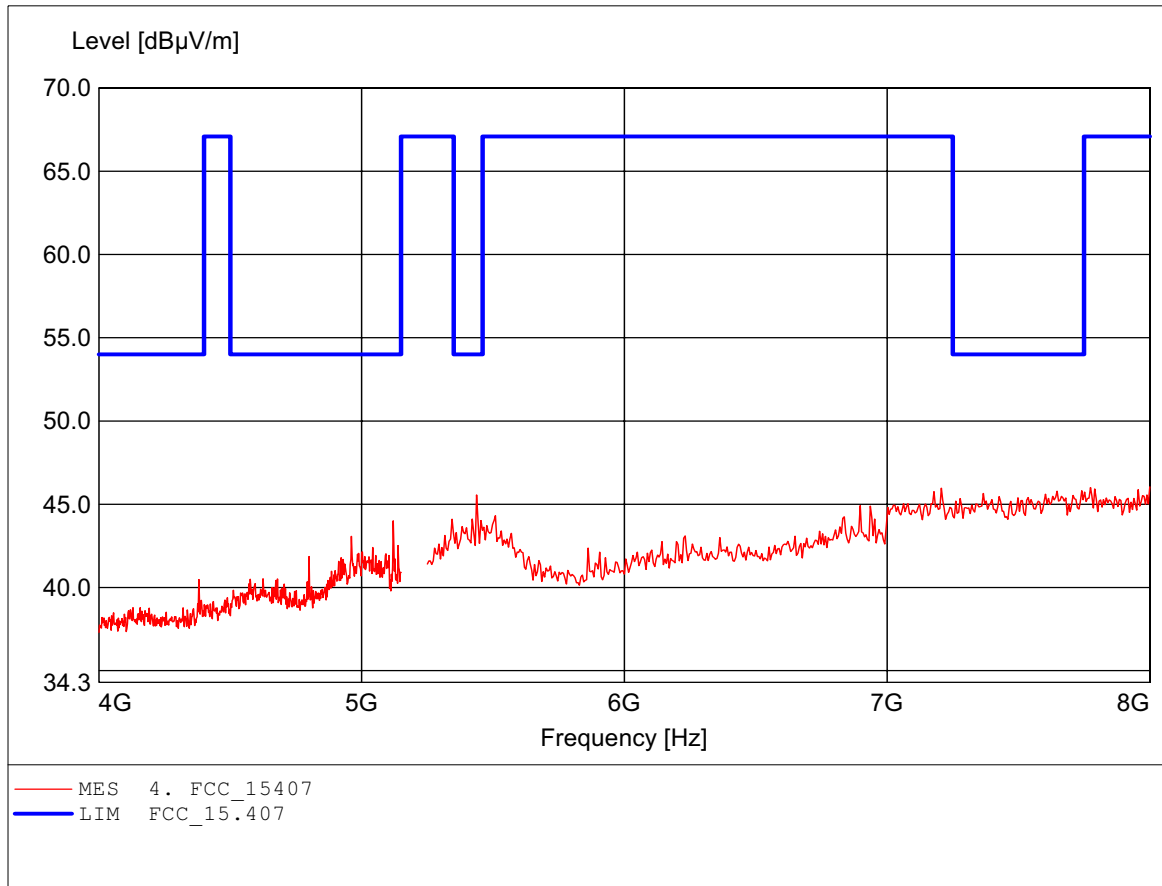

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E

EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 7.576GHz, Emax: 46.79dBμV/m, RBW: 1MHz

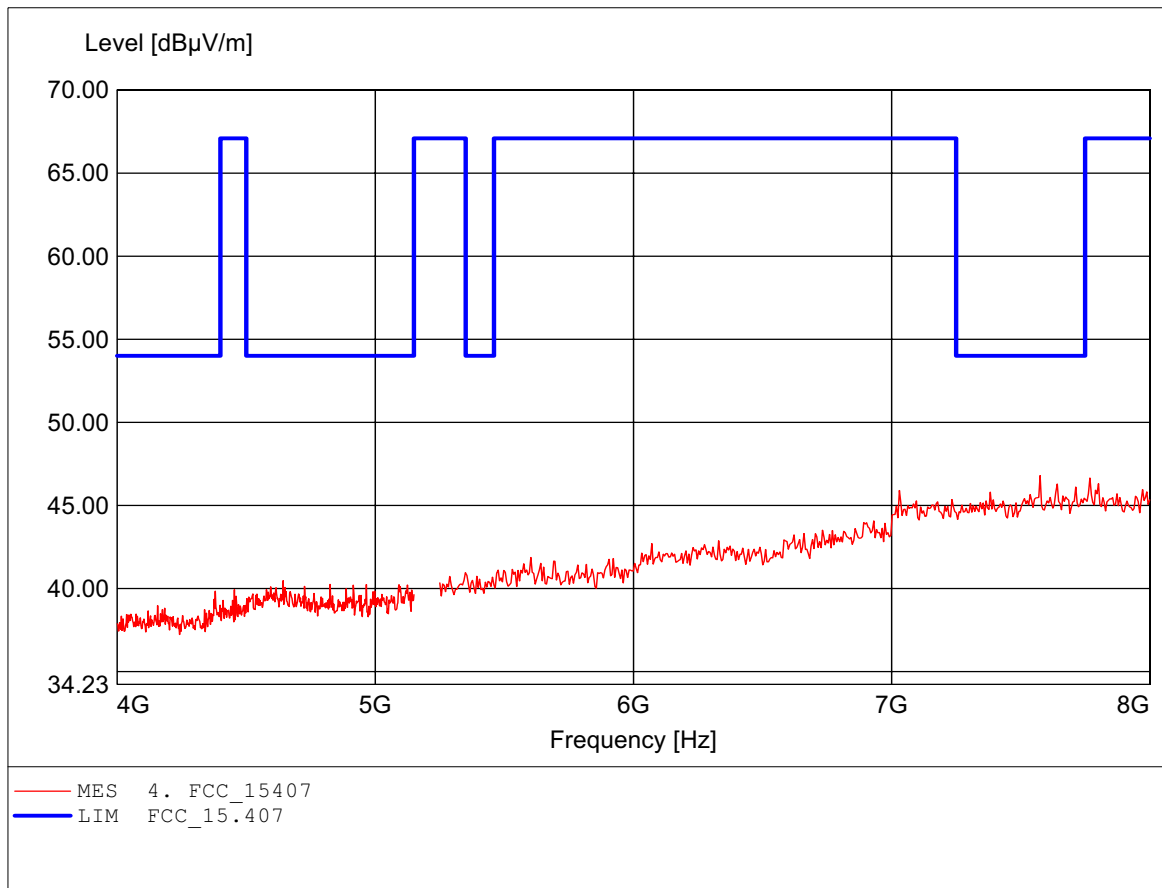




## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 11.599GHz, Emax: 52.05dBμV/m, RBW: 1MHz

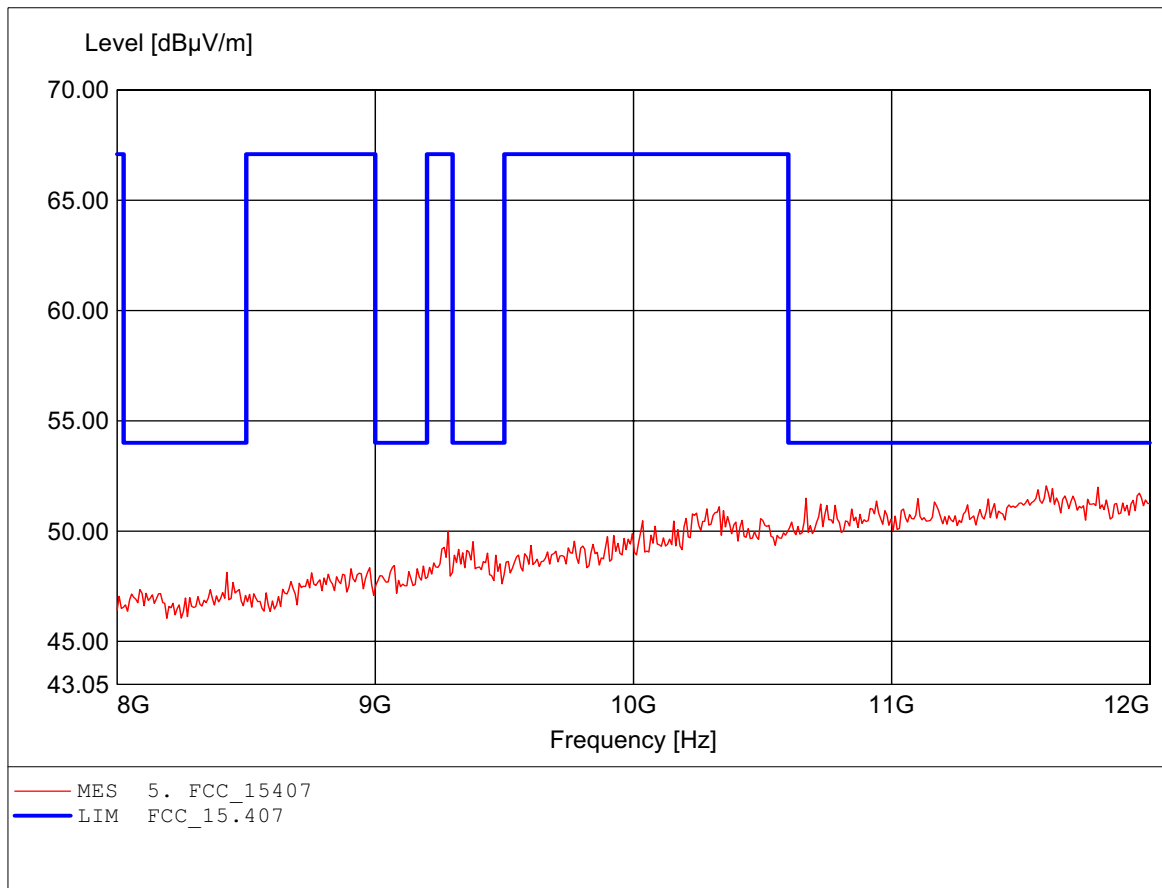

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 11.671GHz, Emax: 52.19dBμV/m, RBW: 1MHz

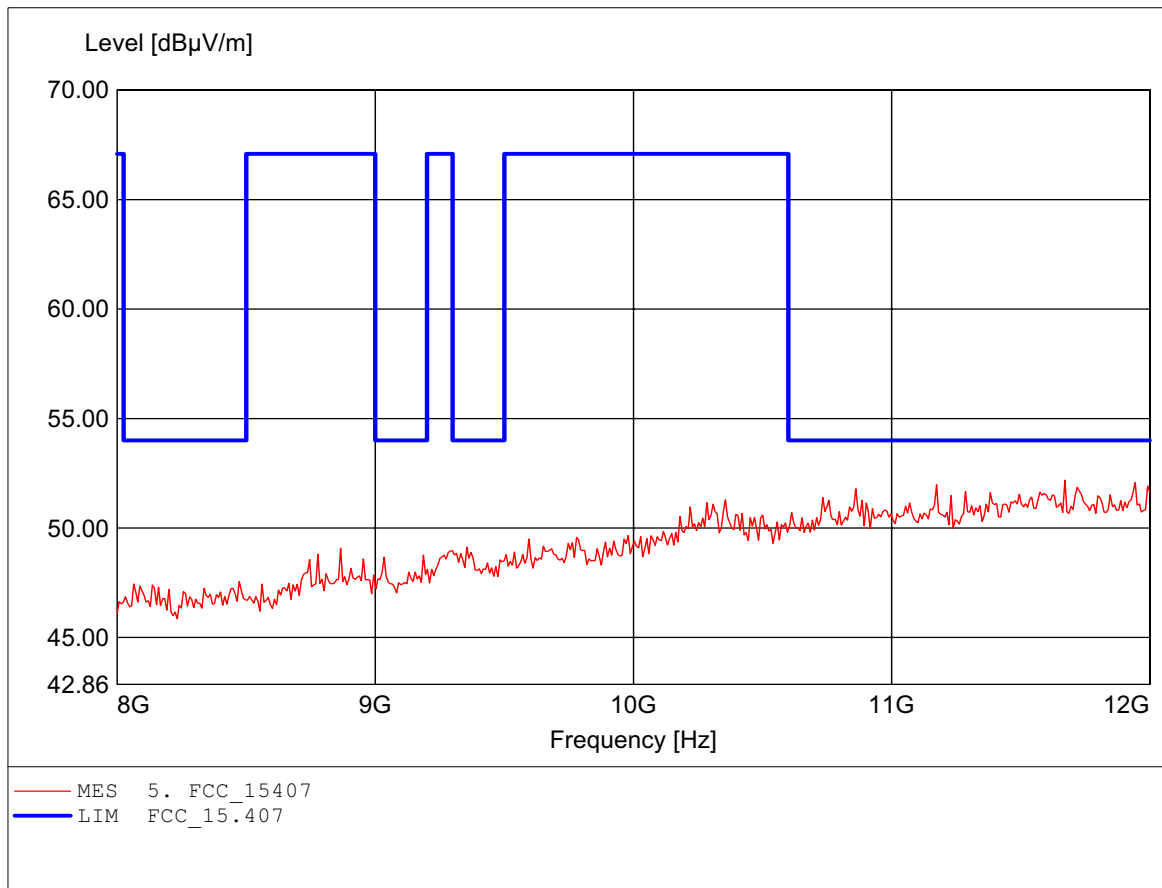

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 17.651GHz, Emax: 50.48dBμV/m, RBW: 1MHz

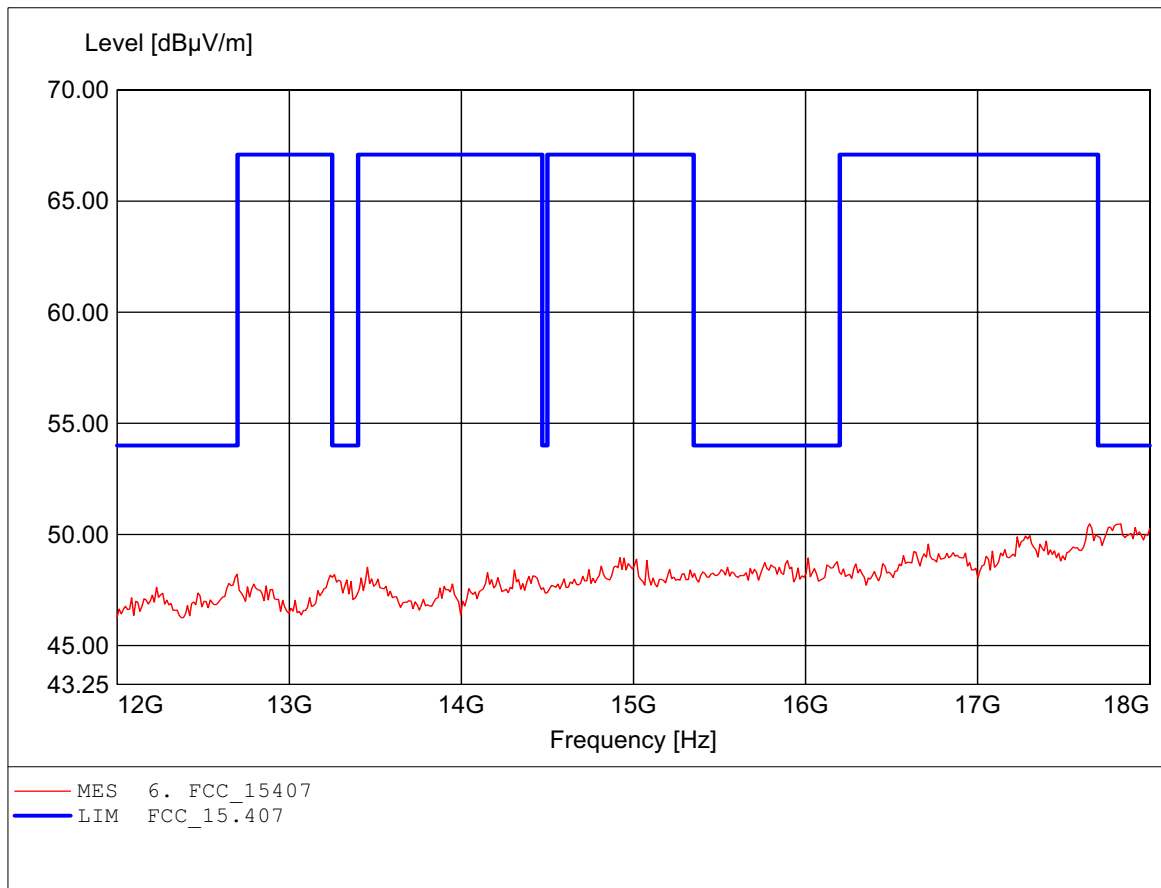

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 17.651GHz, Emax: 50.77dBμV/m, RBW: 1MHz

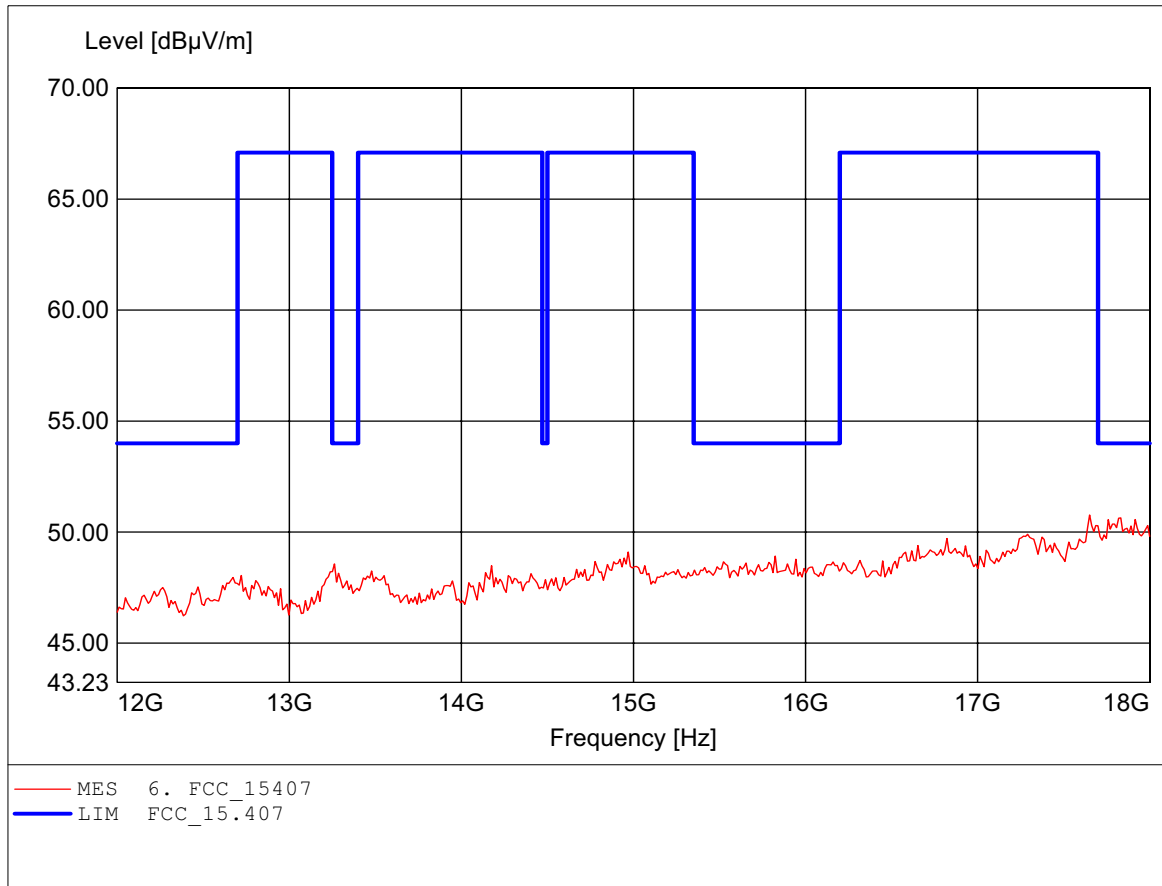

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 25.802GHz, Emax: 54.98dBμV/m, RBW: 1MHz

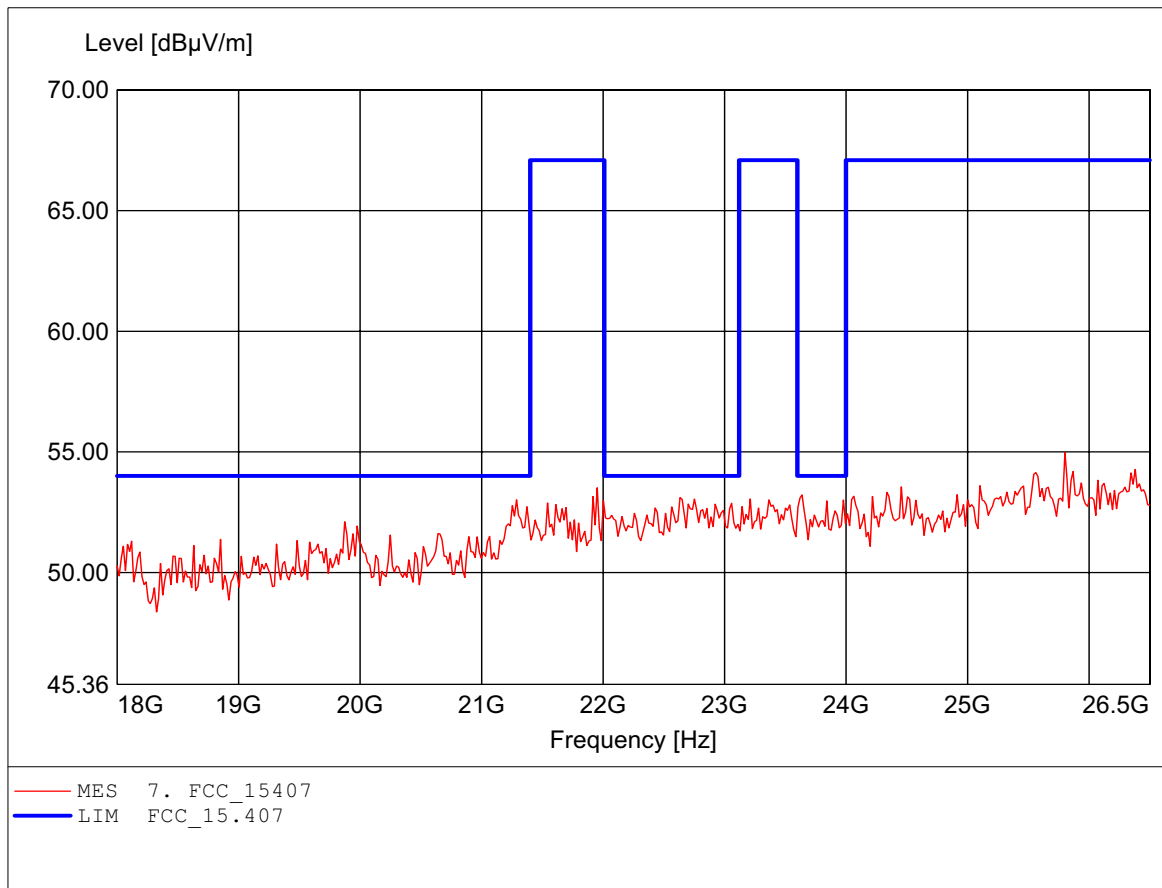

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 26.466GHz, Emax: 55.21dBμV/m, RBW: 1MHz

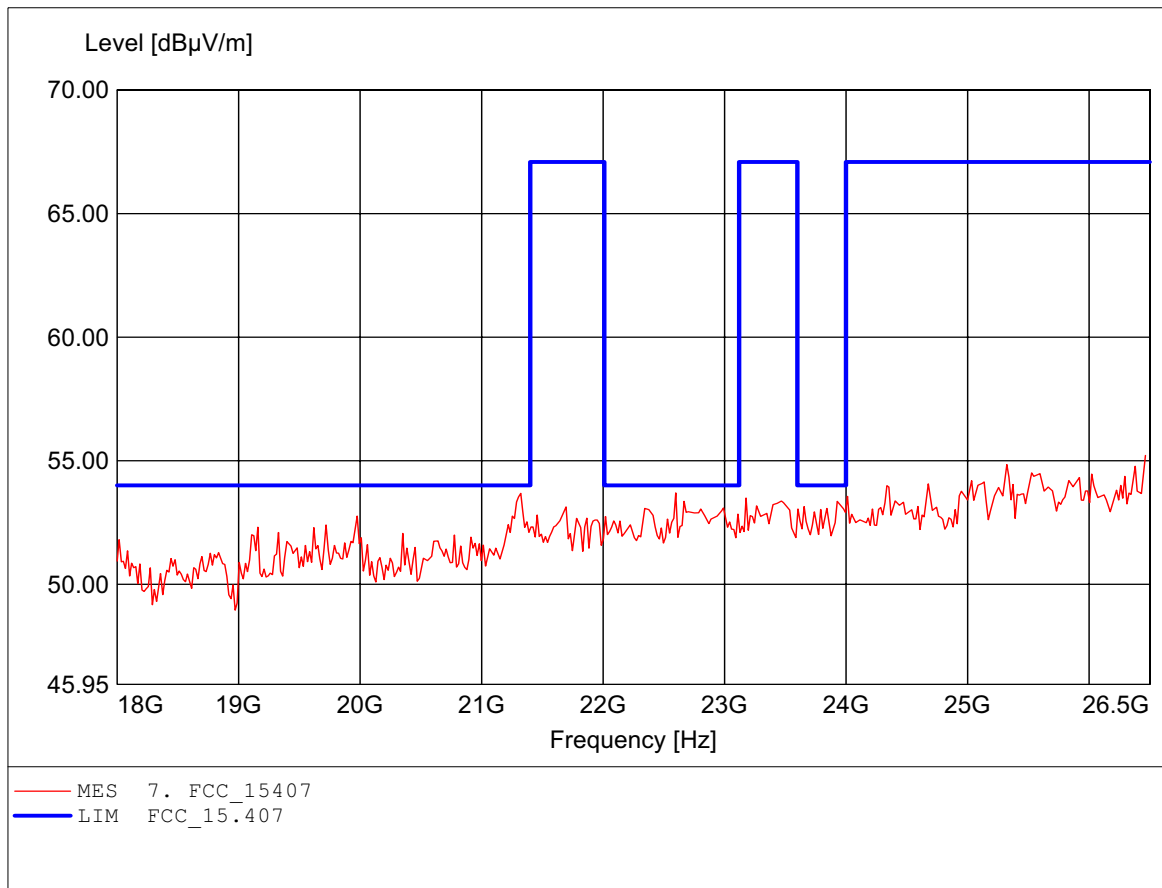

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to Section 15.407  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq: 200.000MHz, Emax: 34.95dBμV/m, RBW: 100kHz

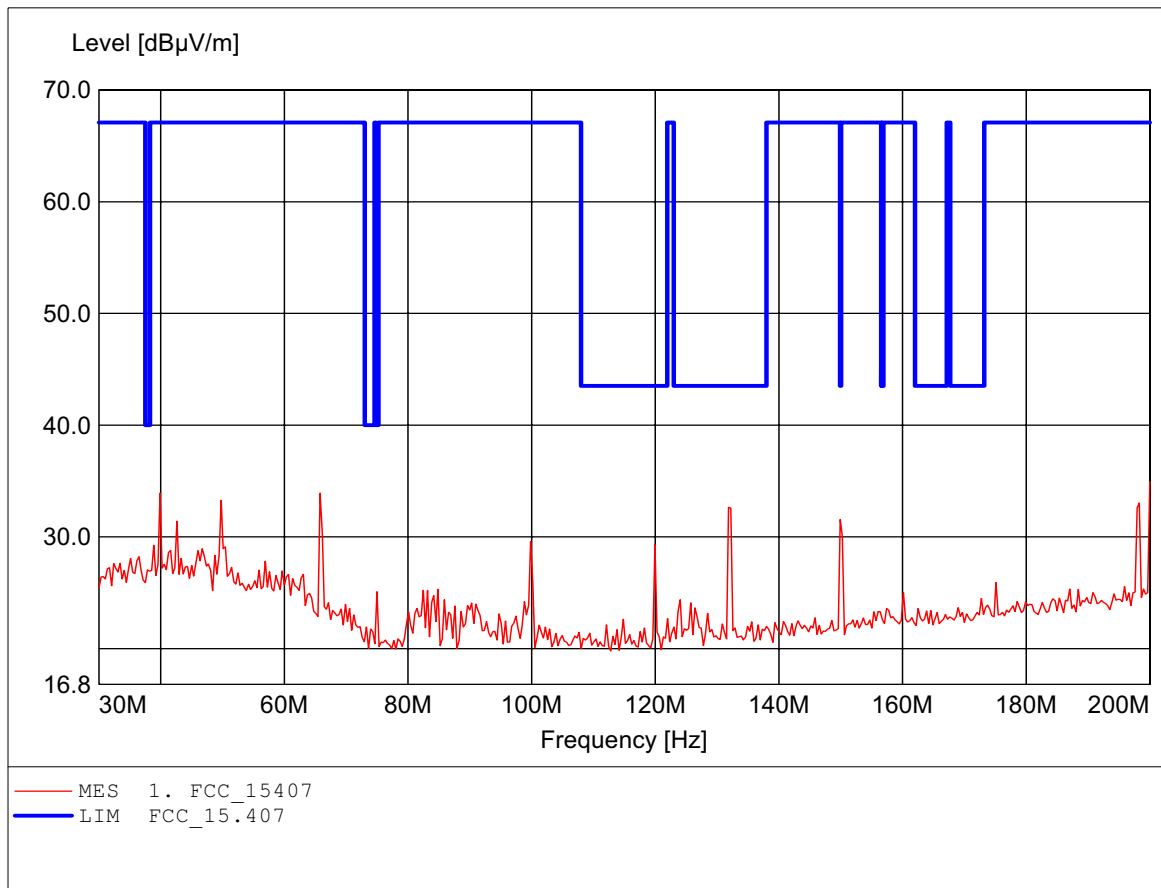

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E

EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to Section 15.407  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq: 198.297MHz, Emax: 34.97dBμV/m, RBW: 100kHz

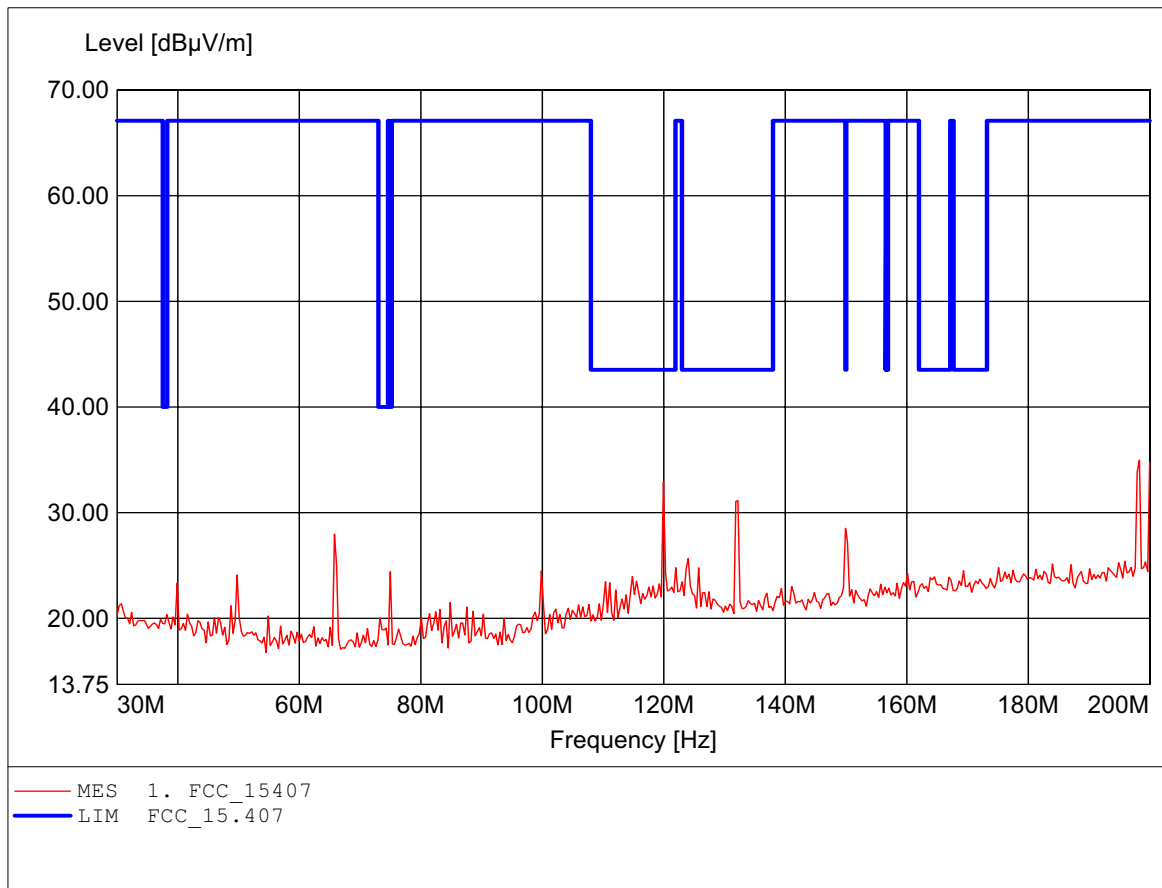




## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to Section 15.407  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Freq: 725.852MHz, Emax: 40.91dBμV/m, RBW: 100kHz

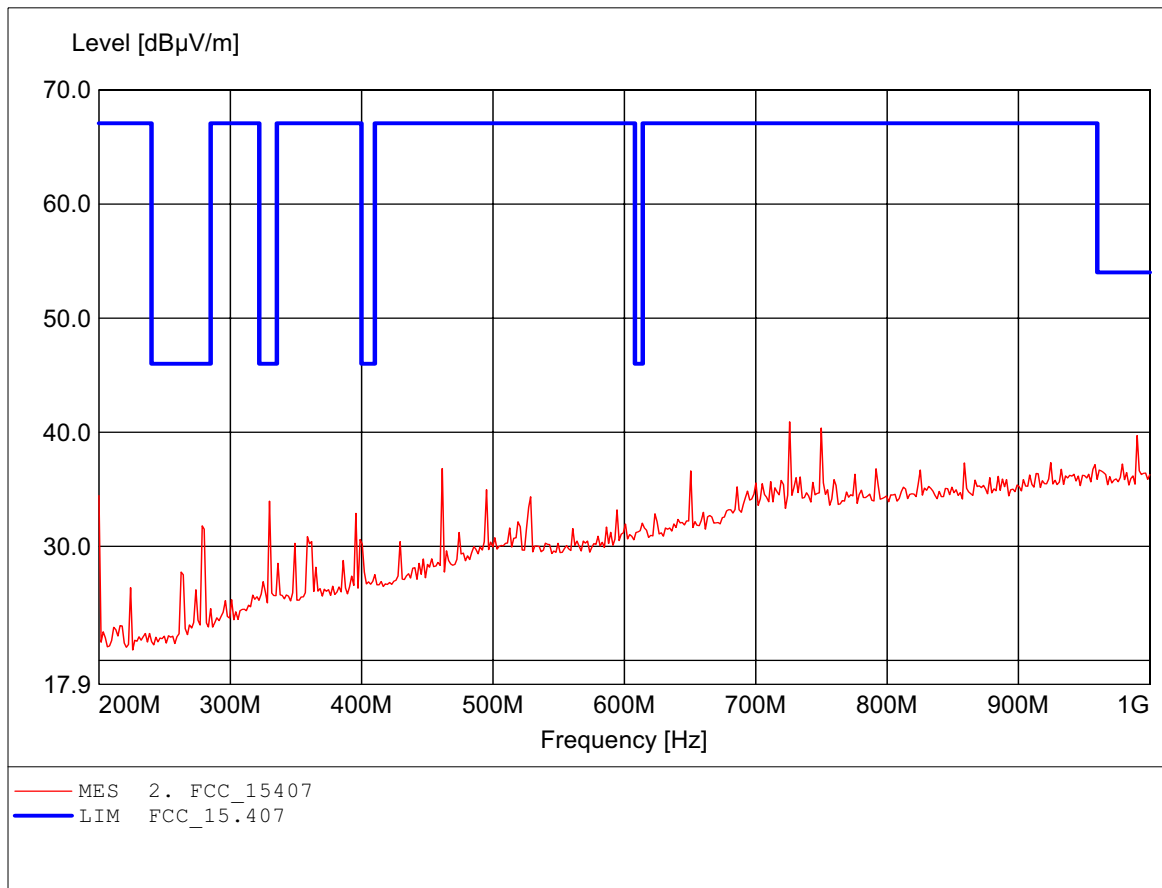

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to Section 15.407  
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.  
Freq: 725.852MHz, Emax: 46.12dBμV/m, RBW: 100kHz

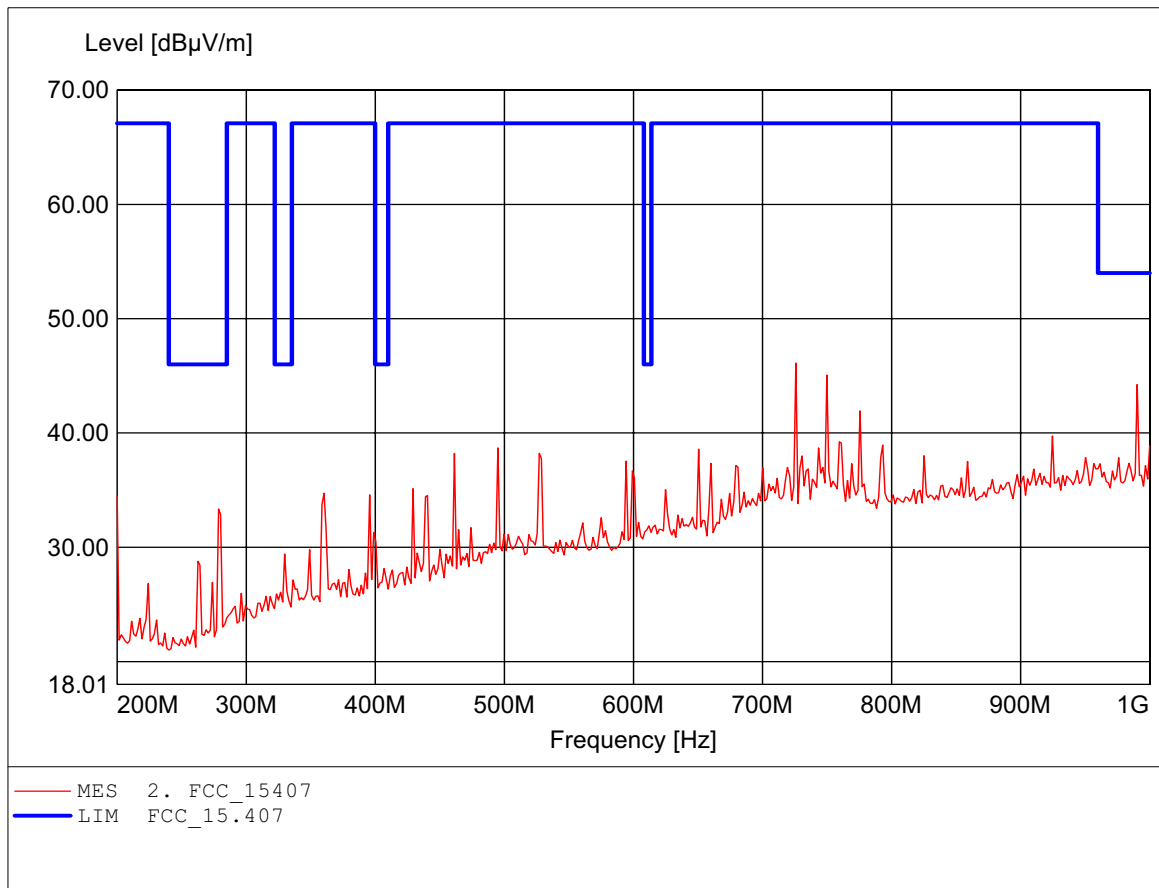

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 3.495GHz, Emax: 45.16dBμV/m, RBW: 1MHz

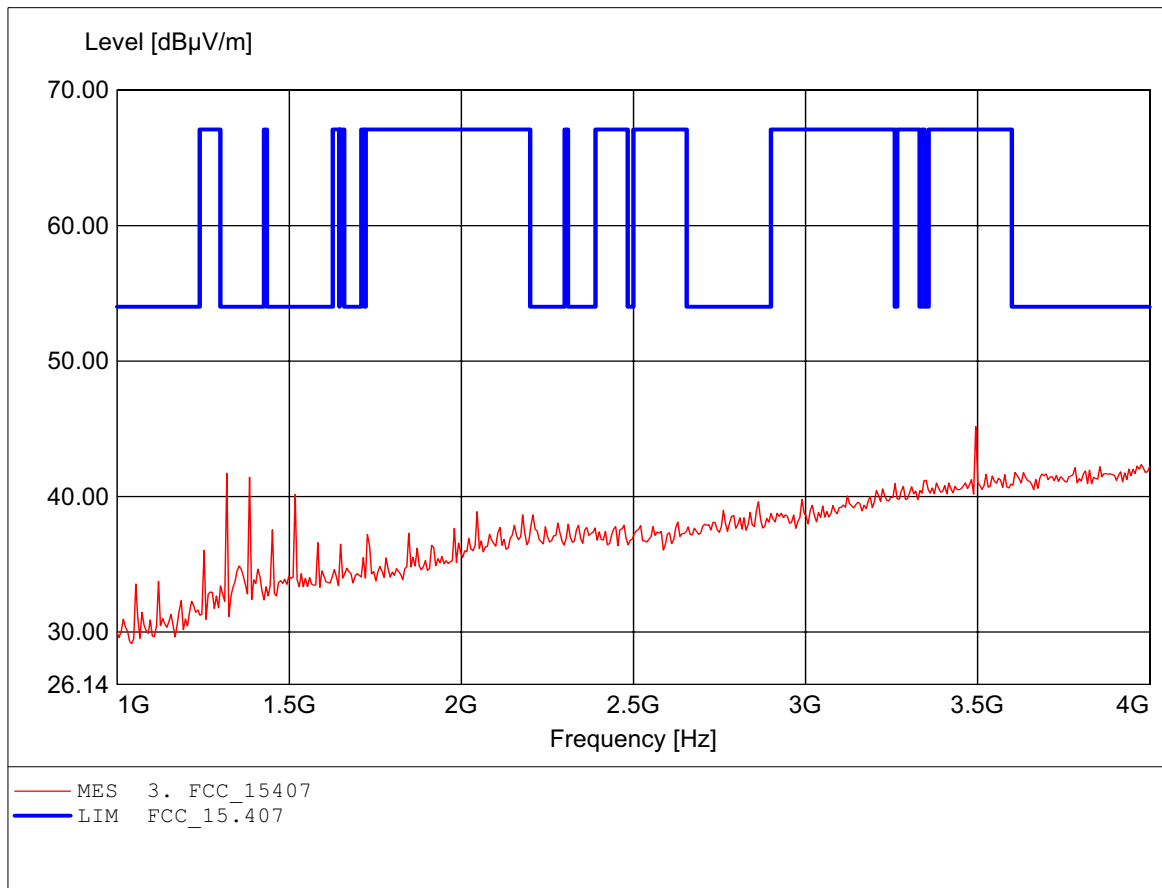

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 3.874GHz, Emax: 42.75dBμV/m, RBW: 1MHz

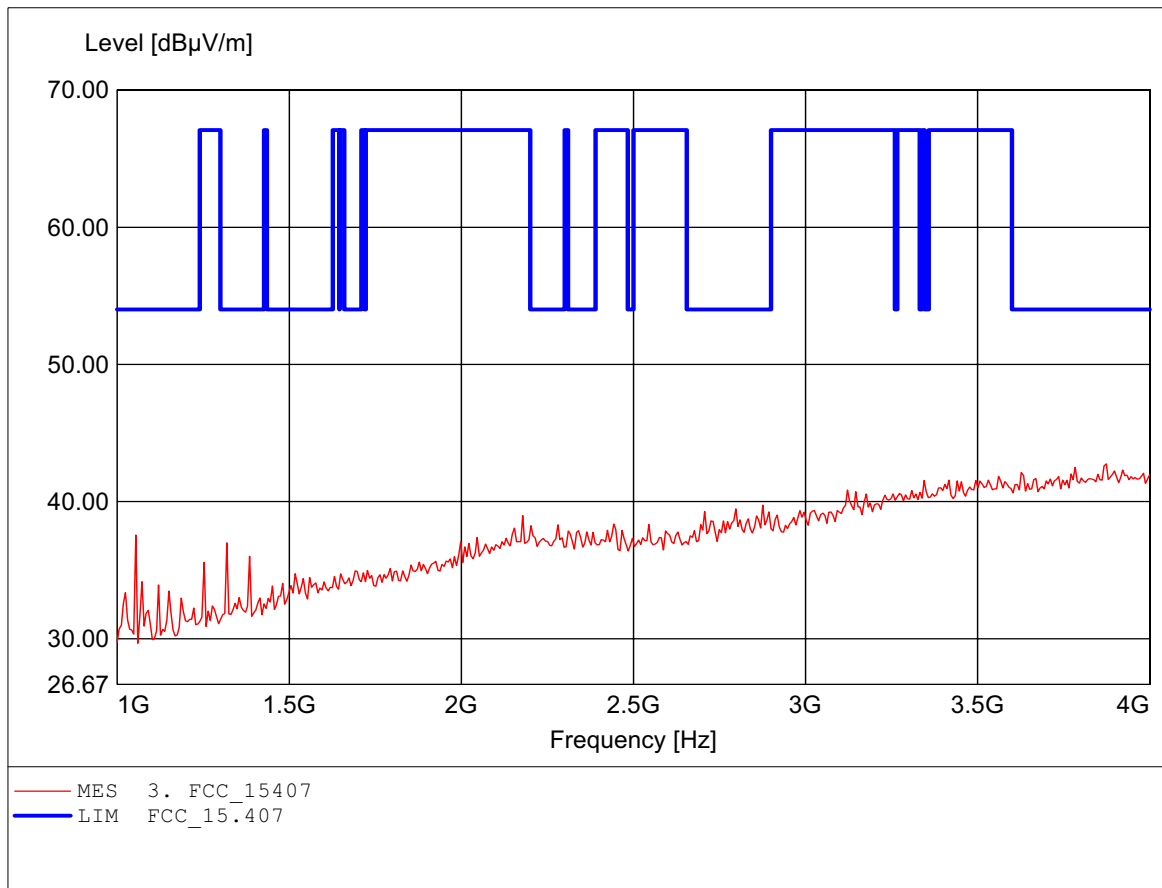

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 5.260GHz, Emax: 57.06dBμV/m, RBW: 1MHz

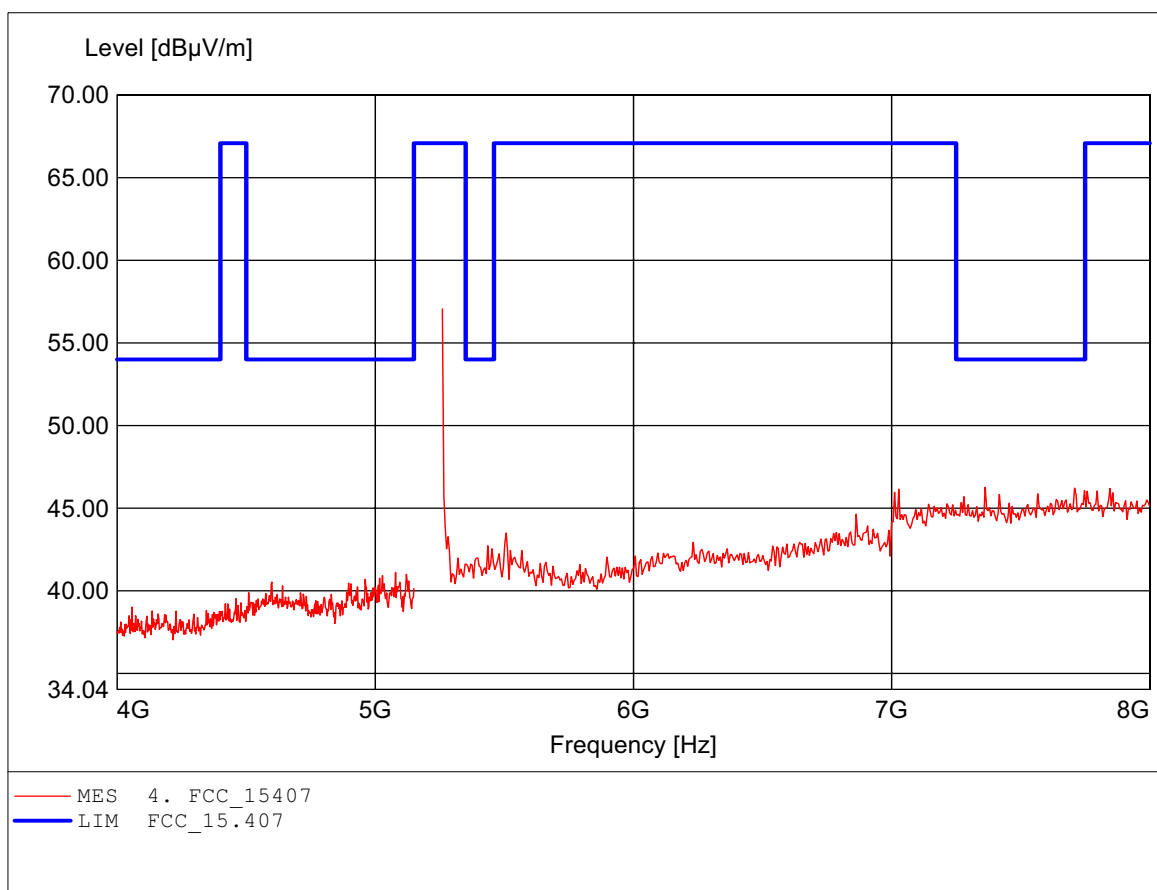

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 7.742GHz, Emax: 46.53dBμV/m, RBW: 1MHz

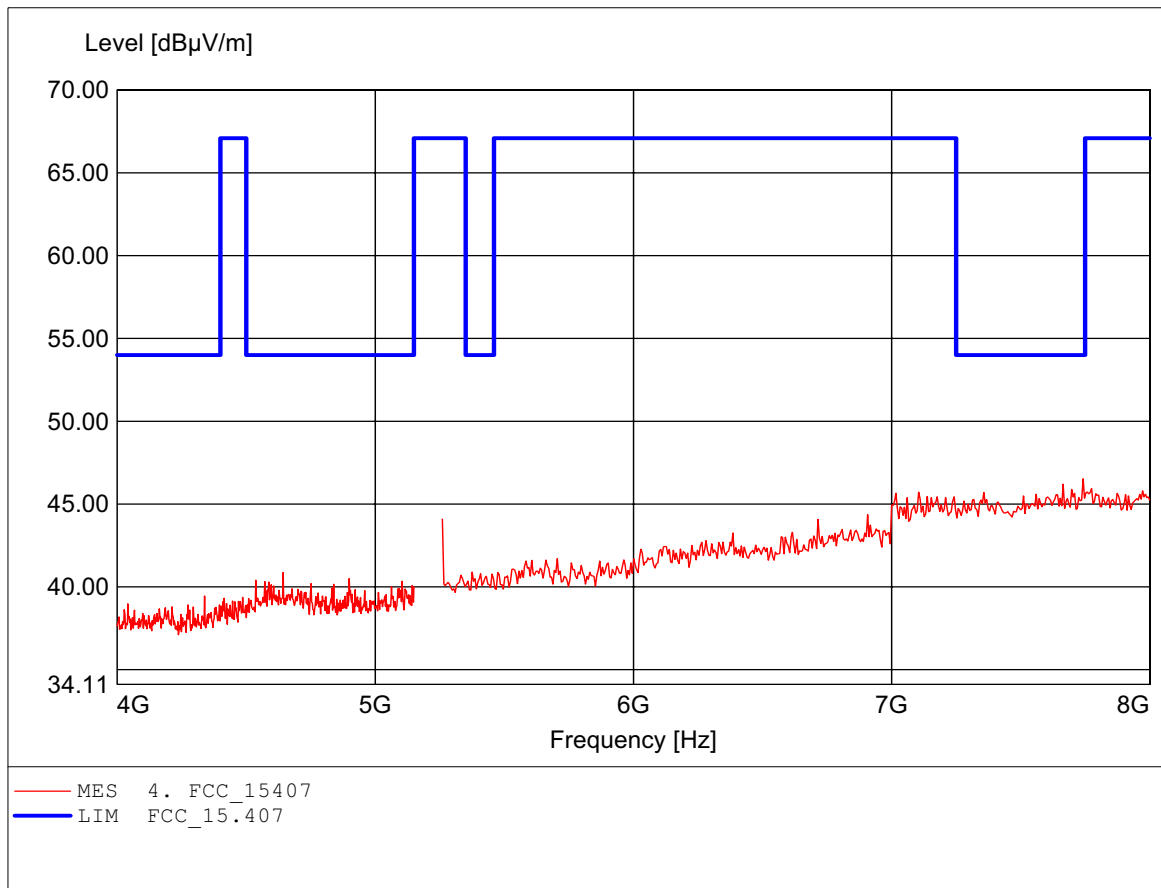

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 11.615GHz, Emax: 52.66dBµV/m, RBW: 1MHz

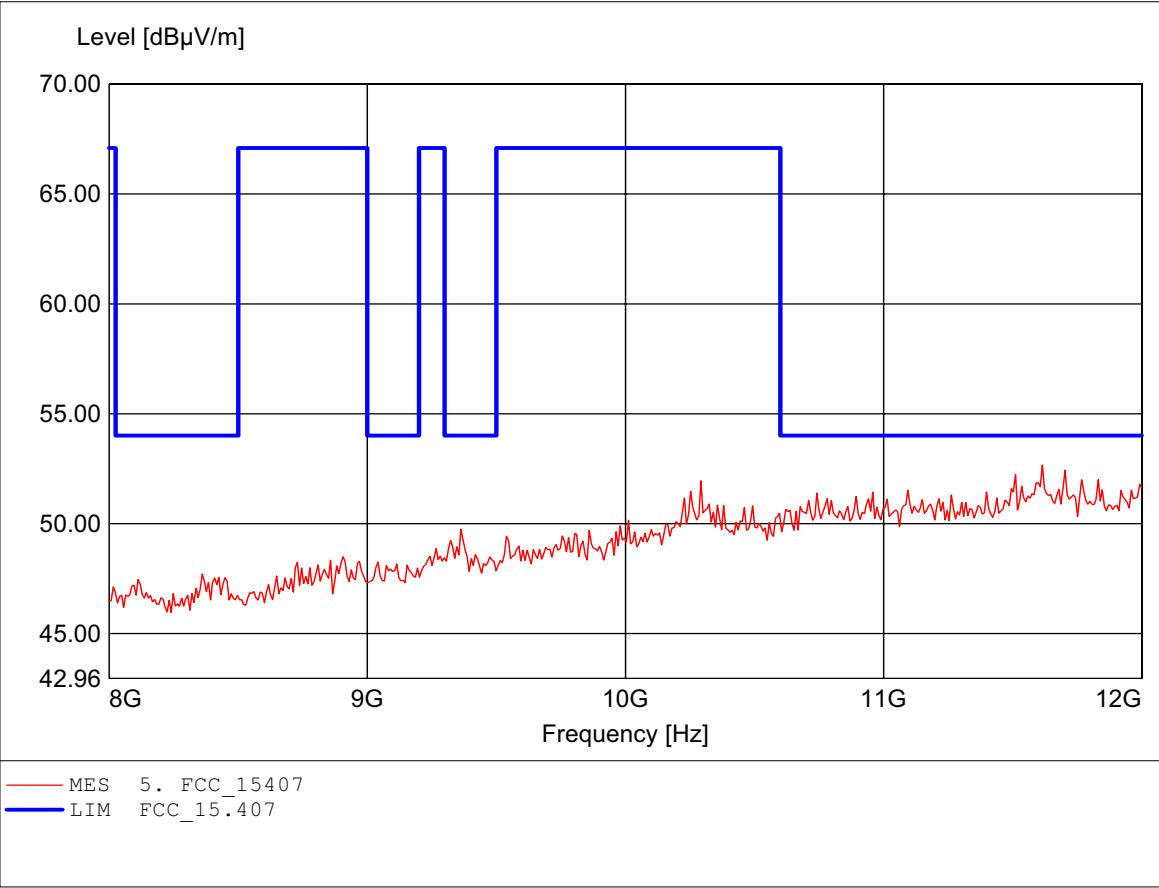

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E

EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 11.631GHz, Emax: 52.13dBμV/m, RBW: 1MHz

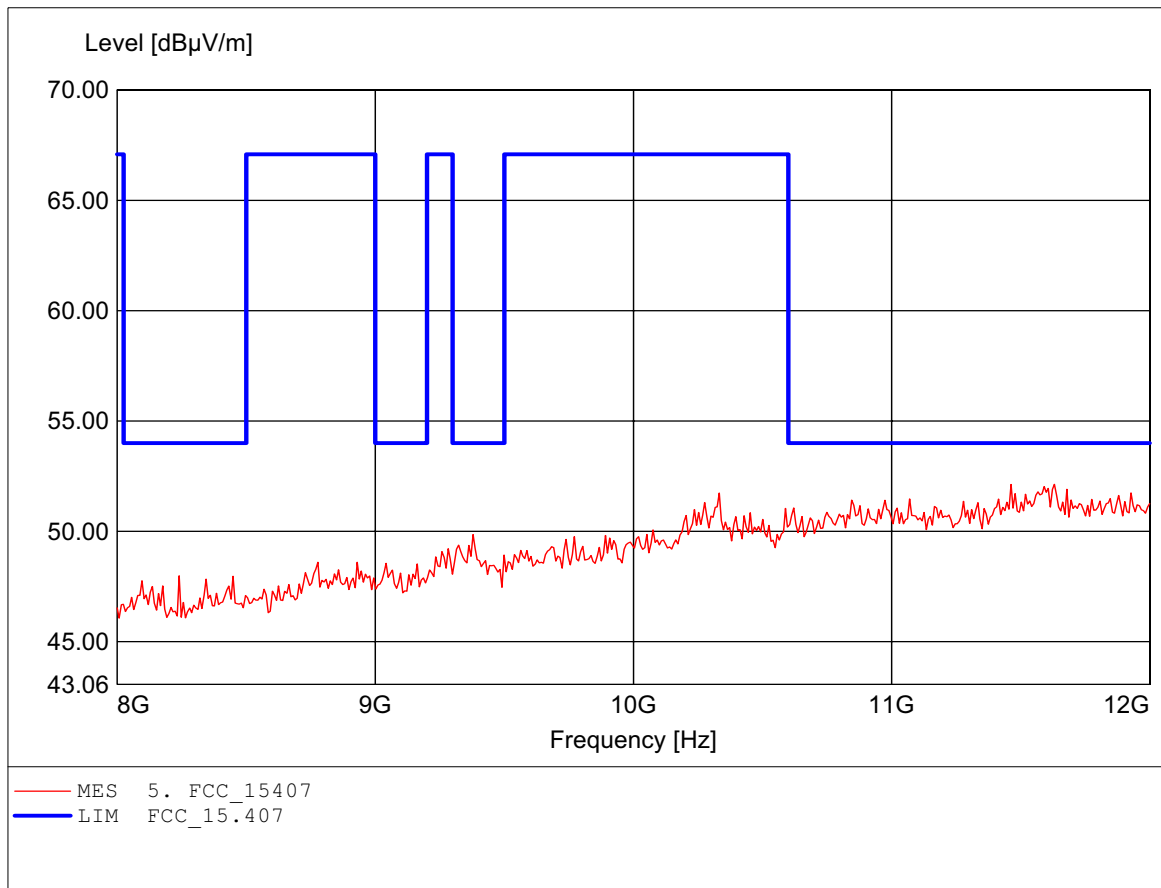




## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 17.651GHz, Emax: 50.85dBμV/m, RBW: 1MHz

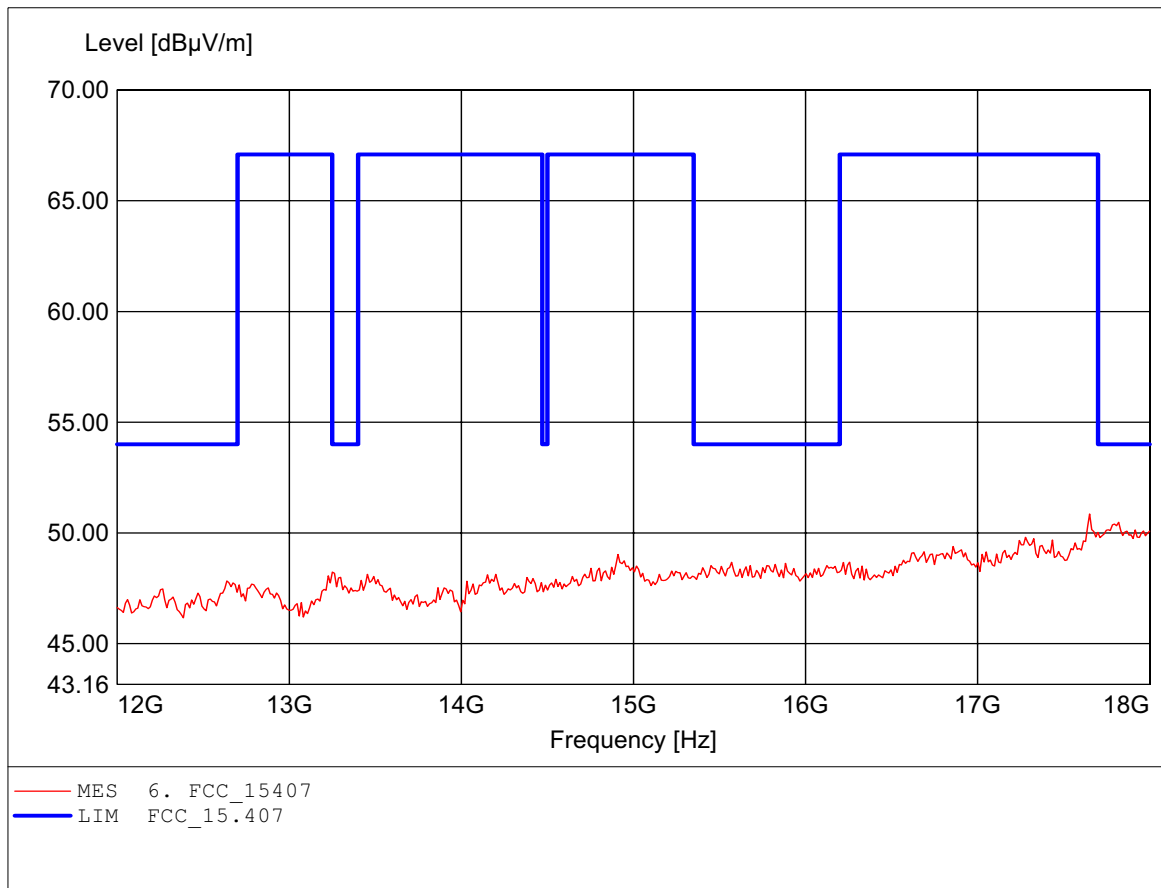

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Freq: 17.651GHz, Emax: 50.84dBμV/m, RBW: 1MHz

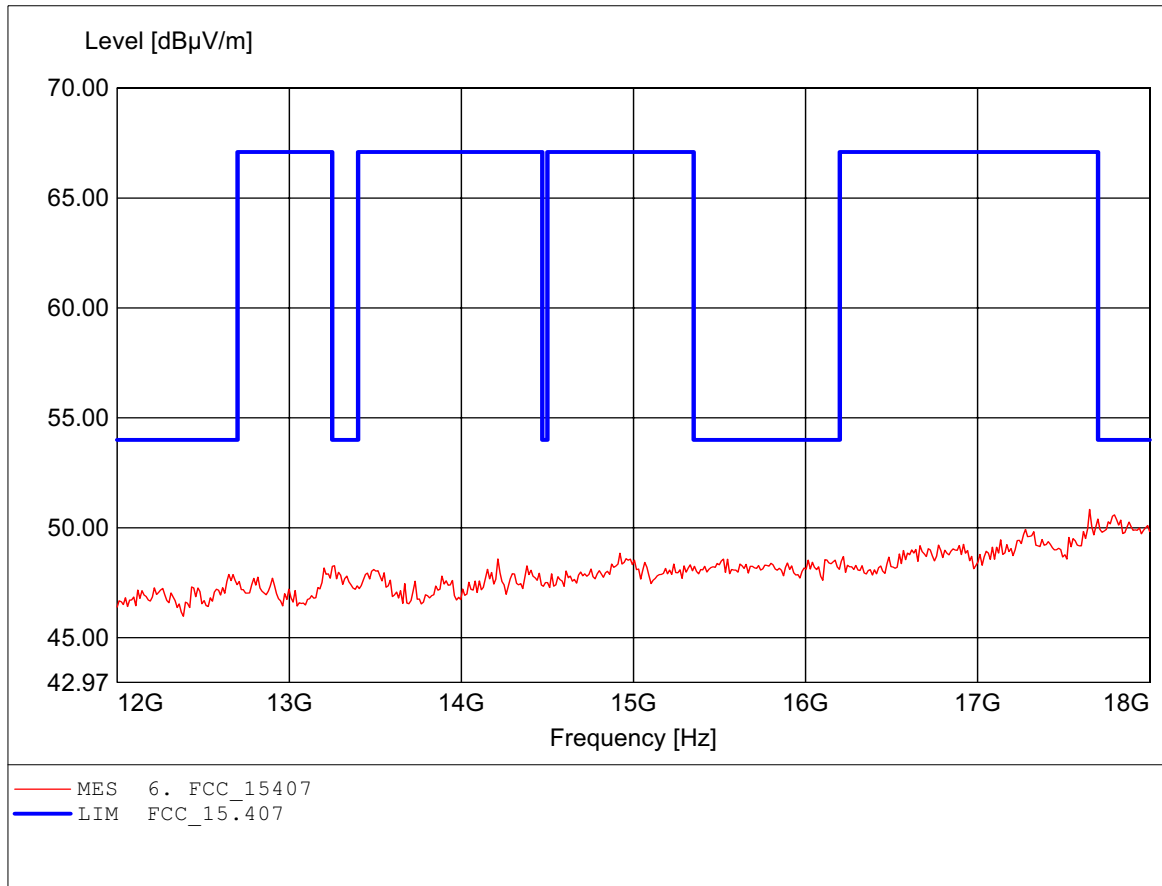

## Spurious emissions Field Strength

### FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 26.347GHz, Emax: 55.23dBμV/m, RBW: 1MHz

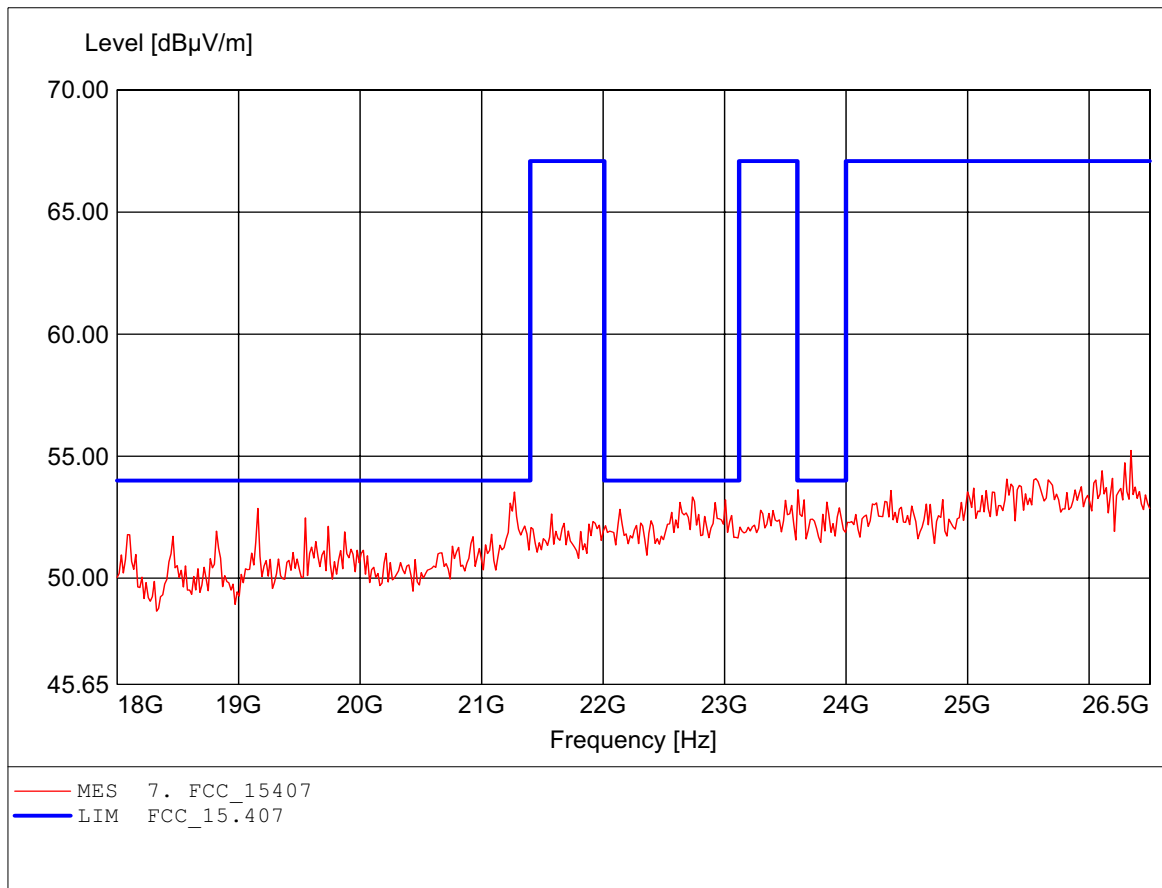

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART E


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to §15.407, peak detector  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Freq: 25.325GHz, Emax: 54.60dBµV/m, RBW: 1MHz

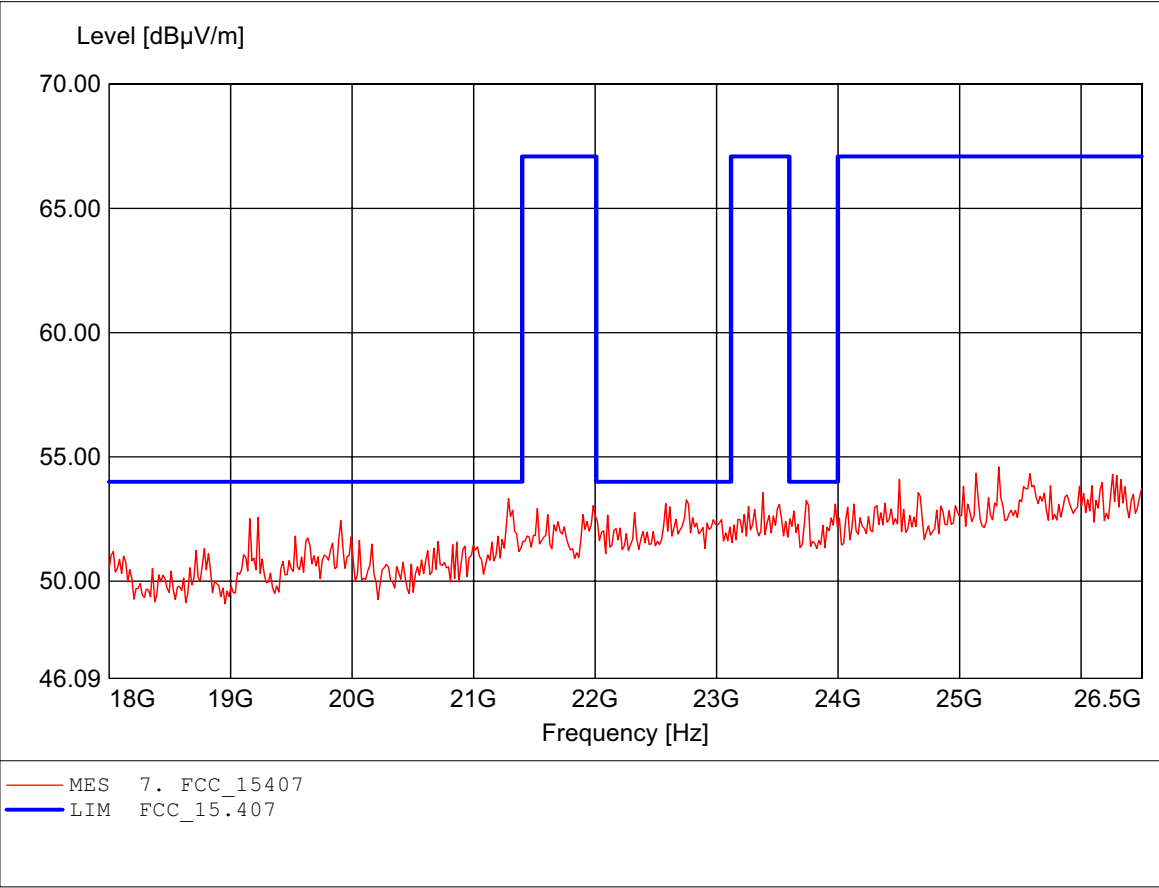

## Field Strength under normal conditions

### FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq:65.772MHz Emax:34.14dBμV/m RBW: 100 kHz

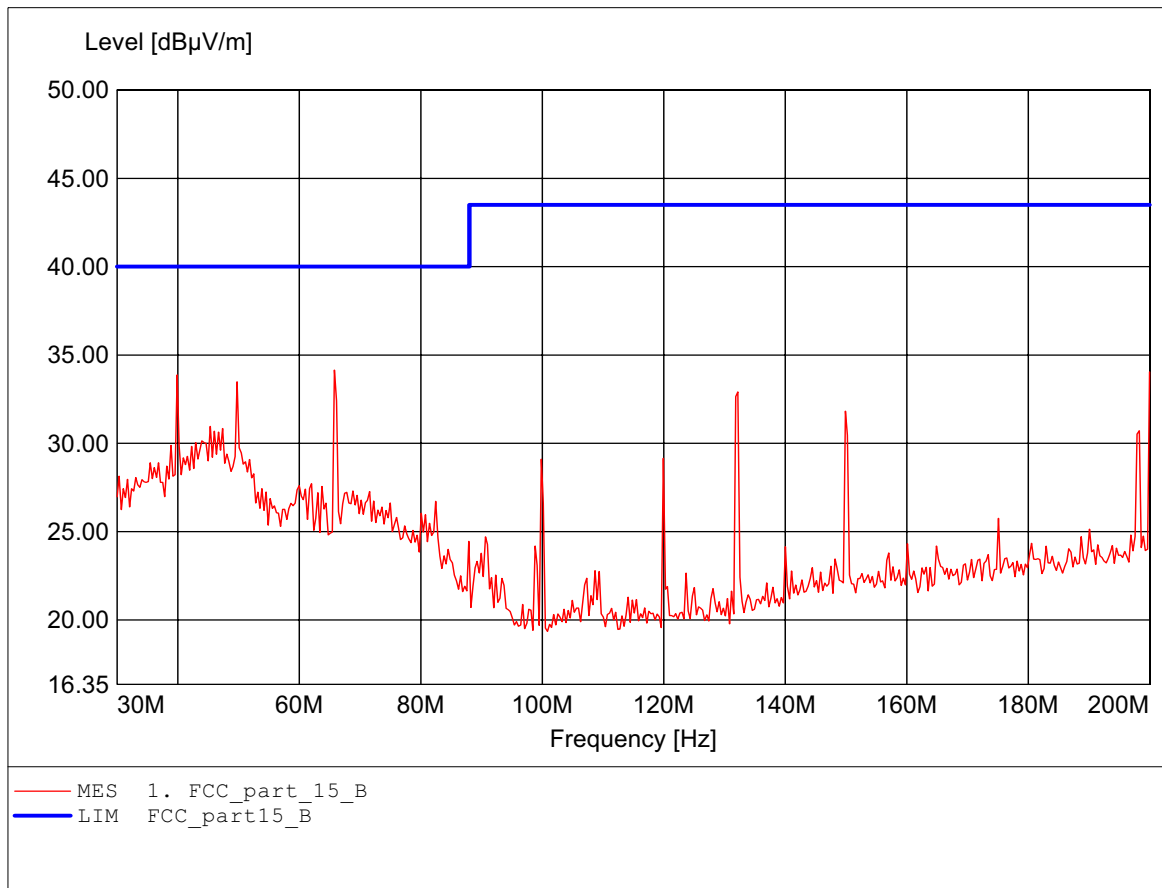

## Field Strength under normal conditions

### FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq:200.000MHz Emax:34.58dBμV/m RBW: 100 kHz

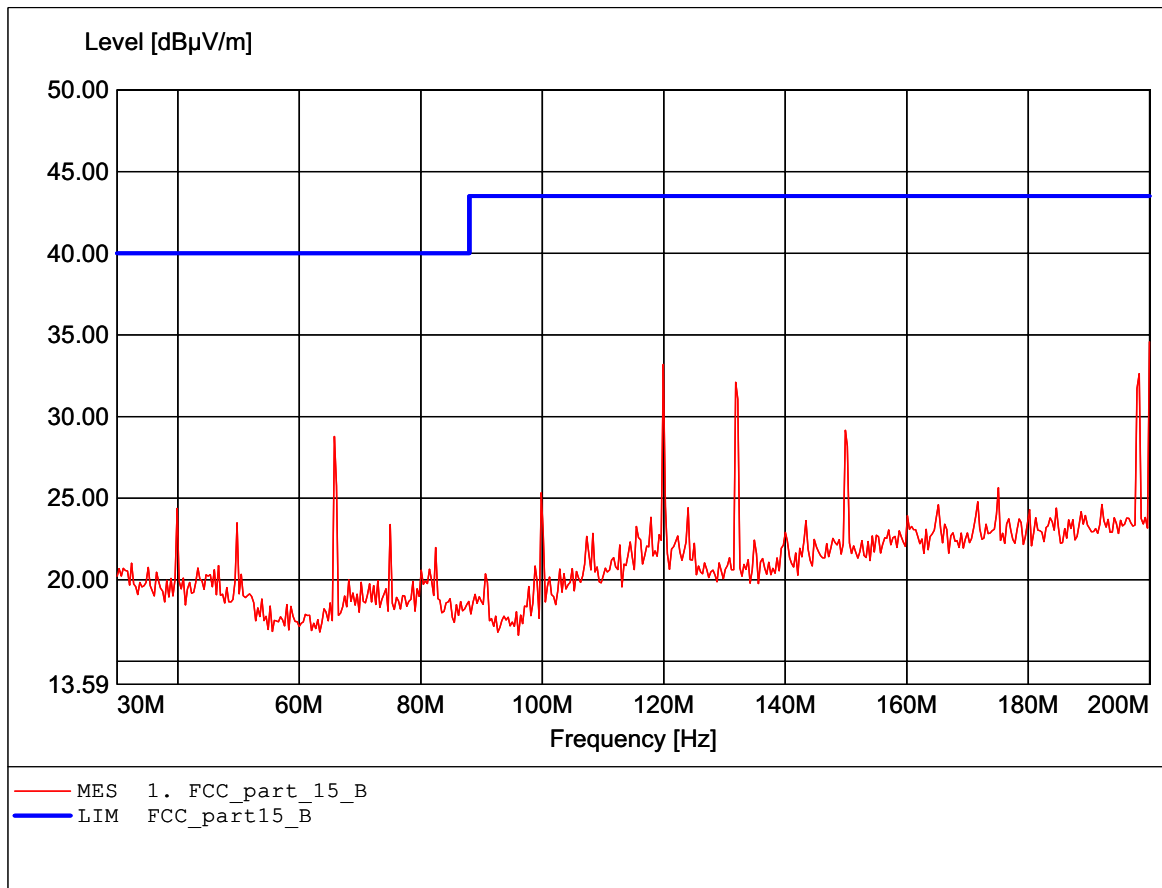

## Field Strength under normal conditions

### FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Freq:749.900MHz Emax:40.07dBμV/m RBW: 100 kHz

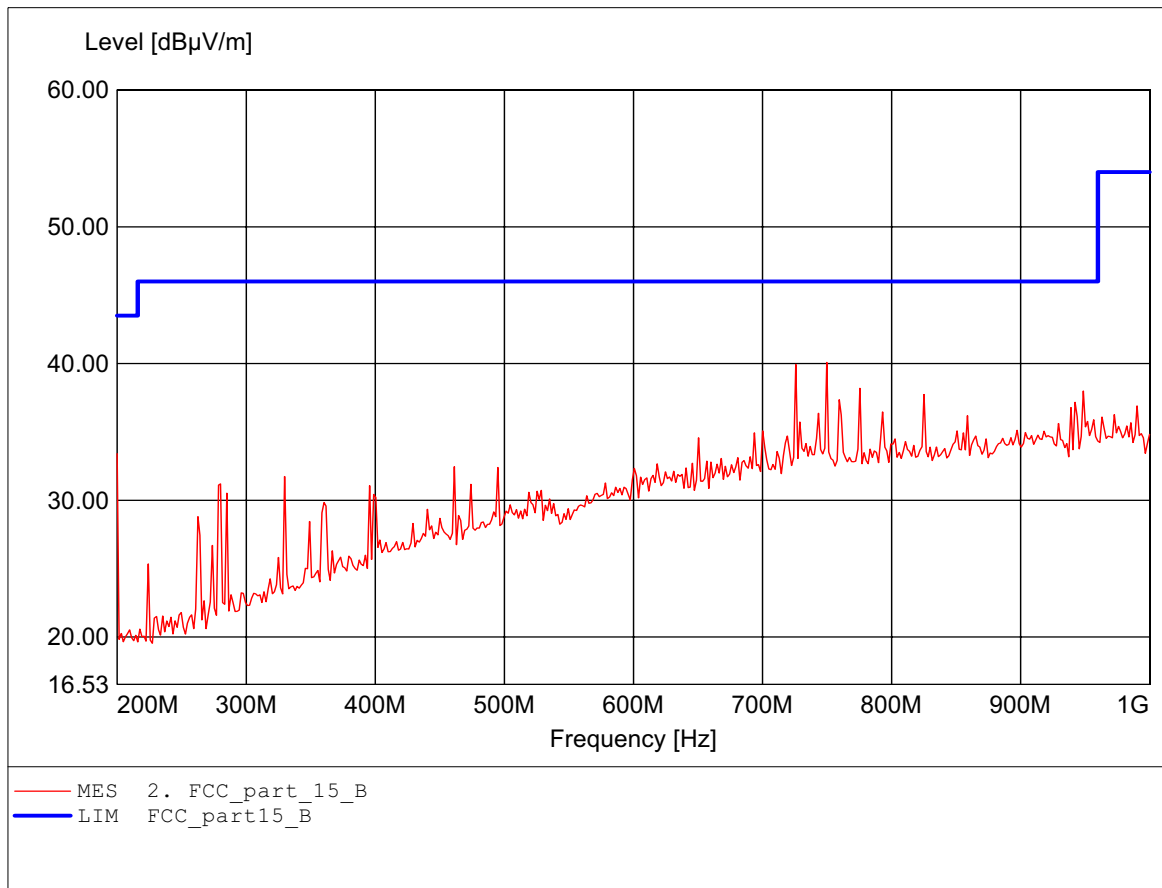

## Field Strength under normal conditions

### FCC RULES PART 15, SUBPART B

EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Freq:725.852MHz Emax:44.37dBμV/m RBW: 100 kHz

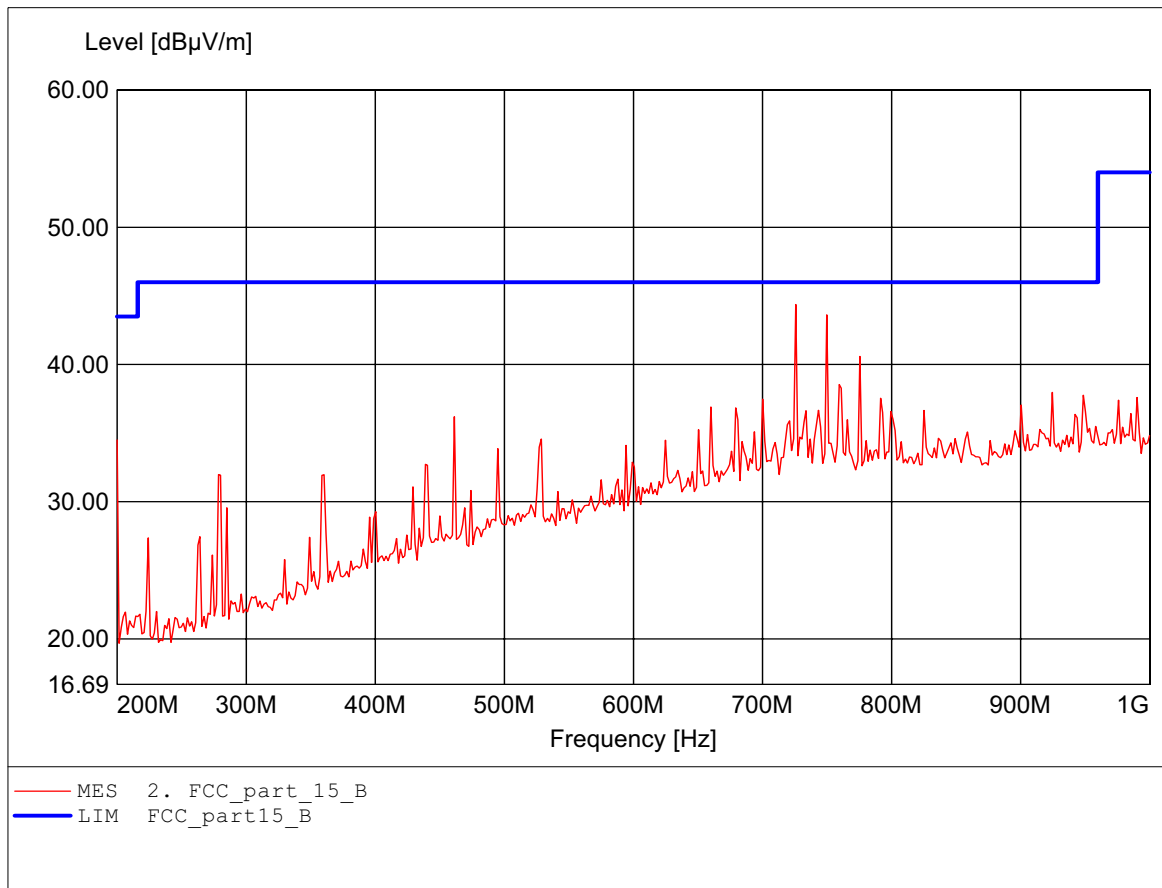




Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:3.453GHz Emax:42.32dBμV/m RBW: 1 MHz

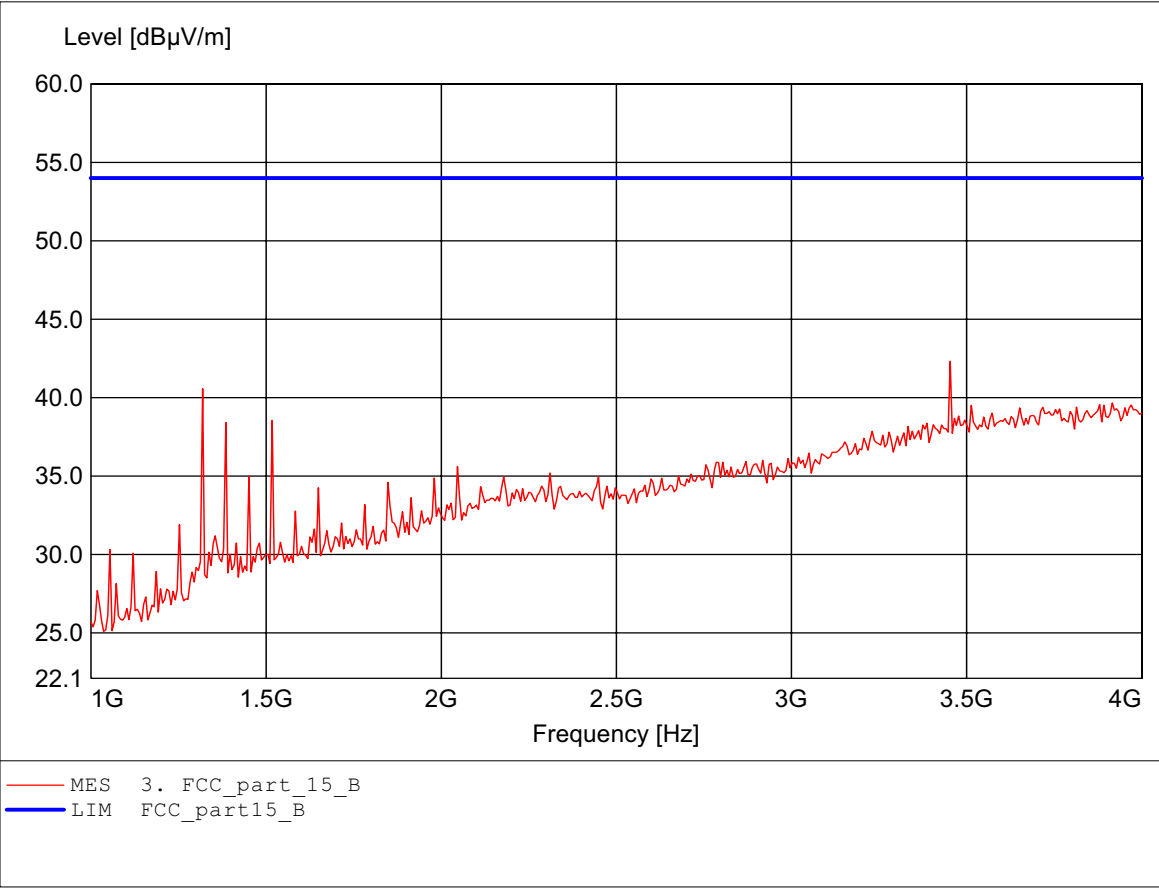

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:4.000GHz Emax:39.99dBμV/m RBW: 1 MHz

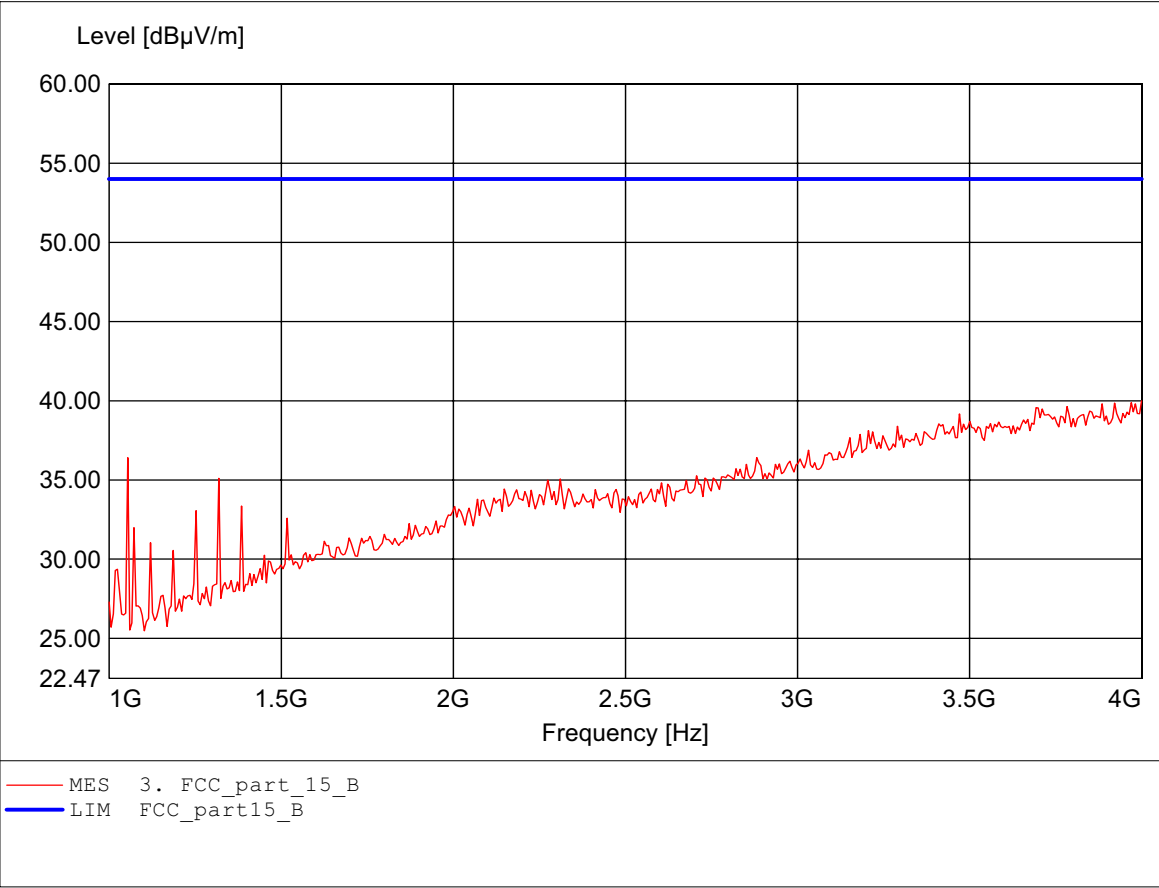

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:7.752GHz Emax:46.37dBμV/m RBW: 1 MHz

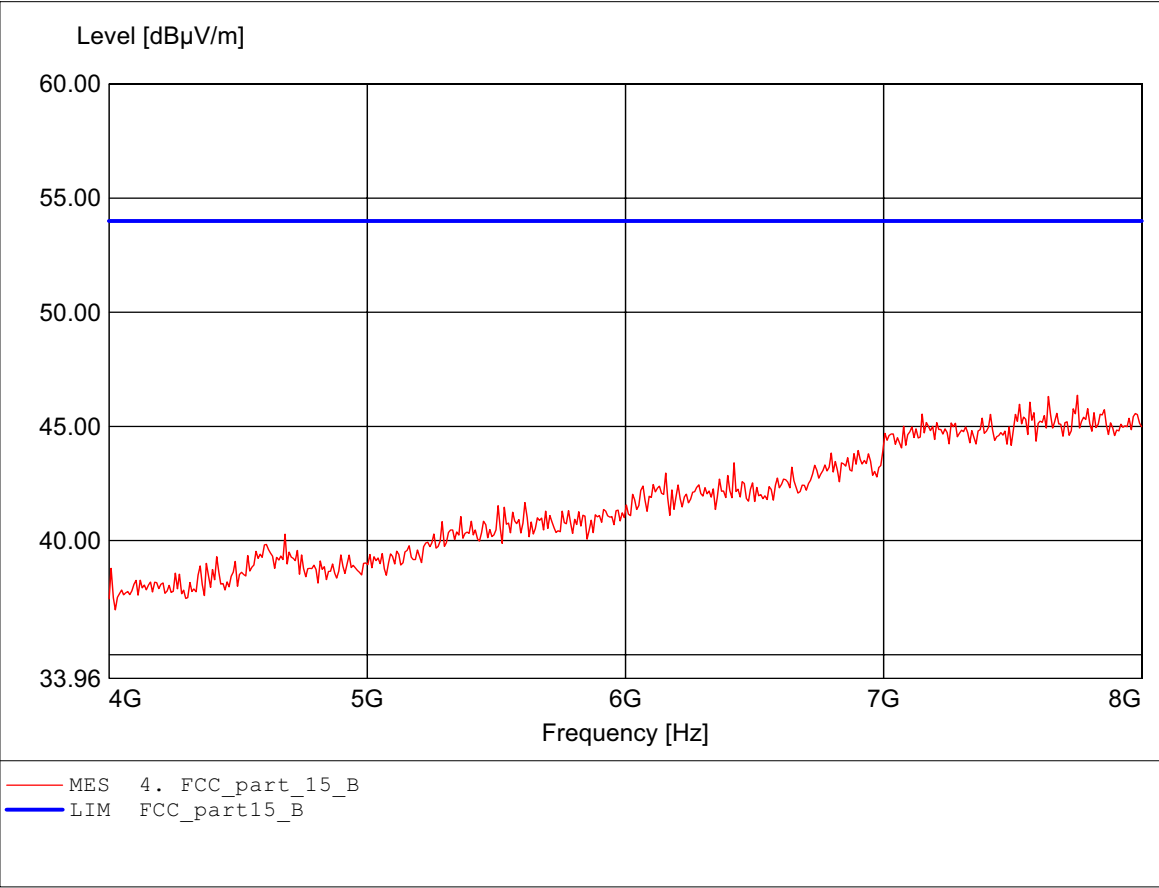

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:7.768GHz Emax:46.26dBμV/m RBW: 1 MHz

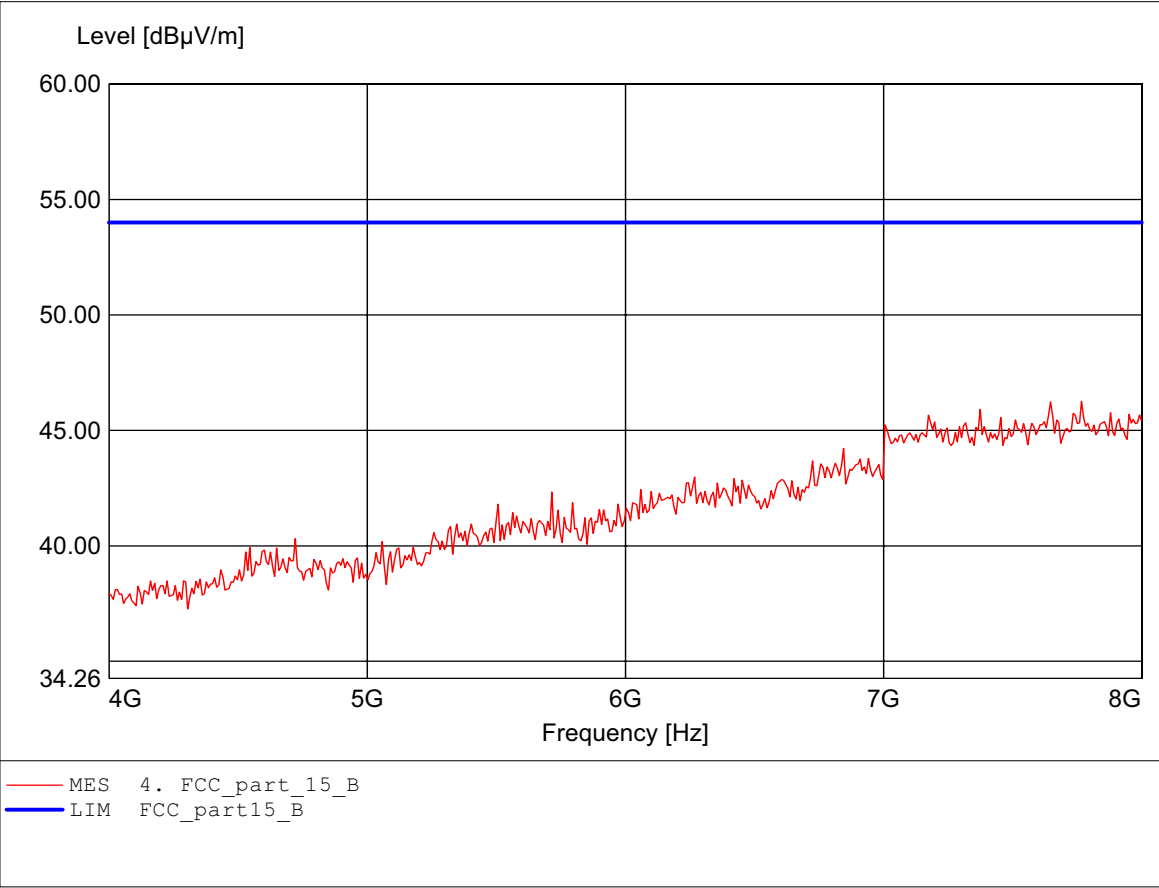

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:11.599GHz Emax:52.69dBμV/m RBW: 1 MHz

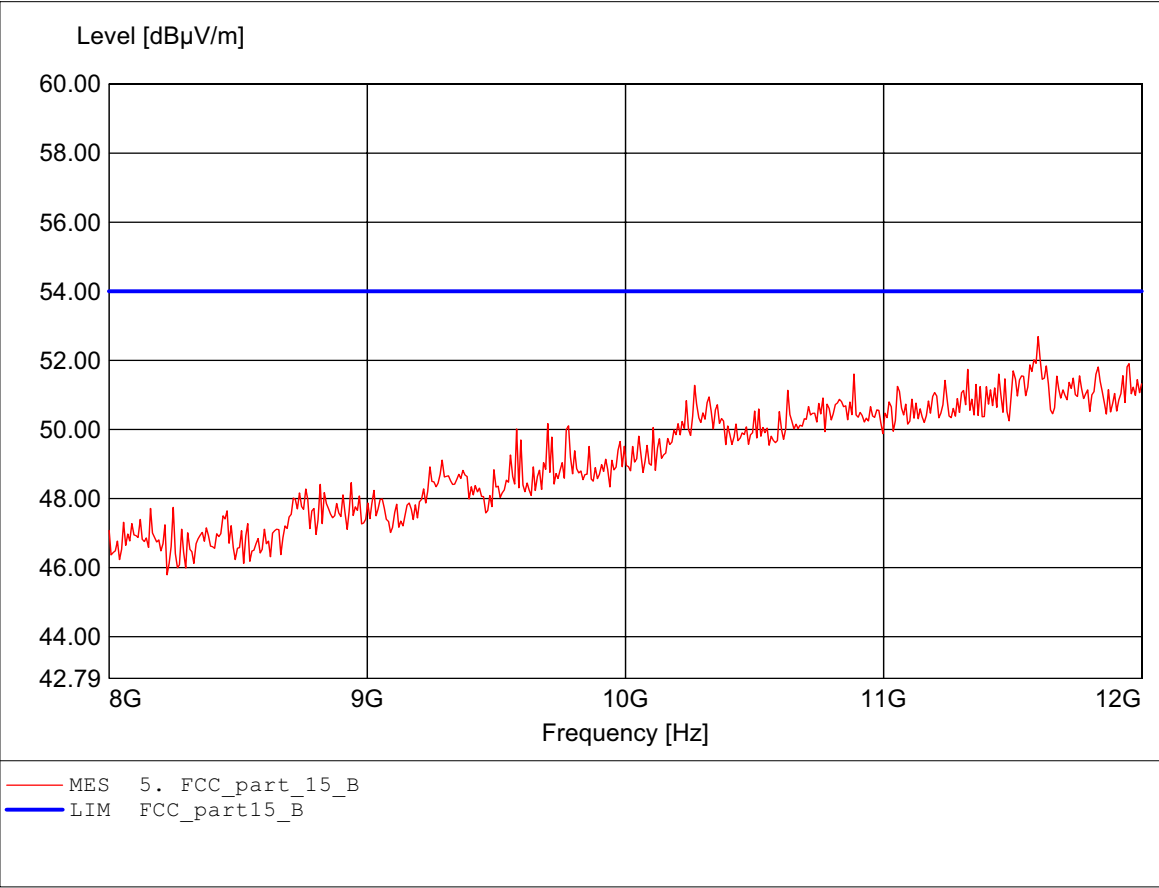

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:11.816GHz Emax:52.07 dBµV/m RBW: 1 MHz

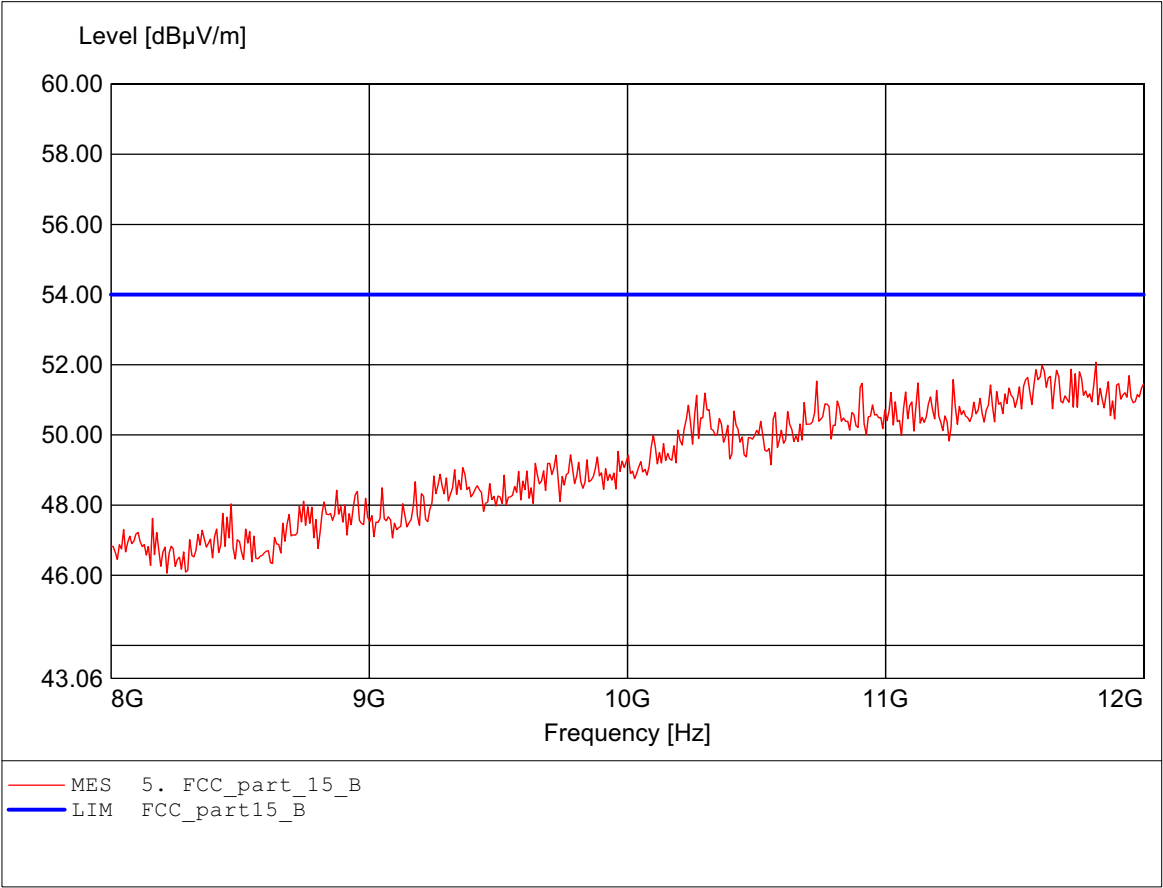

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:17.772GHz Emax:53.14dBμV/m RBW: 1 MHz

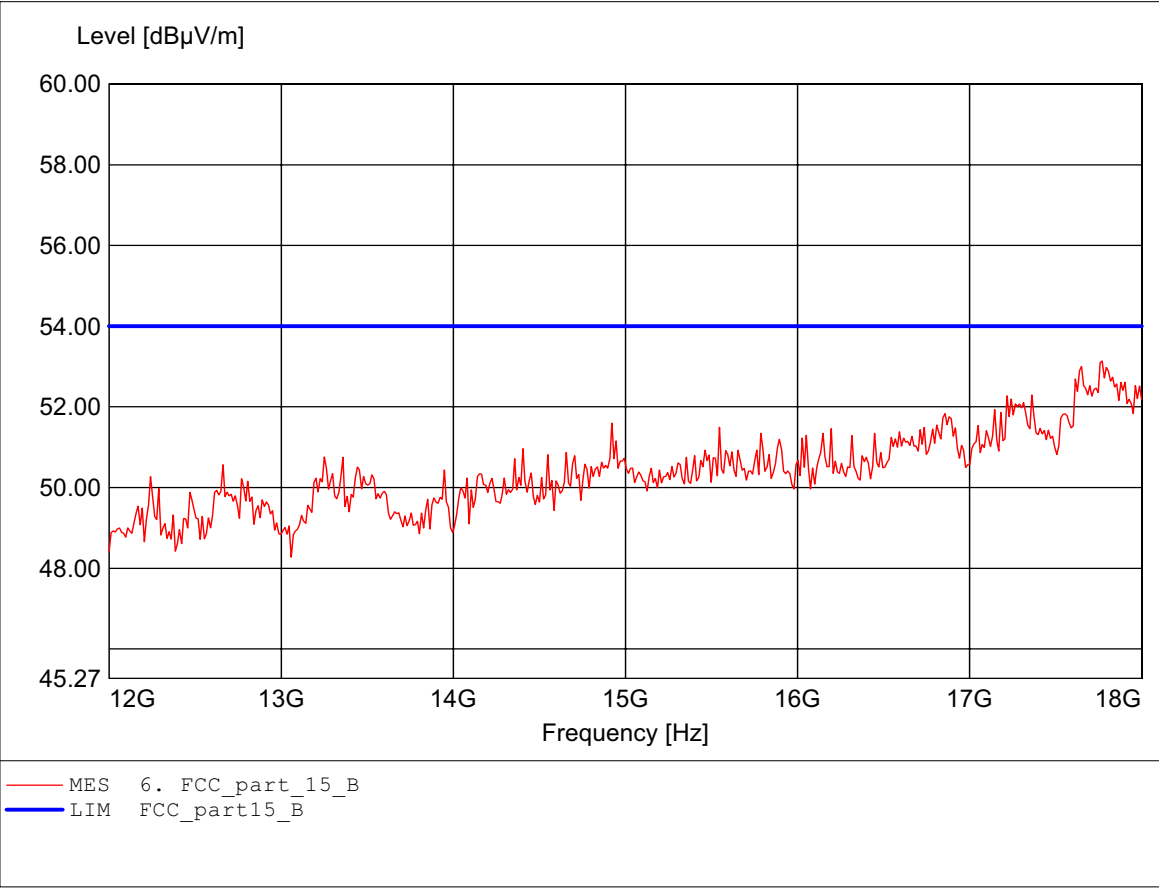

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B

EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:17.808GHz Emax:52.96dBμV/m RBW: 1 MHz

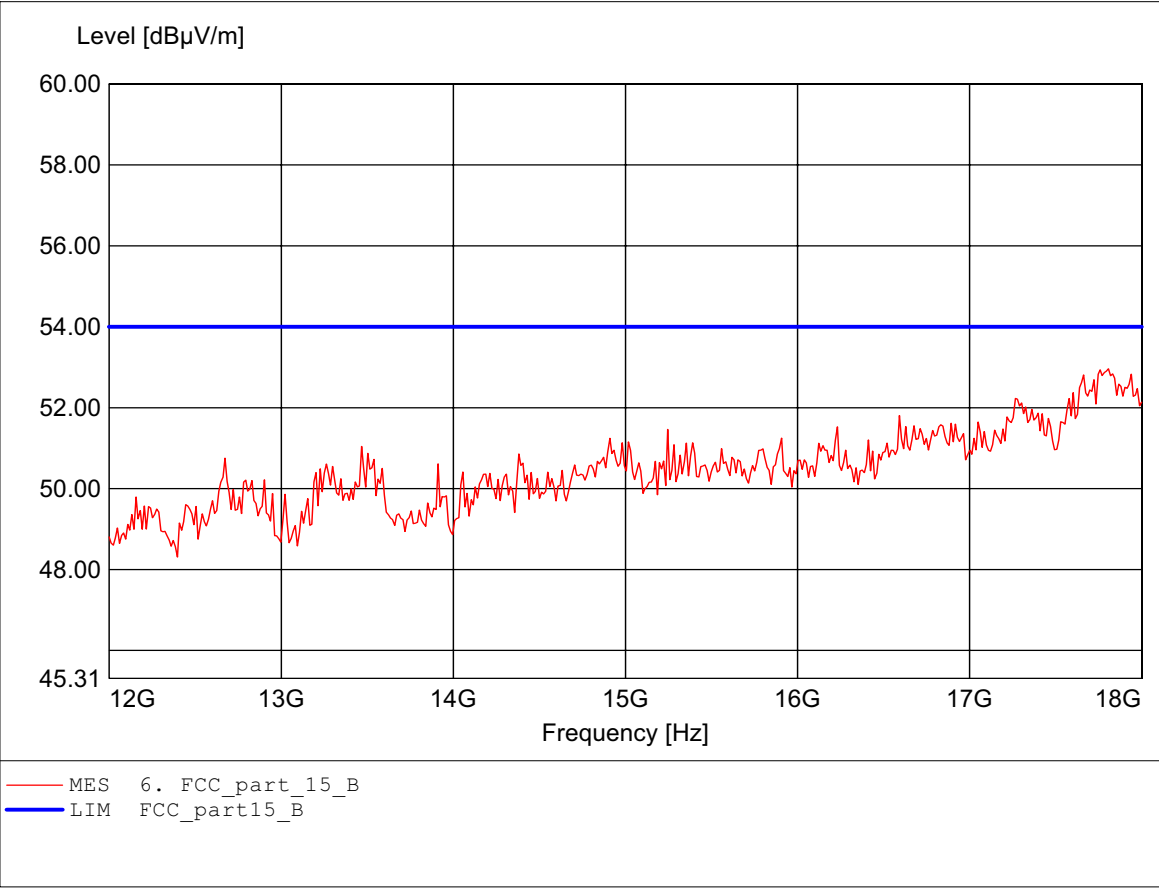




Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.  
Freq:26.432GHz Emax:48.02dBμV/m RBW: 1 MHz

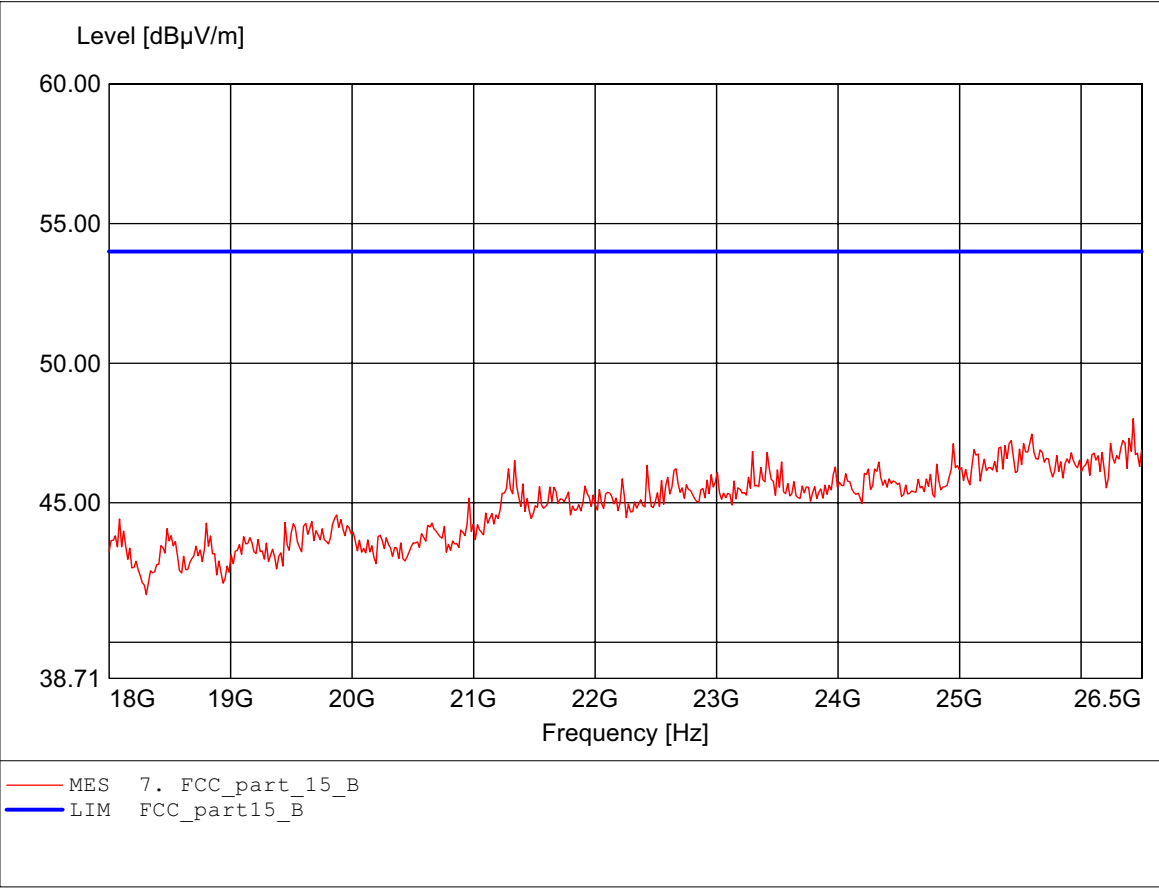

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH36  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.  
Freq:25.342GHz Emax:47.83dBμV/m RBW: 1 MHz

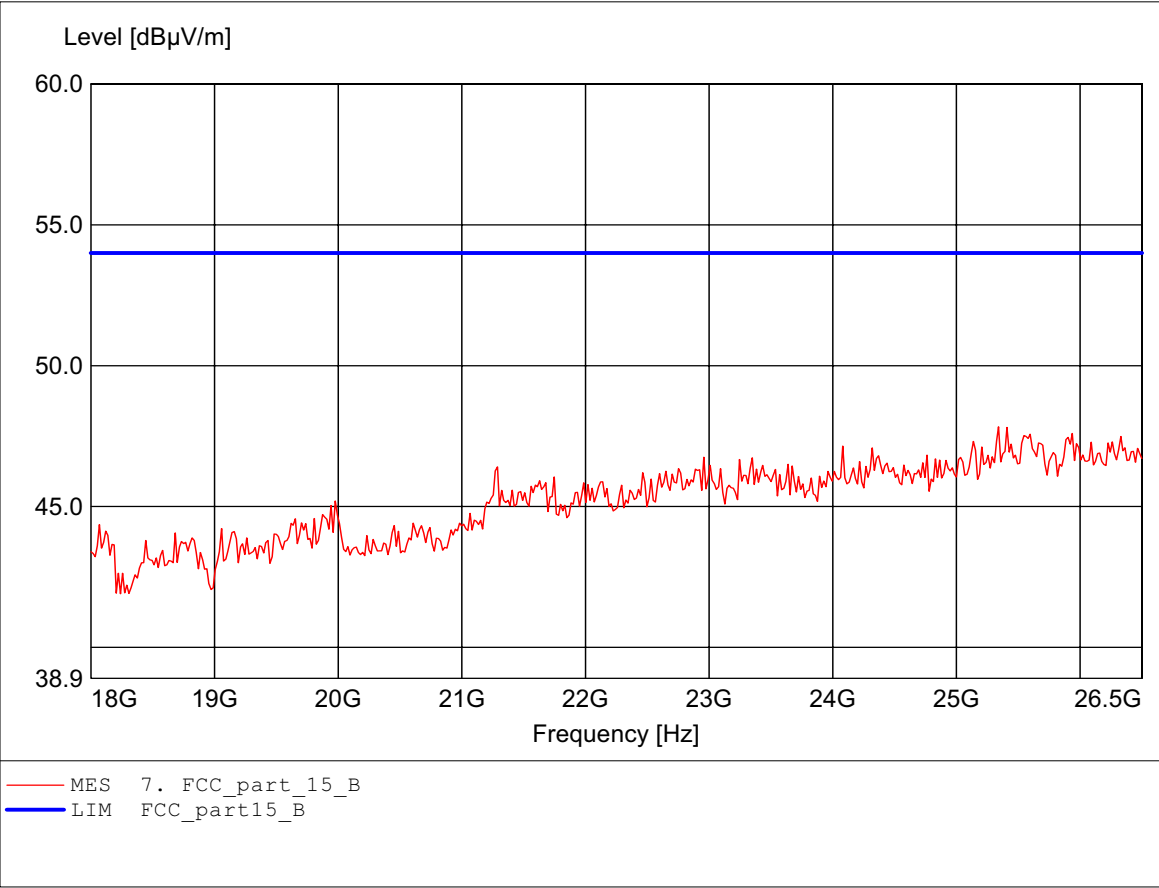

## Field Strength under normal conditions

### FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq:49.760MHz Emax:33.80dBμV/m RBW: 100 kHz

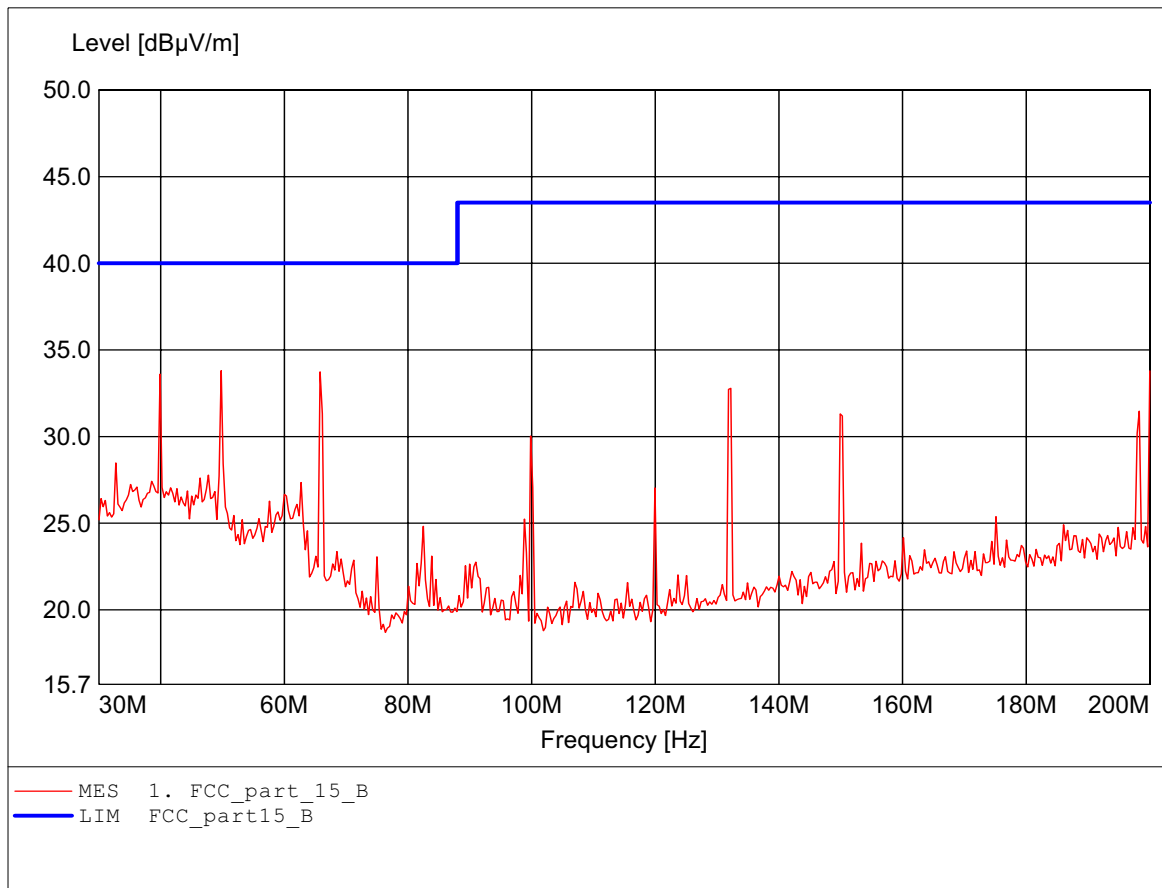

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq:200.000MHz Emax:35.32dBμV/m RBW: 100 kHz

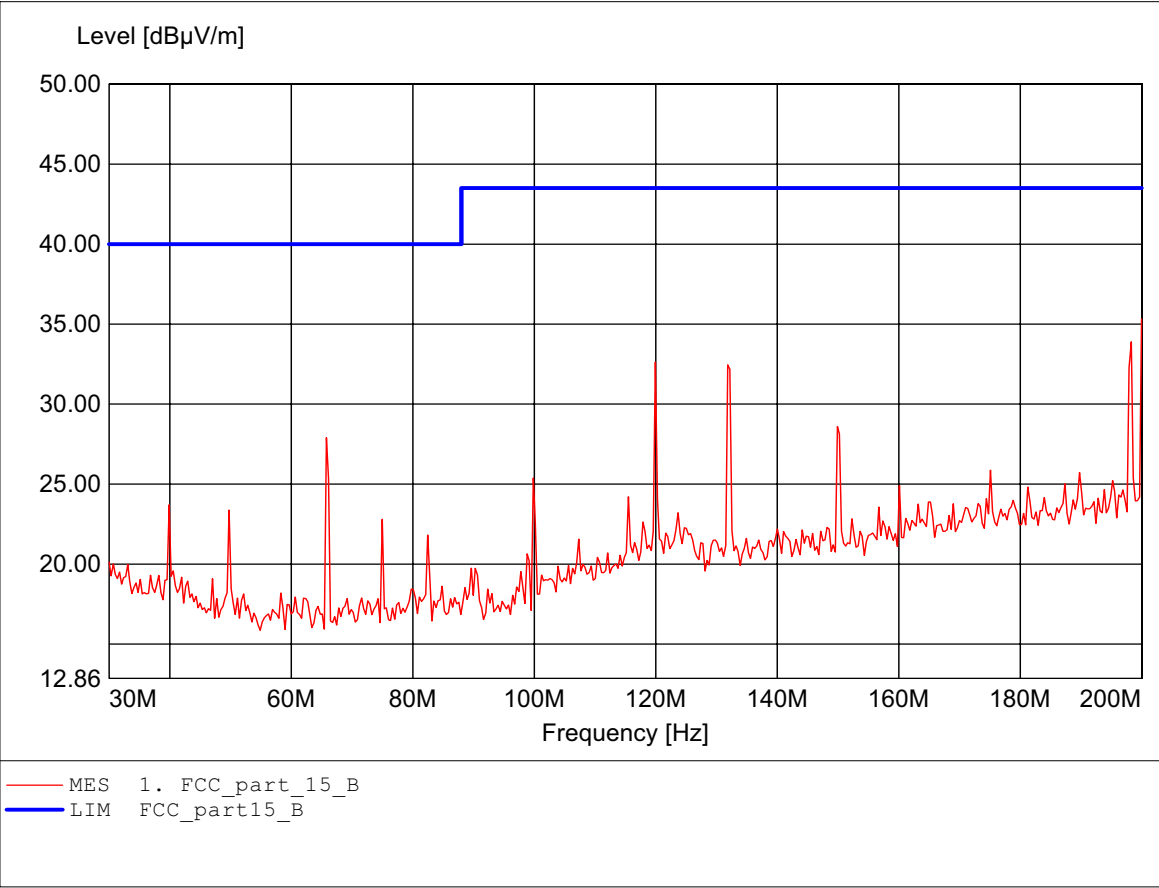

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Freq:725.852MHz Emax:39.96dBμV/m RBW: 100 kHz

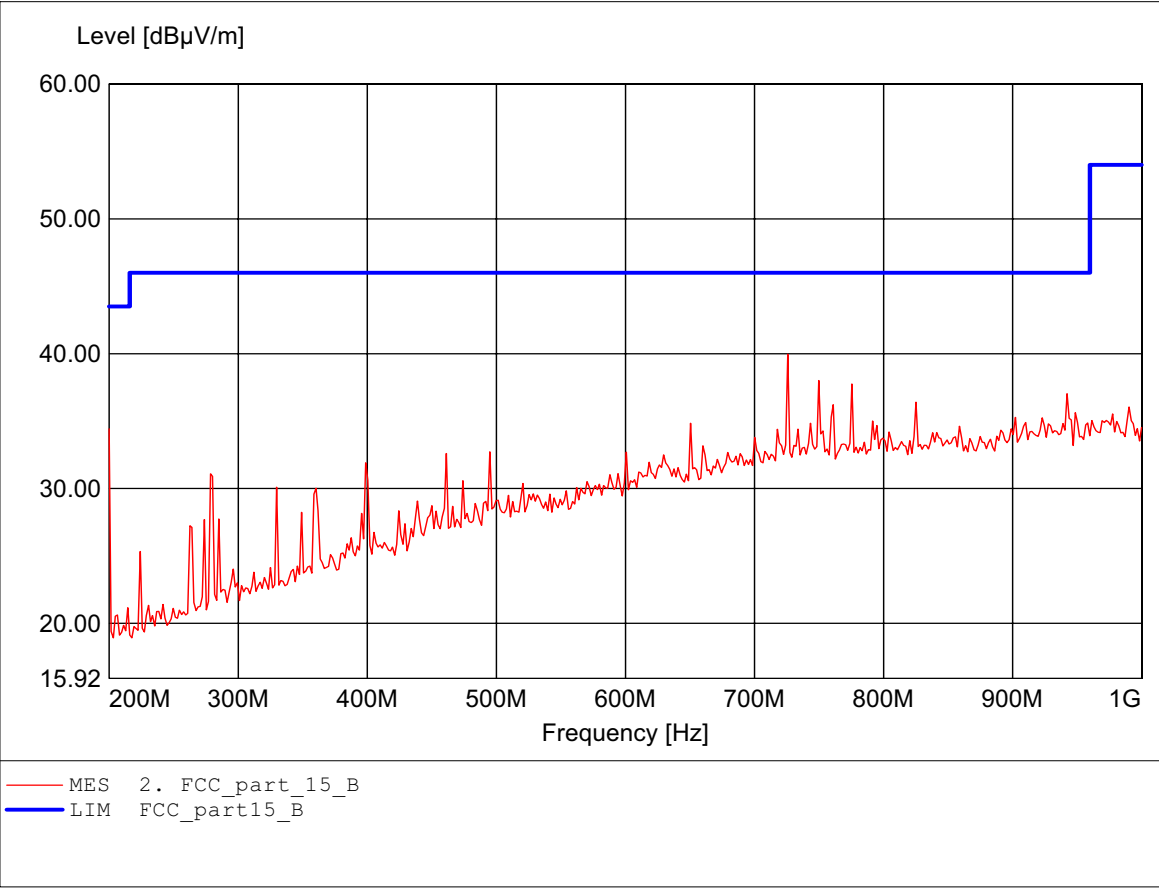

## Field Strength under normal conditions

### FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Freq:725.852MHz Emax:44.38dBμV/m RBW: 100 kHz

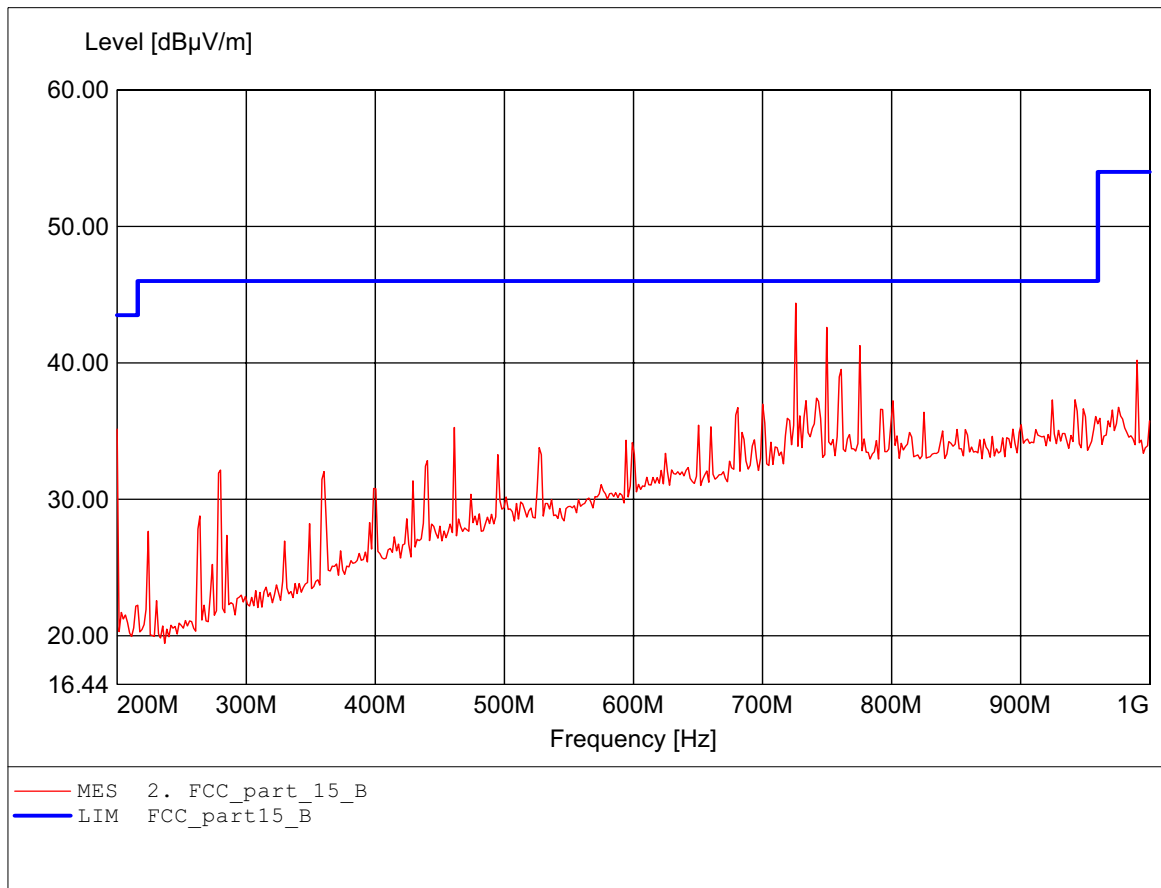

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:1.319GHz Emax:42.11dBμV/m RBW: 1 MHz

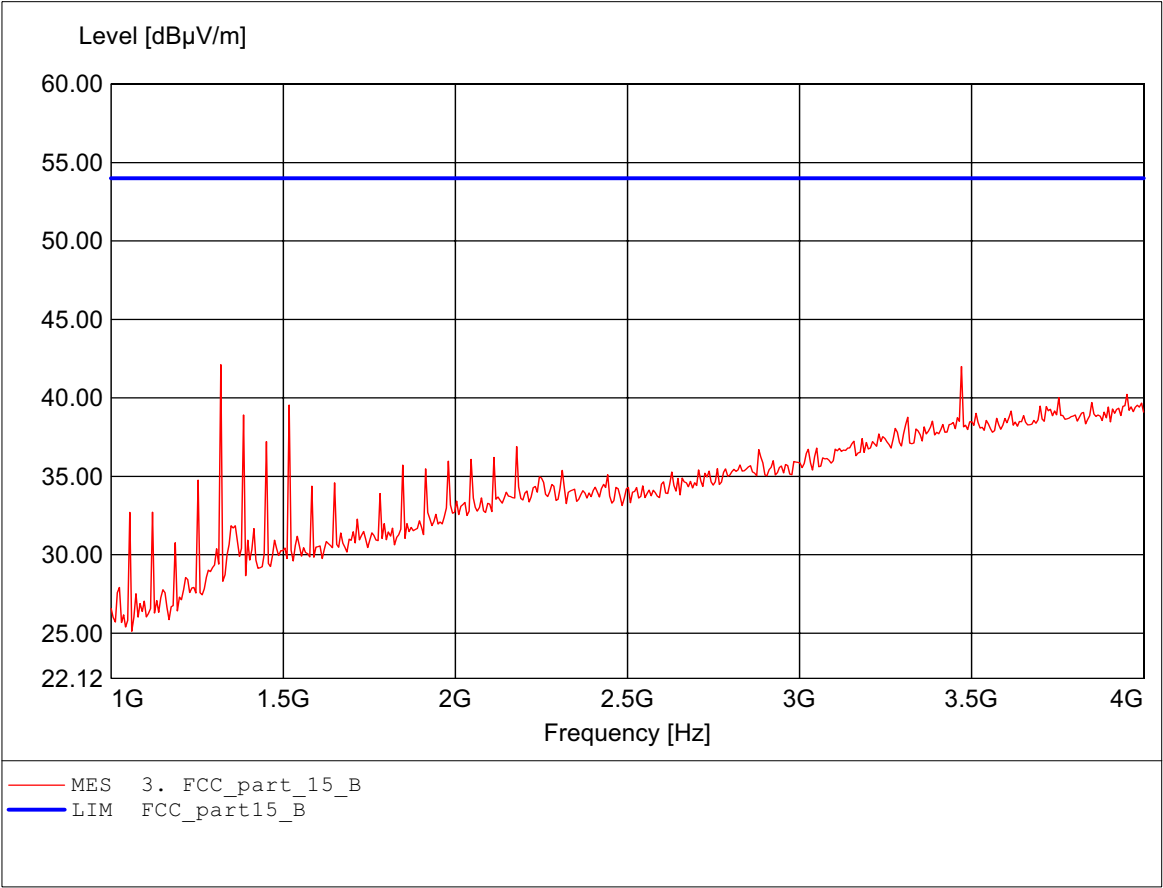

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B

EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:3.982GHz Emax:40.02dBμV/m RBW: 1 MHz

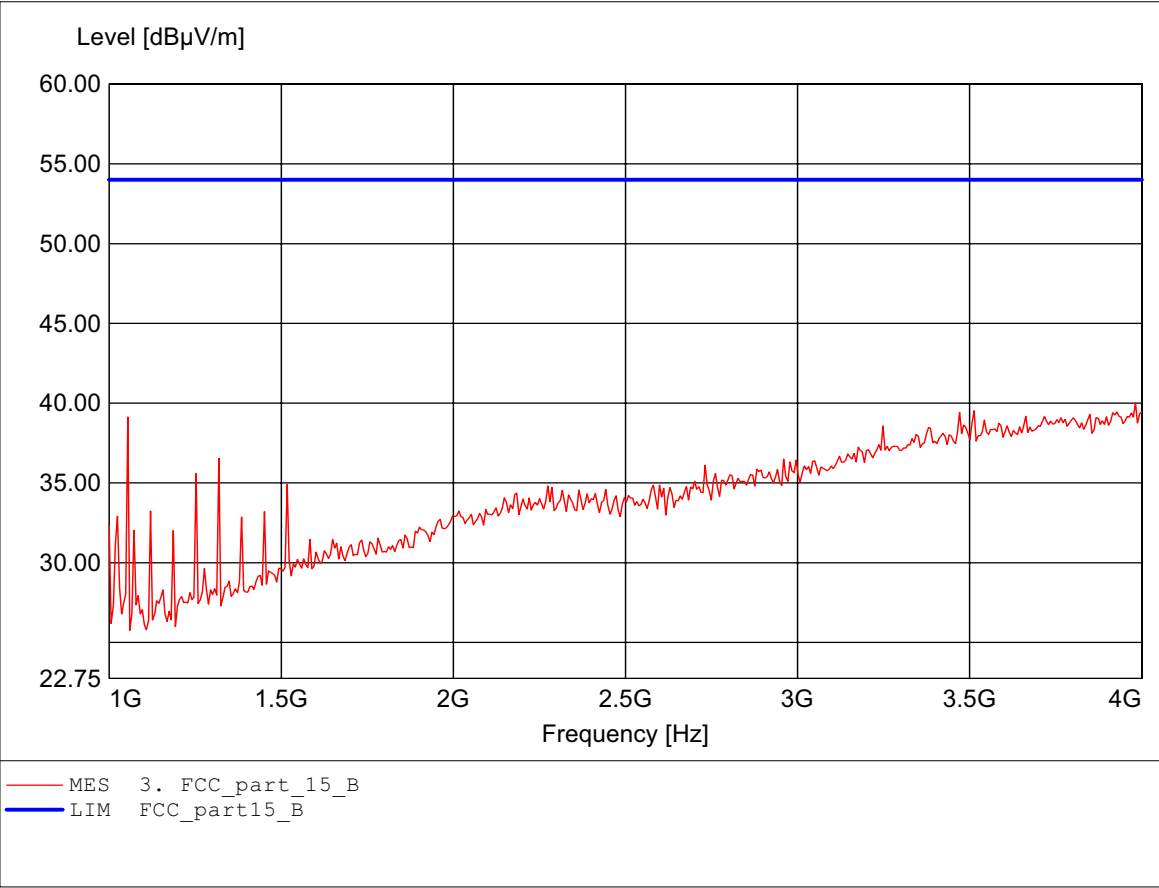




Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:7.776GHz Emax:46.89dBμV/m RBW: 1 MHz

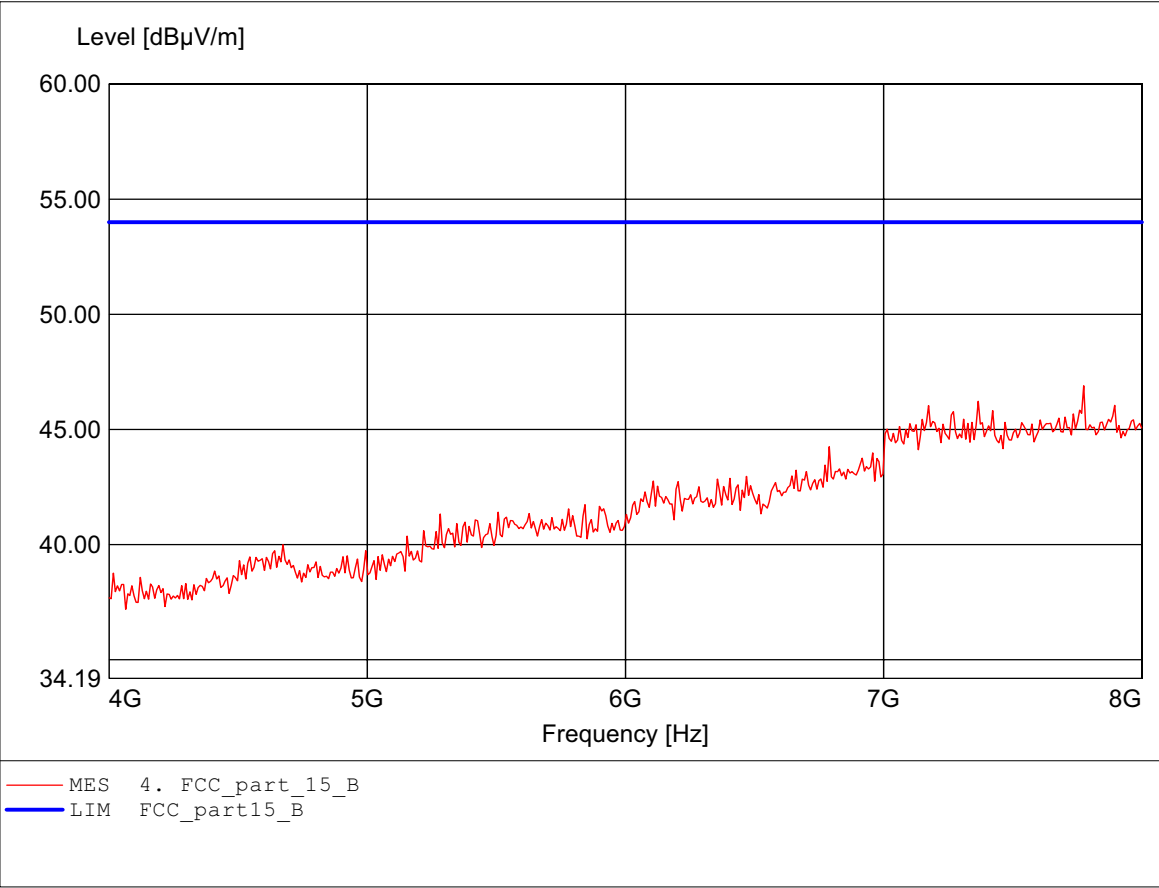

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:7.535GHz Emax:46.12dBμV/m RBW: 1 MHz

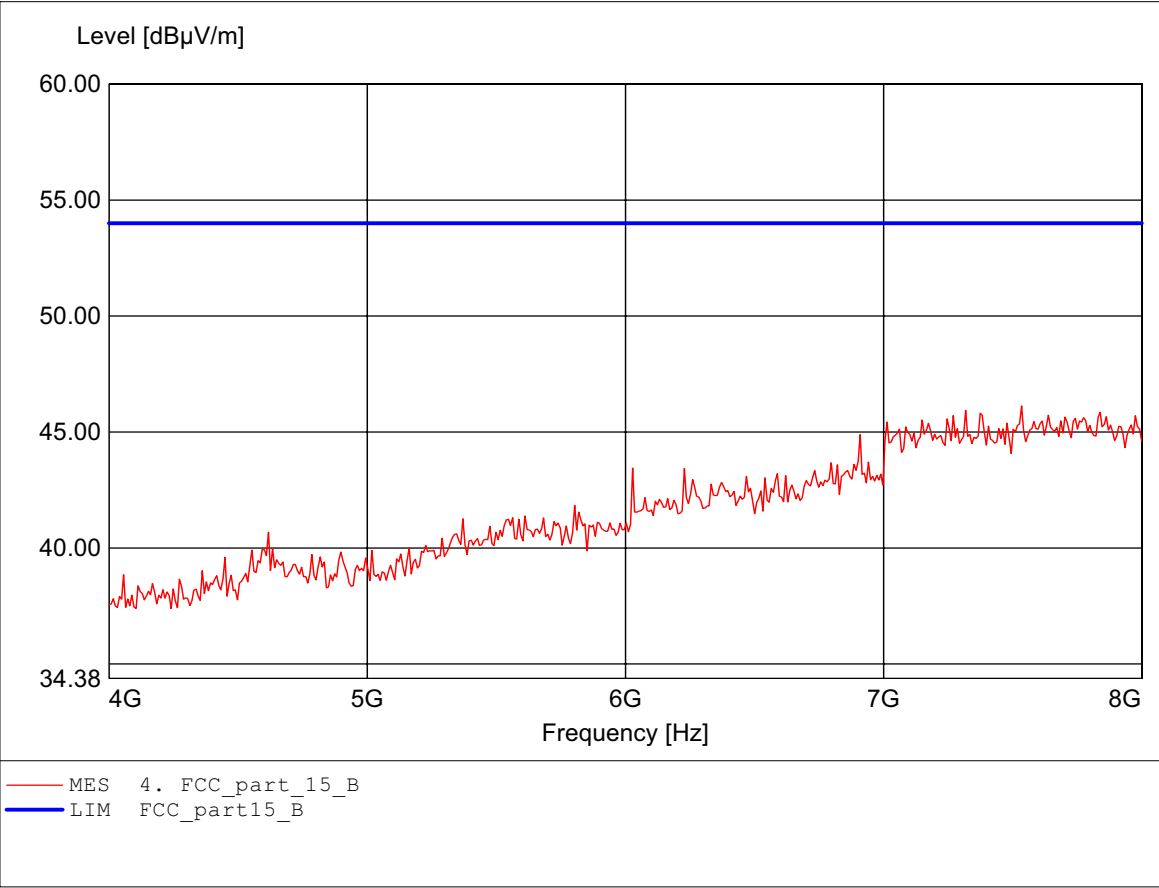

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:11.872GHz Emax:52.16dBμV/m RBW: 1 MHz

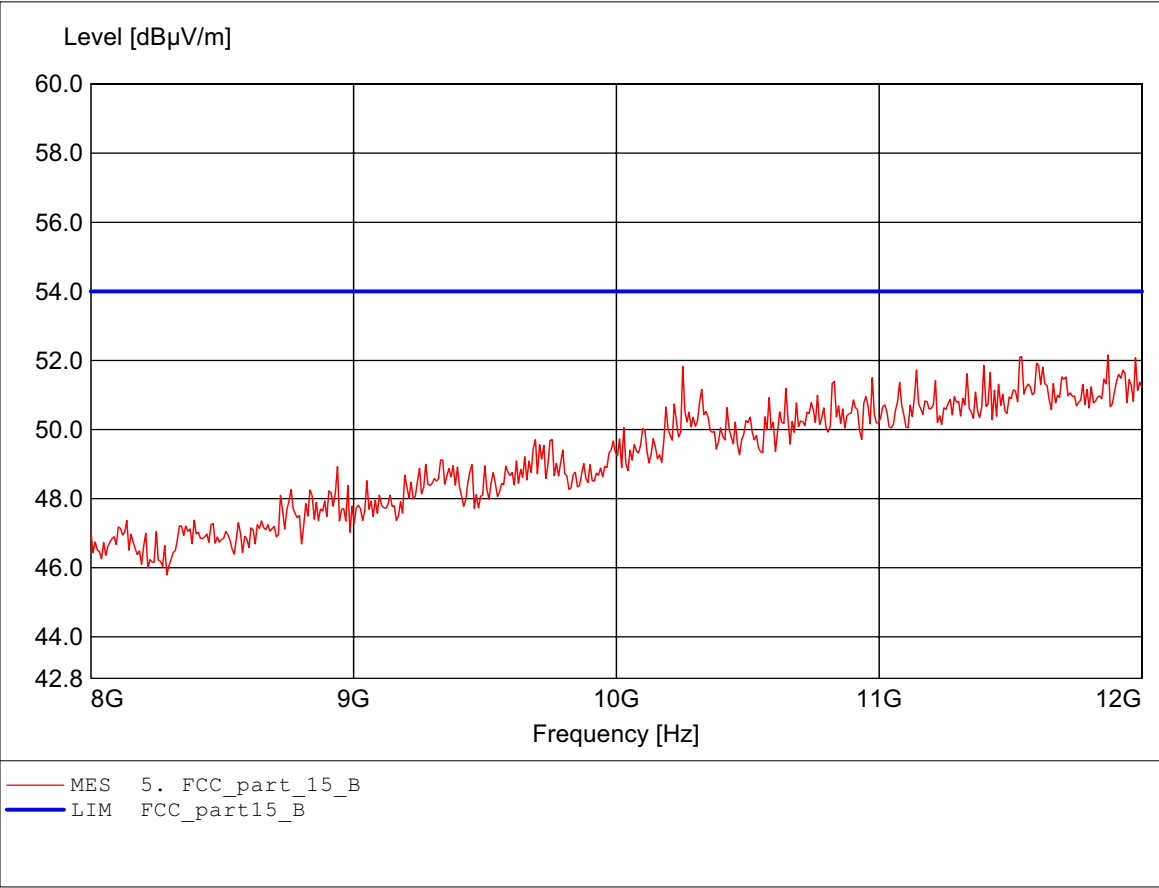

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:11.551GHz Emax:52.53dBμV/m RBW: 1 MHz

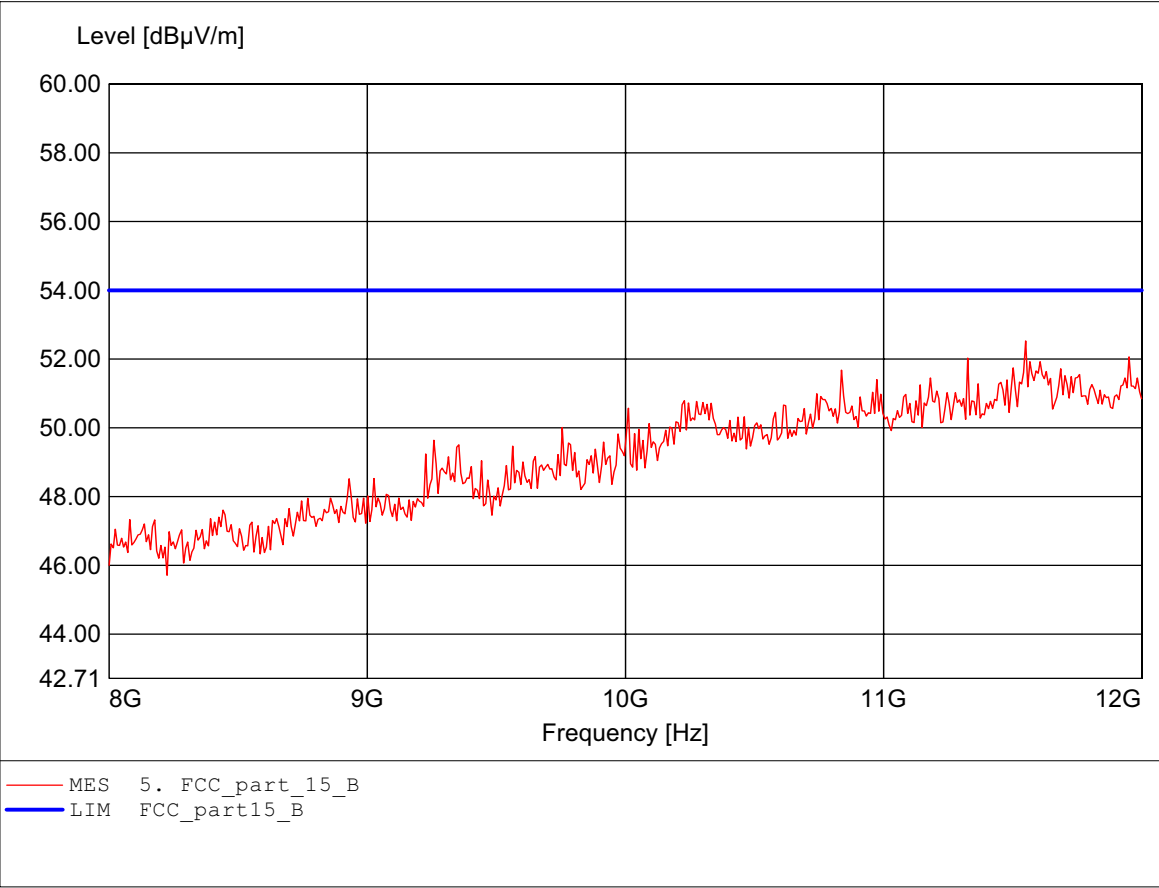

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:17.760GHz Emax:53.10dBμV/m RBW: 1 MHz

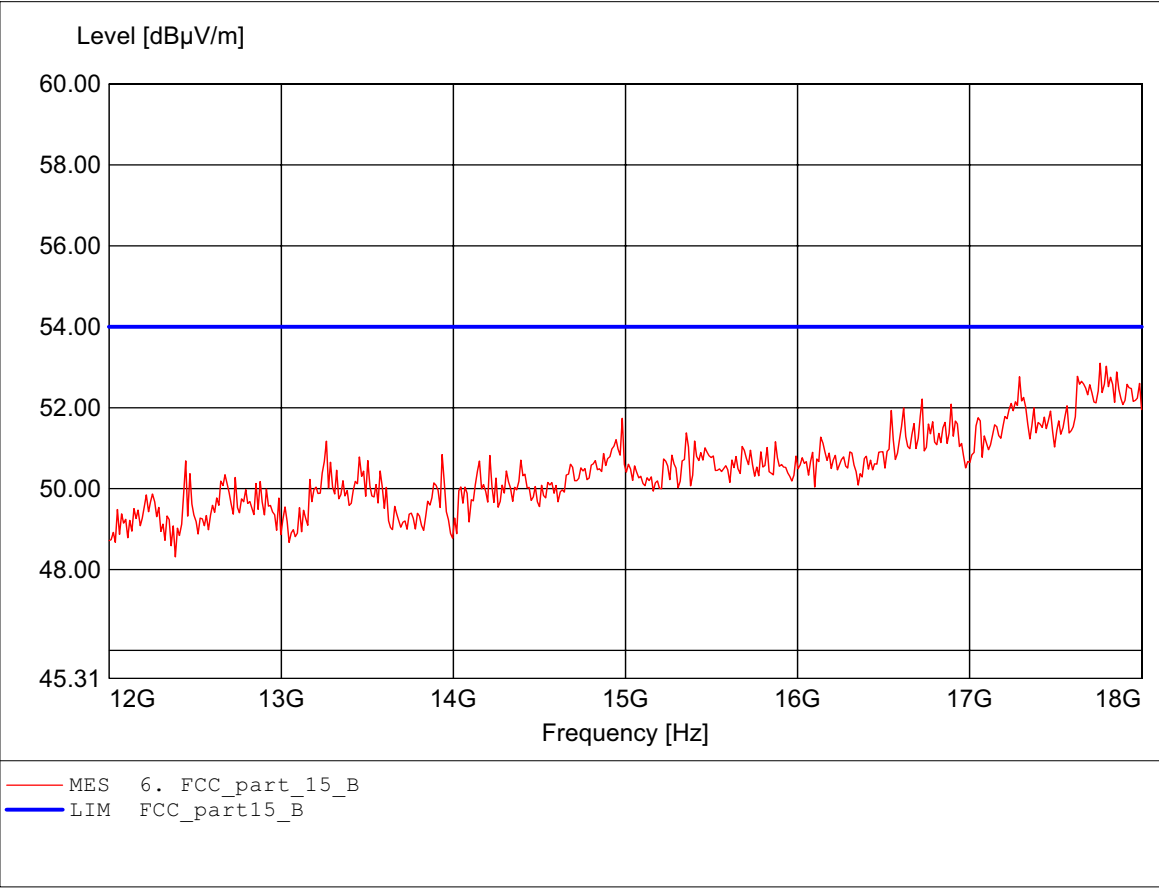

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:17.663GHz Emax:53.43dBμV/m RBW: 1 MHz

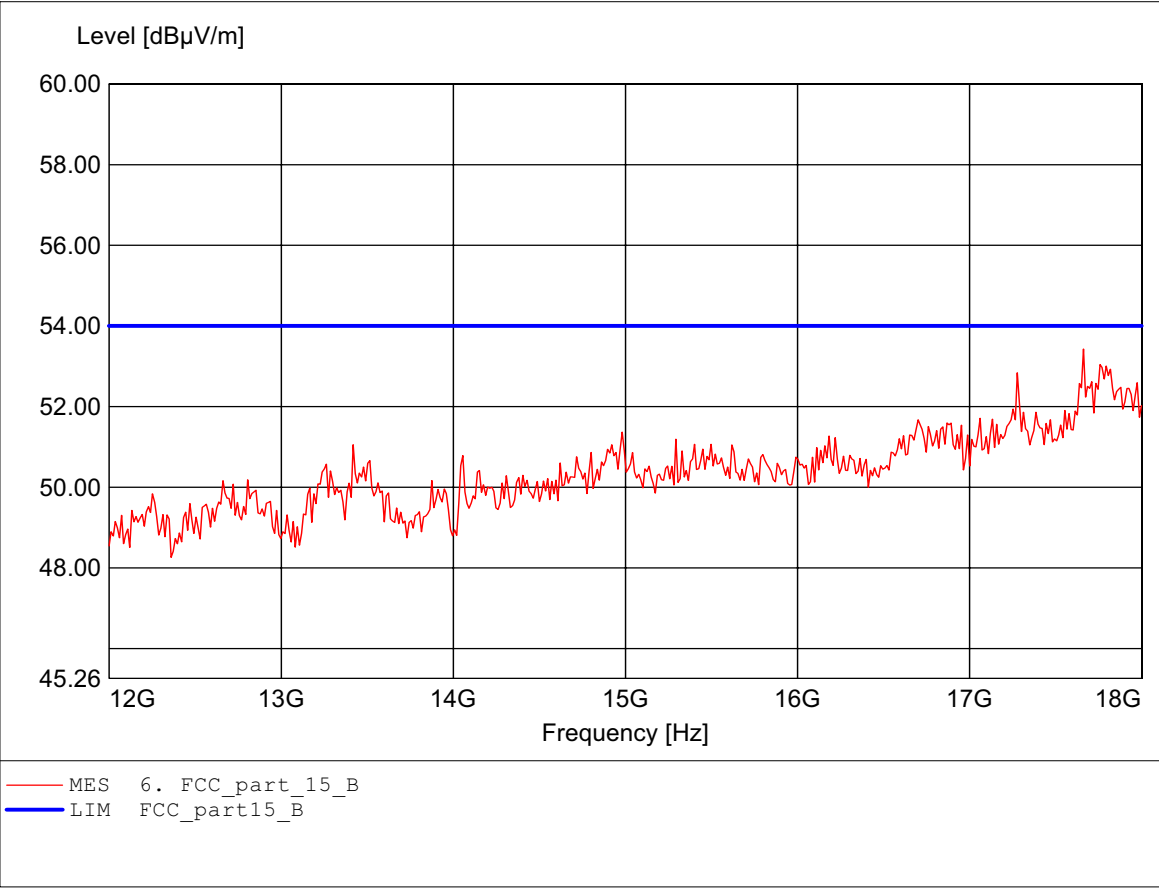

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.  
Freq:25.580GHz Emax:47.74dBμV/m RBW: 1 MHz

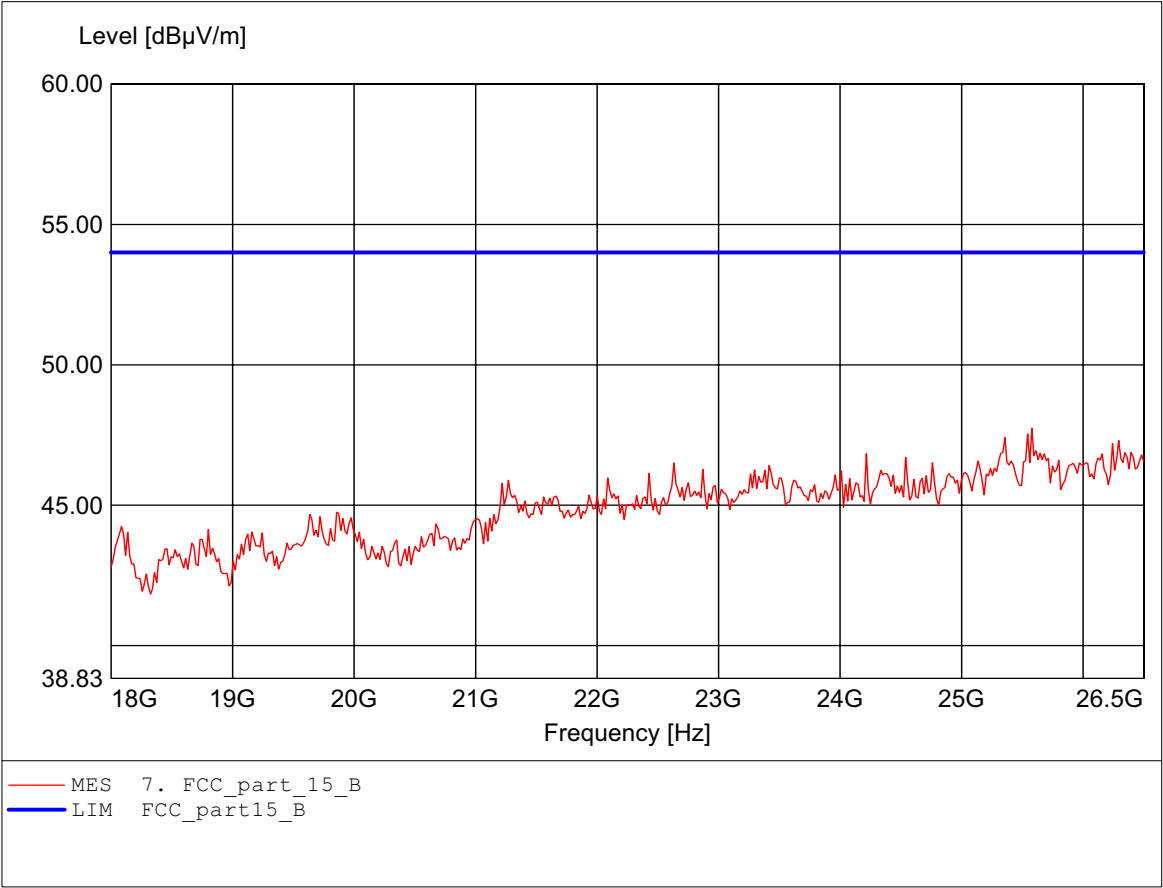

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B

EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH40  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.  
Freq:26.091GHz Emax:47.98dBμV/m RBW: 1 MHz

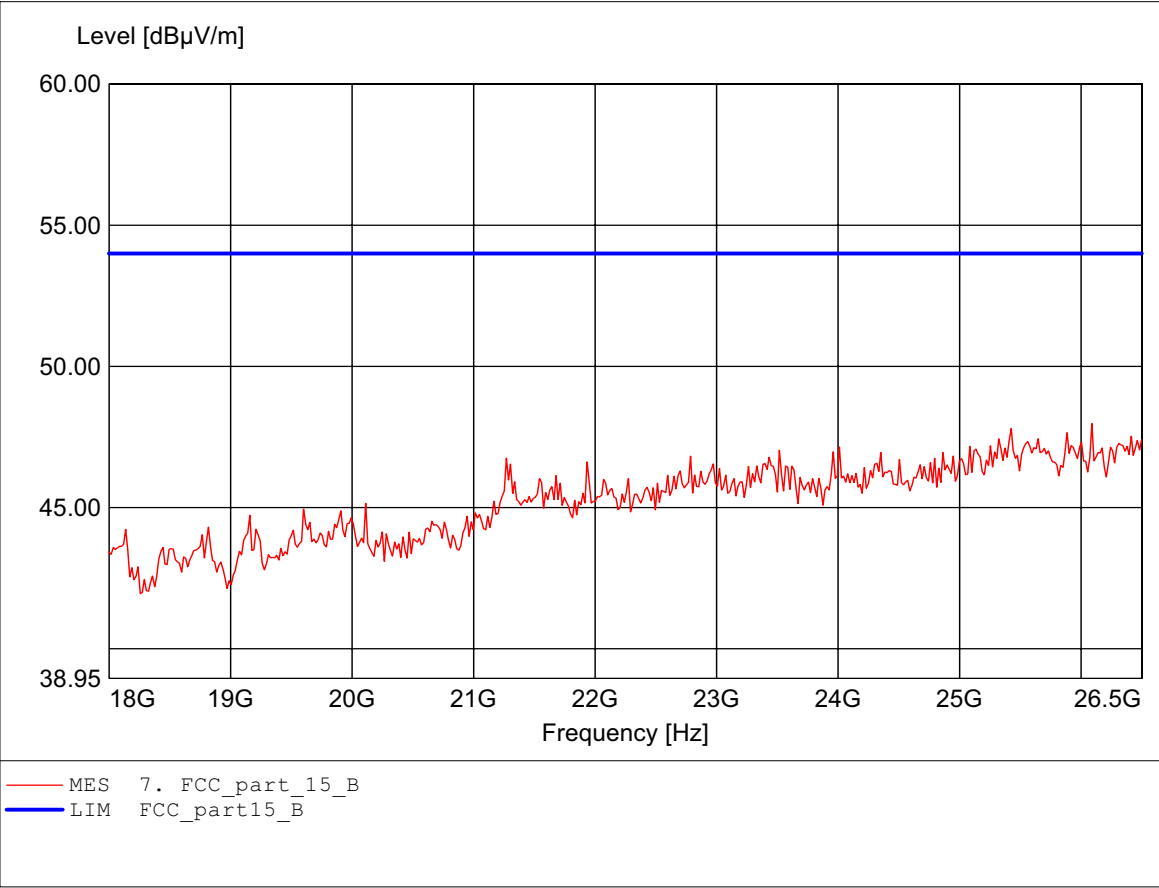




Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq:65.772MHz Emax:33.99dBμV/m RBW: 100 kHz

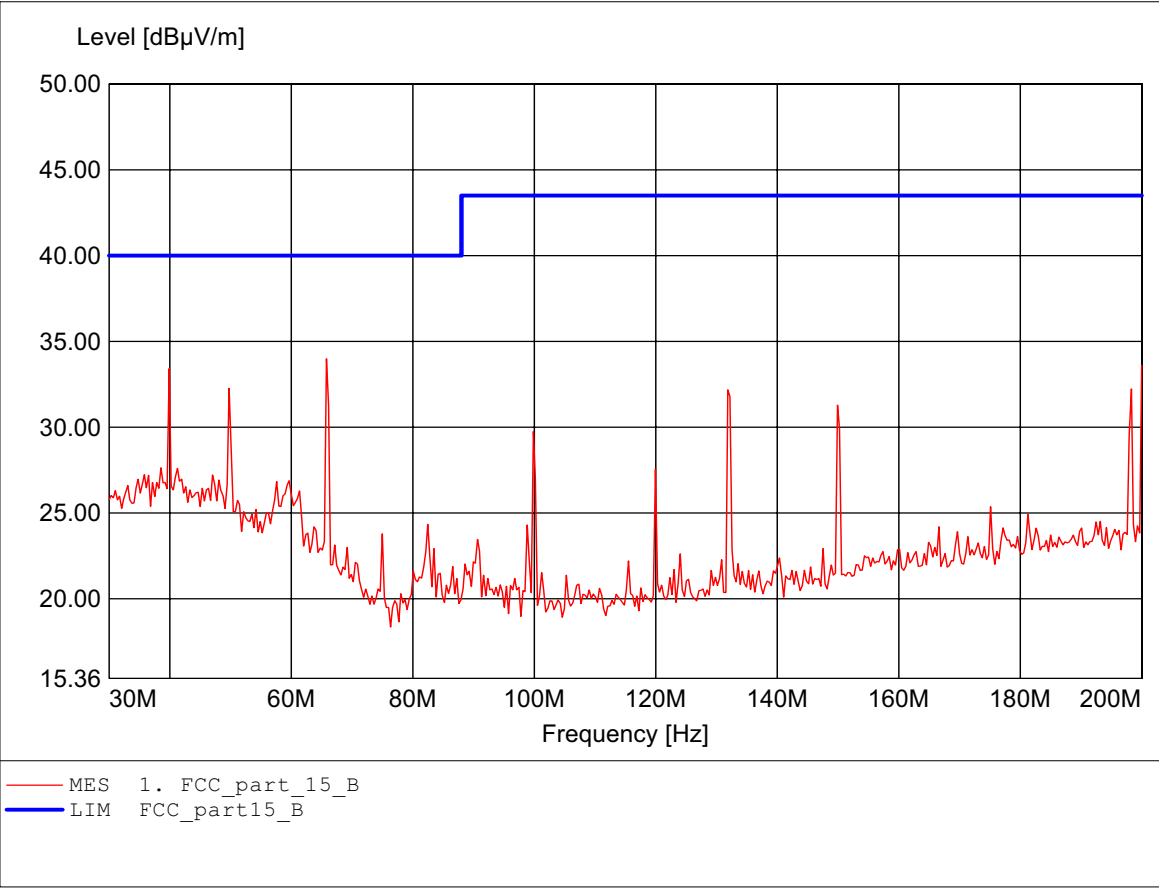

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq:200.000MHz Emax:34.61dBµV/m RBW: 100 kHz

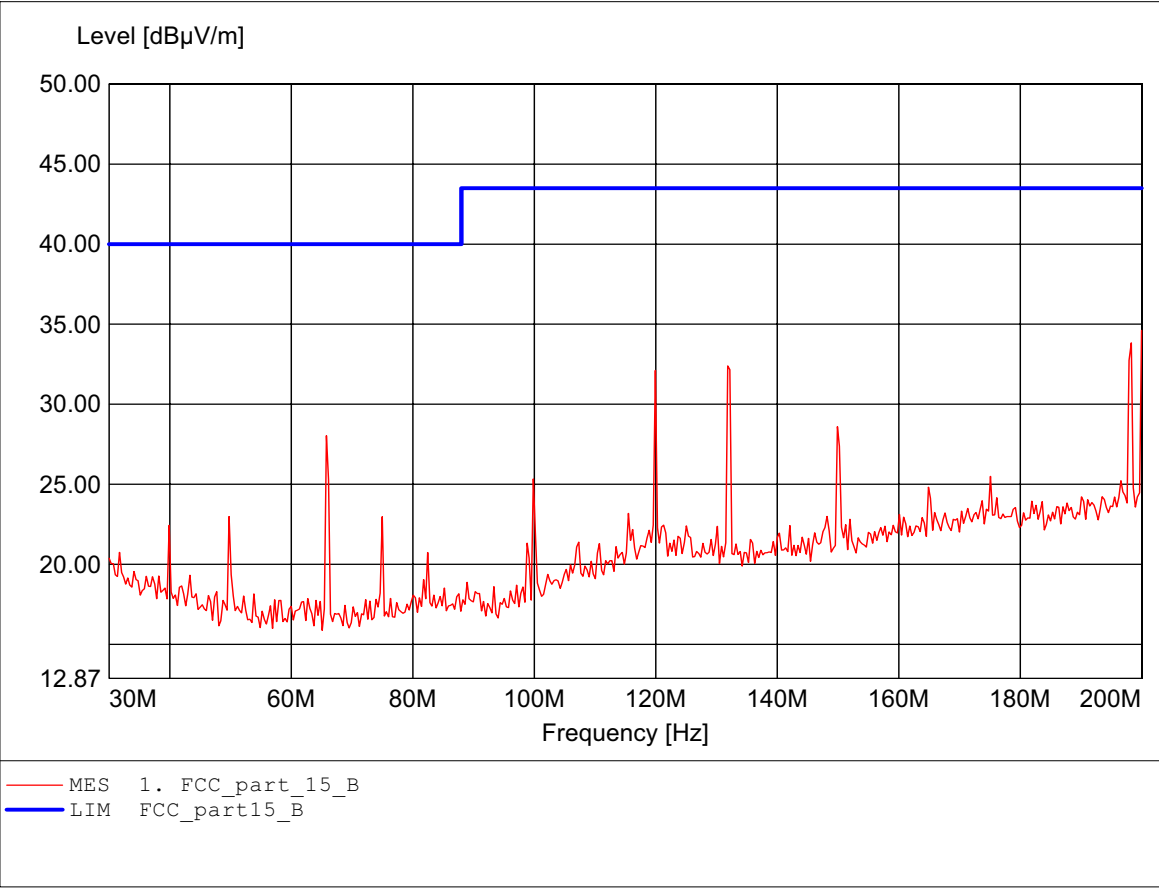

## Field Strength under normal conditions

### FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Freq:725.852MHz Emax:39.49dBμV/m RBW: 100 kHz

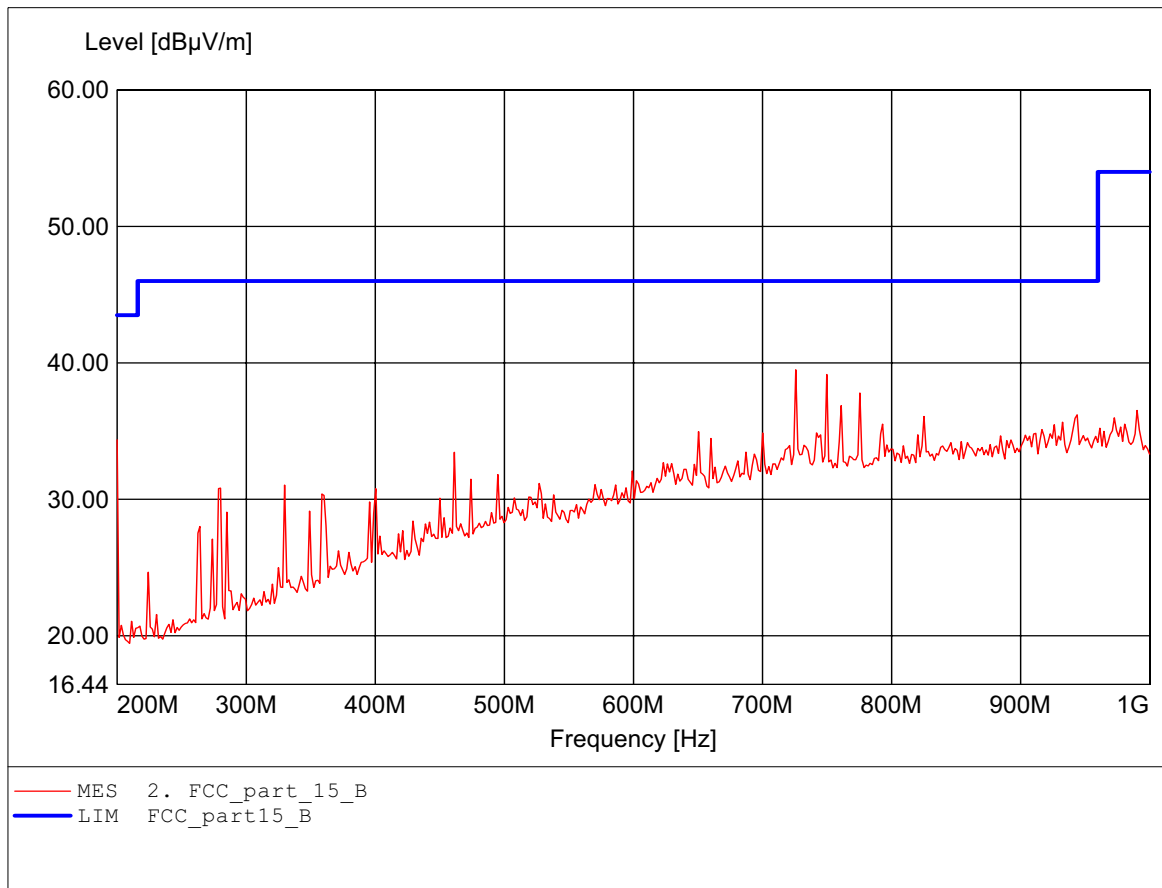

## Field Strength under normal conditions

### FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Freq:725.852MHz Emax:44.41dBμV/m RBW: 100 kHz

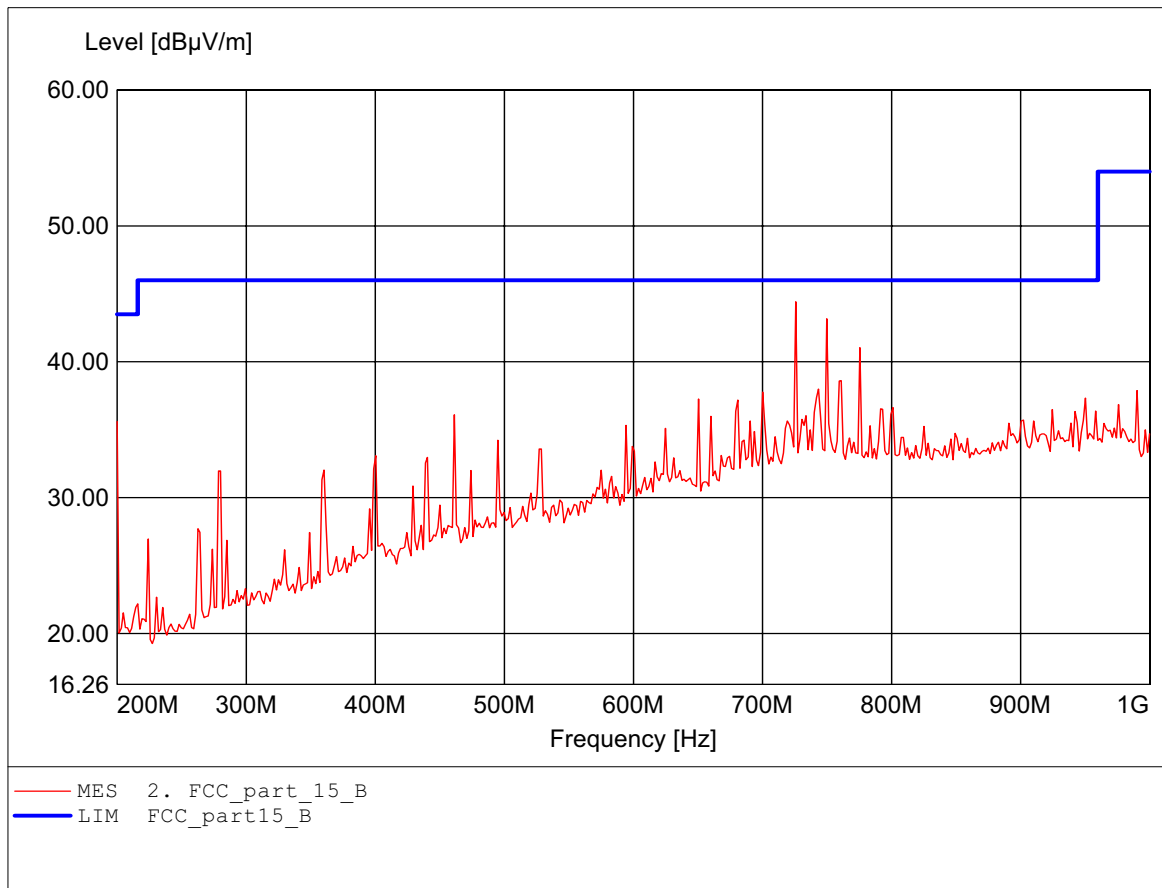

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:3.495GHz Emax:41.49dBμV/m RBW: 1 MHz

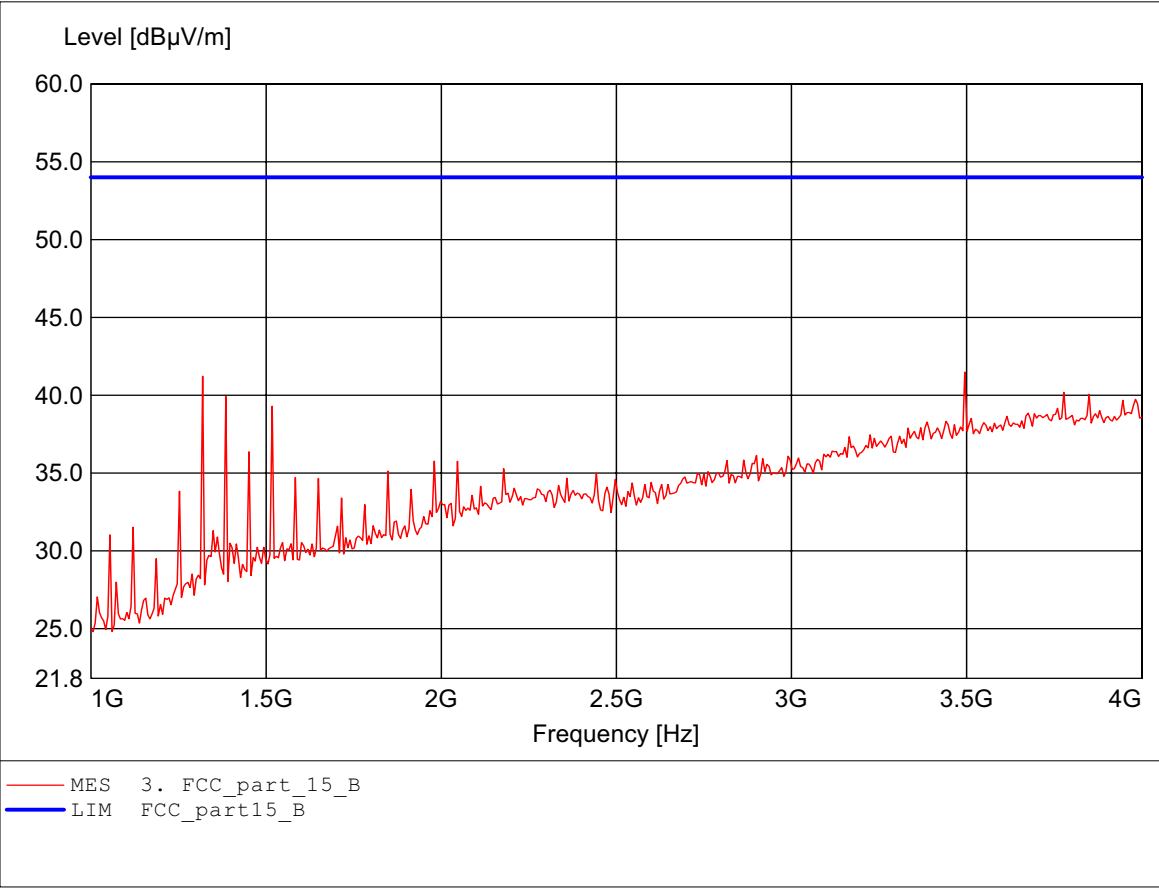

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:3.958GHz Emax:39.51dBμV/m RBW: 1 MHz

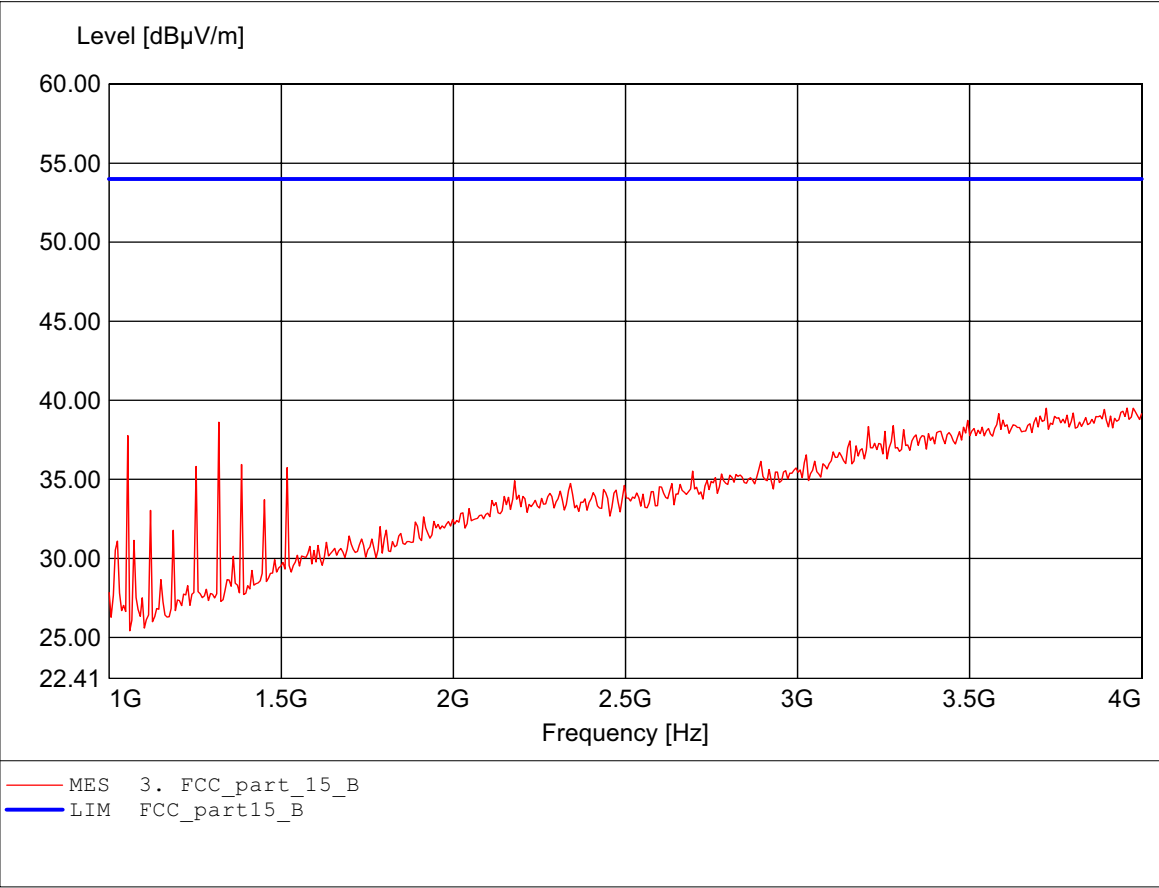

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:7.743GHz Emax:45.80dBμV/m RBW: 1 MHz

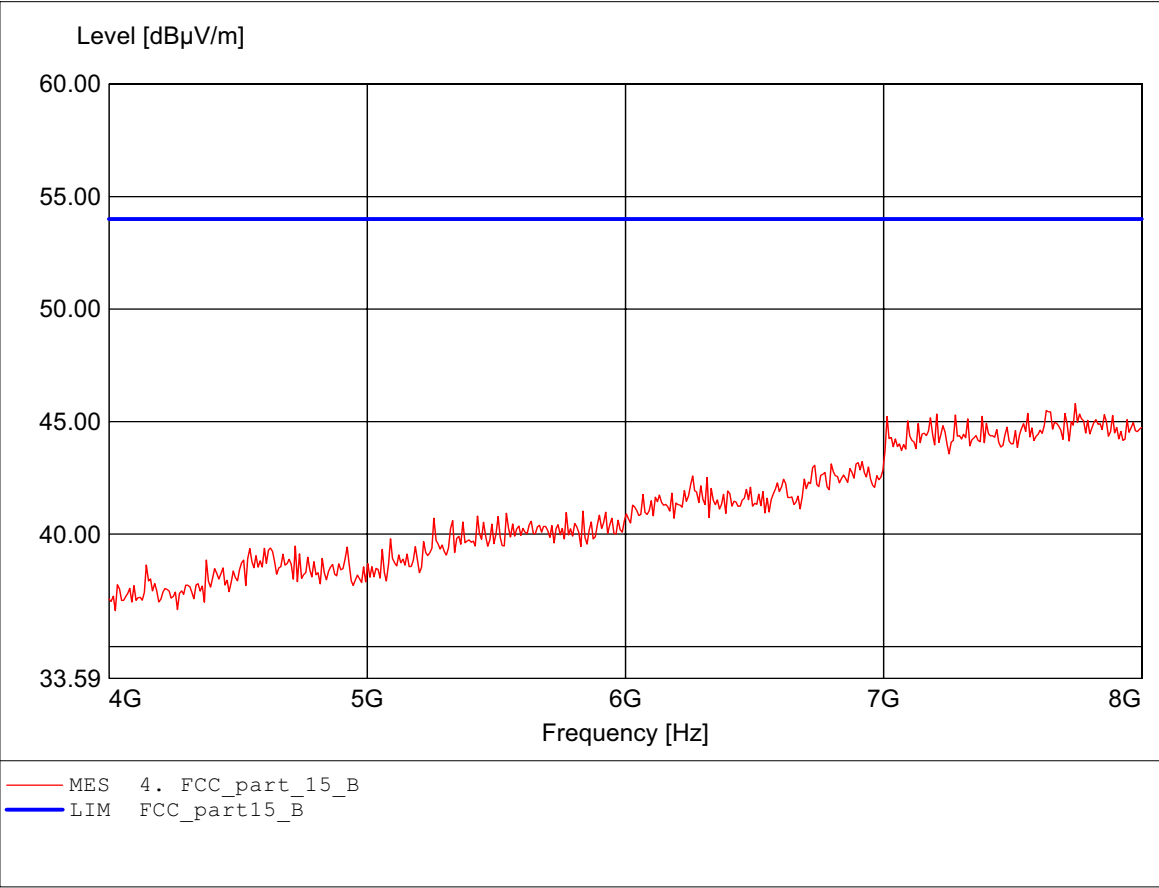

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B

EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:7.856GHz Emax:46.13dBμV/m RBW: 1 MHz

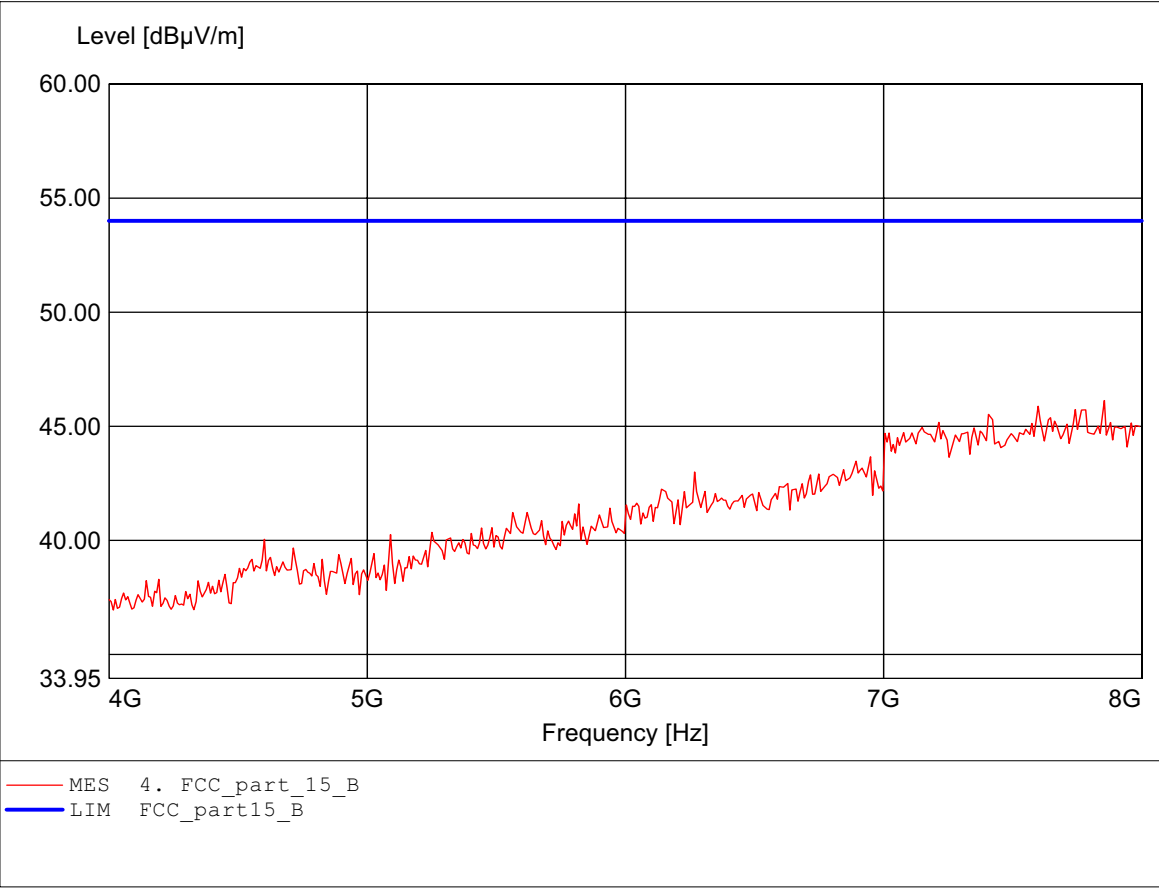




Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:11.671GHz Emax:51.97dBμV/m RBW: 1 MHz

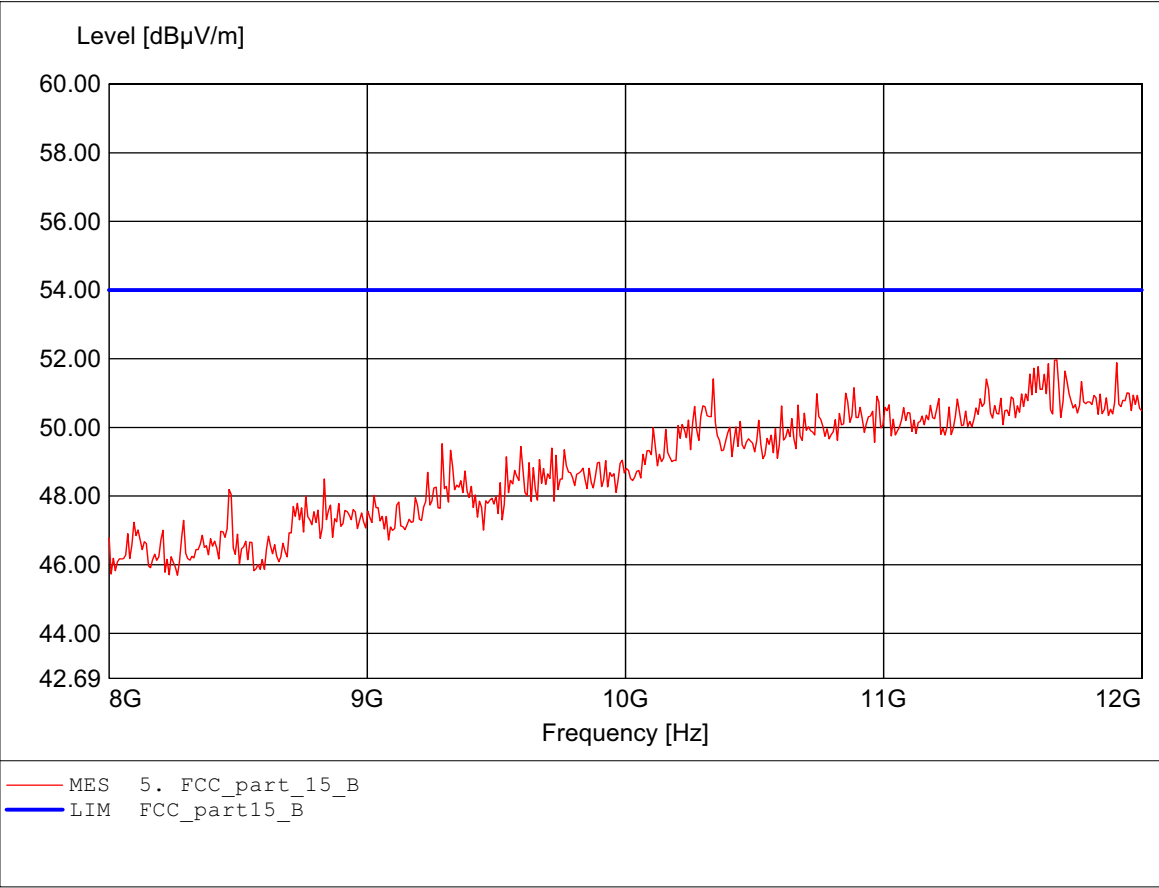

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:11.599GHz Emax:52.58dBμV/m RBW: 1 MHz

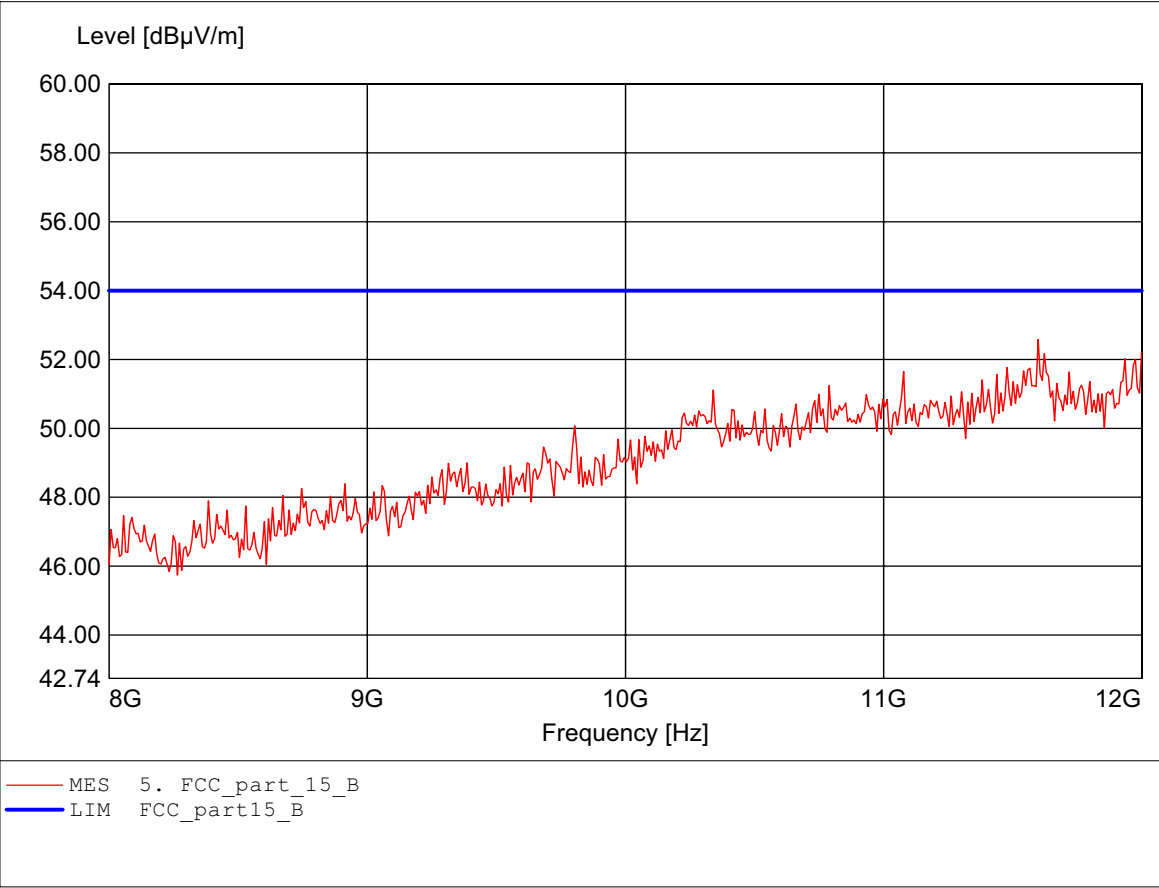

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:17.772GHz Emax:52.77dBμV/m RBW: 1 MHz

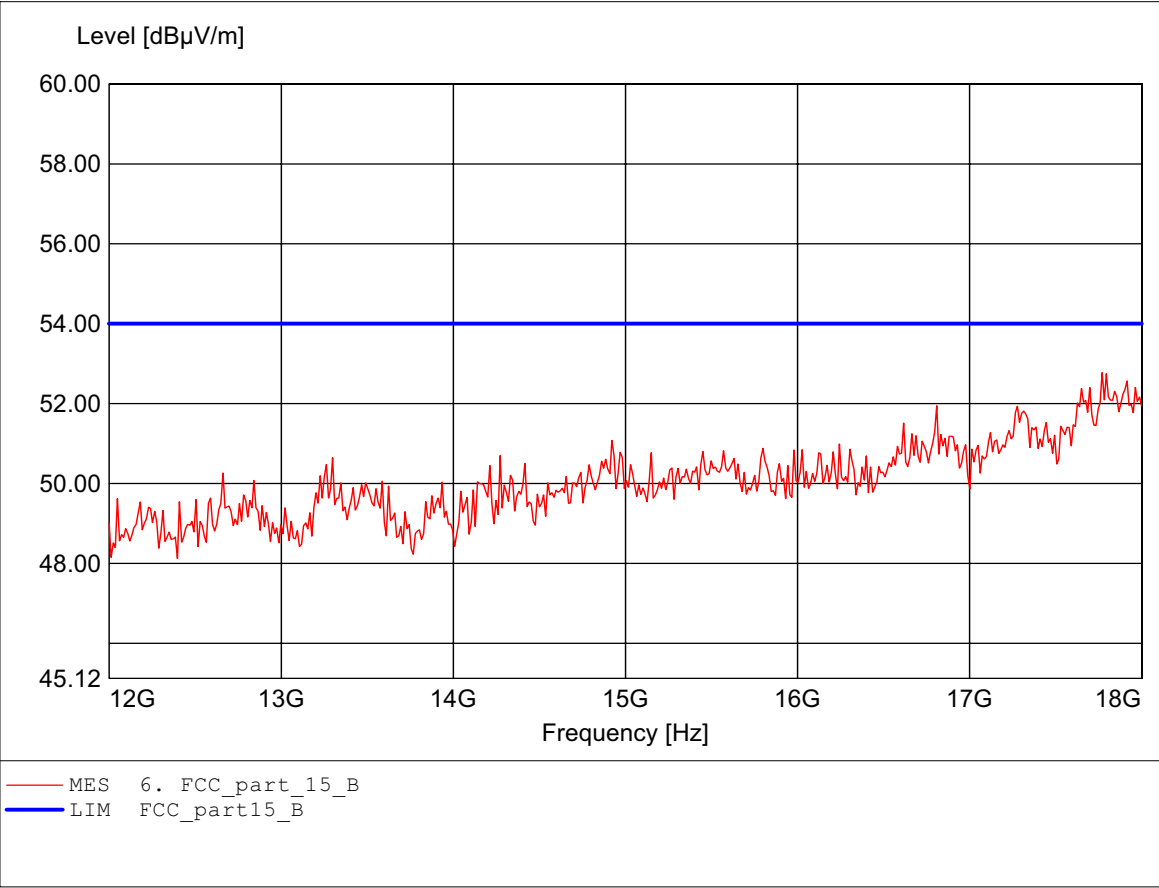

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL25, ampl.  
Freq:17.651GHz Emax:53.41dBμV/m RBW: 1 MHz

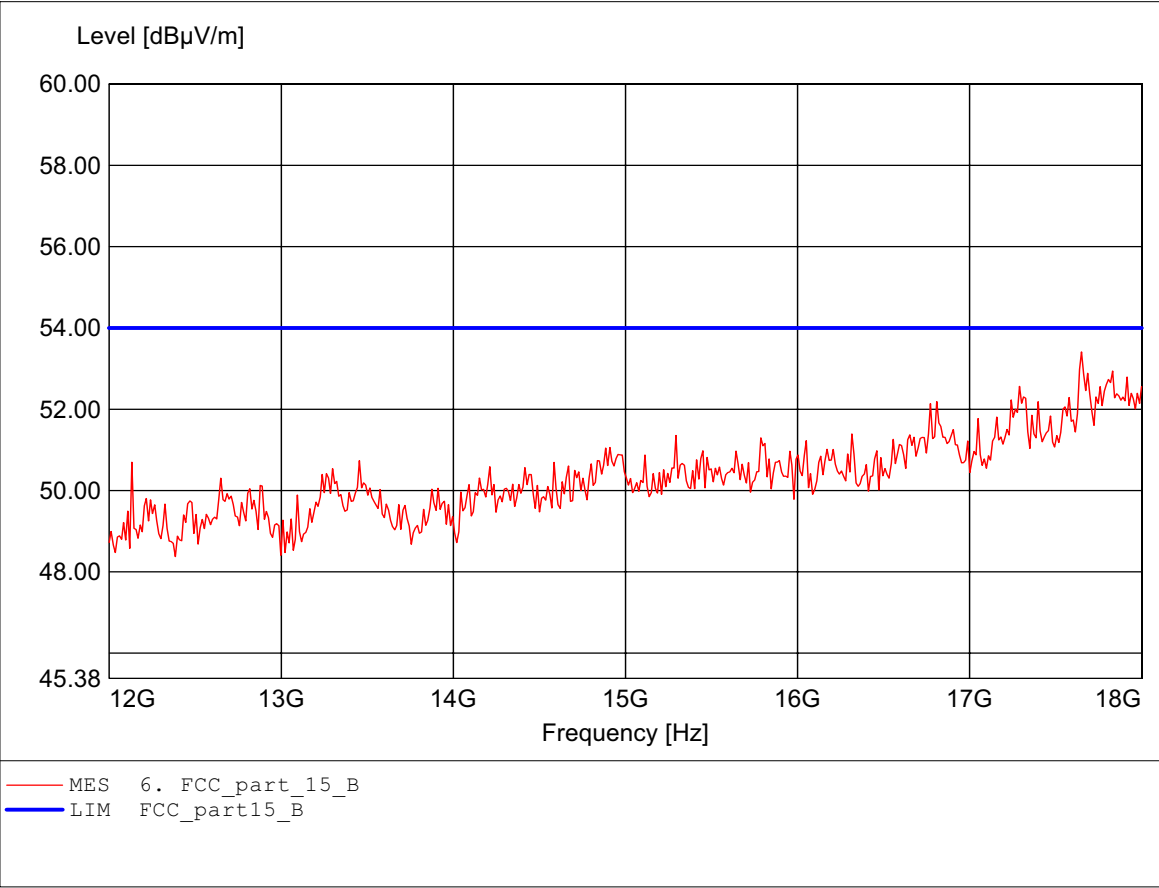

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.  
Freq:25.546GHz Emax:47.32dBμV/m RBW: 1 MHz

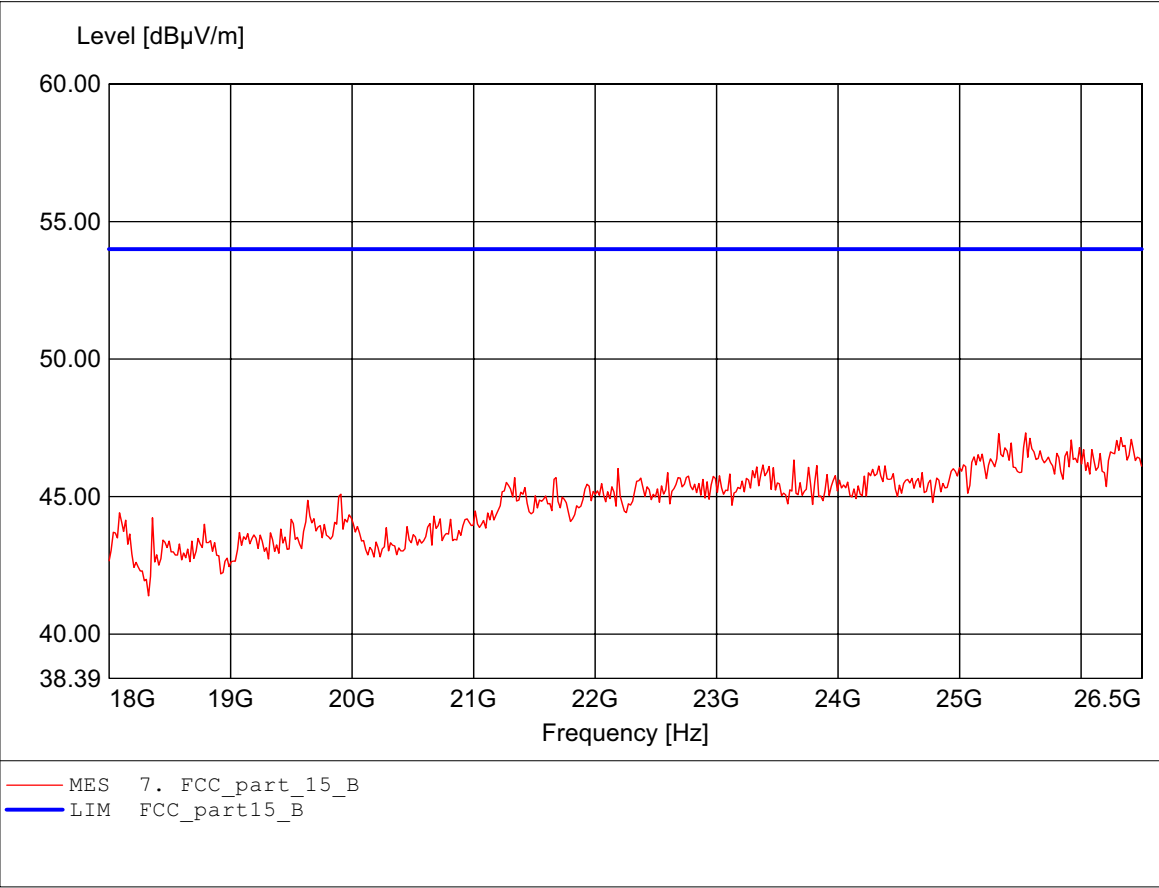


Field Strength under normal conditions

FCC RULES PART 15, SUBPART B

EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver 802.11A CH48  
Approval Holder: YUAN High-Tech Development Co.,Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( ac/dc adaptor )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.  
Freq:26.091GHz Emax:48.01dBμV/m RBW: 1 MHz

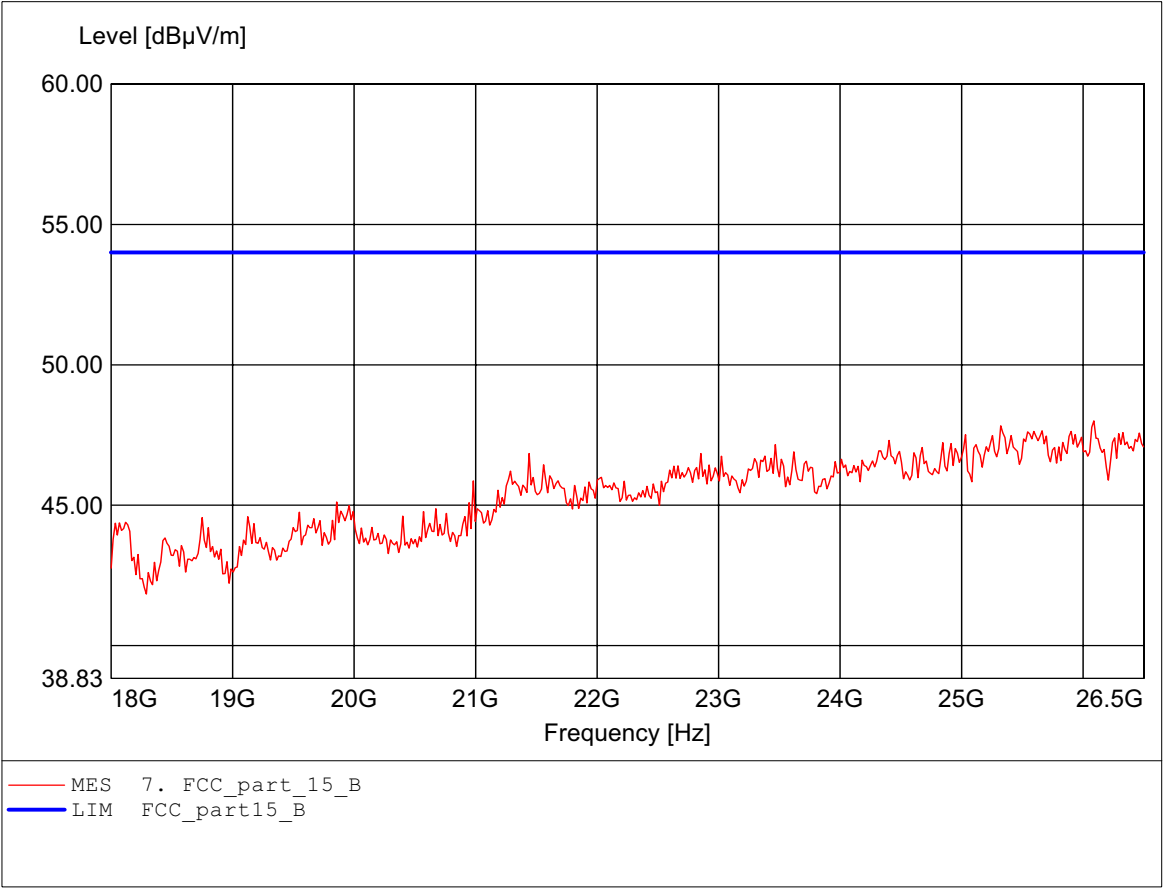




Registration number: W6M20511-6291-E-54  
FCC ID: TSTWV100

## **Appendix G**

### Frequency Stability

No diagrams

Refer to point 3.10



Registration number: W6M20511-6291-E-54  
FCC ID: TSTWV100

## **Appendix H**


### **Radiated Emissions from Receiver Section of Transceiver**



## Field Strength under normal conditions

### FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver (Line)  
Approval Holder: YUAN High-Tech Development Co., Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( AC/DC ADAPTOR )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq:198.297MHz Emax:41.55dBμV/m RBW: 100 kHz

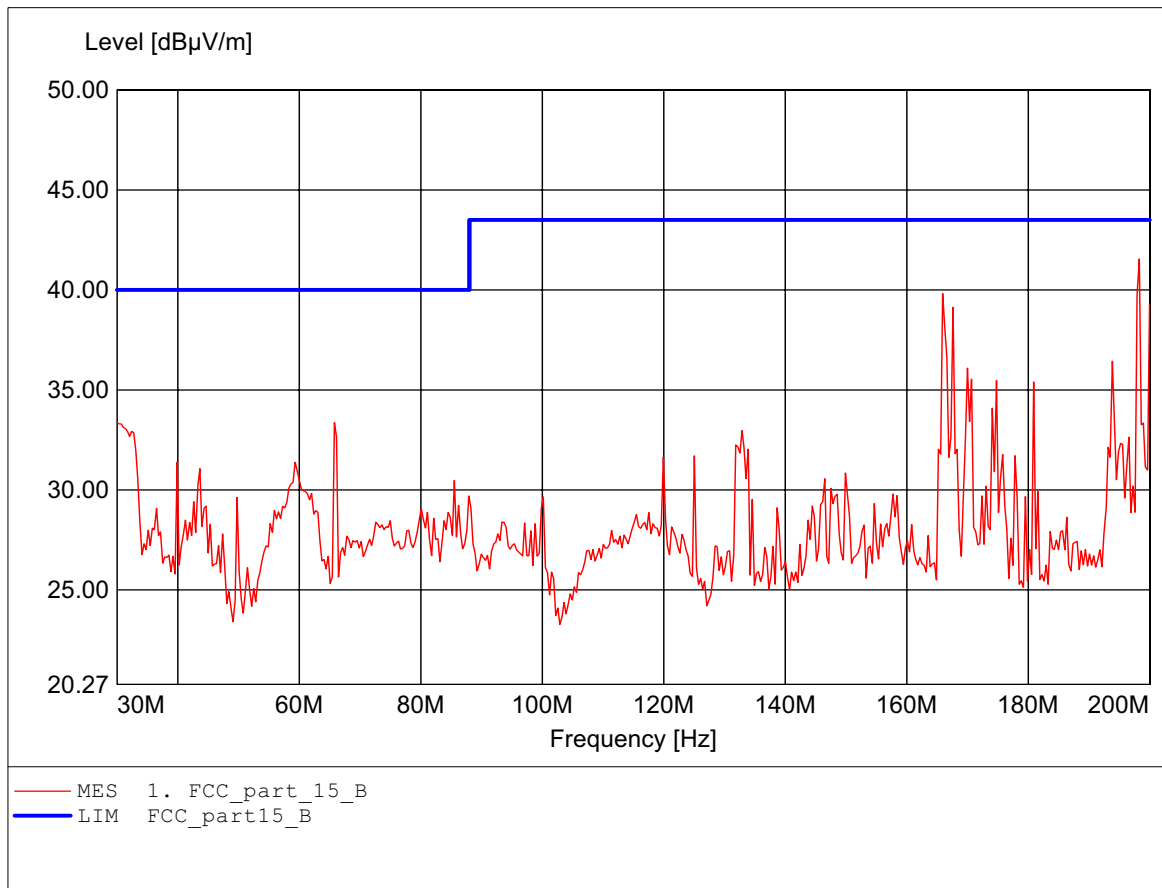

**Field Strength under normal conditions**

**FCC RULES PART 15, SUBPART B**


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver (Line)  
Approval Holder: YUAN High-Tech Development Co., Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( AC/DC ADAPTOR )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq:198.297MHz Emax:42.96dBμV/m RBW: 100 kHz

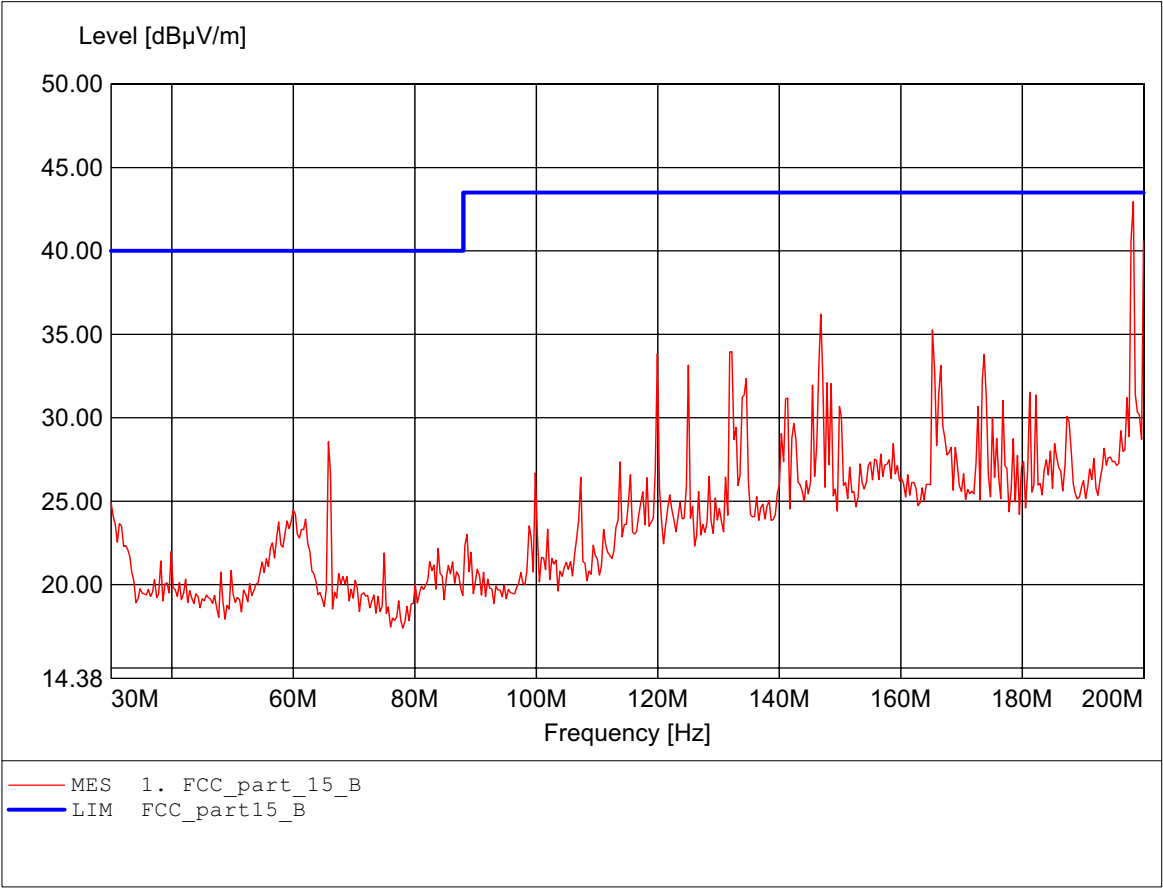

Field Strength under normal conditions

FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver (Line)  
Approval Holder: YUAN High-Tech Development Co., Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( AC/DC ADAPTOR )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Freq:749.900MHz Emax:46.33dBμV/m RBW: 100 kHz

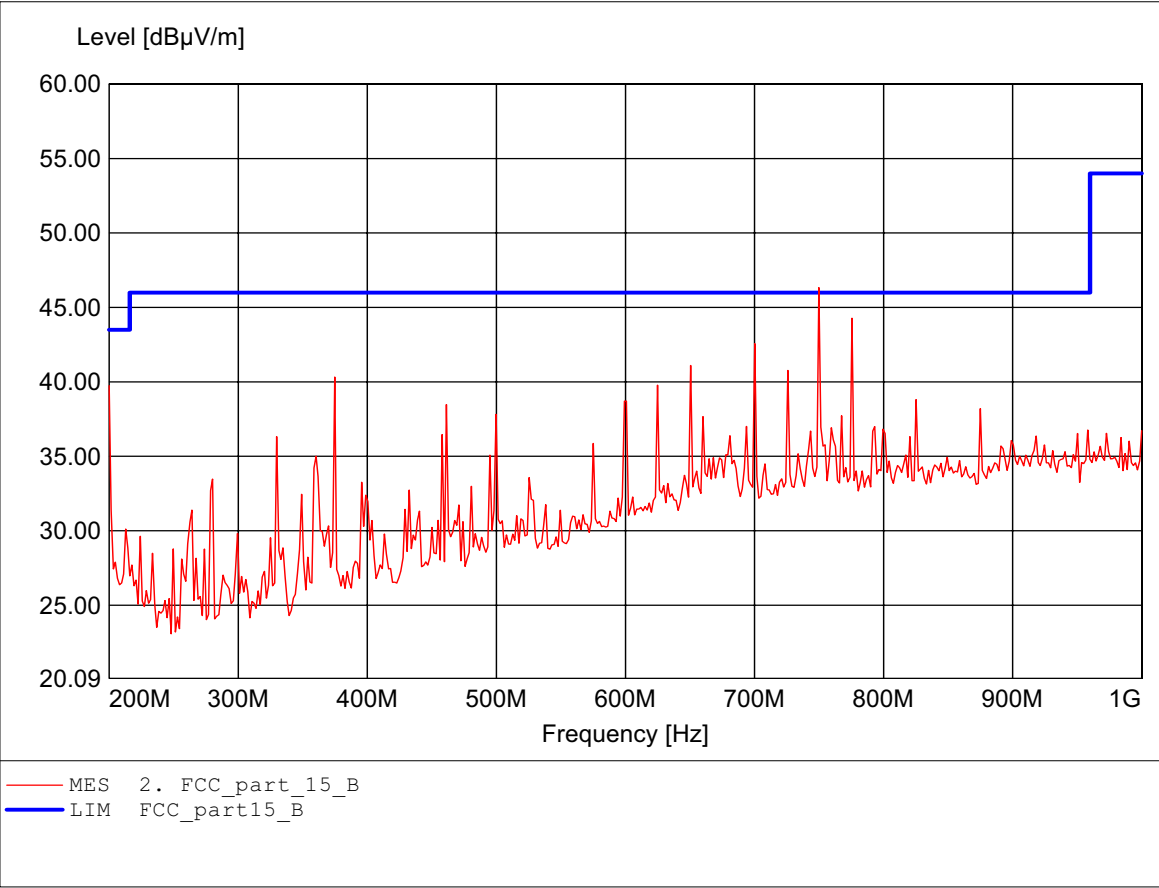

## Field Strength under normal conditions

### FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver (Line)  
Approval Holder: YUAN High-Tech Development Co., Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( AC/DC ADAPTOR )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Freq:749.900MHz Emax:46.27dBμV/m RBW: 100 kHz

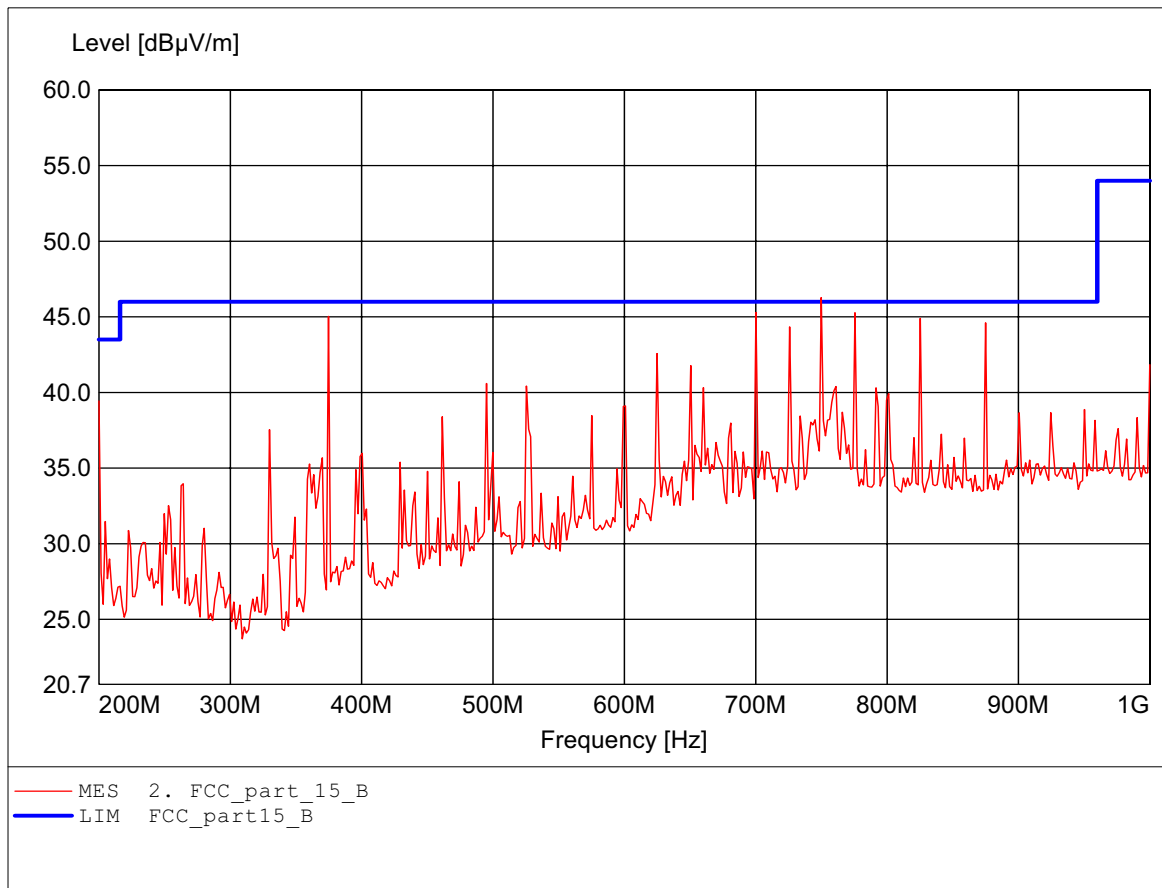

## Field Strength under normal conditions

### FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver (Wireless)  
Approval Holder: YUAN High-Tech Development Co., Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( AC/DC ADAPTOR )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq:198.297MHz Emax:37.96dBμV/m RBW: 100 kHz

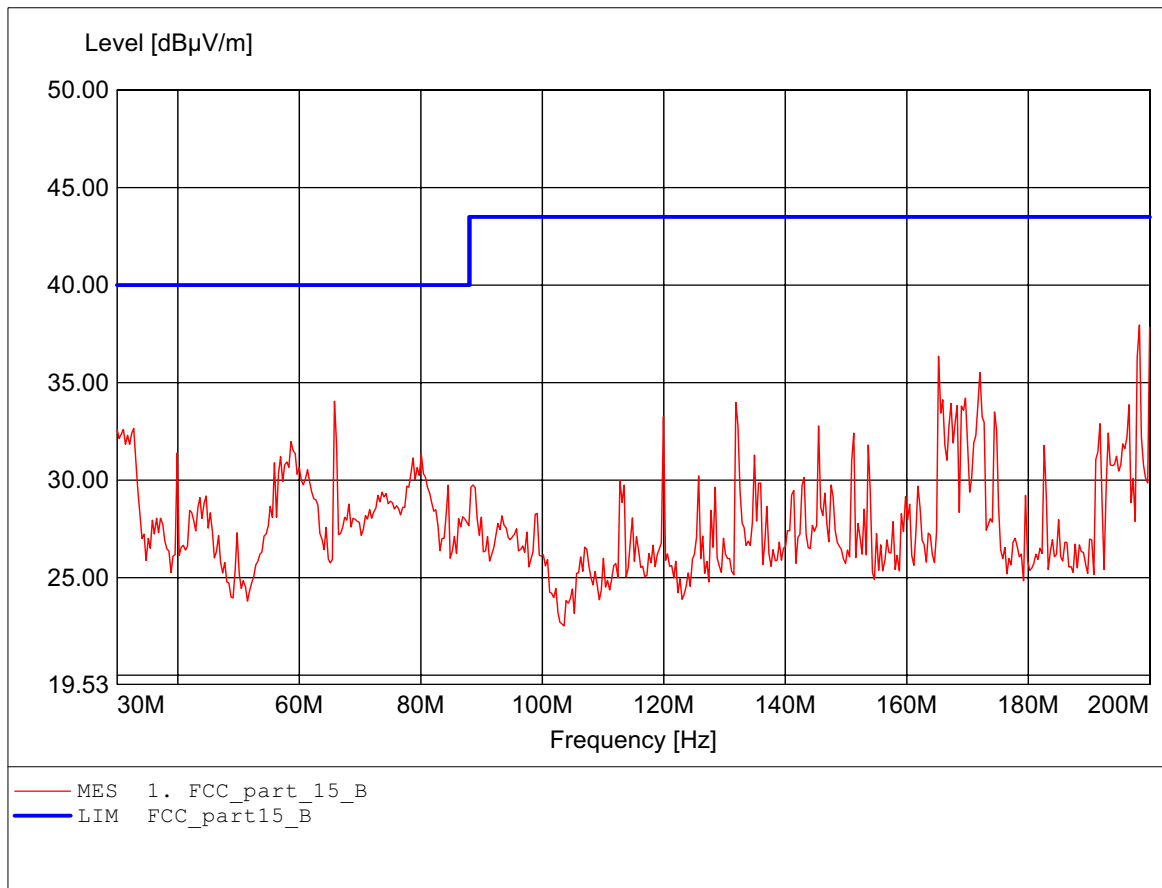

## Field Strength under normal conditions

### FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver (Wireless)  
Approval Holder: YUAN High-Tech Development Co., Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( AC/DC ADAPTOR )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HK 116  
Freq:198.297MHz Emax:39.11dBμV/m RBW: 100 kHz

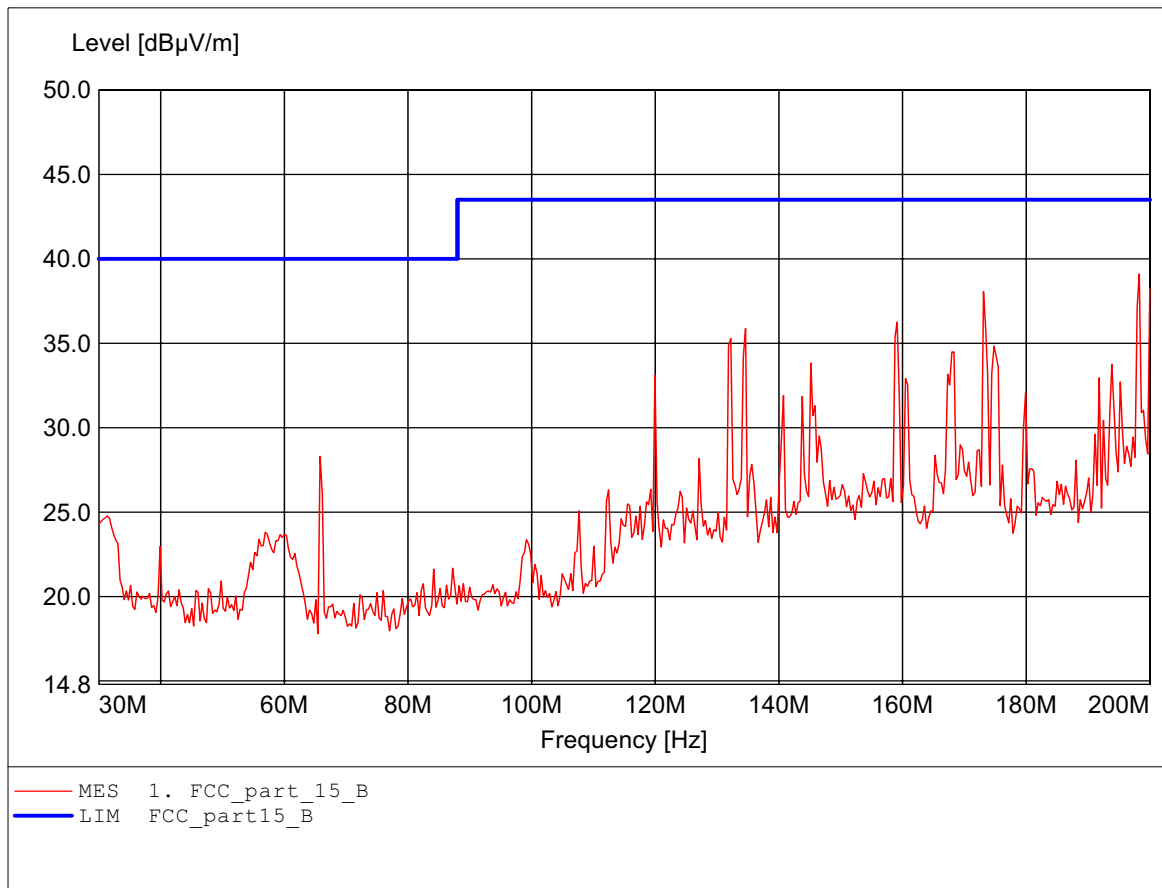

## Field Strength under normal conditions

### FCC RULES PART 15, SUBPART B


EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver (Wireless)  
Approval Holder: YUAN High-Tech Development Co., Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( AC/DC ADAPTOR )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Freq:200.000MHz Emax:38.33dBμV/m RBW: 100 kHz

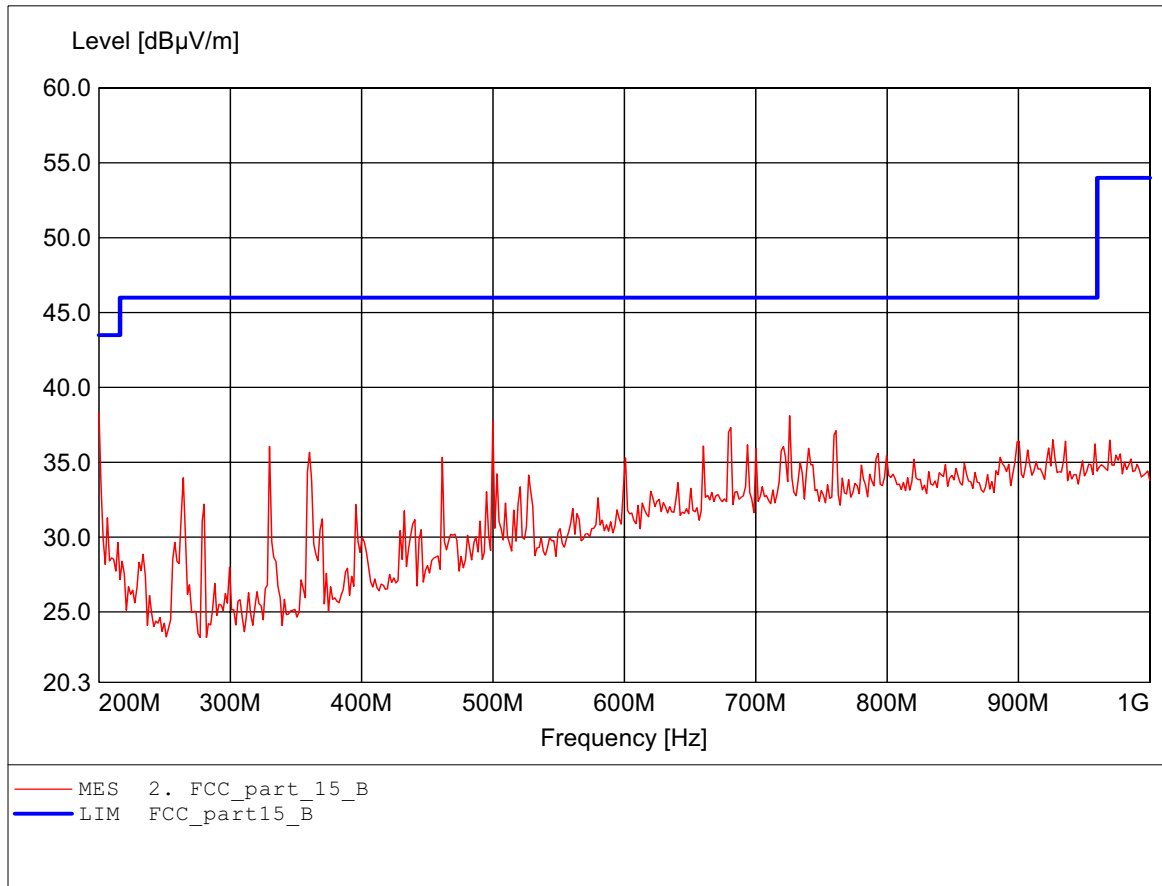


## Field Strength under normal conditions

### FCC RULES PART 15, SUBPART B

EUT: Wireless Multimedia System  
MODEL NO.: WMS 100 Receiver (Wireless)  
Approval Holder: YUAN High-Tech Development Co., Ltd.  
Test Site / Operator: ETS / Dennis  
Temperature/Voltage: Temp.: 23°C/ Unom.: 120 VAC ( AC/DC ADAPTOR )  
Test Specification: according to subpart B  
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.  
Freq: 759.519MHz Emax: 42.97dBμV/m RBW: 100 kHz

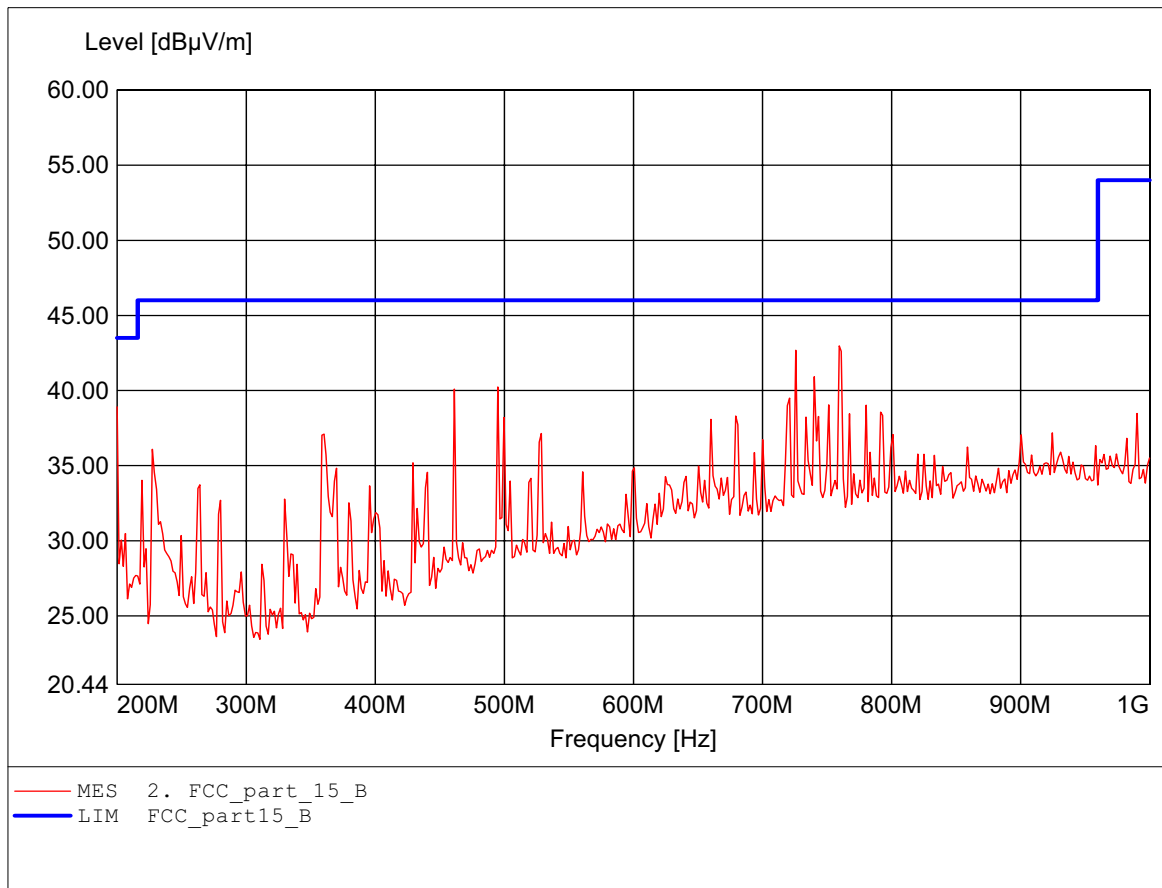





Registration number: W6M20511-6291-E-54  
FCC ID: TSTWV100


## **Appendix I**

Spurious Emission related to AC power line

# EMI voltage test in the ac-mains according to FCC Part 15

## Class B

EUT: Wireless Multimedia System  
Approval Holder: VANHighTechDevelopment Co., Ltd.  
Operating Condition: Unom : 120 VAC (ac/dc adaptor) , Tnom : 23.6°C  
Test Site: ETS  
Operator: Catey  
Test Specification: V-network: ESH3-Z5 N  
Comment: model: WMS 100 Receiver (Line) mode: active

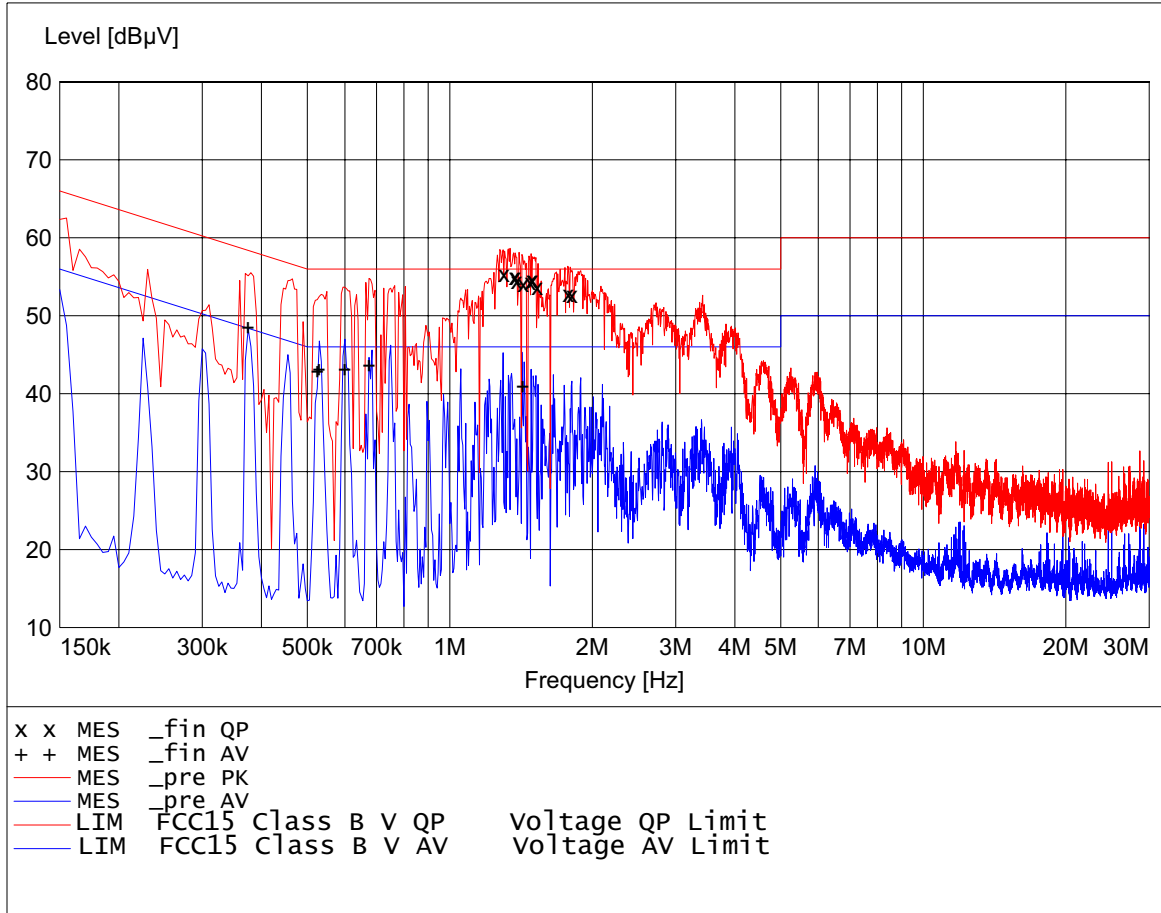

**EMI voltage test in the ac-mains according to FCC Part 15****Class B**

EUT: Wireless Multimedia System  
Approval Holder: YUAN High-Tech Development Co., Ltd.  
Operating Condition: Unom : 120 VAC (ac/dc adaptor) , Tnom : 23.6°C  
Test Site: ETS  
Operator: Catey  
Test Specification: V-network: ESH3-Z5 N  
Comment: model: WMS 100 Receiver (Line) mode: active

**MEASUREMENT RESULT: "\_fin AV"**

12/19/05 5:27PM

| Frequency<br>MHZ | Level<br>dBµV | Transd<br>dB | Limit<br>dBµV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 0.375000         | 47.70         | 19.5         | 48            | 0.3          | ---  | --- |
| 0.525000         | 45.00         | 19.5         | 46            | 1.0          | ---  | --- |
| 0.530000         | 45.30         | 19.5         | 46            | 0.7          | ---  | --- |
| 0.600000         | 45.30         | 19.5         | 46            | 0.7          | ---  | --- |
| 0.675000         | 45.80         | 19.5         | 46            | 0.2          | ---  | --- |
| 0.755000         | 44.20         | 19.5         | 46            | 1.8          | ---  | --- |
| 1.425000         | 43.10         | 19.5         | 46            | 2.9          | ---  | --- |

**MEASUREMENT RESULT: "\_fin QP"**


12/19/05 5:27PM

| Frequency<br>MHZ | Level<br>dBµV | Transd<br>dB | Limit<br>dBµV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 1.300000         | 55.40         | 19.5         | 56            | 0.6          | ---  | --- |
| 1.370000         | 55.80         | 19.5         | 56            | 0.2          | ---  | --- |
| 1.385000         | 55.20         | 19.5         | 56            | 0.8          | ---  | --- |
| 1.430000         | 55.60         | 19.5         | 56            | 0.4          | ---  | --- |
| 1.480000         | 55.40         | 19.5         | 56            | 0.6          | ---  | --- |
| 1.495000         | 55.50         | 19.5         | 56            | 0.5          | ---  | --- |
| 1.530000         | 56.00         | 19.5         | 56            | 0.0          | ---  | --- |
| 1.780000         | 55.10         | 19.5         | 56            | 0.9          | ---  | --- |

# EMI voltage test in the ac-mains according to FCC Part 15

## Class B

EUT: Wireless Multimedia System  
Approval Holder: WAN HighTechDevelopment Co., Ltd.  
Operating Condition: Unom : 120 VAC (ac/dc adaptor) , Tnom : 23.6C  
Test Site: ETS  
Operator: Catey  
Test Specification: V-network: ESH3-Z5 L1  
Comment: model: WMS 100 Receiver (Line) mode: active

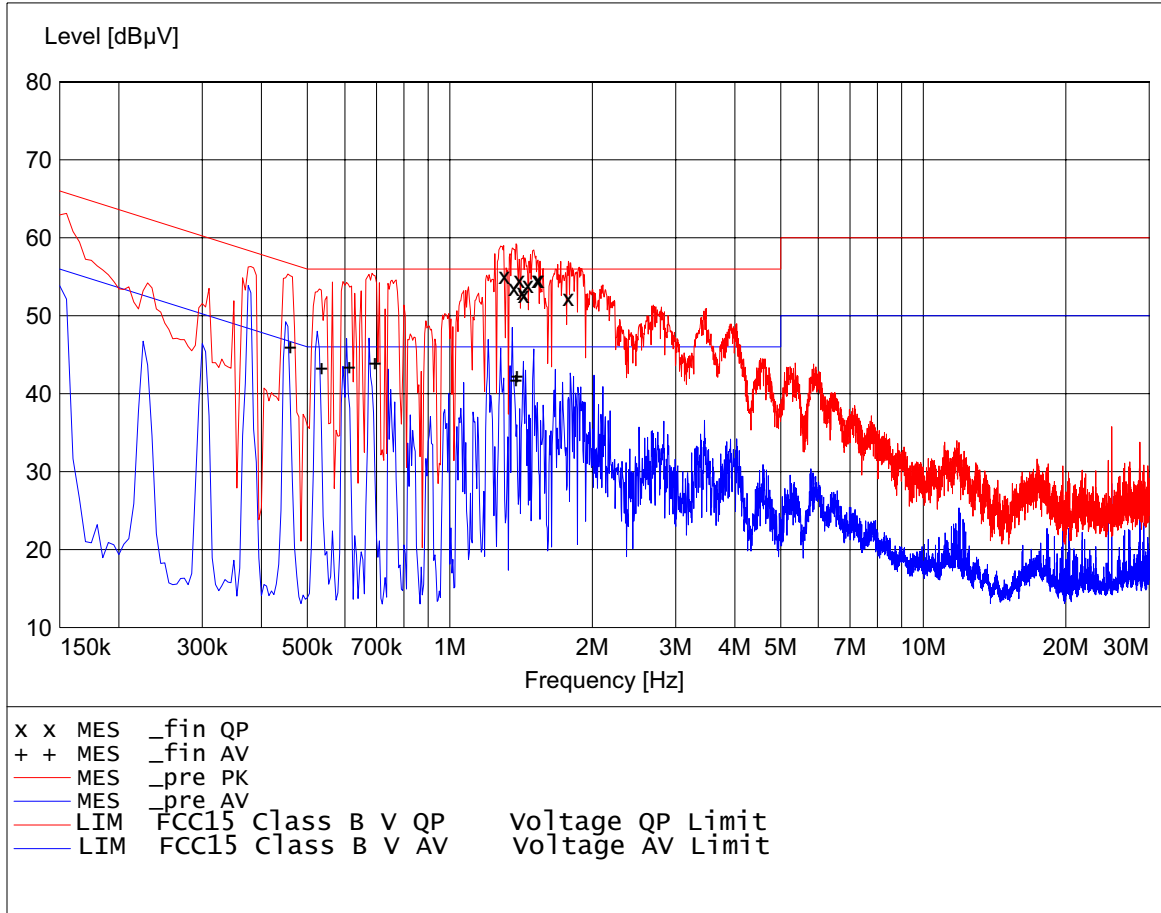

# EMI voltage test in the ac-mains according to FCC Part 15

## Class B

EUT: Wireless Multimedia System  
Approval Holder: YUAN High-Tech Development Co., Ltd.  
Operating Condition: Unom : 120 VAC (ac/dc adaptor) , Tnom : 23.6°C  
Test Site: ETS  
Operator: Catey  
Test Specification: V-network: ESH3-Z5 L1  
Comment: model: WMS 100 Receiver (Line) mode: active

### MEASUREMENT RESULT: "\_fin AV"

12/19/05 5:09PM

| Frequency<br>MHZ | Level<br>dBµV | Transd<br>dB | Limit<br>dBµV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 0.450000         | 46.10         | 19.5         | 47            | 0.9          | ---  | --- |
| 0.525000         | 45.80         | 19.5         | 46            | 0.2          | ---  | --- |
| 0.600000         | 45.70         | 19.5         | 46            | 0.3          | ---  | --- |
| 0.605000         | 45.70         | 19.5         | 46            | 0.3          | ---  | --- |
| 0.680000         | 45.20         | 19.5         | 46            | 0.8          | ---  | --- |
| 1.355000         | 45.10         | 19.5         | 46            | 0.9          | ---  | --- |

### MEASUREMENT RESULT: "\_fin QP"


12/19/05 5:09PM

| Frequency<br>MHZ | Level<br>dBµV | Transd<br>dB | Limit<br>dBµV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 1.275000         | 55.40         | 19.5         | 56            | 0.6          | ---  | --- |
| 1.335000         | 55.50         | 19.5         | 56            | 0.5          | ---  | --- |
| 1.370000         | 55.40         | 19.5         | 56            | 0.6          | ---  | --- |
| 1.390000         | 56.00         | 19.5         | 56            | 0.0          | ---  | --- |
| 1.400000         | 55.70         | 19.5         | 56            | 0.3          | ---  | --- |
| 1.430000         | 55.10         | 19.5         | 56            | 0.9          | ---  | --- |
| 1.495000         | 55.50         | 19.5         | 56            | 0.5          | ---  | --- |
| 1.505000         | 55.50         | 19.5         | 56            | 0.5          | ---  | --- |
| 1.780000         | 55.30         | 19.5         | 56            | 0.7          | ---  | --- |

# EMI voltage test in the ac-mains according to FCC Part 15

## Class B


EUT: Wireless Multimedia System  
Approval Holder: YUAN High-Tech Development Co., Ltd.  
Operating Condition: Unom : 120VAC (ac/dc adaptor) , Tnom : 23 °C  
Test Site: ETS  
Operator: Pann  
Test Specification: V-network: ESH3-Z5 N  
Comment: model: WMS 100 Receiver (wireless) mode: active

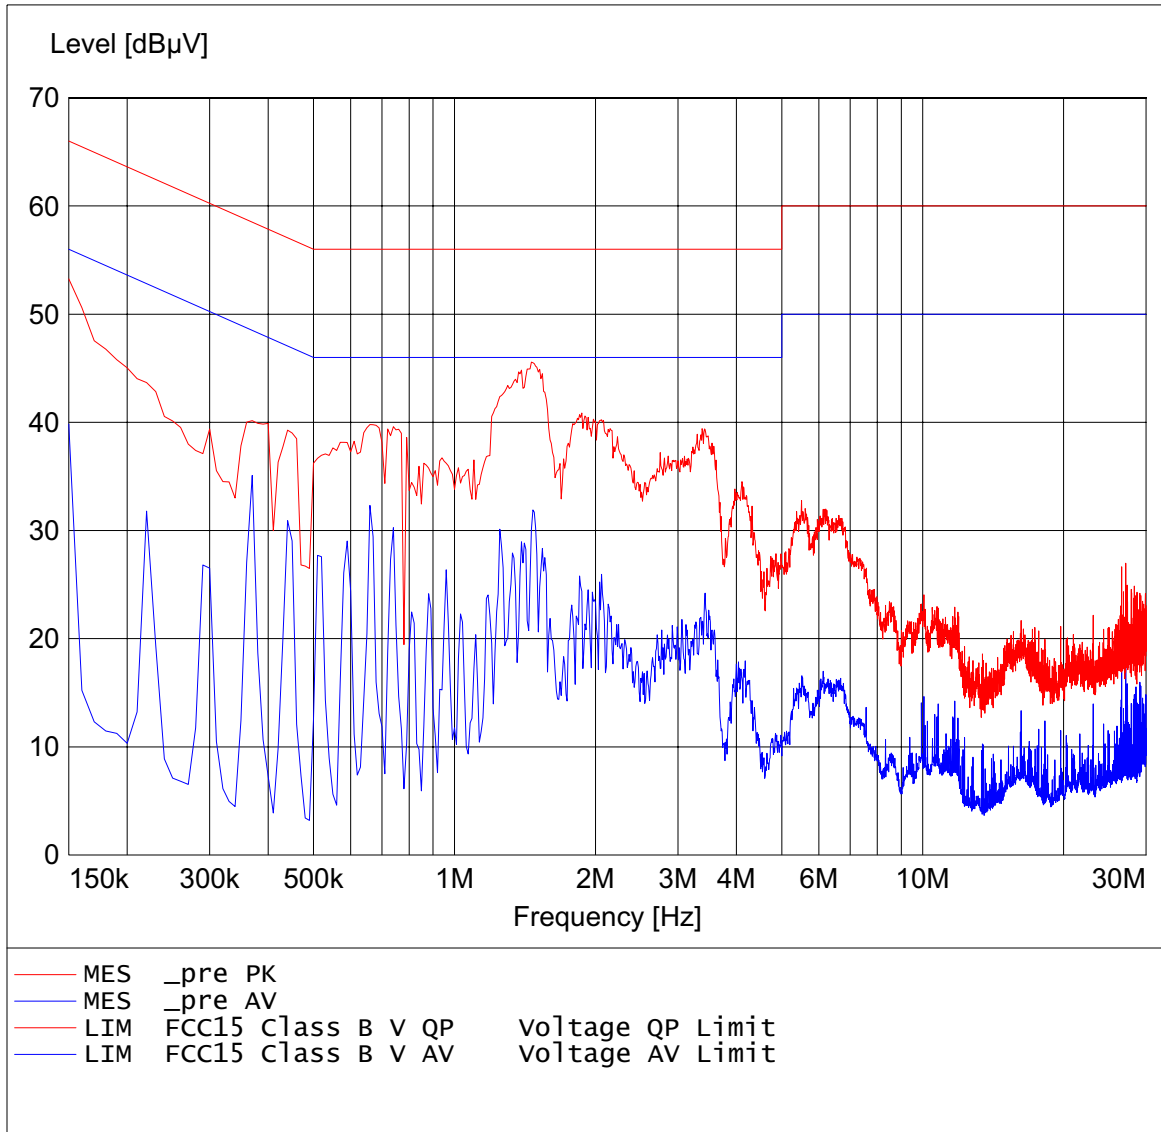

EMI voltage test in the ac-mains according to FCC Part 15

Class B

EUT: Wireless Multimedia System  
Approval Holder: YUAN High-Tech Development Co., Ltd.  
Operating Condition: Unom : 120VAC (ac/dc adaptor) , Tnom : 23 °C  
Test Site: ETS  
Operator: Pann  
Test Specification: V-network: ESH3-Z5 L1  
Comment: model: WMS 100 Receiver (wireless) mode: active

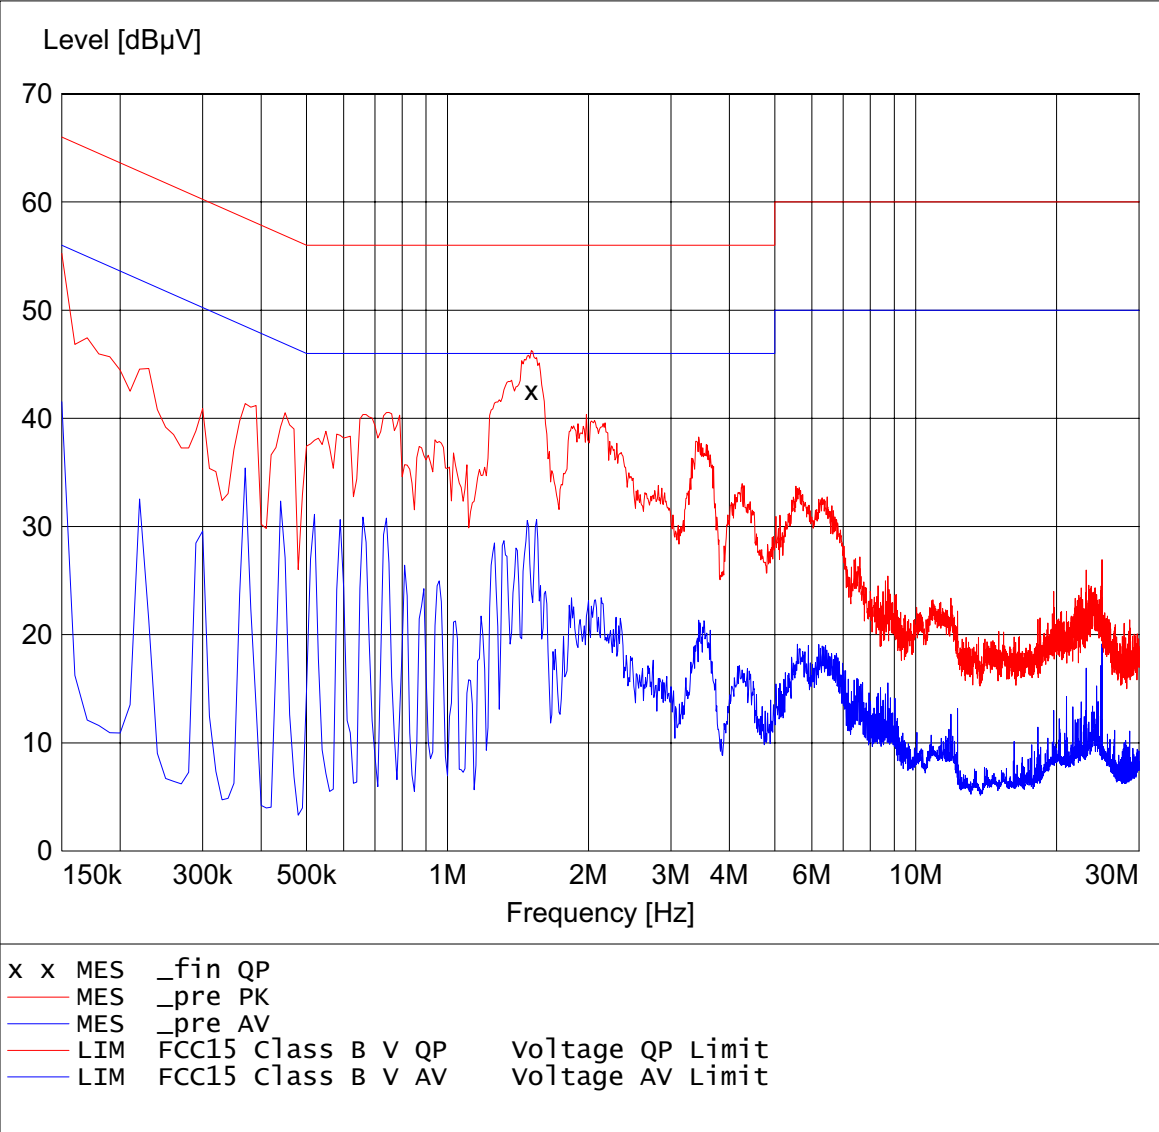

**EMI voltage test in the ac-mains according to FCC Part 15**

**Class B**


EUT: Wireless Multimedia System  
Approval Holder: YUAN High-Tech Development Co., Ltd.  
Operating Condition: Unom : 120VAC (ac/dc adaptor) , Tnom : 23 °C  
Test Site: ETS  
Operator: Pann  
Test Specification: V-network: ESH3-Z5 L1  
Comment: model: WMS 100 Receiver (Wireless) mode: active

**MEASUREMENT RESULT: "\_fin QP"**

11/25/05 6:27PM

| Frequency<br>MHZ | Level<br>dBµV | Transd<br>dB | Limit<br>dBµV | Margin<br>dB | Line | PE  |
|------------------|---------------|--------------|---------------|--------------|------|-----|
| 1.510000         | 42.60         | 10.1         | 56            | 13.4         | ---  | --- |





Registration number: W6M20511-6291-E-54  
FCC ID: TSTWV100

## **Appendix J**

### Pictures