




Report No.: HK08051344-1
Model: V200AM DUO
Talk Mode

Scan Settings (1 Range)

Frequencies				Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0700
12	9k	30M	EW0090

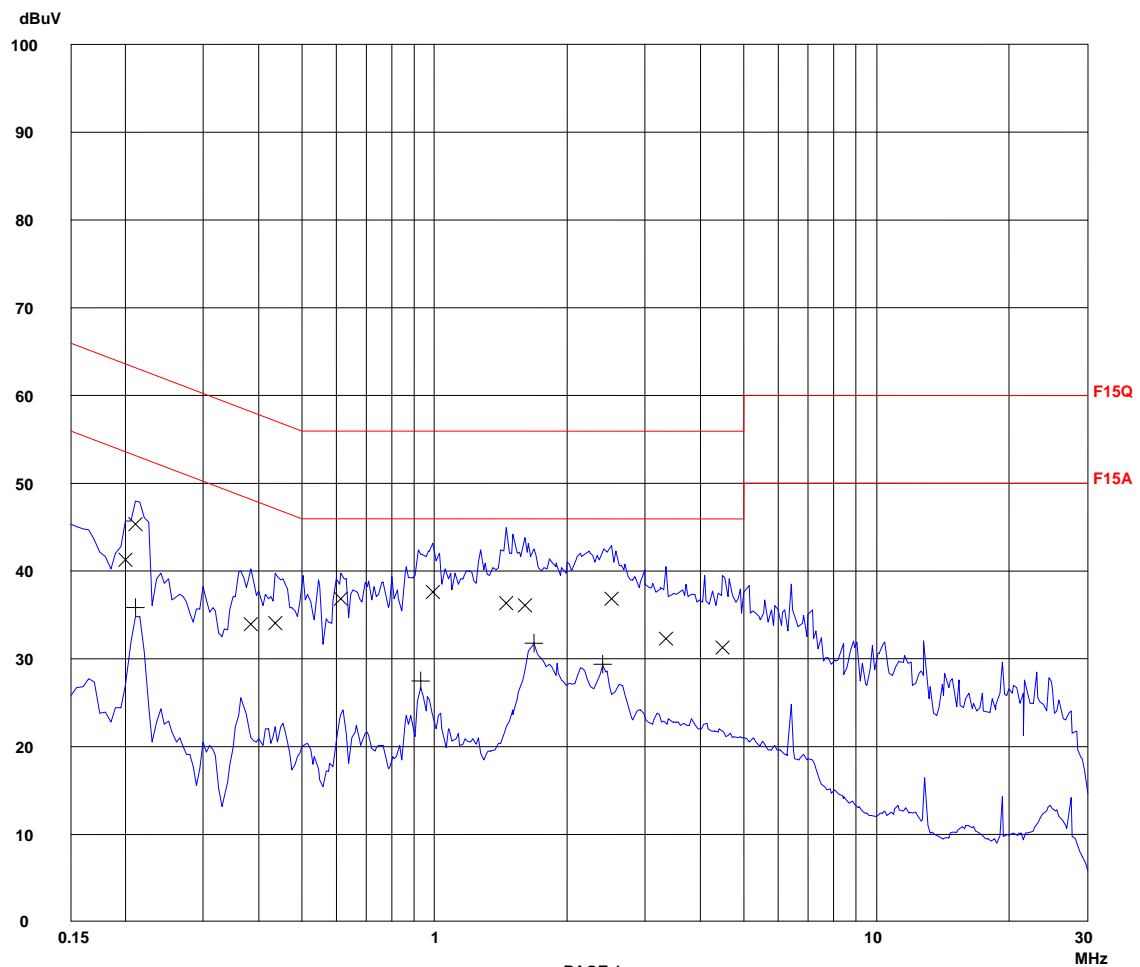

Ctrl No.:



Report No.: HK08051344-1
Model: V200AM DUO
Talk Mode

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.20000	41.2	63.6	-22.4
0.21000	45.3	63.2	-17.9
0.38500	33.8	58.1	-24.3
0.43500	34.0	57.2	-23.2
0.61500	36.8	56.0	-19.2
0.99000	37.5	56.0	-18.5
1.45500	36.3	56.0	-19.7
1.60000	36.0	56.0	-20.0
2.51000	36.7	56.0	-19.3
3.34500	32.2	56.0	-23.8
4.48500	31.2	56.0	-24.8

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.21000	35.8	53.2	-17.4
0.93000	27.4	46.0	-18.6
1.67500	31.6	46.0	-14.4
2.40500	29.4	46.0	-16.6

* limit exceeded

Ctrl No.: