



FCC TEST REPORT

Part 15 Subpart C

FCC ID: **TWNDTR900-FCR**

Report Reference No......: **WE10010003**

Compiled by

(position+printed name+signature)...: File administrators Wenliang Li

Supervised by

(position+printed name+signature)...: Test Engineer Cary Li

Approved by

(position+printed name+signature)...: Manager Jimmy Li

Date of issue.....: Jan 22, 2010

Testing Laboratory Name: **Shenzhen Huatongwei International Inspection Co., Ltd**

Address.....: Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China

Applicant's name.....: **Pro-Lite, Inc.**

Address.....: 3505 Cadillac Ave. Building D

Manufacturer's name: **NINGBO YOUWON TECHNOLOGY ELECTRONICS CO., LTD**

Address.....: #928, XUEYUAN ROAD, LUGANG VILLAGE, GAOQIAO TOWN, NINGBO

Test specification:

Standard: **FCC Part Subpart 15C 2008 – Intentional Radiators**
ANSI C63.4 - 2003

TRF Originator.....: Shenzhen Huatongwei International Inspection CO., Ltd

Master TRF.....: Dated 2006-06

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Equipment Under Test: **Data Transceiver Module**

Trade Mark: /

Model/Type reference.....: DTR900-FC

Listed Models: /

Result.....: **Complied**

TEST REPORT

Test Report No. : WE10010003	Jan 22, 2010 Date of issue
-------------------------------------	-------------------------------

Equipment under Test : Data Transceiver Module

Model /Type : DTR900-FC

Listed Models : /

Applicant : **Pro-Lite, Inc.**

Address : 3505 Cadillac Ave. Building D

Manufacturer : **NINGBO YOUWON TECHNOLOGY ELECTRONICS CO., LTD**

Address : #928, XUEYUAN ROAD, LUGANG VILLAGE, GAOQIAO TOWN, NINGBO

SUMMARY OF STANDARDS AND RUSELT

No.	Test Item	Test Standards and Procedure	Result
1	AC Conducted Emission	FCC Subpart 15C § 15.207	Complied
2	Radiated Emission	FCC Subpart 15C § 15.209 FCC Subpart 15C § 15.231(e) ANSI C63.4-2003 section 13.1.4	Complied
3	Deactivation Time	FCC Subpart 15C § 15.231(e)	Complied
4	20dB Bandwidth	FCC Subpart 15C § 15.231(c) ANSI C63.4-2003 section 13.1.7	Complied
5	Antenna Requirement	FCC Subpart 15C § 15.203	Complied

NOTE: 1),The detailed test result please see section 4.

2),The test report merely corresponds to the test sample.

3),It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2.</u>	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Equipment Under Test Power Supply	5
2.3.	Short description of the Equipment under Test	5
2.4.	EUT operation mode	5
2.5.	Configuration of Tested System	6
2.6.	Related Submittal(s) / Grant (s)	7
2.7.	Modifications	7
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>8</u>
3.1.	Address of the test laboratory	8
3.2.	Test Facility	8
3.3.	Environmental conditions	9
3.4.	Statement of the measurement uncertainty	9
3.5.	Equipments Used during the Test	10
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>11</u>
4.1.	AC Conducted Emission	11
4.2.	Radiated Emission	16
4.3.	Deactivation Time	27
4.4.	20dB Bandwidth	29
4.5.	Antenna Requirement	31
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>32</u>
<u>6.</u>	<u>PHOTOS OF THE EUT</u>	<u>34</u>

1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15 Subpart C (2008) – Intentional Radiators

ANSI C63.4 (2003) – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample : Jan 13, 2010

Testing commenced on : Jan 14, 2010

Testing concluded on : Jan 22, 2010

2.2. Equipment Under Test Power Supply

Power supply voltage : ☐ 120V / 60 Hz ☐ 115V / 60Hz
☐ 12 V DC ☐ 24 V DC
☒ Other (specified in blank below)

DC 5V from host

2.3. Short description of the Equipment under Test

Product Name : Data Transceiver Module

Model Number : DTR900-FC

Operation Frequency : 433.92MHz

Modulation Technology : FSK

Transmitter Type : Periodic Transmitter

Sample Type : Module


Note: The module be used in series host. About more details, refer to the test photos and user's manual.

2.4. EUT operation mode

The EUT has been tested under typical operating mode(TX mode).

2.5. Configuration of Tested System

MODULE STAND ALONE CONFIGURATION

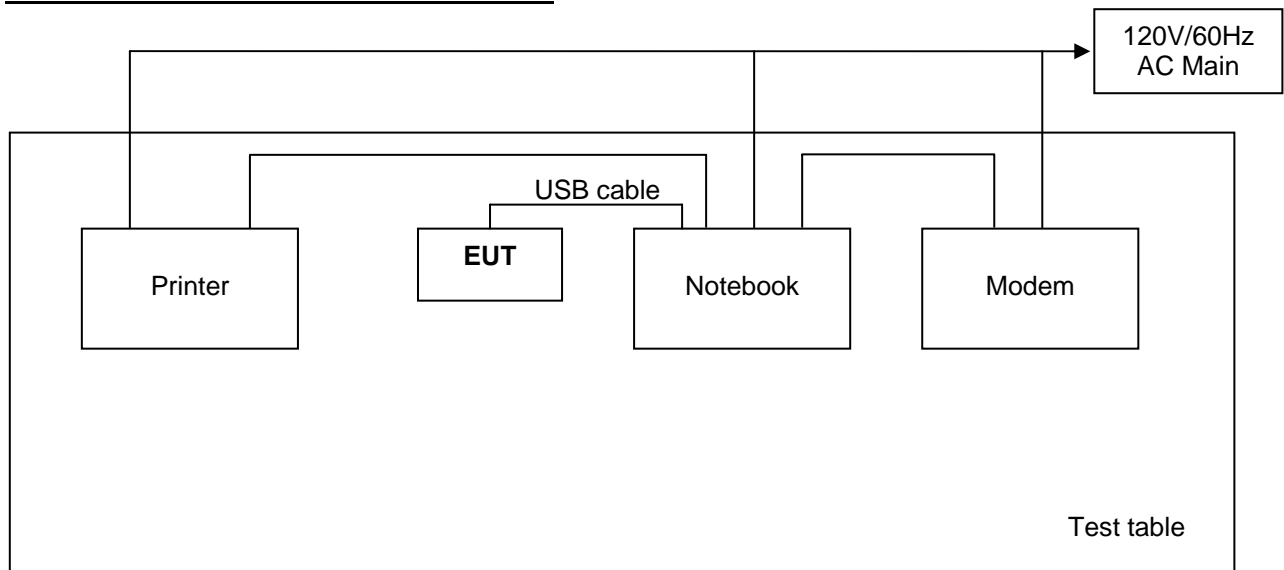


Equipment Used in Tested System

No.	Equipment	Manufacturer	Model No.	Serial No.
1	Notebook	AUSU	I9100L	59NP009727
2	Printer	HP	Laserjet 1000 series	/
3	Modem	D-Link	DSL-300	/

Note: For actual sample please see test setup photos and EUT external photos.

MODULE WITH HOST CONFIGURATION

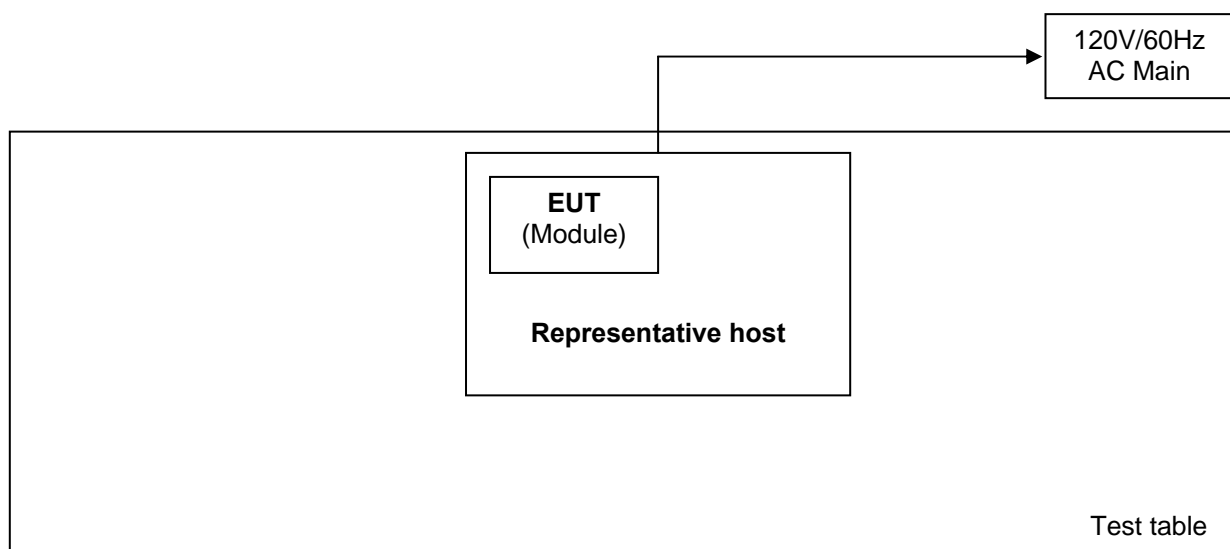

Equipment Used in Tested System

No.	Equipment	Manufacturer	Model No.	Serial No.
1	Host	YOUWON	/	/

2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **TWNDTR900-FCR** filing to comply with the FCC Part 15 Subpart C 15.231(e) Rules 2008.

2.7. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Huatongwei International Inspection Co., Ltd
Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China
Phone: 86-755-26715686 Fax: 86-755-26748089

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: August 02, 2007. Valid time is until March 29, 2012.

A2LA-Lab Cert. No. 2243.01

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is from Aug 24, 2005 to Sept 30, 2009.

FCC-Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date September, 2009.

IC-Registration No.: 5377

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377 on November 28th, 2005.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

NEMKO-Aut. No.: ELA125

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025:2005 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10, the Authorization is valid through April 25, 2009.

VCCI

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) and Shielded Room (8m×4m×3m) of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2484. Date of Registration: December 20, 2006. Valid time is until December 19, 2009.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: December 20, 2006. Valid time is until December 19, 2009.

DNV

Shenzhen Huatongwei International Inspection Co Ltd has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025(2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until 09 July, 2010.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	<u>22 ° C</u>
Humidity:	<u>65 %</u>
Atmospheric pressure:	<u>950-1050mbar</u>

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.22dB	(1)
Radiated Emission	1~12.75GHz	4.35dB	(1)
20dB Bandwidth	/	0.25dB	(1)
Deactivation Time	/	0.5ms	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.5. Equipments Used during the Test

Conducted Emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100106	2009/11
2	Artificial Mains	ROHDE & SCHWARZ	ESH2-Z5	100028	2009/11
3	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100044	2009/11
4	EMI Test Software	ROHDE & SCHWARZ	ESK1	N/A	2009/11
5	Single Balanced Telecom Pair ISN	FCC	FCC-TLISN-T2-02	20371	2009/11
6	Two Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T4-02	20373	2009/11


Radiated Emissions					
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ULTRA-BROADBAND ANTENNA	ROHDE & SCHWARZ	HL562	100015	2008/11
2	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESI 26	100009	2008/11
3	RF TEST PANEL	ROHDE & SCHWARZ	TS / RSP	335015/ 0017	2008/11
4	TURNTABLE	ETS	2088	2149	2008/11
5	ANTENNA MAST	ETS	2075	2346	2008/11
6	EMI TEST SOFTWARE	ROHDE & SCHWARZ	ESK1	N/A	2008/11
7	HORN ANTENNA	ROHDE & SCHWARZ	HF906	N/A	2008/06/

20dB Bandwidth & Deactivation Time & Duty Cycle					
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESCI	100106	2008/11
2	RECEIVER ANTENNA	/	/	/	/

4. TEST CONDITIONS AND RESULTS

4.1. AC Conducted Emission

TEST CONFIGURATION

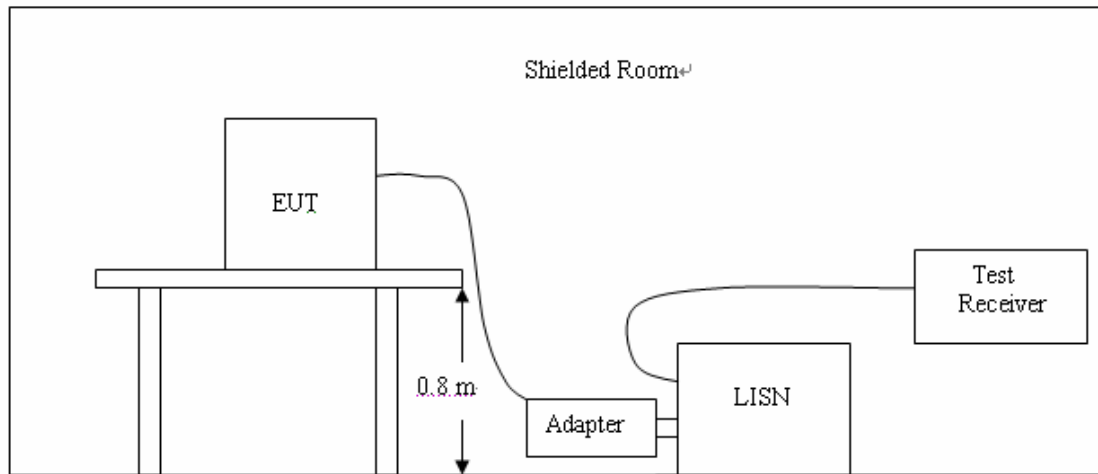

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4.
- 2 Support equipment, if needed, was placed as per ANSI C63.4.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4 The EUT received DC 6V from adaptor input 120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

CONDUCTED LIMIT

According to FCC Subpart 15 B § 15.207 AC Conducted Emission Limits is as following :


Frequency fange (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.1~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50
* Decreasing linearly with the logarithm of the frequency		

TEST RESULTS**TEST DATA OF STAND ALONE****L Line**

EUT: Data Transceiver Module
Manufacturer: Peo-Lite, Inc
Operating Condition: TX mode
Test Site: 3# SHIELDED ROOM
Operator: Cary
Test Specification: AC 120V/60Hz
Comment: M/N:DTR900-FC
Start of Test: 1/16/2010 / 4:23:35PM

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

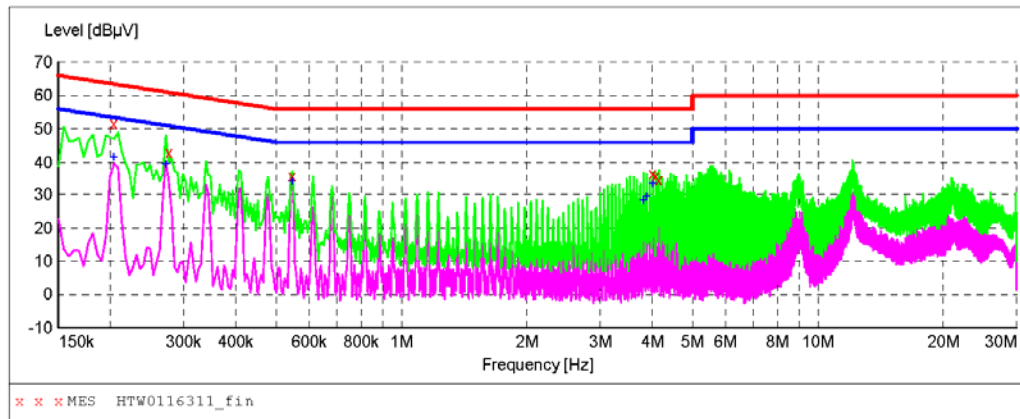**MEASUREMENT RESULT: "HTW0116311_fin"**

1/16/2010 4:26PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.204000	51.70	10.2	63	11.7	QP	L1	GND
0.276000	42.80	10.2	61	18.1	QP	L1	GND
0.546000	35.80	10.2	56	20.2	QP	L1	GND
4.015500	36.40	10.4	56	19.6	QP	L1	GND
4.083000	35.80	10.4	56	20.2	QP	L1	GND
4.150500	34.30	10.4	56	21.7	QP	L1	GND

MEASUREMENT RESULT: "HTW0116311_fin2"

1/16/2010 4:26PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.204000	41.40	10.2	53	12.0	AV	L1	GND
0.271500	39.40	10.2	51	11.7	AV	L1	GND
0.546000	33.90	10.2	46	12.1	AV	L1	GND
3.813000	28.10	10.4	46	17.9	AV	L1	GND
3.880500	29.30	10.4	46	16.7	AV	L1	GND
4.015500	33.20	10.4	46	12.8	AV	L1	GND

N Line

EUT: Data Transceiver Module
Manufacturer: Peo-Lite, Inc
Operating Condition: TX mode
Test Site: 3# SHIELDED ROOM
Operator: Cary
Test Specification: AC 120V/60Hz
Comment: M/N:DTR900-FC
Start of Test: 1/16/2010 / 4:26:41PM

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

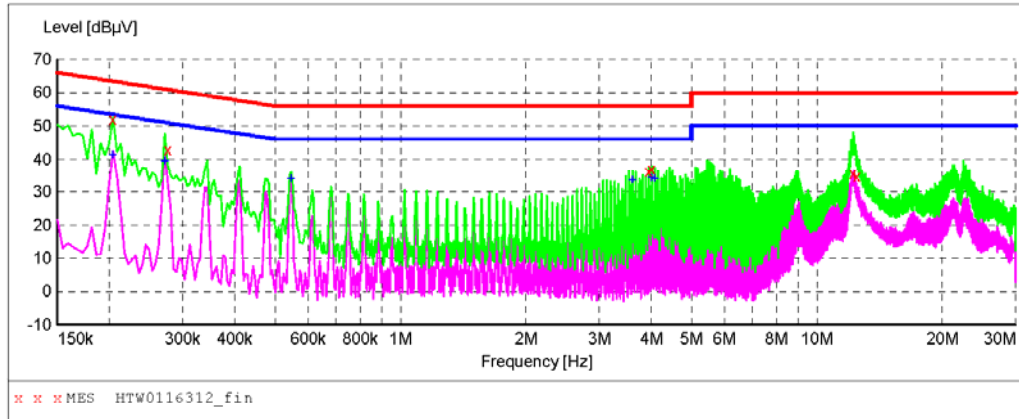**MEASUREMENT RESULT: "HTW0116312_fin"**

1/16/2010 4:29PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.204000	52.10	10.2	63	11.3	QP	N	GND
0.276000	42.80	10.2	61	18.1	QP	N	GND
3.948000	36.10	10.4	56	19.9	QP	N	GND
4.015500	36.90	10.4	56	19.1	QP	N	GND
12.232500	35.40	10.6	60	24.6	QP	N	GND
12.457500	34.70	10.6	60	25.3	QP	N	GND

MEASUREMENT RESULT: "HTW0116312_fin2"

1/16/2010 4:29PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.204000	41.20	10.2	53	12.2	AV	N	GND
0.271500	39.50	10.2	51	11.6	AV	N	GND
0.546000	33.90	10.2	46	12.1	AV	N	GND
3.606000	33.40	10.4	46	12.6	AV	N	GND
4.015500	34.20	10.4	46	11.8	AV	N	GND
4.083000	33.90	10.4	46	12.1	AV	N	GND

TEST DATA WITH HOST**L Line**

EUT: Data Transceiver Module
Manufacturer: Pro-Lite, Inc
Operating Condition: TX mode
Test Site: 3# SHIELDED ROOM
Operator: Cary
Test Specification: AC 120V/60Hz
Comment: M/N:DTR900-FC
Start of Test: 1/22/2010 / 9:29:06AM

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

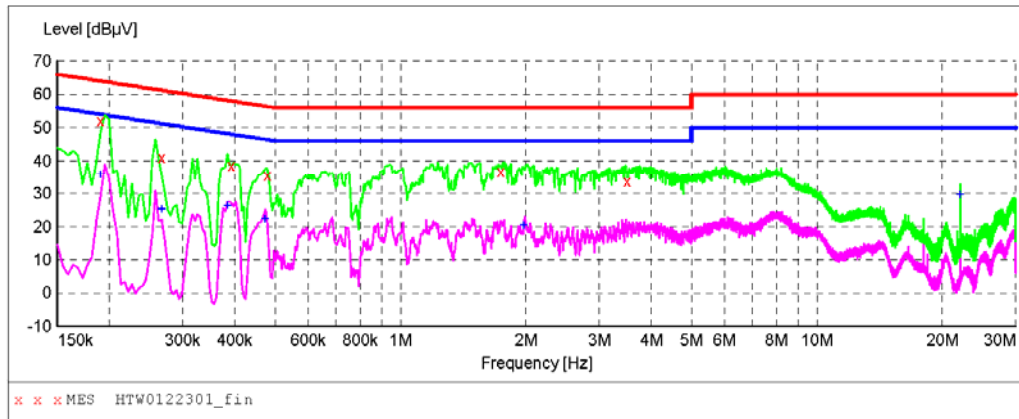**MEASUREMENT RESULT: "HTW0122301_fin"**

1/22/2010 9:31AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.190500	52.10	10.1	64	11.9	QP	L1	GND
0.267000	41.10	10.1	61	20.1	QP	L1	GND
0.393000	38.60	10.1	58	19.4	QP	L1	GND
0.478500	35.60	10.1	56	20.8	QP	L1	GND
1.743000	36.70	10.2	56	19.3	QP	L1	GND
3.498000	33.60	10.2	56	22.4	QP	L1	GND

MEASUREMENT RESULT: "HTW0122301_fin2"

1/22/2010 9:31AM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.190500	35.70	10.1	54	18.3	AV	L1	GND
0.267000	25.10	10.1	51	26.1	AV	L1	GND
0.384000	26.40	10.1	48	21.8	AV	L1	GND
0.474000	22.20	10.1	46	24.2	AV	L1	GND
1.977000	20.40	10.2	46	25.6	AV	L1	GND
22.119000	29.60	10.8	50	20.4	AV	L1	GND

N Line

EUT: Data Transceiver Module
Manufacturer: Pro-Lite, Inc
Operating Condition: TX mode
Test Site: 3# SHIELDED ROOM
Operator: Cary
Test Specification AC 120V/60Hz
Comment: M/N:DTR900-FC
Start of Test: 1/22/2010 / 9:32:39AM

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

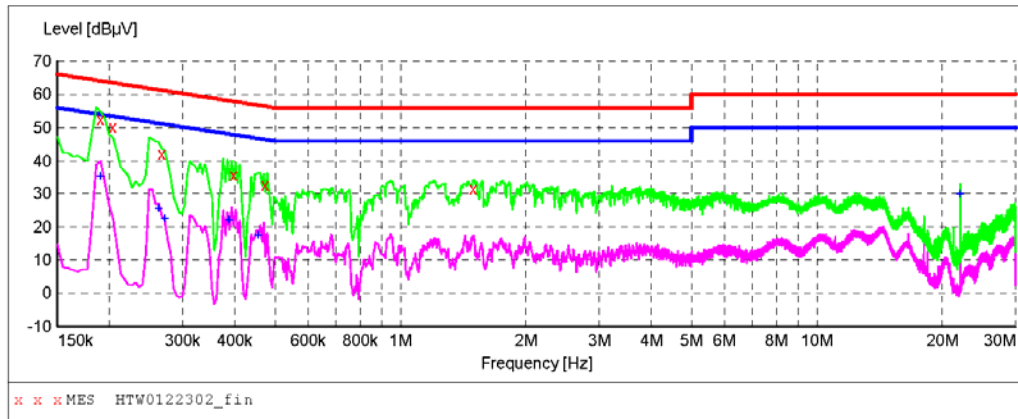**MEASUREMENT RESULT: "HTW0122302_fin"**

1/22/2010 9:35AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.190500	52.50	10.1	64	11.5	QP	N	GND
0.204000	50.20	10.1	63	13.2	QP	N	GND
0.267000	42.20	10.1	61	19.0	QP	N	GND
0.397500	35.50	10.1	58	22.4	QP	N	GND
0.474000	32.60	10.1	56	23.8	QP	N	GND
1.500000	31.40	10.2	56	24.6	QP	N	GND

MEASUREMENT RESULT: "HTW0122302_fin2"


1/22/2010 9:35AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.190500	35.10	10.1	54	18.9	AV	N	GND
0.262500	25.30	10.1	51	26.1	AV	N	GND
0.271500	22.50	10.1	51	28.6	AV	N	GND
0.388500	21.90	10.1	48	26.2	AV	N	GND
0.456000	17.30	10.1	47	29.5	AV	N	GND
22.119000	29.80	10.8	50	20.2	AV	N	GND


4.2. Radiated Emission

TEST CONFIGURATION

Radiated Emission Test Set-Up, Frequency range 30 - 1000MHz

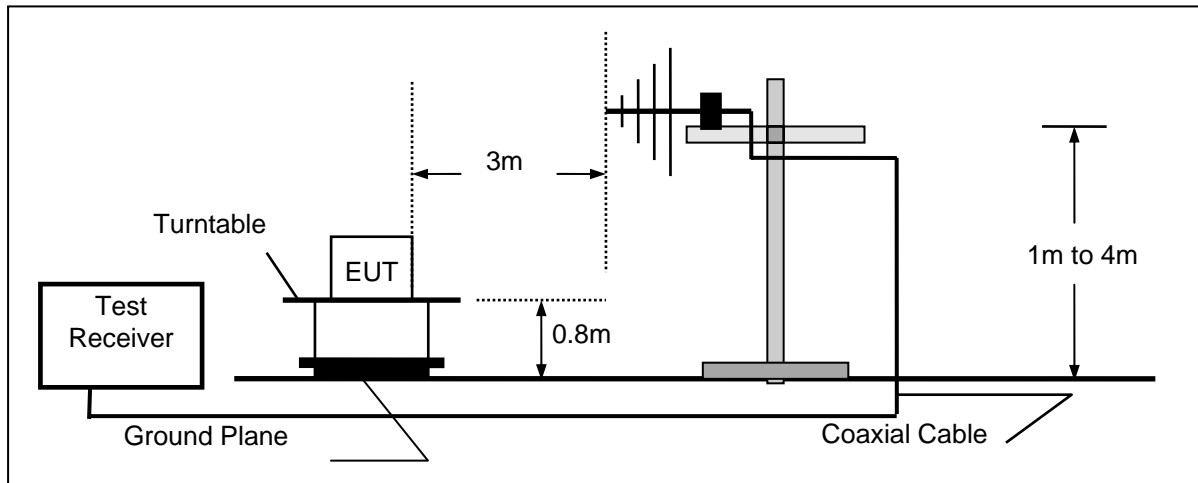

Radiated Emission Test Set-Up, Frequency range 1GHz - 5GHz

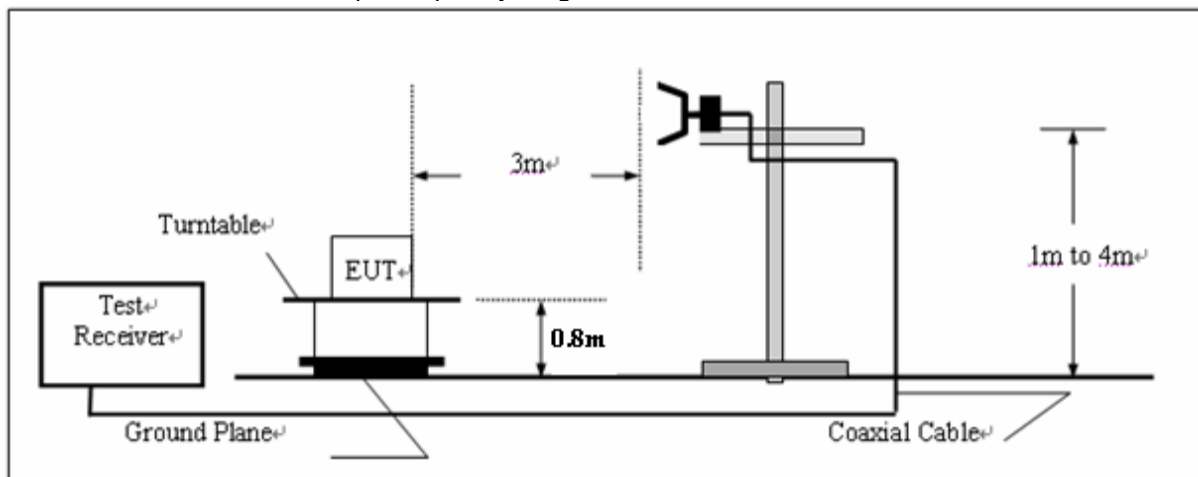

TEST PROCEDURE

- 1, The EUT was placed on a turn table which is 0.8m above ground plane.
- 2, Connect the EUT to the USB port of Notebook, and EUT will transmit automatic at 433.92MHz.
- 3, Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
- 4, And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 5, Repeat above procedures until all frequency measurements have been completed.

RADIATION LIMIT

For periodic transmitter, according to § 15.231(e), the field strength of fundamental from device at a distance of 3 meters shall not exceed the following values:

Fundamental frequency (MHz)	Distance (Meters)	Field strength of fundamental (dBμV/m)	
		AV	Peak
433.92	3	72.87	92.87
Note: For the band 260-470MHz, $\mu\text{V/m}$ at 3 meters = $16.6667(F) - 2833.333$ Where F is fundamental frequency 433.92MHz			

For periodic transmitter, according to § 15.231(e), the field strength radiated emissions from device at a distance of 3 meters shall not exceed the following values:

Fundamental frequency (MHz)	Distance (Meters)	Field strength of spurious emission	
		(μV/m)	(dBμV/m)
40.66-40.70	3	100	40
70-130	3	50	34
130-174	3	50 to 150	34 to 43.5
174-260	3	150	43.5
260-470	3	150 to 500	43.5 to 54
Above 470	3	500	54
Note: 1, For other bands limit pls refer 15.209 2, The limit below 1GHz based CISPR quasi-peak detector, the limit above 1GHz based average detector and peak limit is 74dBμV/m.			

FCC Part 15B § 15.209, all spurious emissions shall comply with the limits of table as follow:

Frequency (MHz)	Distance (Meters)	Radiated (μV/m)	Radiated (dBμV/m)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0

Note: The spurious emissions shall be attenuated to the average limits shown in above table or to the general limits shown in section 15.209, which limit permits a higher field strength.

TEST RESULTS

The emissions from 1GHz to 5GHz are peak measured peak and average level, below 1GHz measured QPlevel, detailed test data please see the following pages.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$


Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

Duty Cycle Correction Factor

Duty Cycle = TX on/100ms X 100% = 58.9 ms/100ms X 100% = 58.9%

Duty Cycle Correction Factor = $20\log(\text{Duty Cycle}) = -4.6$

The pulses of 100ms = 1 times

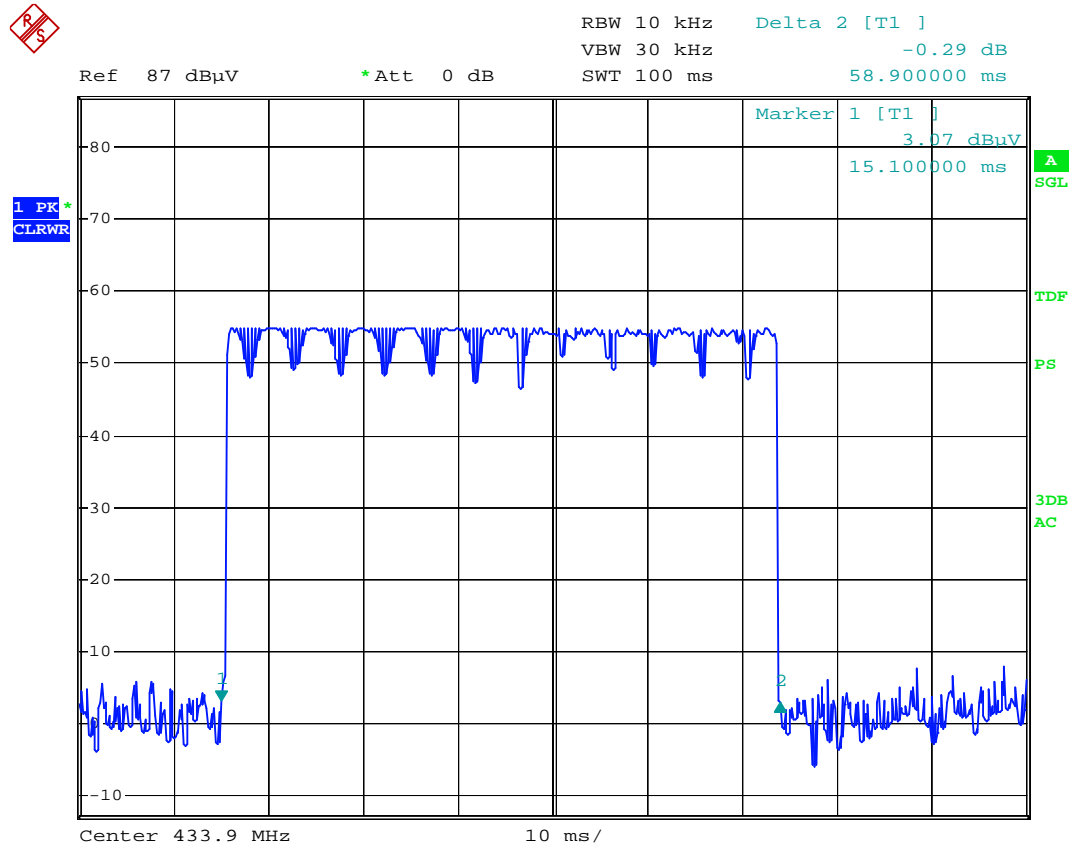


Time of a pulse = 58.9ms

TEST DATA OF STAND ALONE**30MHz to 1GHz Test Data**

EUT: Data Transceiver Module
 Manufacturer: Pro-Lite, Inc
 Operating Condition: TX mode
 Test Site: 3M CHAMBER
 Operator: Cary
 Test Specification: AC 120V/60Hz
 Comment: M/N:DTR900-FC
 Start of Test: 1/16/2010 / 6:07:19PM

SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 30.0 MHz 1.0 GHz MaxPeak Coupled 100 kHz HL562 09

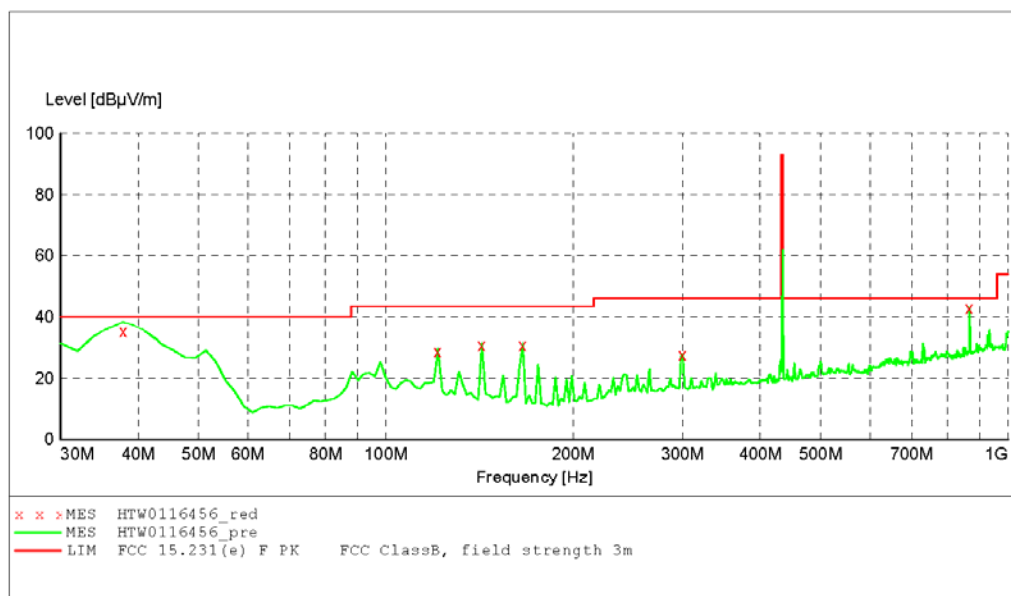**MEASUREMENT RESULT: "HTW0116456_red"**

1/16/2010 6:08PM


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
37.775551	34.70	-8.9	40.0	5.3	QP	100.0	223.00	VERTICAL
121.362725	28.80	-12.9	43.5	14.7	QP	100.0	197.00	VERTICAL
142.745491	30.80	-15.4	43.5	12.7	QP	100.0	130.00	VERTICAL
166.072144	30.70	-17.4	43.5	12.8	QP	100.0	43.00	VERTICAL
300.200401	27.70	-10.9	46.0	18.3	QP	100.0	312.00	VERTICAL
867.815631	42.80	0.2	46.0	3.2	QP	100.0	56.00	VERTICAL

Frequency (MHz)	Field strength (dBμV/m)	Limit (dBμV/m)	Duty Cycle Correction Factor	Result (dB)	Margin (dB)	Det.
433.92	62.2	92.87	/	62.2	30.67	Peak
	62.2	72.87	-4.6	57.6	15.27	AV
Note: Result = Field Strength + Duty Cycle Corrcetion Factor						

EUT: Data Transceiver Module
 Manufacturer: Pro-Lite, Inc
 Operating Condition: TX mode
 Test Site: 3M CHAMBER
 Operator: Cary
 Test Specification: AC 120V/60Hz
 Comment: M/N:DTR900-FC
 Start of Test: 1/16/2010 / 5:47:36PM

SWEEP TABLE: "test (30M-1G)"

Short Description:	Field Strength
Start Stop Detector Meas. IF Transducer	
Frequency Frequency Time Bandw.	
30.0 MHz 1.0 GHz MaxPeak Coupled 100 kHz HL562 09	

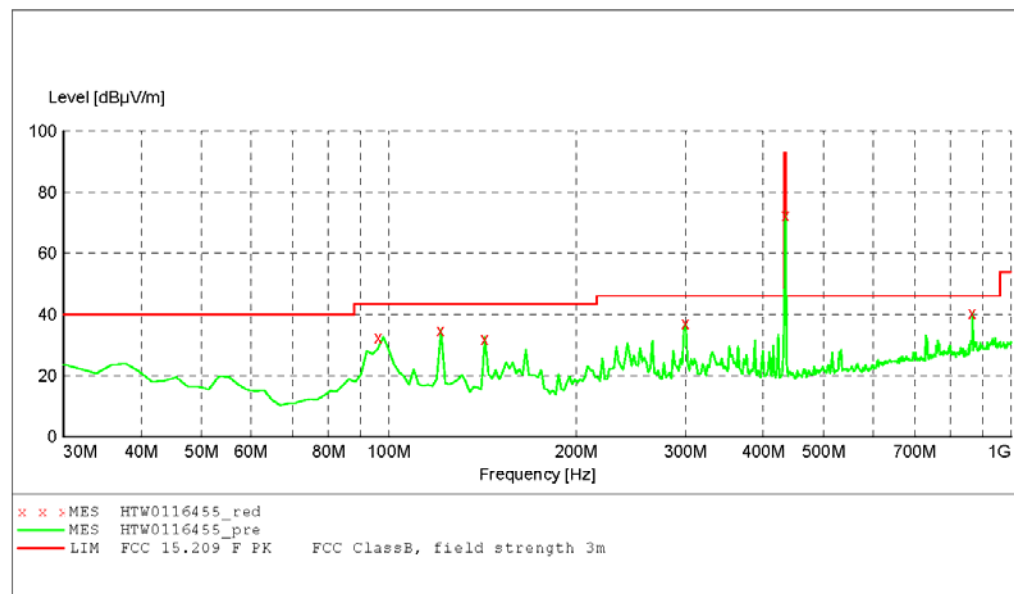

MEASUREMENT RESULT: "HTW0116455_red"

1/16/2010 5:49PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
98.036072	32.70	-13.8	43.5	10.8	QP	100.0	107.00	HORIZONTAL
121.362725	34.80	-12.9	43.5	8.7	QP	100.0	261.00	HORIZONTAL
142.745491	32.00	-15.4	43.5	11.5	QP	100.0	113.00	HORIZONTAL
300.200401	37.10	-10.9	46.0	8.9	QP	100.0	167.00	HORIZONTAL
434.328657	72.00	-8.6	92.9	20.9	QP	100.0	15.00	HORIZONTAL
867.815631	40.50	0.2	46.0	5.5	QP	100.0	315.00	HORIZONTAL


Frequency (MHz)	Field strength (dBμV/m)	Limit (dBμV/m)	Duty Cycle Correction Factor	Result (dB)	Margin (dB)	Det.
433.92	72.6	92.87	/	72.6	20.27	Peak
	72.6	72.87	-4.6	68.0	4.87	AV
Note: Result = Field Strength + Duty Cycle Corrcetion Factor						

1GHz to 5GHz Test Data

EUT: Data Transceiver Module
Manufacturer: Pro-Lite, Inc
Operating Condition: TX mode
Test Site: 3M CHAMBER
Operator: Cary
Test Specification: AC 230V/50Hz
Comment: M/N:DTR900-FC
Start of Test: 1/16/2010 / 6:20:43PM

SWEEP TABLE: "test (1G-18G) P"

Short Description: EN 55022 Field Strength
Start Stop Detector Meas. IF Transducer
Frequency Frequency Time Bandw.
1.0 GHz 18.0 GHz MaxPeak Coupled 1 MHz HF906
Average

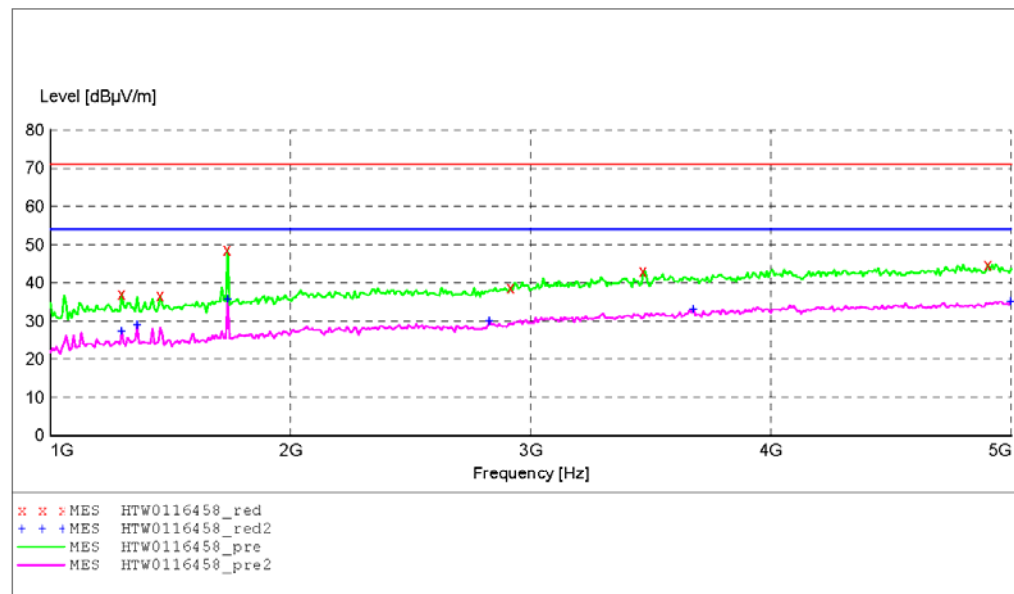**MEASUREMENT RESULT: "HTW0116458_red"**

1/16/2010 6:22PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
1296.593186	37.20	-8.1	71.0	33.8	Peak	100.0	171.00	HORIZONTAL
1456.913828	36.70	-7.7	71.0	34.3	Peak	100.0	201.00	HORIZONTAL
1737.474950	48.70	-6.4	71.0	22.3	Peak	100.0	211.00	HORIZONTAL
2915.831663	38.90	-2.3	71.0	32.1	Peak	100.0	295.00	HORIZONTAL
3468.937876	43.20	-0.2	71.0	27.8	Peak	100.0	211.00	HORIZONTAL
4903.807615	44.80	3.6	71.0	26.2	Peak	100.0	0.00	HORIZONTAL

MEASUREMENT RESULT: "HTW0116458_red2"


1/16/2010 6:22PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
1296.593186	27.20	-8.1	54.0	26.8	AV	100.0	181.00	HORIZONTAL
1360.721443	28.80	-7.9	54.0	25.2	AV	100.0	192.00	HORIZONTAL
1737.474950	35.60	-6.4	54.0	18.4	AV	100.0	211.00	HORIZONTAL
2827.655311	30.00	-3.0	54.0	24.0	AV	100.0	248.00	HORIZONTAL
3677.354709	33.00	0.6	54.0	21.0	AV	100.0	49.00	HORIZONTAL
5000.000000	35.10	4.0	54.0	18.9	AV	100.0	346.00	HORIZONTAL

EUT: Data Transceiver Module
Manufacturer: Pro-Lite, Inc
Operating Condition: TX mode
Test Site: 3M CHAMBER
Operator: Cary
Test Specification: AC 230V/50Hz
Comment: M/N:DTR900-FC
Start of Test: 1/16/2010 / 6:24:22PM

SWEEP TABLE: "test (1G-18G) P"

Short Description: EN 55022 Field Strength
Start Stop Detector Meas. IF Transducer
Frequency Frequency Time Bandw.
1.0 GHz 18.0 GHz MaxPeak Coupled 1 MHz HF906
Average

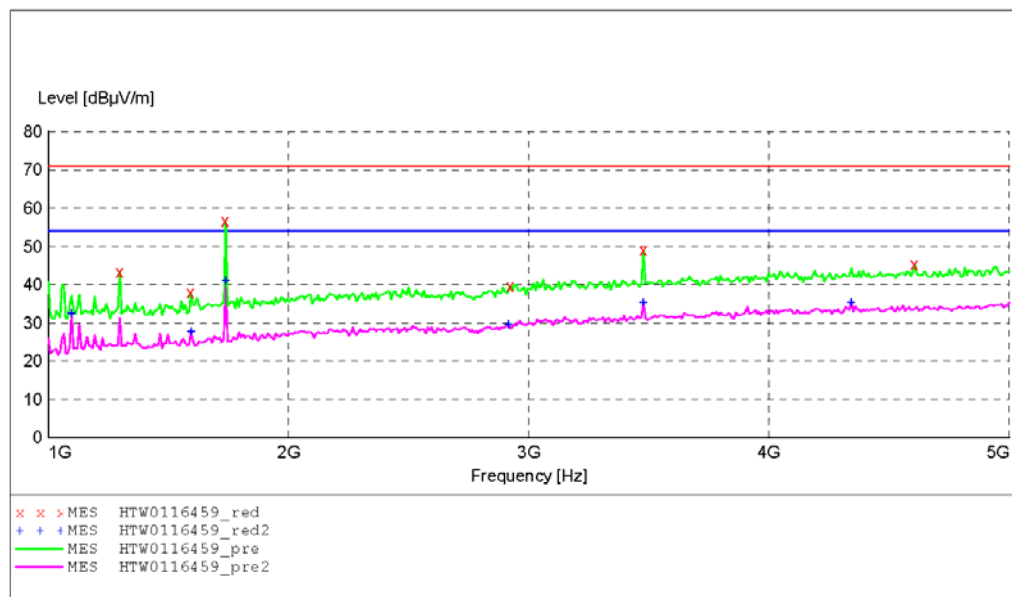**MEASUREMENT RESULT: "HTW0116459_red"**

1/16/2010 6:25PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
1296.593186	43.40	-8.1	71.0	27.6	Peak	100.0	25.00	VERTICAL
1593.186373	38.00	-7.3	71.0	33.0	Peak	100.0	217.00	VERTICAL
1737.474950	56.80	-6.4	71.0	14.2	Peak	100.0	177.00	VERTICAL
2923.847695	39.60	-2.3	71.0	31.4	Peak	100.0	0.00	VERTICAL
3476.953908	49.00	-0.1	71.0	22.0	Peak	100.0	177.00	VERTICAL
4607.214429	45.30	2.4	71.0	25.7	Peak	100.0	257.00	VERTICAL

MEASUREMENT RESULT: "HTW0116459_red2"

1/16/2010 6:25PM


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
1096.192385	32.40	-9.3	54.0	21.6	AV	100.0	167.00	VERTICAL
1593.186373	27.60	-7.3	54.0	26.4	AV	100.0	217.00	VERTICAL
1737.474950	41.00	-6.4	54.0	13.0	AV	100.0	177.00	VERTICAL
2915.831663	29.50	-2.3	54.0	24.5	AV	100.0	14.00	VERTICAL
3476.953908	35.30	-0.1	54.0	18.7	AV	100.0	177.00	VERTICAL
4342.685371	35.30	2.1	54.0	18.7	AV	100.0	56.00	VERTICAL

TEST DATA WITH HOST**30MHz to 1GHz Test Data**

EUT: Data Transceiver Module
 Manufacturer: Pro-Lite, Inc
 Operating Condition: TX mode
 Test Site: 3M CHAMBER
 Operator: Cary
 Test Specification: AC 120V/60Hz
 Comment: M/N:DTR900-FC
 Start of Test: 1/21/2010 / 3:02:21PM

SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 30.0 MHz 1.0 GHz MaxPeak Coupled 100 kHz HL562 09

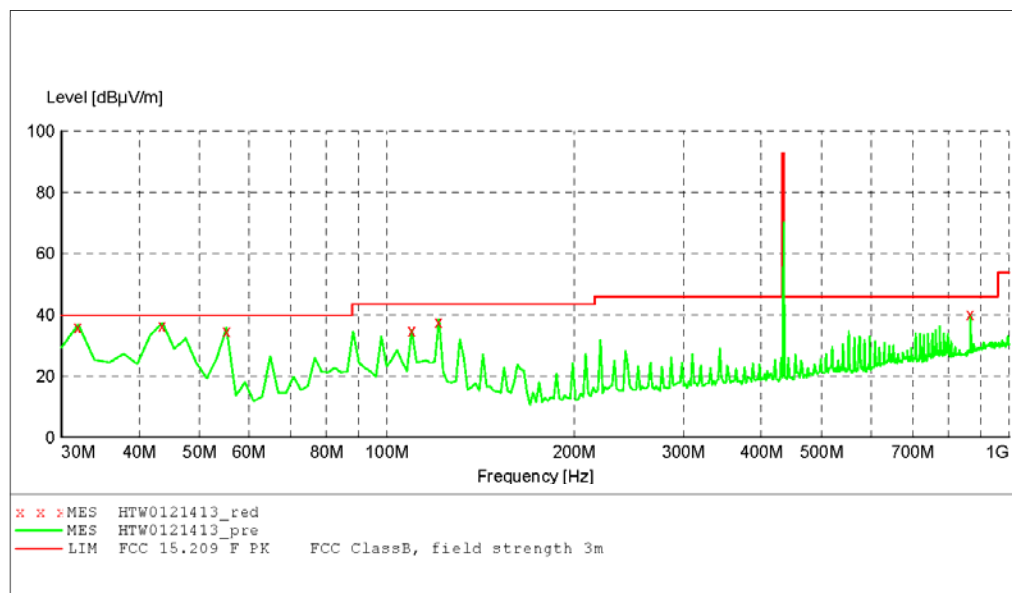**MEASUREMENT RESULT: "HTW0121413_red"**

1/22/2010 8:55AM


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
31.943888	35.90	-5.8	40.0	4.1	QP	100.0	355.00	VERTICAL
43.607214	36.40	-12.3	40.0	3.6	QP	100.0	344.00	VERTICAL
55.270541	34.60	-17.8	40.0	5.4	QP	100.0	29.00	VERTICAL
109.699399	35.00	-13.3	43.5	8.5	QP	100.0	29.00	VERTICAL
121.362725	37.60	-12.9	43.5	5.9	QP	100.0	0.00	VERTICAL
867.815600	40.20	0.2	46.0	5.8	QP	100.0	0.00	VERTICAL

Frequency (MHz)	Field strength (dBμV/m)	Limit (dBμV/m)	Duty Cycle Correction Factor	Result (dB)	Margin (dB)	Det.
433.92	70.1	92.87	/	70.1	22.77	Peak
	70.1	72.87	-4.6	65.5	7.37	AV
Note: Result = Field Strength + Duty Cycle Corrcction Factor						

EUT: Data Transceiver Module
 Manufacturer: Pro-Lite, Inc
 Operating Condition: TX mode
 Test Site: 3M CHAMBER
 Operator: Cary
 Test Specification: AC 120V/60Hz
 Comment: M/N:DTR900-FC
 Start of Test: 1/21/2010 / 3:04:05PM

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency 30.0 MHz	Frequency 1.0 GHz	MaxPeak	Coupled	100 kHz	HL562 09

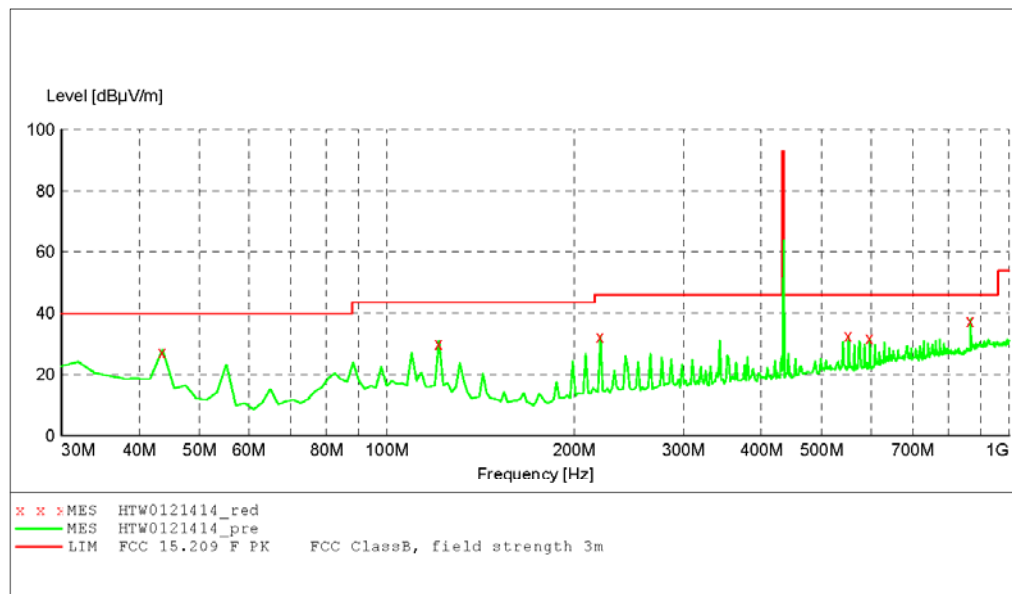

MEASUREMENT RESULT: "HTW0121414_red"

1/22/2010 9:00AM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
43.607214	27.10	-12.3	40.0	12.9	QP	100.0	99.00	HORIZONTAL
121.362725	30.00	-12.9	43.5	13.5	QP	100.0	347.00	HORIZONTAL
220.501002	32.40	-14.3	46.0	13.6	QP	100.0	293.00	HORIZONTAL
552.905812	32.50	-5.9	46.0	13.5	QP	100.0	66.00	HORIZONTAL
597.615230	31.90	-5.3	46.0	14.1	QP	100.0	159.00	HORIZONTAL
867.509018	37.40	0.2	46.0	8.6	QP	100.0	239.00	HORIZONTAL


Frequency (MHz)	Field strength (dBμV/m)	Limit (dBμV/m)	Duty Cycle Correction Factor	Result (dB)	Margin (dB)	Det.
433.92	63.7	92.87	/	63.7	29.17	Peak
	63.7	72.87	-4.6	59.1	13.77	AV
Note: Result = Field Strength + Duty Cycle Corrcetion Factor						

1GHz to 5GHz Test Data

EUT: Data Transceiver Module
Manufacturer: Pro-Lite, Inc
Operating Condition: TX mode
Test Site: 3M CHAMBER
Operator: Cary
Test Specification: AC 230V/50Hz
Comment: M/N:DTR900-FC
Start of Test: 1/22/2010 / 8:45:52AM

SWEEP TABLE: "test (1G-18G) P"

Short Description: EN 55022 Field Strength
Start Stop Detector Meas. IF Transducer
Frequency Frequency Time Bandw.
1.0 GHz 18.0 GHz MaxPeak Coupled 1 MHz HF906
Average

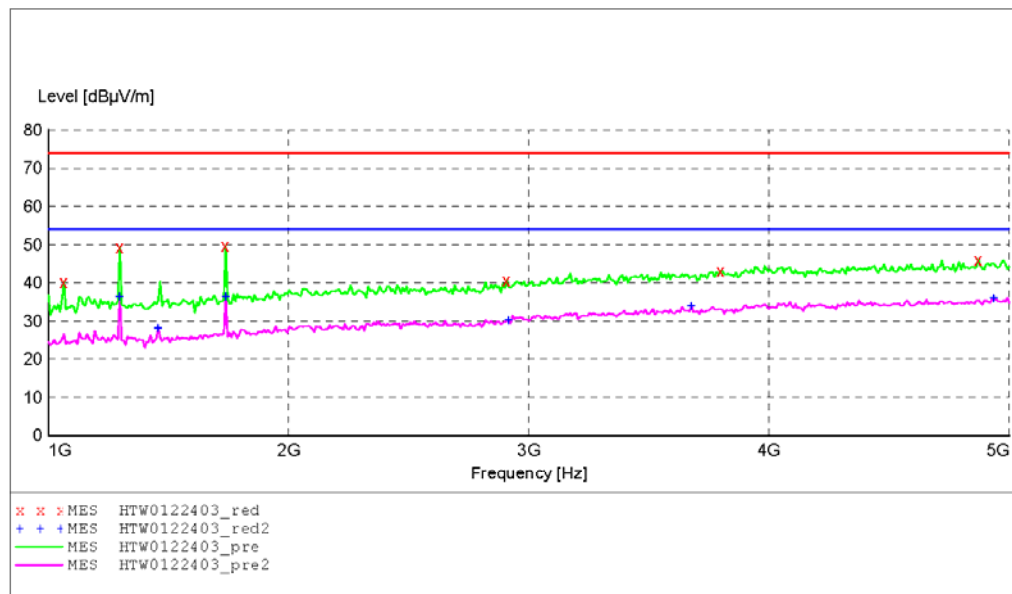**MEASUREMENT RESULT: "HTW0122403_red"**

1/22/2010 8:47AM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
1064.128257	40.30	-9.6	74.0	33.7	Peak	100.0	277.00	VERTICAL
1296.593186	49.30	-8.1	74.0	24.7	Peak	100.0	283.00	VERTICAL
1737.474950	49.70	-6.4	74.0	24.3	Peak	100.0	200.00	VERTICAL
2907.815631	40.70	-2.4	74.0	33.3	Peak	100.0	107.00	VERTICAL
3797.595190	43.10	0.9	74.0	30.9	Peak	100.0	75.00	VERTICAL
4871.743487	46.10	3.5	74.0	27.9	Peak	100.0	0.00	VERTICAL

MEASUREMENT RESULT: "HTW0122403_red2"


1/22/2010 8:47AM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
1296.593186	36.40	-8.1	54.0	17.6	AV	100.0	283.00	VERTICAL
1456.913828	28.10	-7.7	54.0	25.9	AV	100.0	86.00	VERTICAL
1737.474950	36.40	-6.4	54.0	17.6	AV	100.0	200.00	VERTICAL
2915.831663	30.20	-2.3	54.0	23.8	AV	100.0	143.00	VERTICAL
3677.354709	33.80	0.6	54.0	20.2	AV	100.0	132.00	VERTICAL
4935.871743	36.00	3.8	54.0	18.0	AV	100.0	143.00	VERTICAL

EUT: Data Transceiver Module
Manufacturer: Pro-Lite, Inc
Operating Condition: TX mode
Test Site: 3M CHAMBER
Operator: Cary
Test Specification: AC 230V/50Hz
Comment: M/N:DTR900-FC
Start of Test: 1/22/2010 / 8:48:17AM

SWEEP TABLE: "test (1G-18G) P"

Short Description: EN 55022 Field Strength
Start Stop Detector Meas. IF Transducer
Frequency Frequency Time Bandw.
1.0 GHz 18.0 GHz MaxPeak Coupled 1 MHz HF906(2007)
Average

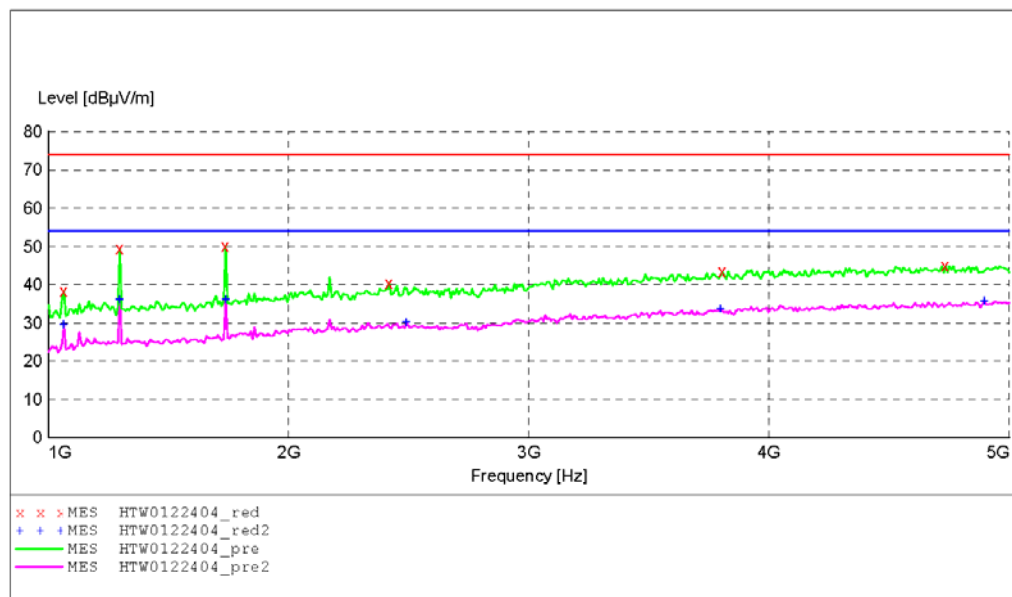***MEASUREMENT RESULT: "HTW0122404_red"***

1/22/2010 8:49AM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
1064.128257	38.40	-9.6	74.0	35.6	Peak	100.0	280.00	HORIZONTAL
1296.593186	49.40	-8.1	74.0	24.6	Peak	100.0	331.00	HORIZONTAL
1737.474950	50.10	-6.4	74.0	23.9	Peak	100.0	97.00	HORIZONTAL
2418.837675	40.40	-3.3	74.0	33.6	Peak	100.0	23.00	HORIZONTAL
3805.611222	43.50	0.9	74.0	30.5	Peak	100.0	341.00	HORIZONTAL
4735.470942	44.90	2.9	74.0	29.1	Peak	100.0	12.00	HORIZONTAL


MEASUREMENT RESULT: "HTW0122404_red2"

1/22/2010 8:49AM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
1064.128257	29.50	-9.6	54.0	24.5	AV	100.0	223.00	HORIZONTAL
1296.593186	36.20	-8.1	54.0	17.8	AV	100.0	331.00	HORIZONTAL
1737.474950	36.10	-6.4	54.0	17.9	AV	100.0	97.00	HORIZONTAL
2490.981964	30.10	-3.3	54.0	23.9	AV	100.0	175.00	HORIZONTAL
3797.595190	33.70	0.9	54.0	20.3	AV	100.0	97.00	HORIZONTAL
4895.791583	35.70	3.6	54.0	18.3	AV	100.0	31.00	HORIZONTAL

4.3. Deactivation Time

TEST CONFIGURATION

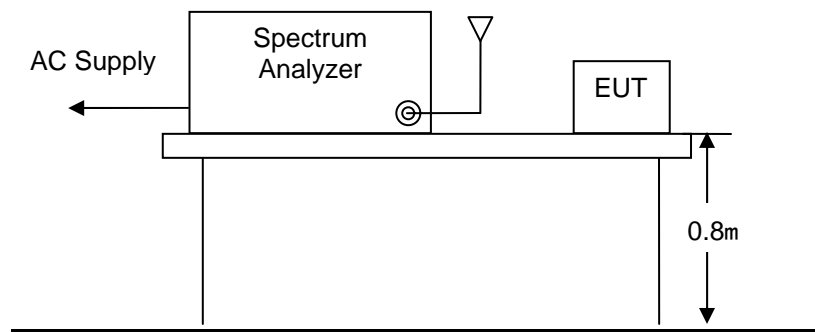

TEST PROCEDURE

- 1 The EUT was placed on a wooded table which is 0.8m height and close to receiver antenna of spectrum analyzer.
- 2 The spectrum analyzer resolution bandwidth was set to 100kHz and video bandwidth was set to 300kHz to encompass all significant spectral components during the test. The spectrum analyzer was operated in linear scale and zero span mode after tuning to the transmitter carrier frequency.

Limit



For periodic transmitter, according to FCC Part 15C § 15.231(e)

Item	Limit (second)
One transmission time	not greater than 1 second
Transmission period	at least 30 times the duration of the transmsion but in no case less than 10 second

TEST RESULTS


EUT statement: The transmitter was automatically activated, and the carrier frequency 433.92MHz:

Frequency (MHz)	One transmission time (second)	Transmission period (second)	Result
433.92	0.0592	11.04	Pass

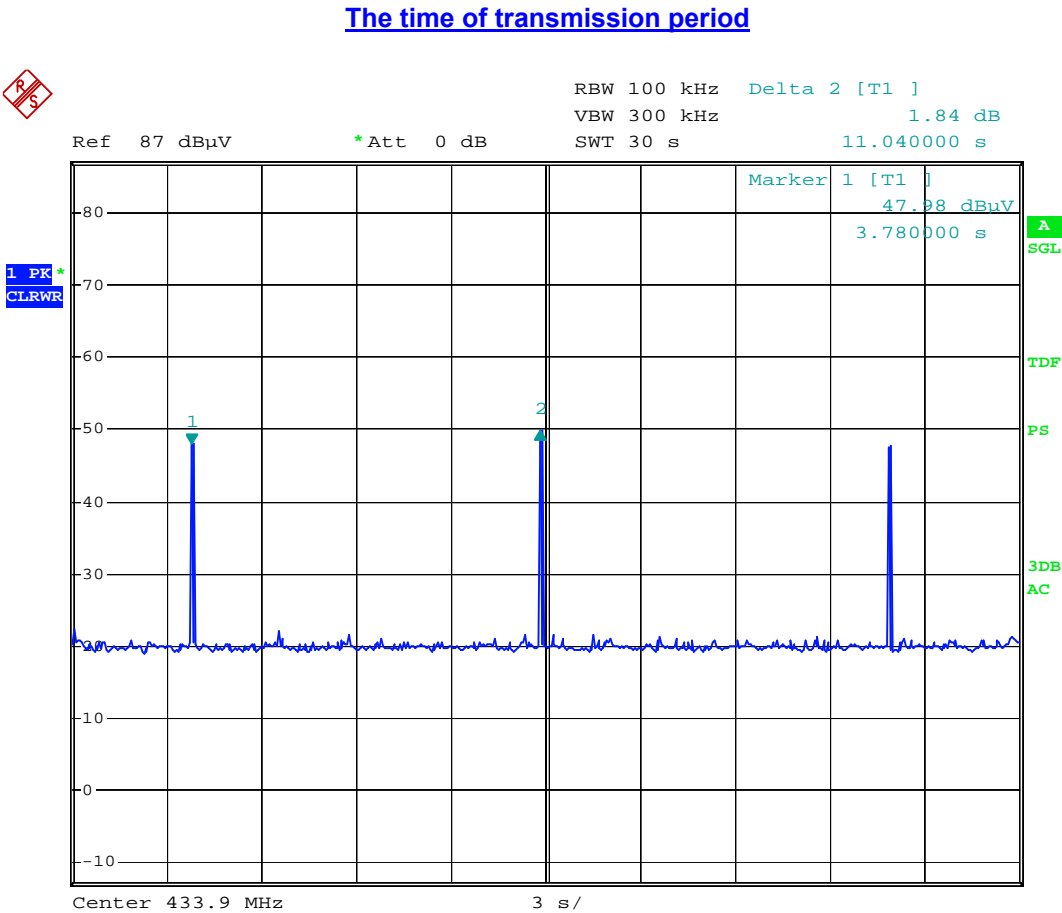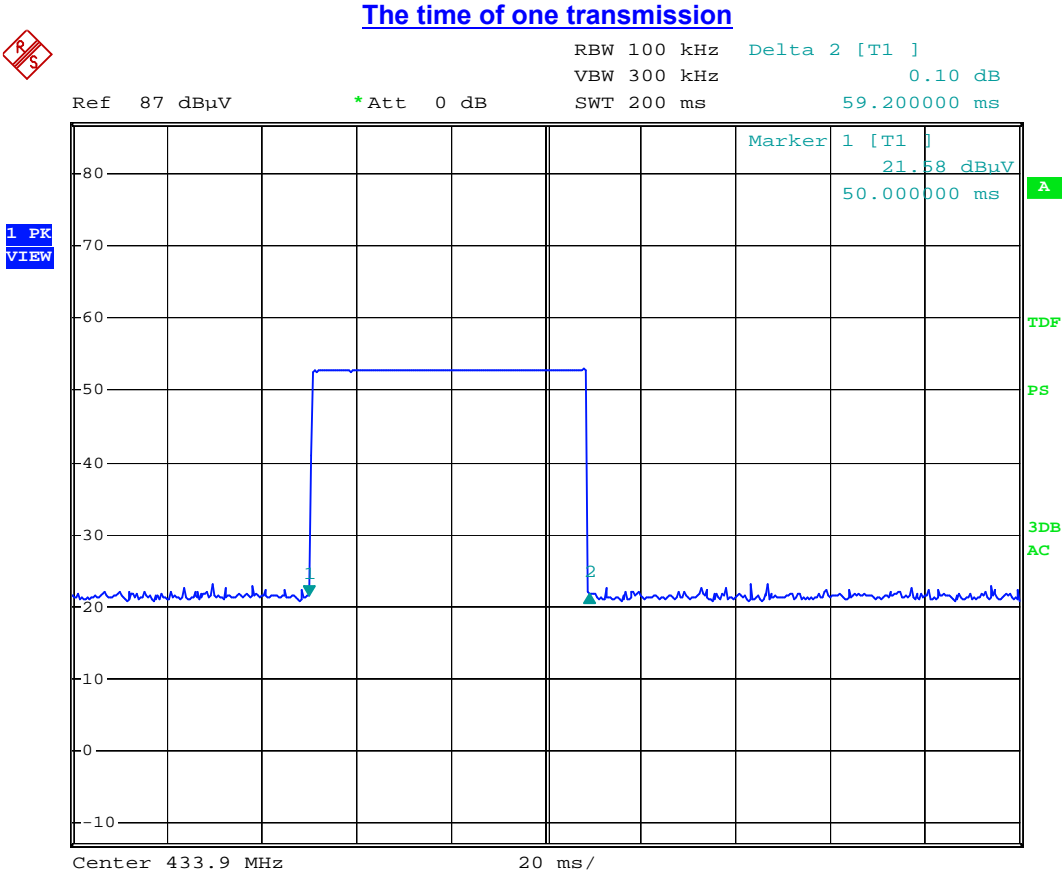

4.4. 20dB Bandwidth

TEST CONFIGURATION

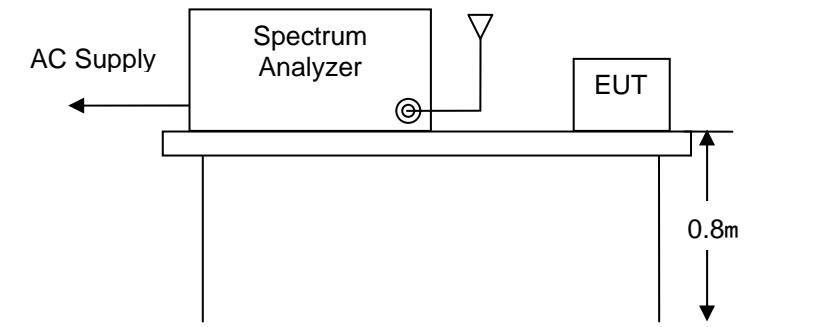

TEST PROCEDURE

- 1 The EUT was placed on a wooded table which is 0.8m height and close to receiver antenna of spectrum analyzer.
- 2 The spectrum analyzer resolution bandwidth was set to 10kHz and video bandwidth was set to 30kHz to encompass all significant spectral components during the test. The detector was set to peak and hold mode to clearly observe the components.

Limit


According to FCC Part 15C § 15.231(c)

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz.

TEST RESULTS

Frequency (MHz)	Measurement Bandwidth (KHz)	Limit (kHz)	Result
433.92	248	1085	Pass

20dB Bandwidth

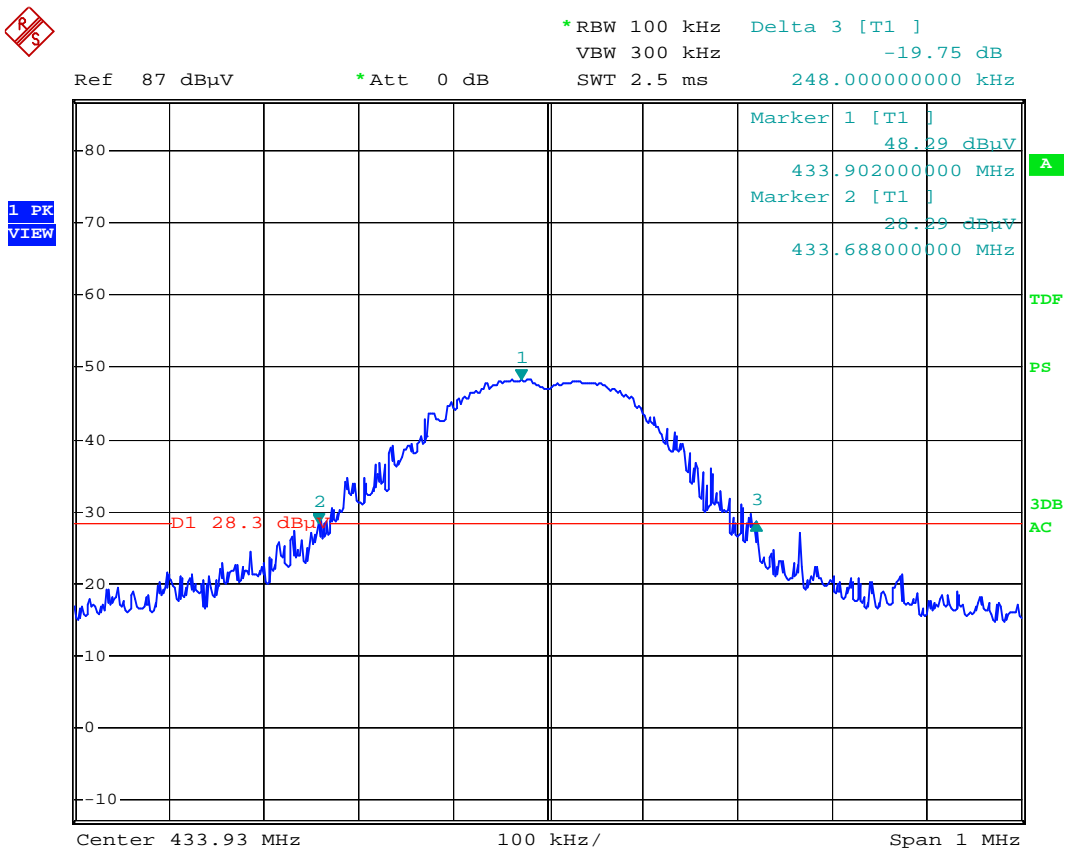

4.5. Antenna Requirement

According to FCC Part 15C § 15.203,

- a), An intentional radiator shall be de-signed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
- b), The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The EUT use of a nonstandard antenna connector(SMA-B), so the EUT meets the requirements of antenna. Detial please see the photos as following:

