



FCC TEST REPORT

47 CFR FCC Part 15 Subpart C & 15.231

FCC ID: TWNZF01-D

Report Reference No.....: TRE12050039

Compiled by

(position+printed name+signature)...: File administrators Eric Zhang

Eric Zhang

Supervised by

(position+printed name+signature)...: Test Engineer Tim Zhang

Tim Zhang

Approved by

(position+printed name+signature)...: Manager Wenliang Li

Wenliang Li

Date of issue.....: Jun 07, 2012

Testing Laboratory Name: Shenzhen Huatongwei International Inspection Co., Ltd

Address: Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China

Applicant's name: Pro-Lite, Inc.

Address: 3505 Cadillac Ave. Building D

Manufacturer's name: NINGBO YOUWON TECHNOLOGY ELECTRONICS CO., LTD

Address: #928, XUEYUAN ROAD, LUGANG VILLAGE, GAOQIAO TOWN, NINGBO

Test specification:

Standard: 47 CFR FCC Part 15 Subpart C & 15.231

ANSI C63.10: 2009

TRF Originator.....: Shenzhen Huatongwei International Inspection CO., Ltd

Master TRF.....: Dated 2006-06

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Equipment Under Test: Wireless Module

Trade Mark: /

Model/Type reference.....: ZF01-D

Listed Models: /

Result.....: Complied

T E S T R E P O R T

Test Report No. :	TRE12050039	Jun 07, 2012
		Date of issue

Equipment under Test : Wireless Module

Model /Type : ZF01-D

Listed Models : /

Applicant : **Pro-Lite, Inc.**

Address : 3505 Cadillac Ave. Building D

Manufacturer : **NINGBO YOUWON TECHNOLOGY ELECTRONICS CO., LTD**

Address : #928, XUEYUAN ROAD, LUGANG VILLAGE, GAOQIAO TOWN,
NINGBO

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2.</u>	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Equipment Under Test Power Supply	5
2.3.	S Short description of the Equipment under Test (EUT)	5
2.4.	EUT operation mode	5
2.5.	Related Submittal(s) / Grant (s)	5
2.6.	Modifications	6
2.7.	Configuration of Tested System	6
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	8
3.4.	Statement of the measurement uncertainty	8
3.5.	Equipments Used during the Test	9
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>10</u>
4.1.	AC Conducted Emission	10
4.2.	Radiated Emission	15
4.3.	Deactivation Time	39
4.4.	20dB Bandwidth	50
4.5.	Antenna Requirement	54
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>56</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>58</u>

1. TEST STANDARDS

The tests were performed according to following standards:

[47 CFR FCC Part 15 Subpart C & 15.231](#) – Intentional Radiators & Periodic operation in the band 40.66–40.70 MHz and above 70 MHz

[ANSI C63.10: 2009](#) – American National Standard for Testing Unlicensed Wireless Devices

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample : May 07, 2012

Testing commenced on : May 07, 2012

Testing concluded on : Jun 07, 2012

Note:1.The test report based on original test report No.: WE10090038.

2.IC mega8 and IC mega328 are the control IC, not the main RF IC, all of the EUT have the same RF IC.

3.the Original EUT have three switch and the new EUT have two switch,Please see EUT photo.the difference between them are the number of frequency.

2.2. Equipment Under Test Power Supply

Power supply voltage : ☐ 120V / 60 Hz ☐ 115V / 60Hz
☐ 12 V DC ☐ 24 V DC
☒ Other (specified in blank below)

DC 5V from PC

2.3. S Short description of the Equipment under Test (EUT)

Product Name : Wireless Module

Model Number : ZF01-D

Original EUT Operation : 433.05MHz,432.70MHz,433.31MHz
Frequency 433.54MHz,434.05MHz,434.31MHz
434.61MHz,434.91MHz

New EUT Operation : 433.05MHz, 433.63MHz,434.43MHz
Frequency ,434.91MHz

Modulation Technology : GFSK

Transmitter Type : Periodic Transmitter

Sample Type : Prototype

I/O Port : USB, RS232, RS422, TTL

For more details, refer to the user's manual of the EUT.

Remark: The EUT has been tested with 4 different ports, and the worst case is EUT with USB port.
And the data recorded in this report is the worst case test data.

2.4. EUT operation mode

The EUT has been tested under typical operating condition.


2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **TWNZF01-D** filing to comply with the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

2.7. Configuration of Tested System

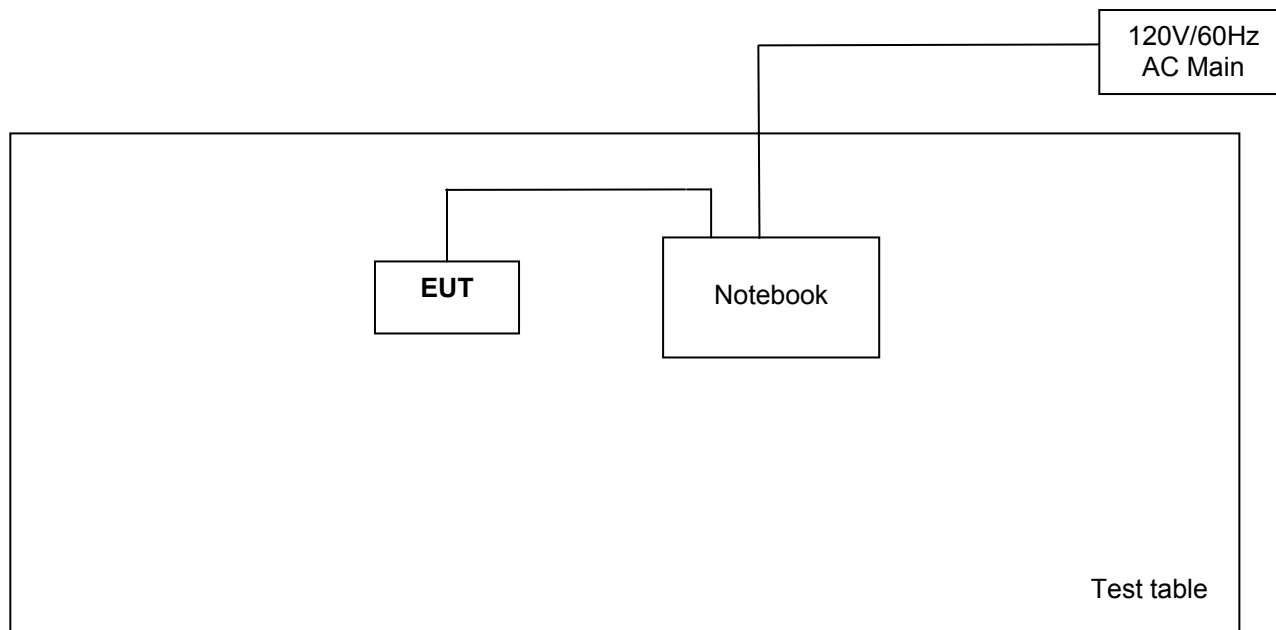

Equipment Used in Tested System

No.	Equipment	Manufacturer	Model No.	Serial No.
1	Notebook	DELL	PP01L	2F485A00

Note: For actual sample please see test setup photos and EUT external photos.

2.8. SUMMARY OF STANDARDS AND RUSELT

No.	Test Item	Test Standards and Procedure	Result
1	AC Conducted Emission	FCC Subpart 15C § 15.207	Compliant
2	Radiated Emission	FCC Subpart 15C § 15.209 FCC Subpart 15C § 15.231(e)	Compliant
3	Deactivation Time	FCC Subpart 15C § 15.231(e)	Compliant
4	20dB Bandwidth	FCC Subpart 15C § 15.231(c)	Compliant
5	Antenna Requirement	FCC Subpart 15C § 15.203	Compliant

NOTE: 1) The detailed test result please see section 4.

2) The test report merely corresponds to the test sample.

3) It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Huatongwei International Inspection Co., Ltd
Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China
Phone: 86-755-26715686 Fax: 86-755-26748089

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2009) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: Mar. 30, 2009. Valid time is until Feb 28, 2015.

A2LA-Lab Cert. No. 2243.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until Sept. 30, 2013.

FCC-Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date Jun. 01, 2012, valid time is until Jun. 01, 2015.

IC-Registration No.: 5377A

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Jan. 25, 2011, valid time is until Jan. 24, 2014.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

NEMKO-Aut. No.: ELA125

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10, the authorization is valid through July 07, 2013

VCCI

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) and Shielded Room (8m×4m×3m) of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-292. Date of Registration: Dec. 24, 2010. Valid time is until Dec. 23, 2013.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: Dec. 20, 2009. Valid time is until Dec. 19, 2012.

Telecommunication Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-1837. Date of Registration: May 07, 2010. Valid time is until May 06, 2013.

DNV

Shenzhen Huatongwei International Inspection Co., Ltd. has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025 (2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug. 24, 2013.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	<u>22 ° C</u>
Humidity:	<u>65 %</u>
Atmospheric pressure:	<u>950-1050mbar</u>

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.22dB	(1)
Radiated Emission	1~12.75GHz	4.35dB	(1)
20dB Bandwidth	/	0.25dB	(1)
Deactivation Time	/	0.5ms	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.5. Equipments Used during the Test

Conducted Emissions					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100106	2011/11
2	Artificial Mains	ROHDE & SCHWARZ	ESH2-Z5	100028	2011/11
3	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100044	2011/11
4	EMI Test Software	ROHDE & SCHWARZ	ESK1	N/A	2011/11


Radiated Emissions					
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ULTRA-BROADBAND ANTENNA	ROHDE & SCHWARZ	HL562	100015	2011/11
2	Amplifier	Sonoma	310 N	291722	2011/11
3	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESI 26	100009	2011/11
4	RF TEST PANEL	ROHDE & SCHWARZ	TS / RSP	335015/ 0017	2011/11
5	TURNTABLE	ETS	2088	2149	2011/11
6	ANTENNA MAST	ETS	2075	2346	2011/11
7	EMI TEST SOFTWARE	ROHDE & SCHWARZ	ESK1	N/A	2011/11
8	Double-Ridged-Waveguide Horn Antenna	ROHDE & SCHWARZ	HF906	100039	2011/11
9	Amplifier	ROHDE & SCHWARZ	HF906 (1-18)GMZ	00101800-28-5A	2011/11

20dB Bandwidth & Deactivation Time & Duty Cycle					
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESCI	100106	2011/11

4. TEST CONDITIONS AND RESULTS

4.1. AC Conducted Emission

TEST CONFIGURATION

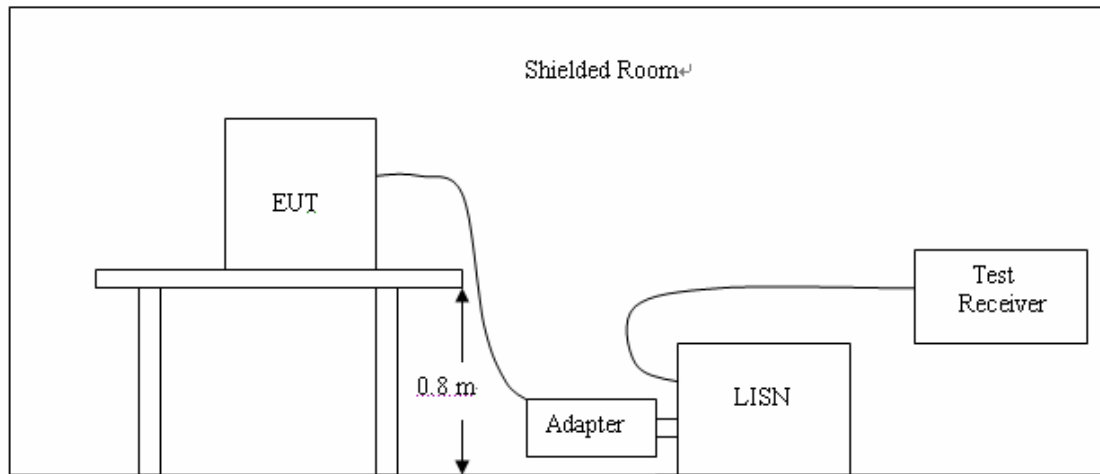

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4.
- 2 Support equipment, if needed, was placed as per ANSI C63.4.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4 The EUT received DC 5V from PC input 120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

CONDUCTED LIMIT

According to FCC Subpart 15 B § 15.207 AC Conducted Emission Limits is as following :

Frequency fange (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.1~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50
* Decreasing linearly with the logarithm of the frequency		


TEST RESULTS

The original test data of IC: mega8

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description:

150K-30M Voltage

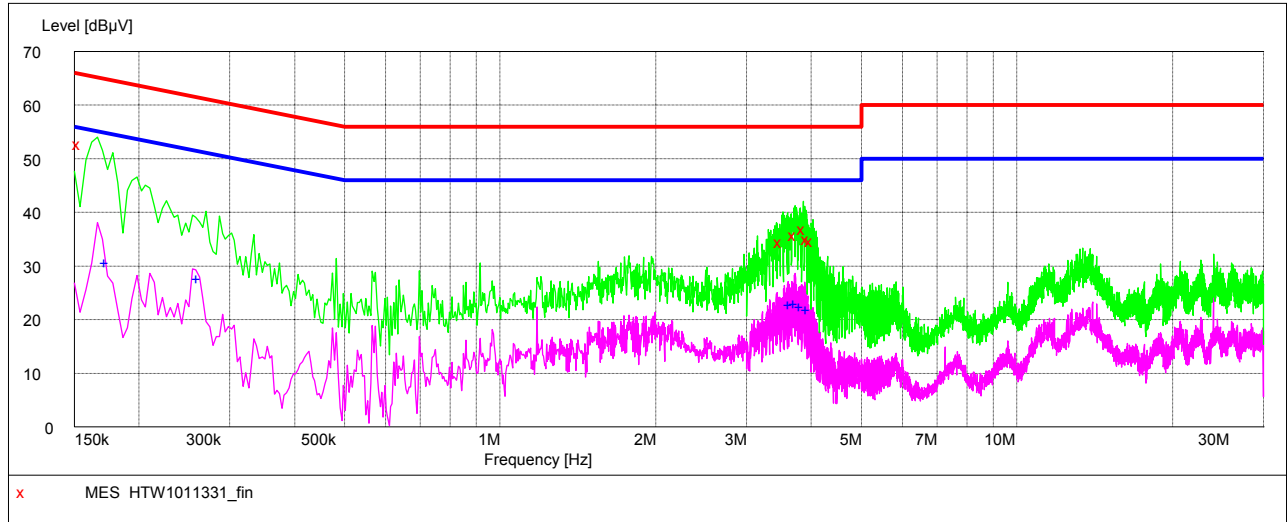**MEASUREMENT RESULT: "HTW1011331_fin"**

10/11/2010 8:46PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154000	52.90	10.5	66	12.9	QP	N	GND
3.510000	34.70	10.5	56	21.3	QP	N	GND
3.738000	36.00	10.5	56	20.0	QP	N	GND
3.890000	37.00	10.5	56	19.0	QP	N	GND
3.946000	35.20	10.5	56	20.8	QP	N	GND
4.014000	34.90	10.5	56	21.1	QP	N	GND


MEASUREMENT RESULT: "HTW1011331_fin2"

10/11/2010 8:46PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.174000	30.70	10.5	55	24.1	AV	N	GND
0.262000	27.70	10.5	51	23.7	AV	N	GND
3.654000	22.80	10.5	46	23.2	AV	N	GND
3.746000	23.10	10.5	46	22.9	AV	N	GND
3.846000	22.60	10.5	46	23.4	AV	N	GND
3.954000	21.90	10.5	46	24.1	AV	N	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

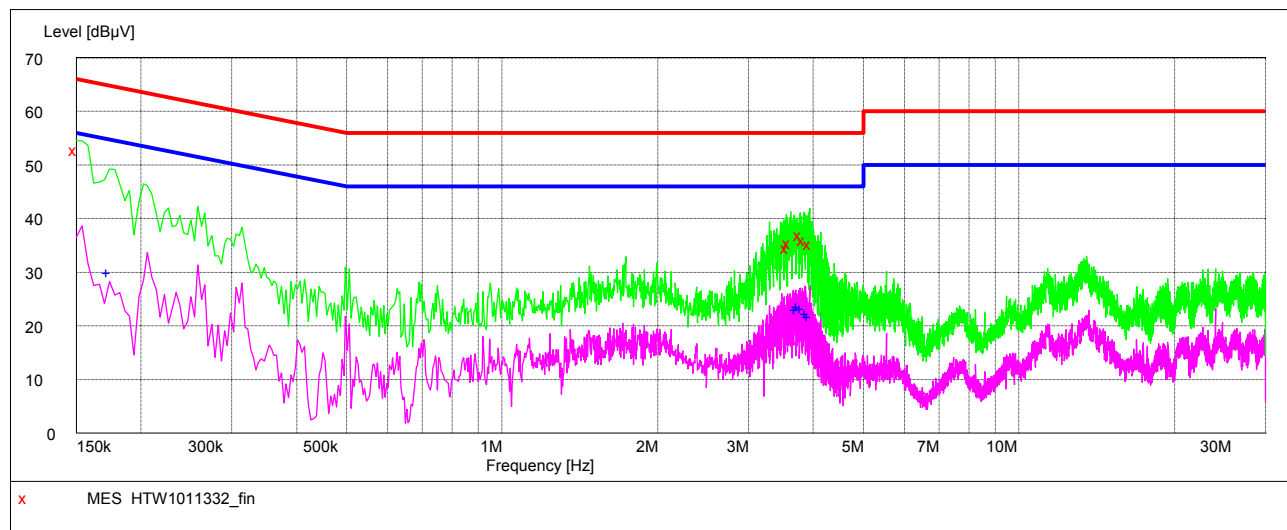**MEASUREMENT RESULT: "HTW1011332_fin"**

10/11/2010 8:49PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	53.00	10.5	66	13.0	QP	L1	GND
3.574000	34.70	10.5	56	21.3	QP	L1	GND
3.610000	35.60	10.5	56	20.4	QP	L1	GND
3.790000	37.20	10.5	56	18.8	QP	L1	GND
3.854000	36.10	10.5	56	19.9	QP	L1	GND
3.950000	35.40	10.5	56	20.6	QP	L1	GND

MEASUREMENT RESULT: "HTW1011332_fin2"


10/11/2010 8:49PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.174000	30.10	10.5	55	24.7	AV	L1	GND
3.722000	23.20	10.5	46	22.8	AV	L1	GND
3.750000	23.70	10.5	46	22.3	AV	L1	GND
3.814000	23.30	10.5	46	22.7	AV	L1	GND
3.902000	22.30	10.5	46	23.7	AV	L1	GND
3.938000	21.80	10.5	46	24.2	AV	L1	GND

The test data of IC: mega328

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

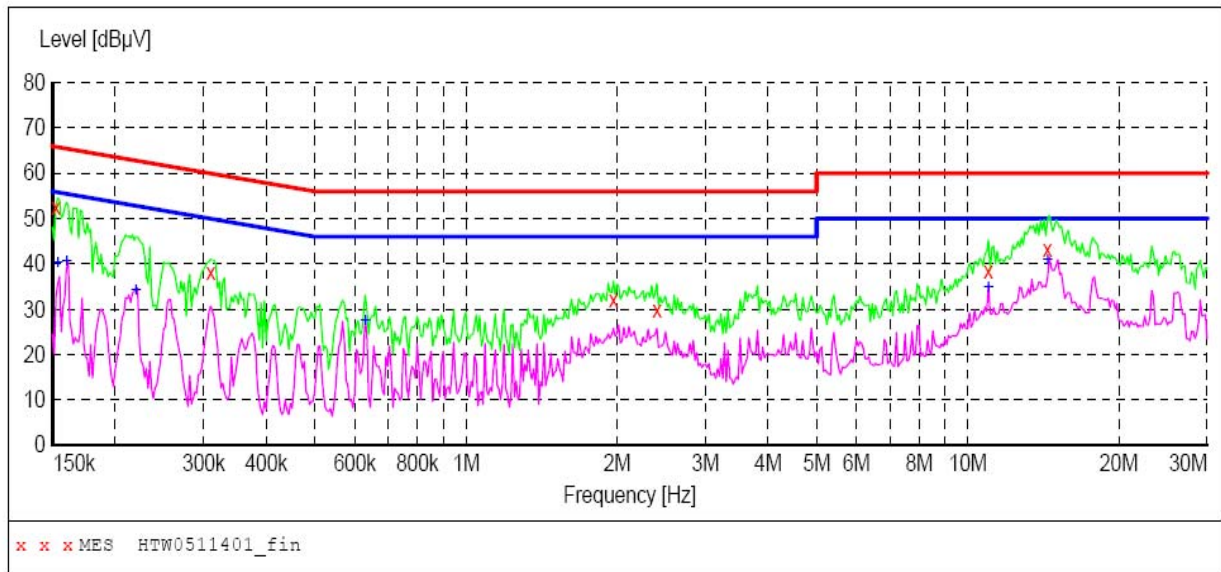**MEASUREMENT RESULT: "HTW0511401_fin"**

5/14/2012 9:58AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.152400	52.60	9.8	66	13.3	QP	L1	GND
0.309738	38.10	9.7	60	21.9	QP	L1	GND
1.967172	32.10	9.9	56	23.9	QP	L1	GND
2.400794	30.00	9.8	56	26.0	QP	L1	GND
10.998107	38.30	9.7	60	21.7	QP	L1	GND
14.420360	43.20	9.7	60	16.8	QP	L1	GND


MEASUREMENT RESULT: "HTW0511401_fin2"

5/14/2012 10:28AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.153620	40.30	9.8	56	15.5	AV	L1	GND
0.159870	40.60	9.8	56	15.4	AV	L1	GND
0.219880	34.30	9.7	53	18.7	AV	L1	GND
0.629486	27.50	9.8	46	18.5	AV	L1	GND
10.998107	34.80	9.7	50	15.2	AV	L1	GND
14.420360	40.90	9.7	50	9.1	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

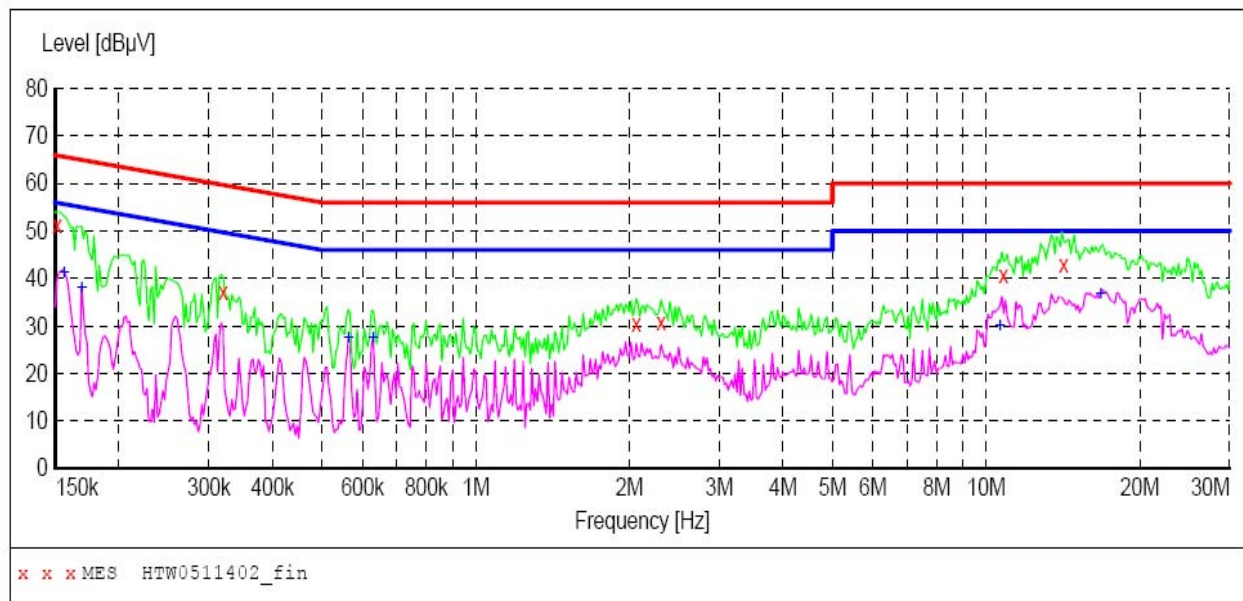**MEASUREMENT RESULT: "HTW0511402_fin"**

5/14/2012 10:05AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.151200	51.10	9.8	66	14.8	QP	N	GND
0.319770	37.30	9.7	60	22.4	QP	N	GND
2.063507	30.50	9.8	56	25.5	QP	N	GND
2.307030	30.80	9.8	56	25.2	QP	N	GND
10.824220	40.60	9.7	60	19.4	QP	N	GND
14.192370	43.00	9.7	60	17.0	QP	N	GND

MEASUREMENT RESULT: "HTW0511402_fin2"


5/14/2012 10:26AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.156090	41.50	9.8	56	14.5	AV	N	GND
0.169042	38.20	9.8	55	16.8	AV	N	GND
0.563039	27.50	9.8	46	18.5	AV	N	GND
0.629486	27.50	9.8	46	18.5	AV	N	GND
10.653090	30.30	9.7	50	19.7	AV	N	GND
16.777460	36.90	9.7	50	13.1	AV	N	GND


4.2. Radiated Emission

TEST CONFIGURATION

Radiated Emission Test Set-Up, Frequency range 30 - 1000MHz

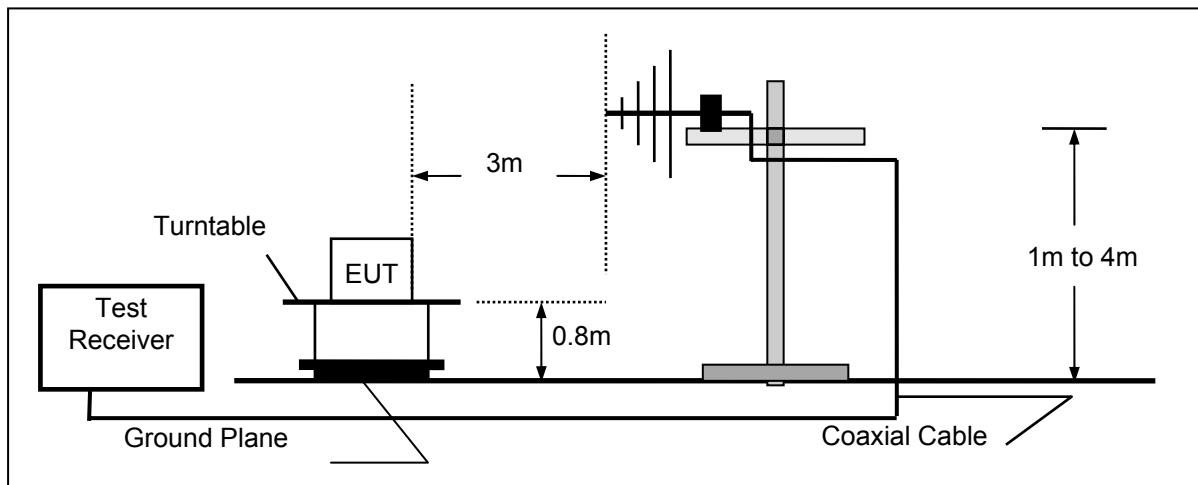

Radiated Emission Test Set-Up, Frequency range 1GHz – 6GHz

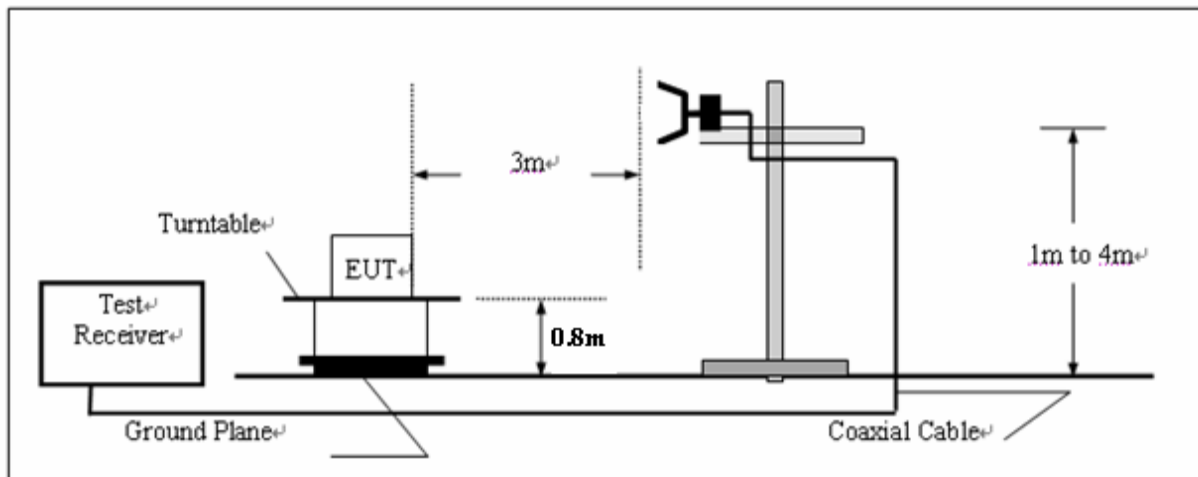

TEST PROCEDURE

- 1, The EUT was placed on a turn table which is 0.8m above ground plane.
- 2, Connect the EUT to Notebook PC, and EUT will transmit automatic at 433.05MHz.
- 3, Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0 ° to 360 ° to acquire the highest emissions from EUT.
- 4, And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 5, Repeat above procedures until all frequency measurements have been completed.

RADIATION LIMIT

For periodic transmitter, according to § 15.231(e), the field strength of fundamental from device at a distance of 3 meters shall not exceed the following values:

Fundamental frequency (MHz)	Distance (Meters)	Field strength of fundamental	
		($\mu\text{V/m}$)	(dB $\mu\text{V/m}$)
40.66-40.70	3	1000	60
70-130	3	500	54
130-174	3	500 to 1500	54 to 63.5
174-260	3	1500	63.5
260-470	3	1500 to 5000	63.5 to 74
Above 470	3	5000	74

For periodic transmitter, according to § 15.231(e), the field strength radiated emissions from device at a distance of 3 meters shall not exceed the following values:

Fundamental frequency (MHz)	Distance (Meters)	Field strength of spurious emission	
		($\mu\text{V/m}$)	(dB $\mu\text{V/m}$)
40.66-40.70	3	100	40
70-130	3	50	34
130-174	3	50 to 150	34 to 43.5
174-260	3	150	43.5
260-470	3	150 to 500	43.5 to 54
Above 470	3	500	54

Note: 1, For other bands limit pls refer 15.209

2, The limit below 1GHz based CISPR quasi-peak detector, the limit above 1GHz based average detector and peak limit is 74dB $\mu\text{V/m}$.

FCC Part 15B § 15.209, all spurious emissions shall comply with the limits of table as follow:

Frequency (MHz)	Distance (Meters)	Radiated ($\mu\text{V/m}$)	Radiated (dB $\mu\text{V/m}$)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0

Note: The spurious emissions shall be attenuated to the average limits shown in above table or to the general limits shown in section 15.209, which limit permits a higher field strength.

TEST RESULTS

The emissions from 1GHz to 6GHz are peak measured peak and average level, below 1GHz measured QPlevel, detailed test data please see the following pages.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$


Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

Duty Cycle Correction Factor

original IC :mega8

$$\text{Duty Cycle} = \text{TX on}/100\text{ms} \times 100\% = 16.23 \text{ ms}/100\text{ms} \times 100\% = 16.23\%$$

$$\text{Duty Cycle Correction Factor} = 20\log(\text{Duty Cycle}) = -15.79$$

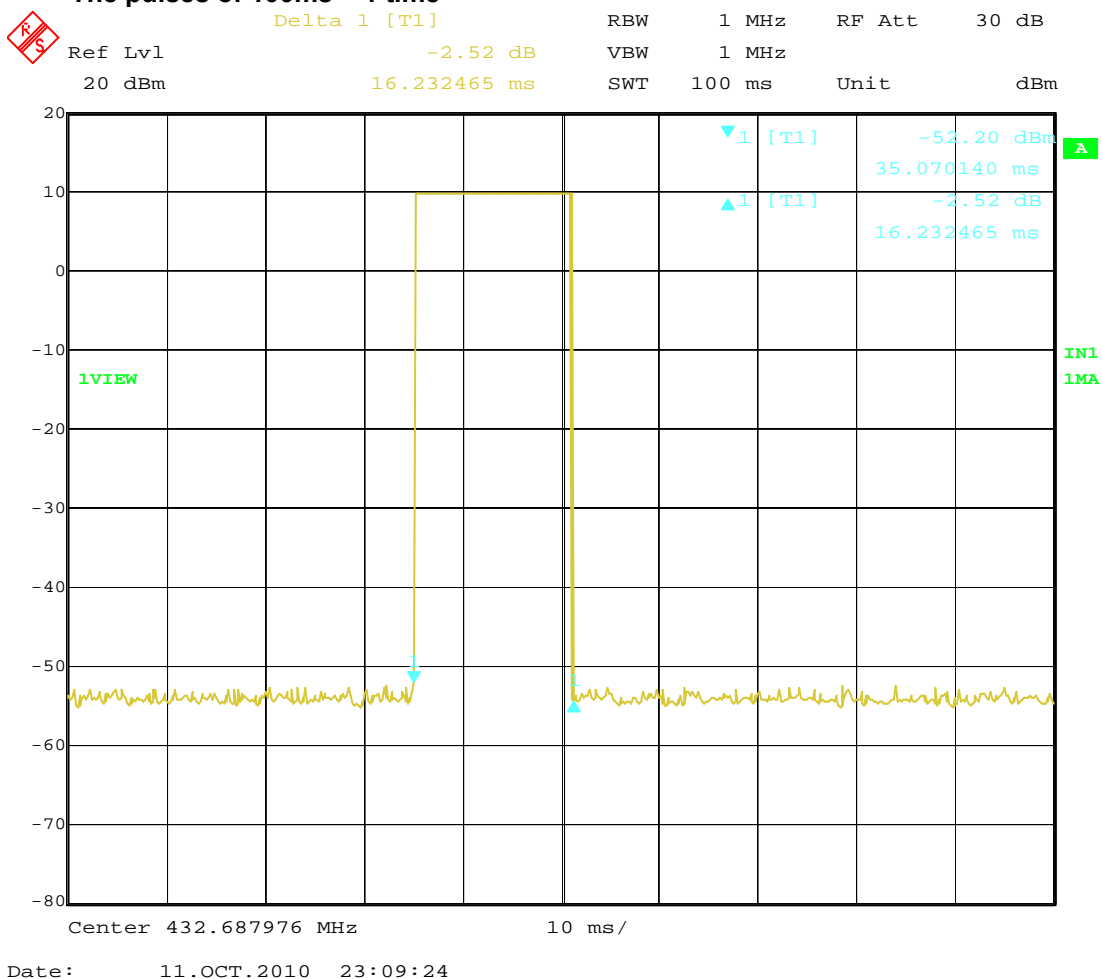The pulses of 100ms = 1 time

Time of a pulse = 16.23ms

Radiated emission of fundamental emission

Frequency (MHz)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dB μ V)	Polarization
432.70	85.80	92.83	7.03	PK	14.50	8.70	31.90	94.50	Horizontal
432.70	70.01	72.83	2.82	AV	14.50	8.70	31.90	78.71	Horizontal
433.54	87.15	92.85	5.70	PK	14.50	8.70	31.90	95.85	Horizontal
433.54	71.36	72.85	1.49	AV	14.50	8.70	31.90	80.06	Horizontal
434.91	86.63	92.90	6.27	PK	14.50	8.70	31.90	95.33	Horizontal
434.91	70.84	72.90	2.06	AV	14.50	8.70	31.90	79.54	Horizontal

Frequency (MHz)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dB μ V)	Polarization
432.68	83.20	92.83	9.63	PK	14.50	8.70	31.90	91.90	Vertical
432.68	67.41	72.83	5.42	AV	14.50	8.70	31.90	76.11	Vertical
433.56	85.94	92.85	6.91	PK	14.50	8.70	31.90	94.64	Vertical
433.56	70.15	72.85	2.70	AV	14.50	8.70	31.90	78.85	Vertical
434.90	85.70	92.90	7.20	PK	14.50	8.70	31.90	94.40	Vertical
434.90	69.91	72.90	2.99	AV	14.50	8.70	31.90	78.61	Vertical

Note: According to section 15.35(b), when average radiated emission measurements are specified, including emission measurement below 1000MHz, there also is limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated.

Spurious radiated emission**Bottom channel**

Frequency (MHz)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dB μ V)	Polarization
220.50	40.10	46.00	5.90	QP	10.00	7.80	31.90	54.20	Horizontal
352.69	35.40	46.00	10.60	QP	13.40	8.50	31.90	45.40	Horizontal
376.01	37.60	46.00	8.40	QP	14.20	8.50	31.90	46.80	Horizontal
865.41	66.50	72.83	5.33	PK	20.20	9.34	31.50	69.46	Horizontal
865.41	50.71	52.83	2.12	AV	20.20	9.34	31.50	52.67	Horizontal
1298.21	58.80	72.83	14.03	PK	25.60	3.40	32.20	62.00	Horizontal
1298.21	43.01	52.83	9.82	AV	25.60	3.40	32.20	46.21	Horizontal
2163.47	43.00	72.83	29.83	PK	27.40	4.30	32.30	43.60	Horizontal
2163.47	27.21	52.83	25.62	AV	27.40	4.30	32.30	27.81	Horizontal
3028.30	55.10	72.83	17.73	PK	29.80	5.30	32.50	52.50	Horizontal
3028.30	39.31	52.83	13.52	AV	29.80	5.30	32.50	36.71	Horizontal
3461.69	48.10	72.83	24.73	PK	30.90	5.90	32.60	43.90	Horizontal
3461.69	32.31	52.83	20.52	AV	30.90	5.90	32.60	28.11	Horizontal
4326.76	46.30	74.00	27.20	PK	11.30	6.10	32.60	61.50	Horizontal
4326.76	30.51	54.00	23.49	AV	11.30	6.10	32.60	45.71	Horizontal

Frequency (MHz)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dB μ V)	Polarization
31.94	30.50	40.00	9.50	QP	20.20	6.36	31.80	35.74	Vertical
43.61	34.90	40.00	5.10	QP	13.80	6.48	31.80	46.42	Vertical
834.77	40.70	46.00	5.30	QP	20.70	9.21	31.50	42.29	Vertical
865.41	65.40	72.83	4.43	PK	20.20	9.34	31.50	69.36	Vertical
865.41	49.61	52.83	3.22	AV	20.20	9.34	31.50	51.57	Vertical
1298.08	50.90	72.83	21.93	PK	25.60	3.40	32.20	54.10	Vertical
1298.08	35.11	52.83	17.72	AV	25.60	3.40	32.20	38.31	Vertical
2163.40	42.50	72.83	30.33	PK	27.40	4.30	32.30	43.10	Vertical
2163.40	25.71	52.83	27.12	AV	27.40	4.30	32.30	26.31	Vertical
3028.68	58.00	72.83	14.83	PK	29.80	5.30	32.50	55.40	Vertical
3028.68	42.21	52.83	10.62	AV	29.80	5.30	32.50	39.61	Vertical
3461.51	49.00	72.83	23.83	PK	30.90	5.90	32.60	44.80	Vertical
3461.51	33.21	52.83	19.62	AV	30.90	5.90	32.60	29.01	Vertical
4326.87	50.00	74.00	24.00	PK	11.30	6.10	32.60	65.20	Vertical
4326.87	34.21	54.00	19.79	AV	11.30	6.10	32.60	49.41	Vertical

Note: Within the frequency range 30-4500MHz, other than harmonics, there are no other spurious emissions found in the measurement.

Middle channel

Frequency (MHz)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dB μ V)	Polarization
221.41	41.30	46.00	4.70	QP	10.00	7.80	31.90	55.40	Horizontal
350.89	33.20	46.00	12.80	QP	13.40	8.50	31.90	43.20	Horizontal
377.62	39.90	46.00	6.10	QP	14.20	8.50	31.90	49.10	Horizontal
867.07	65.31	72.85	7.54	PK	20.20	9.34	31.50	67.27	Horizontal
867.07	49.52	52.85	3.33	AV	20.20	9.34	31.50	51.48	Horizontal
1300.84	56.10	72.85	16.75	PK	25.60	3.40	32.20	59.30	Horizontal
1300.84	40.31	52.85	12.54	AV	25.60	3.40	32.20	43.51	Horizontal
2167.69	53.00	72.85	19.85	PK	27.40	4.30	32.30	53.60	Horizontal
2167.69	37.21	52.85	15.64	AV	27.40	4.30	32.30	37.81	Horizontal
3034.57	49.10	72.85	23.75	PK	29.80	5.30	32.50	46.50	Horizontal
3034.57	33.31	52.85	19.54	AV	29.80	5.30	32.50	30.71	Horizontal
3468.50	51.80	72.85	21.05	PK	30.90	5.90	32.60	47.60	Horizontal
3468.50	36.01	52.85	16.84	AV	30.90	5.90	32.60	31.81	Horizontal
4335.38	43.20	74.00	30.80	PK	11.30	6.10	32.60	58.40	Horizontal
4335.38	27.41	54.00	26.59	AV	11.30	6.10	32.60	42.61	Horizontal

Frequency (MHz)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dB μ V)	Polarization
30.87	28.70	40.00	11.30	QP	20.20	6.36	31.80	33.94	Vertical
46.36	36.50	40.00	3.50	QP	13.80	6.48	31.80	48.02	Vertical
835.89	42.70	46.00	3.30	QP	20.70	9.21	31.50	44.29	Vertical
867.39	66.10	72.85	6.75	PK	20.20	9.34	31.50	68.06	Vertical
867.39	50.31	52.85	2.54	AV	20.20	9.34	31.50	52.27	Vertical
1300.43	51.70	72.85	21.15	PK	25.60	3.40	32.20	54.90	Vertical
1300.43	35.91	52.85	16.94	AV	25.60	3.40	32.20	39.11	Vertical
2167.06	52.60	72.85	20.25	PK	27.40	4.30	32.30	53.20	Vertical
2167.06	36.81	52.85	16.04	AV	27.40	4.30	32.30	37.41	Vertical
3034.74	48.30	72.85	24.55	PK	29.80	5.30	32.50	45.70	Vertical
3034.74	32.51	52.85	20.34	AV	29.80	5.30	32.50	29.91	Vertical
3468.60	49.90	72.85	22.95	PK	30.90	5.90	32.60	45.70	Vertical
3468.60	34.11	52.85	18.74	AV	30.90	5.90	32.60	29.91	Vertical
4335.54	44.10	74.00	29.90	PK	11.30	6.10	32.60	59.30	Vertical
4335.54	28.31	54.00	25.69	AV	11.30	6.10	32.60	43.51	Vertical

Note: Within the frequency range 30-4500MHz, other than harmonics, there are no other spurious emissions found in the measurement.

Top channel

Frequency (MHz)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dB μ V)	Polarization
221.80	41.30	46.00	4.70	QP	10.00	7.80	31.90	55.40	Horizontal
347.21	33.20	46.00	12.80	QP	13.40	8.50	31.90	43.20	Horizontal
375.30	39.90	46.00	6.10	QP	14.20	8.50	31.90	49.10	Horizontal
869.88	66.10	72.90	5.80	PK	20.20	9.34	31.50	69.06	Horizontal
869.88	50.31	52.90	2.59	AV	20.20	9.34	31.50	52.27	Horizontal
1304.81	55.90	72.90	17.00	PK	25.60	3.40	32.20	59.10	Horizontal
1304.81	40.11	52.90	12.79	AV	25.60	3.40	32.20	43.31	Horizontal
2169.63	49.60	72.90	23.30	PK	27.40	4.30	32.30	50.20	Horizontal
2169.63	33.81	52.90	19.09	AV	27.40	4.30	32.30	34.41	Horizontal
3044.57	53.60	72.90	19.30	PK	29.80	5.30	32.50	51.00	Horizontal
3044.57	37.81	52.90	15.09	AV	29.80	5.30	32.50	35.21	Horizontal
3479.50	48.40	72.90	24.50	PK	30.90	5.90	32.60	44.20	Horizontal
3479.50	32.61	52.90	20.29	AV	30.90	5.90	32.60	28.41	Horizontal
4349.38	46.10	74.00	27.90	PK	11.30	6.10	32.60	61.30	Horizontal
4349.38	30.31	54.00	23.69	AV	11.30	6.10	32.60	45.51	Horizontal

Frequency (MHz)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dB μ V)	Polarization
31.60	31.50	40.00	8.50	QP	20.20	6.36	31.80	36.74	Vertical
47.49	34.90	40.00	5.10	QP	13.80	6.48	31.80	46.42	Vertical
836.35	41.70	46.00	4.30	QP	20.70	9.21	31.50	43.29	Vertical
869.61	65.90	72.90	5.00	PK	20.20	9.34	31.50	68.86	Vertical
869.61	50.11	52.90	2.79	AV	20.20	9.34	31.50	52.07	Vertical
1304.75	55.30	72.90	17.6	PK	25.60	3.40	32.20	58.50	Vertical
1304.75	39.51	52.90	13.39	AV	25.60	3.40	32.20	42.71	Vertical
2169.90	50.30	72.90	22.60	PK	27.40	4.30	32.30	50.90	Vertical
2169.90	34.51	52.90	18.39	AV	27.40	4.30	32.30	35.11	Vertical
3044.39	51.20	72.90	21.70	PK	29.80	5.30	32.50	48.60	Vertical
3044.39	35.41	52.90	17.49	AV	29.80	5.30	32.50	32.81	Vertical
3479.20	53.60	72.90	19.30	PK	30.90	5.90	32.60	49.40	Vertical
3479.20	37.81	52.90	15.09	AV	30.90	5.90	32.60	33.61	Vertical
4349.16	45.40	74.00	28.60	PK	11.30	6.10	32.60	60.60	Vertical
4349.16	29.61	54.00	24.39	AV	11.30	6.10	32.60	44.81	Vertical

Note: Within the frequency range 30-4500MHz, other than harmonics, there are no other spurious emissions found in the measurement.

Radiated emission of fundamental emission

The new test data of IC: mega8 (antenna 1)

Frequency (MHz)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dB μ V)	Polarization
433.05	85.17	92.84	7.67	PK	14.50	8.70	31.90	93.87	Horizontal
433.05	69.14	72.84	3.7	AV	14.50	8.70	31.90	77.84	Horizontal
433.63	86.26	92.86	6.6	PK	14.50	8.70	31.90	94.96	Horizontal
433.63	70.34	72.86	2.52	AV	14.50	8.70	31.90	79.04	Horizontal
434.91	86.02	92.90	6.88	PK	14.50	8.70	31.90	94.72	Horizontal
434.91	70.58	72.90	2.32	AV	14.50	8.70	31.90	79.28	Horizontal

Frequency (MHz)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dB μ V)	Polarization
433.05	83.44	92.84	9.4	PK	14.50	8.70	31.90	92.14	Vertical
433.05	67.41	72.84	5.43	AV	14.50	8.70	31.90	76.11	Vertical
433.63	84.72	92.86	8.14	PK	14.50	8.70	31.90	93.42	Vertical
433.63	68.75	72.86	4.11	AV	14.50	8.70	31.90	77.45	Vertical
434.91	86.02	92.90	6.88	PK	14.50	8.70	31.90	94.72	Vertical
434.91	70.12	72.90	2.78	AV	14.50	8.70	31.90	78.82	Vertical

The test data of IC: mega8 (antenna 2)

Frequency (MHz)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dB μ V)	Polarization
433.05	86.17	92.84	6.67	PK	14.50	8.70	31.90	94.87	Horizontal
433.05	70.14	72.84	2.7	AV	14.50	8.70	31.90	78.84	Horizontal
433.63	86.76	92.86	6.1	PK	14.50	8.70	31.90	95.46	Horizontal
433.63	71.34	72.86	1.52	AV	14.50	8.70	31.90	80.04	Horizontal
434.91	87.02	92.90	5.88	PK	14.50	8.70	31.90	95.72	Horizontal
434.91	71.58	72.90	1.32	AV	14.50	8.70	31.90	80.28	Horizontal

Frequency (MHz)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dB μ V)	Polarization
433.05	84.47	92.84	8.37	PK	14.50	8.70	31.90	93.17	Vertical
433.05	68.41	72.84	4.43	AV	14.50	8.70	31.90	77.11	Vertical
433.63	85.72	92.86	7.14	PK	14.50	8.70	31.90	94.42	Vertical
433.63	69.86	72.86	3.00	AV	14.50	8.70	31.90	78.56	Vertical
434.91	87.02	92.90	5.88	PK	14.50	8.70	31.90	95.72	Vertical
434.91	71.12	72.90	1.78	AV	14.50	8.70	31.90	79.82	Vertical

The new test data of IC:mega328 (antenna 1)

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
433.05	84.46	92.84	8.38	PK	14.50	8.70	31.90	93.16	Horizontal
433.05	72.28	72.84	0.56	AV	14.50	8.70	31.90	80.98	Horizontal
433.63	83.77	92.86	9.09	PK	14.50	8.70	31.90	92.47	Horizontal
433.63	71.52	72.86	1.34	AV	14.50	8.70	31.90	80.22	Horizontal
434.91	83.61	92.90	9.29	PK	14.50	8.70	31.90	92.31	Horizontal
434.91	71.36	72.90	1.54	AV	14.50	8.70	31.90	80.06	Horizontal

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
433.05	83.86	92.84	8.98	PK	14.50	8.70	31.90	92.56	Vertical
433.05	71.68	72.84	1.16	AV	14.50	8.70	31.90	80.38	Vertical
433.63	82.67	92.86	10.19	PK	14.50	8.70	31.90	91.37	Vertical
433.63	70.42	72.86	2.44	AV	14.50	8.70	31.90	79.12	Vertical
434.91	82.98	92.90	9.92	PK	14.50	8.70	31.90	91.68	Vertical
434.91	70.73	72.90	2.17	AV	14.50	8.70	31.90	79.43	Vertical

The new test data of IC:mega328 (antenna 2)

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
433.05	84.14	92.84	8.7	PK	14.50	8.70	31.90	92.84	Horizontal
433.05	71.96	72.84	0.88	AV	14.50	8.70	31.90	80.66	Horizontal
433.63	83.45	92.86	9.41	PK	14.50	8.70	31.90	92.15	Horizontal
433.63	71.2	72.86	1.66	AV	14.50	8.70	31.90	79.9	Horizontal
434.91	83.29	92.90	9.61	PK	14.50	8.70	31.90	91.99	Horizontal
434.91	71.04	72.90	1.86	AV	14.50	8.70	31.90	79.74	Horizontal

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
433.05	84.34	92.84	8.5	PK	14.50	8.70	31.90	93.04	Vertical
433.05	72.16	72.84	0.68	AV	14.50	8.70	31.90	80.86	Vertical
433.63	83.15	92.86	9.71	PK	14.50	8.70	31.90	91.85	Vertical
433.63	70.9	72.86	1.96	AV	14.50	8.70	31.90	79.6	Vertical
434.91	83.46	92.90	9.44	PK	14.50	8.70	31.90	92.16	Vertical
434.91	71.21	72.90	1.69	AV	14.50	8.70	31.90	79.91	Vertical

Note: According to section 15.35(b), when average radiated emission measurements are specified, including emission measurement below 1000MHz, there also is limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated.

Spurious radiated emission

The new test data of IC: mega8(433.05MHz) & (antenna 1)

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
22.11	40.65	49.54	8.89	QP	20.20	6.36	31.80	45.89	/
348.24	34.93	46.00	11.07	QP	13.40	8.50	31.90	44.93	Horizontal
379.37	39.7	46.00	6.3	QP	14.20	8.50	31.90	48.9	Horizontal
866.10	67.98	72.84	4.86	PK	20.20	9.34	31.50	69.94	Horizontal
866.10	51.95	52.84	0.89	AV	20.20	9.34	31.50	53.91	Horizontal
1299.15	60.82	72.84	12.02	PK	25.60	3.40	32.20	64.02	Horizontal
1299.15	44.79	52.84	8.05	AV	25.60	3.40	32.20	47.99	Horizontal
3031.35	57.54	72.84	15.3	PK	29.80	5.30	32.50	54.94	Horizontal
3031.35	41.51	52.84	11.33	AV	29.80	5.30	32.50	38.91	Horizontal

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
22.11	30.02	49.54	19.52	QP	20.20	6.36	31.80	35.26	/
43.61	34.42	40.00	5.58	QP	13.80	6.48	31.80	45.94	Vertical
834.77	40.22	46.00	5.78	QP	20.70	9.21	31.50	41.81	Vertical
865.41	68.03	72.84	4.81	PK	20.20	9.34	31.50	69.99	Vertical
865.41	52	52.84	0.84	AV	20.20	9.34	31.50	53.96	Vertical
1298.08	51.95	72.84	20.89	PK	25.60	3.40	32.20	55.15	Vertical
1298.08	35.92	52.84	16.92	AV	25.60	3.40	32.20	39.12	Vertical
3028.68	59.01	72.84	13.83	PK	29.80	5.30	32.50	56.41	Vertical
3028.68	42.98	52.84	9.86	AV	29.80	5.30	32.50	40.38	Vertical

The new test data of IC: mega8(433.63MHz) & (antenna 1)

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
22.11	45.14	49.54	4.4	QP	20.20	6.36	31.80	50.38	/
350.89	33.98	46.00	12.02	QP	13.40	8.50	31.90	43.98	Horizontal
377.62	39.39	46.00	6.61	QP	14.20	8.50	31.90	48.59	Horizontal
867.26	65.52	72.86	7.34	PK	20.20	9.34	31.50	67.48	Horizontal
867.26	49.6	52.86	3.26	AV	20.20	9.34	31.50	51.56	Horizontal
1300.89	56.65	72.86	16.21	PK	25.60	3.40	32.20	59.85	Horizontal
1300.89	40.73	52.86	12.13	AV	25.60	3.40	32.20	43.93	Horizontal
2168.15	53.48	72.86	19.38	PK	27.40	4.30	32.30	54.08	Horizontal
2168.15	37.56	52.86	15.3	AV	27.40	4.30	32.30	38.16	Horizontal

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
22.11	30.33	49.54	19.21	QP	20.20	6.36	31.80	35.57	/
46.36	35.86	40.00	4.14	QP	13.80	6.48	31.80	47.38	Vertical
835.89	43.6	46.00	2.4	QP	20.70	9.21	31.50	45.19	Vertical
867.26	67.22	72.86	5.64	PK	20.20	9.34	31.50	69.18	Vertical
867.26	51.3	52.86	1.56	AV	20.20	9.34	31.50	53.26	Vertical
1300.89	51.95	72.86	20.91	PK	25.60	3.40	32.20	55.15	Vertical
1300.89	36.03	52.86	16.83	AV	25.60	3.40	32.20	39.23	Vertical
2168.15	53.39	72.86	19.47	PK	27.40	4.30	32.30	53.99	Vertical
2168.15	37.47	52.86	15.39	AV	27.40	4.30	32.30	38.07	Vertical

The new test data of IC: mega8(434.91MHz) & (antenna 1)

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
22.11	42.88	49.54	6.66	QP	20.20	6.36	31.80	48.12	/
347.21	34.45	46.00	11.55	QP	13.40	8.50	31.90	44.45	Horizontal
375.30	39.66	46.00	6.34	QP	14.20	8.50	31.90	48.86	Horizontal
869.82	66.61	72.90	6.29	PK	20.20	9.34	31.50	68.57	Horizontal
869.82	50.69	52.90	2.21	AV	20.20	9.34	31.50	52.65	Horizontal
1304.73	56.15	72.90	16.75	PK	25.60	3.40	32.20	59.35	Horizontal
1304.73	40.23	52.90	12.67	AV	25.60	3.40	32.20	43.43	Horizontal
3044.37	52.98	72.90	19.92	PK	29.80	5.30	32.50	50.38	Horizontal
3044.37	37.06	52.90	15.84	AV	29.80	5.30	32.50	34.46	Horizontal

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
22.11	31.31	49.54	18.23	QP	20.20	6.36	31.80	36.55	/
47.56	34.71	40.00	5.29	QP	13.80	6.48	31.80	46.23	Vertical
836.54	41.51	46.00	4.49	QP	20.70	9.21	31.50	43.1	Vertical
869.82	66.89	72.90	6.01	PK	20.20	9.34	31.50	68.85	Vertical
869.82	50.97	52.90	1.93	AV	20.20	9.34	31.50	52.93	Vertical
1304.73	55.28	72.90	17.62	PK	25.60	3.40	32.20	58.48	Vertical
1304.73	39.36	52.90	13.54	AV	25.60	3.40	32.20	42.56	Vertical
3479.28	53.68	72.90	19.22	PK	30.90	5.90	32.60	49.48	Vertical
3479.28	37.76	52.90	15.14	AV	30.90	5.90	32.60	33.56	Vertical

The new test data of IC: mega8(433.05MHz) & (antenna 2)

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
22.11	40.39	49.54	9.15	QP	20.20	6.36	31.80	45.63	/
348.24	34.67	46.00	11.33	QP	13.40	8.50	31.90	44.67	Horizontal
379.37	39.44	46.00	6.56	QP	14.20	8.50	31.90	48.64	Horizontal
866.10	67.72	72.84	5.12	PK	20.20	9.34	31.50	69.68	Horizontal
866.10	51.69	52.84	1.15	AV	20.20	9.34	31.50	53.65	Horizontal
1299.15	60.56	72.84	12.28	PK	25.60	3.40	32.20	63.76	Horizontal
1299.15	44.53	52.84	8.31	AV	25.60	3.40	32.20	47.73	Horizontal
3031.35	57.28	72.84	15.56	PK	29.80	5.30	32.50	54.68	Horizontal
3031.35	41.25	52.84	11.59	AV	29.80	5.30	32.50	38.65	Horizontal

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
22.11	30.5	49.54	19.04	QP	20.20	6.36	31.80	35.74	/
43.61	34.9	40.00	5.1	QP	13.80	6.48	31.80	46.42	Vertical
834.77	40.7	46.00	5.3	QP	20.70	9.21	31.50	42.29	Vertical
865.41	68.51	72.84	4.33	PK	20.20	9.34	31.50	70.47	Vertical
865.41	52.48	52.84	0.36	AV	20.20	9.34	31.50	54.44	Vertical
1298.08	52.43	72.84	20.41	PK	25.60	3.40	32.20	55.63	Vertical
1298.08	36.4	52.84	16.44	AV	25.60	3.40	32.20	39.6	Vertical
3028.68	59.49	72.84	13.35	PK	29.80	5.30	32.50	56.89	Vertical
3028.68	43.46	52.84	9.38	AV	29.80	5.30	32.50	40.86	Vertical

The new test data of IC: mega8(433.63MHz) & (antenna 2)

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
22.11	45.33	49.54	4.21	QP	20.20	6.36	31.80	50.57	/
350.89	34.17	46.00	11.83	QP	13.40	8.50	31.90	44.17	Horizontal
377.62	39.58	46.00	6.42	QP	14.20	8.50	31.90	48.78	Horizontal
867.26	65.71	72.86	7.15	PK	20.20	9.34	31.50	67.67	Horizontal
867.26	49.79	52.86	3.07	AV	20.20	9.34	31.50	51.75	Horizontal
1300.89	56.84	72.86	16.02	PK	25.60	3.40	32.20	60.04	Horizontal
1300.89	40.92	52.86	11.94	AV	25.60	3.40	32.20	44.12	Horizontal
2168.15	53.67	72.86	19.19	PK	27.40	4.30	32.30	54.27	Horizontal
2168.15	37.75	52.86	15.11	AV	27.40	4.30	32.30	38.35	Horizontal

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
22.11	30.52	49.54	19.02	QP	20.20	6.36	31.80	35.76	/
46.36	36.05	40.00	3.95	QP	13.80	6.48	31.80	47.57	Vertical
835.89	43.79	46.00	2.21	QP	20.70	9.21	31.50	45.38	Vertical
867.26	67.41	72.86	5.45	PK	20.20	9.34	31.50	69.37	Vertical
867.26	51.49	52.86	1.37	AV	20.20	9.34	31.50	53.45	Vertical
1300.89	52.14	72.86	20.72	PK	25.60	3.40	32.20	55.34	Vertical
1300.89	36.22	52.86	16.64	AV	25.60	3.40	32.20	39.42	Vertical
2168.15	53.58	72.86	19.28	PK	27.40	4.30	32.30	54.18	Vertical
2168.15	37.66	52.86	15.2	AV	27.40	4.30	32.30	38.26	Vertical

The new test data of IC: mega8(434.91MHz) & (antenna 2)

Frequency (MHz)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dB μ V)	Polarization
22.11	43.07	49.54	6.47	QP	20.20	6.36	31.80	48.31	/
347.21	34.64	46.00	11.36	QP	13.40	8.50	31.90	44.64	Horizontal
375.30	39.85	46.00	6.15	QP	14.20	8.50	31.90	49.05	Horizontal
869.82	66.8	72.90	6.1	PK	20.20	9.34	31.50	68.76	Horizontal
869.82	50.88	52.90	2.02	AV	20.20	9.34	31.50	52.84	Horizontal
1304.73	56.34	72.90	16.56	PK	25.60	3.40	32.20	59.54	Horizontal
1304.73	40.42	52.90	12.48	AV	25.60	3.40	32.20	43.62	Horizontal
3044.37	53.17	72.90	19.73	PK	29.80	5.30	32.50	50.57	Horizontal
3044.37	37.25	52.90	15.65	AV	29.80	5.30	32.50	34.65	Horizontal

Frequency (MHz)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dB μ V)	Polarization
22.11	31.5	49.54	18.04	QP	20.20	6.36	31.80	36.74	/
47.56	34.9	40.00	5.1	QP	13.80	6.48	31.80	46.42	Vertical
836.54	41.7	46.00	4.3	QP	20.70	9.21	31.50	43.29	Vertical
869.82	67.08	72.90	5.82	PK	20.20	9.34	31.50	69.04	Vertical
869.82	51.16	52.90	1.74	AV	20.20	9.34	31.50	53.12	Vertical
1304.73	55.47	72.90	17.43	PK	25.60	3.40	32.20	58.67	Vertical
1304.73	39.55	52.90	13.35	AV	25.60	3.40	32.20	42.75	Vertical
3479.28	53.87	72.90	19.03	PK	30.90	5.90	32.60	49.67	Vertical
3479.28	37.95	52.90	14.95	AV	30.90	5.90	32.60	33.75	Vertical

Note 1: According to RssGen, when average radiated emission measurements are specified, including emission measurement below 1000MHz, there also is limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated.

Note 2: Average Result =Peak Field Strength+Duty Cycle Correction Factor.

Note 3: Duty Cycle Correction Factor value refers to below.

The new test data of IC: mega328(433.05MHz) & (antenna 1)

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
26.0	44.81	49.54	4.73	QP	20.20	6.36	31.80	50.05	/
352.75	36.18	46.00	9.82	QP	13.40	8.50	31.90	46.18	Horizontal
376.43	37.66	46.00	8.34	QP	14.20	8.50	31.90	46.86	Horizontal
866.10	63.52	72.83	9.31	PK	20.20	9.34	31.50	65.48	Horizontal
866.10	51.34	52.83	1.49	AV	20.20	9.34	31.50	53.3	Horizontal
1299.15	57.95	72.83	14.88	PK	25.60	3.40	32.20	61.15	Horizontal
1299.15	45.77	52.83	7.06	AV	25.60	3.40	32.20	48.97	Horizontal
3031.35	56.09	72.83	16.74	PK	29.80	5.30	32.50	53.49	Horizontal
3031.35	43.91	52.83	8.92	AV	29.80	5.30	32.50	41.31	Horizontal

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
26.0	30.94	49.54	18.6	QP	20.20	6.36	31.80	36.18	/
43.61	34.84	40.00	5.16	QP	13.80	6.48	31.80	46.36	Vertical
834.77	41.67	46.00	4.33	QP	20.70	9.21	31.50	43.26	Vertical
866.10	62.21	72.83	10.62	PK	20.20	9.34	31.50	64.17	Vertical
866.10	50.03	52.83	2.8	AV	20.20	9.34	31.50	51.99	Vertical
1299.15	50.71	72.83	22.12	PK	25.60	3.40	32.20	53.91	Vertical
1299.15	38.53	52.83	14.3	AV	25.60	3.40	32.20	41.73	Vertical
3031.35	57.81	72.83	15.02	PK	29.80	5.30	32.50	55.21	Vertical
3031.35	45.56	52.83	7.27	AV	29.80	5.30	32.50	42.96	Vertical

The new test data of IC: mega328(433.63MHz) & (antenna 1)

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
26.0	41.97	49.54	7.57	QP	20.20	6.36	31.80	47.21	/
351.27	35.18	46.00	10.82	QP	13.40	8.50	31.90	45.18	Horizontal
382.59	40.85	46.00	5.15	QP	14.20	8.50	31.90	50.05	Horizontal
867.26	61.12	72.85	11.73	PK	20.20	9.34	31.50	63.08	Horizontal
867.26	48.87	52.85	3.98	AV	20.20	9.34	31.50	50.83	Horizontal
1300.89	55.35	72.85	17.5	PK	25.60	3.40	32.20	58.55	Horizontal
1300.89	43.1	52.85	9.75	AV	25.60	3.40	32.20	46.3	Horizontal
2168.15	53.6	72.85	19.25	PK	27.40	4.30	32.30	54.2	Horizontal
2168.15	41.35	52.85	11.5	AV	27.40	4.30	32.30	41.95	Horizontal

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
26.0	37.42	49.54	12.12	QP	20.20	6.36	31.80	42.66	/
46.36	35.93	40.00	4.07	QP	13.80	6.48	31.80	47.45	Vertical
835.89	44.17	46.00	1.83	QP	20.70	9.21	31.50	45.76	Vertical
867.26	63.78	72.85	9.07	PK	20.20	9.34	31.50	65.74	Vertical
867.26	51.53	52.85	1.32	AV	20.20	9.34	31.50	53.49	Vertical
1300.89	51.98	72.85	20.87	PK	25.60	3.40	32.20	55.18	Vertical
1300.89	39.73	52.85	13.12	AV	25.60	3.40	32.20	42.93	Vertical
2168.15	52.41	72.85	20.44	PK	27.40	4.30	32.30	53.01	Vertical
2168.15	40.16	52.85	12.69	AV	27.40	4.30	32.30	40.76	Vertical

The new test data of IC: mega328(434.91MHz) & (antenna 1)

Frequency (MHz)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dB μ V)	Polarization
26.0	42.94	49.54	6.6	QP	20.20	6.36	31.80	48.18	/
347.21	34	46.00	12	QP	13.40	8.50	31.90	44	Horizontal
375.30	40.85	46.00	5.15	QP	14.20	8.50	31.90	50.05	Horizontal
869.82	62.12	72.90	10.78	PK	20.20	9.34	31.50	64.08	Horizontal
869.82	49.87	52.90	3.03	AV	20.20	9.34	31.50	51.83	Horizontal
1304.73	55.71	72.90	17.19	PK	25.60	3.40	32.20	58.91	Horizontal
1304.73	43.46	52.90	9.44	AV	25.60	3.40	32.20	46.66	Horizontal
3044.37	53.41	72.90	19.49	PK	29.80	5.30	32.50	50.81	Horizontal
3044.37	41.16	52.90	11.74	AV	29.80	5.30	32.50	38.56	Horizontal

Frequency (MHz)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dB μ V)	Polarization
26.0	34.13	49.54	15.41	QP	20.20	6.36	31.80	39.37	/
49.51	36.88	40.00	3.12	QP	13.80	6.48	31.80	48.4	Vertical
836.35	44.56	46.00	1.44	QP	20.70	9.21	31.50	46.15	Vertical
869.82	62.91	72.90	9.99	PK	20.20	9.34	31.50	64.87	Vertical
869.82	50.66	52.90	2.24	AV	20.20	9.34	31.50	52.62	Vertical
1304.73	56.28	72.90	16.62	PK	25.60	3.40	32.20	59.48	Vertical
1304.73	44.03	52.90	8.87	AV	25.60	3.40	32.20	47.23	Vertical
3479.28	53.46	72.90	19.44	PK	30.90	5.90	32.60	49.26	Vertical
3479.28	41.21	52.90	11.69	AV	30.90	5.90	32.60	37.01	Vertical

The new test data of IC: mega328(433.05MHz) & (antenna 2)

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
26.0	45	49.54	4.54	QP	20.20	6.36	31.80	50.24	/
352.75	36.37	46.00	9.63	QP	13.40	8.50	31.90	46.37	Horizontal
376.43	37.85	46.00	8.15	QP	14.20	8.50	31.90	47.05	Horizontal
866.10	63.71	72.83	9.12	PK	20.20	9.34	31.50	65.67	Horizontal
866.10	51.53	52.83	1.3	AV	20.20	9.34	31.50	53.49	Horizontal
1299.15	58.14	72.83	14.69	PK	25.60	3.40	32.20	61.34	Horizontal
1299.15	45.96	52.83	6.87	AV	25.60	3.40	32.20	49.16	Horizontal
3031.35	56.28	72.83	16.55	PK	29.80	5.30	32.50	53.68	Horizontal
3031.35	44.1	52.83	8.73	AV	29.80	5.30	32.50	41.5	Horizontal

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
26.0	31.13	49.54	18.41	QP	20.20	6.36	31.80	36.37	/
43.61	35.03	40.00	4.97	QP	13.80	6.48	31.80	46.55	Vertical
834.77	41.86	46.00	4.14	QP	20.70	9.21	31.50	43.45	Vertical
866.10	62.4	72.83	10.43	PK	20.20	9.34	31.50	64.36	Vertical
866.10	50.22	52.83	2.61	AV	20.20	9.34	31.50	52.18	Vertical
1299.15	50.9	72.83	21.93	PK	25.60	3.40	32.20	54.10	Vertical
1299.15	38.72	52.83	14.11	AV	25.60	3.40	32.20	41.92	Vertical
3031.35	58	72.83	14.83	PK	29.80	5.30	32.50	55.40	Vertical
3031.35	45.75	52.83	7.08	AV	29.80	5.30	32.50	43.15	Vertical

The new test data of IC: mega328(433.63MHz) & (antenna 2)

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
26.0	42.16	49.54	7.38	QP	20.20	6.36	31.80	47.40	/
351.27	35.37	46.00	4.63	QP	13.40	8.50	31.90	45.37	Horizontal
382.59	41.04	46.00	4.96	QP	14.20	8.50	31.90	50.24	Horizontal
867.26	61.31	72.85	11.55	PK	20.20	9.34	31.50	63.27	Horizontal
867.26	49.06	52.85	3.8	AV	20.20	9.34	31.50	51.02	Horizontal
1300.89	55.54	72.85	17.32	PK	25.60	3.40	32.20	58.74	Horizontal
1300.89	43.29	52.85	9.57	AV	25.60	3.40	32.20	46.49	Horizontal
2168.15	53.79	72.85	19.07	PK	27.40	4.30	32.30	54.39	Horizontal
2168.15	41.54	52.85	11.32	AV	27.40	4.30	32.30	42.14	Horizontal

Frequency (MHz)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dBμV)	Polarization
26.0	37.61	49.54	11.93	QP	20.20	6.36	31.80	42.85	/
46.36	36.12	40.00	3.88	QP	13.80	6.48	31.80	47.64	Vertical
835.89	44.36	46.00	1.64	QP	20.70	9.21	31.50	45.95	Vertical
867.26	63.97	72.85	8.88	PK	20.20	9.34	31.50	65.93	Vertical
867.26	51.72	52.85	1.13	AV	20.20	9.34	31.50	53.68	Vertical
1300.89	52.17	72.85	20.68	PK	25.60	3.40	32.20	55.37	Vertical
1300.89	39.92	52.85	12.93	AV	25.60	3.40	32.20	43.12	Vertical
2168.15	52.6	72.85	20.25	PK	27.40	4.30	32.30	53.20	Vertical
2168.15	40.35	52.85	12.5	AV	27.40	4.30	32.30	40.95	Vertical

The new test data of IC: mega328(434.91MHz) & (antenna 2)

Frequency (MHz)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dB μ V)	Polarization
26.0	43.13	49.54	6.41	QP	20.20	6.36	31.80	48.37	/
347.21	34.19	46.00	11.81	QP	13.40	8.50	31.90	44.19	Horizontal
375.30	41.04	46.00	4.96	QP	14.20	8.50	31.90	50.24	Horizontal
869.82	62.31	72.90	10.59	PK	20.20	9.34	31.50	64.27	Horizontal
869.82	50.06	52.90	2.84	AV	20.20	9.34	31.50	52.02	Horizontal
1304.73	55.9	72.90	17	PK	25.60	3.40	32.20	59.10	Horizontal
1304.73	43.65	52.90	9.25	AV	25.60	3.40	32.20	46.85	Horizontal
3044.37	53.6	72.90	19.3	PK	29.80	5.30	32.50	51.00	Horizontal
3044.37	41.35	52.90	11.55	AV	29.80	5.30	32.50	38.75	Horizontal

Frequency (MHz)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detect or	Antenna Factor (dB/m)	Cable Loss (dB)	Amplifier Gain (dB)	Reading Amplitude (dB μ V)	Polarization
26.0	34.32	49.54	15.22	QP	20.20	6.36	31.80	39.56	/
49.51	37.07	40.00	2.93	QP	13.80	6.48	31.80	48.59	Vertical
836.35	44.75	46.00	1.25	QP	20.70	9.21	31.50	46.34	Vertical
869.82	63.1	72.90	9.8	PK	20.20	9.34	31.50	65.06	Vertical
869.82	50.85	52.90	2.05	AV	20.20	9.34	31.50	52.81	Vertical
1304.73	56.47	72.90	16.43	PK	25.60	3.40	32.20	59.67	Vertical
1304.73	44.22	52.90	8.68	AV	25.60	3.40	32.20	47.42	Vertical
3479.28	53.65	72.90	19.25	PK	30.90	5.90	32.60	49.45	Vertical
3479.28	41.4	52.90	11.5	AV	30.90	5.90	32.60	37.2	Vertical

Note 1: According to RssGen, when average radiated emission measurements are specified, including emission measurement below 1000MHz, there also is limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated.


Note 2: Average Result =Peak Field Strength+Duty Cycle Correction Factor.

Note 3: Duty Cycle Correction Factor value refers to below.

Duty Cycle Correction Factor

The new test data of IC: mega8(433.05MHz)
Total pulse on time: 15.8 millisecond
Duty Cycle = TX on/100ms X 100% = 15.8ms/100ms X 100% = 15.8%
Duty Cycle Correction Factor = $20\log(\text{Duty Cycle}) = -16.03$


The test photo of IC: mega8

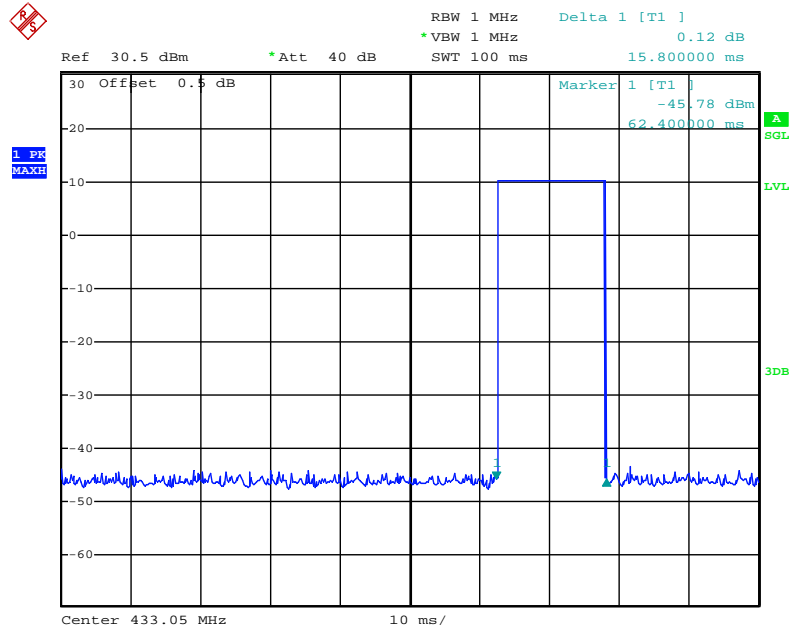

Date: 16.MAY.2012 03:36:46

The new test data of IC: mega8(433.63MHz)
Total pulse on time: 16.0 millisecond
Duty Cycle = TX on/100ms X 100% = 16.0ms/100ms X 100% = 16.0%
Duty Cycle Correction Factor = $20\log(\text{Duty Cycle}) = -15.92$

The test photo of IC: mega8(433.63MHz)

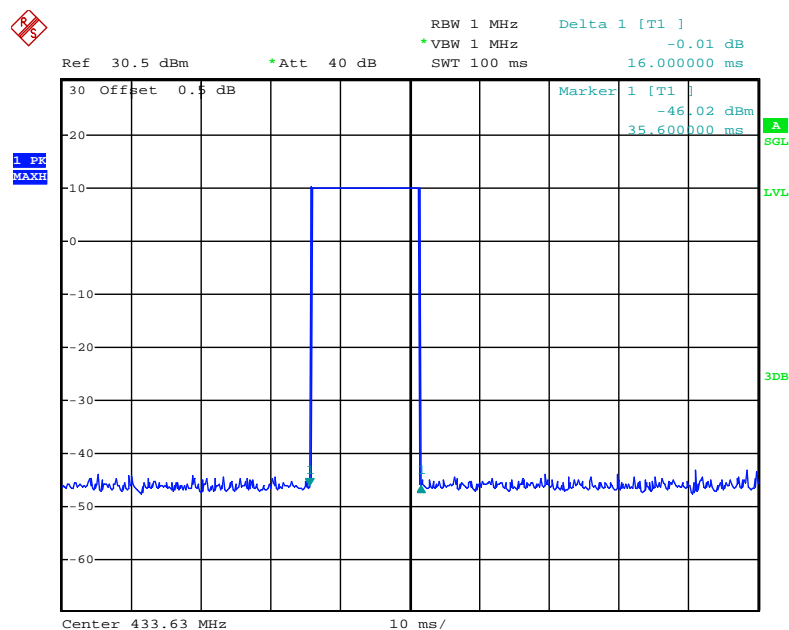

Date: 16.MAY.2012 03:38:34


The new test data of IC: mega8(434.91MHz)

Total pulse on time: 16.0 millisecond

Duty Cycle = TX on/100ms X 100% = 16.0ms/100ms X 100% = 16.0%

Duty Cycle Correction Factor = $20\log(\text{Duty Cycle}) = -15.92$

The new test photo of IC: mega8(434.91MHz)

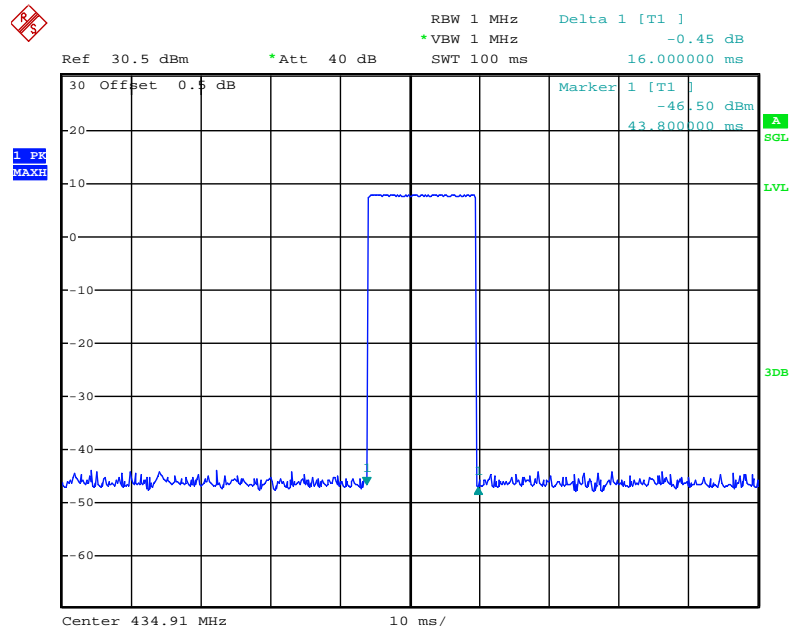

Date: 16.MAY.2012 03:44:01


The new test data of IC: mega328(433.05MHz)

Total pulse on time: 24.6 millisecond

Duty Cycle = TX on/100ms X 100% = 24.6ms/100ms X 100% = 24.6%

Duty Cycle Correction Factor = $20\log(\text{Duty Cycle}) = -12.18$

The new test photo of IC: mega328(433.05MHz)

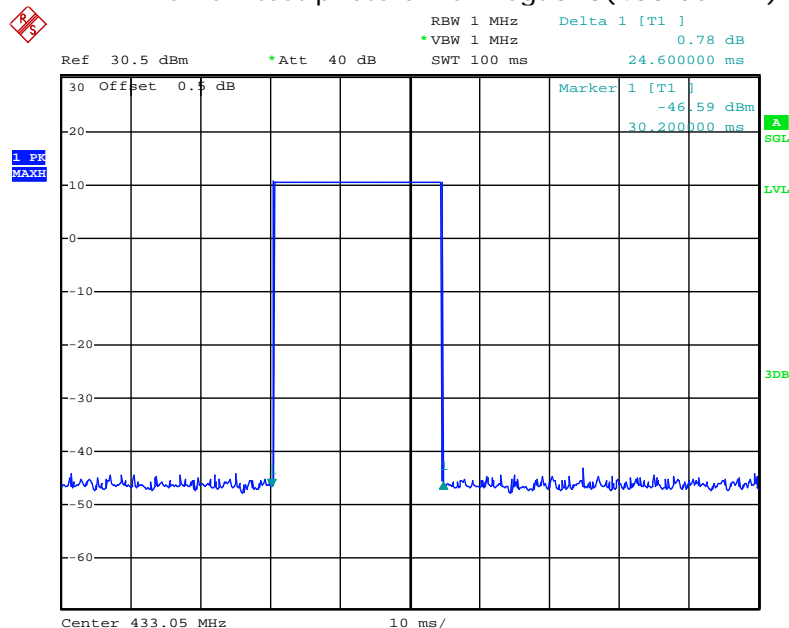

Date: 21.MAY.2012 08:22:27


The new test data of IC: mega328(433.63MHz)

Total pulse on time: 24.4 millisecond

Duty Cycle = TX on/100ms X 100% = 24.4ms/100ms X 100% = 24.4%

Duty Cycle Correction Factor = $20\log(\text{Duty Cycle}) = -12.25$

The new test photo of IC: mega328(433.63MHz)

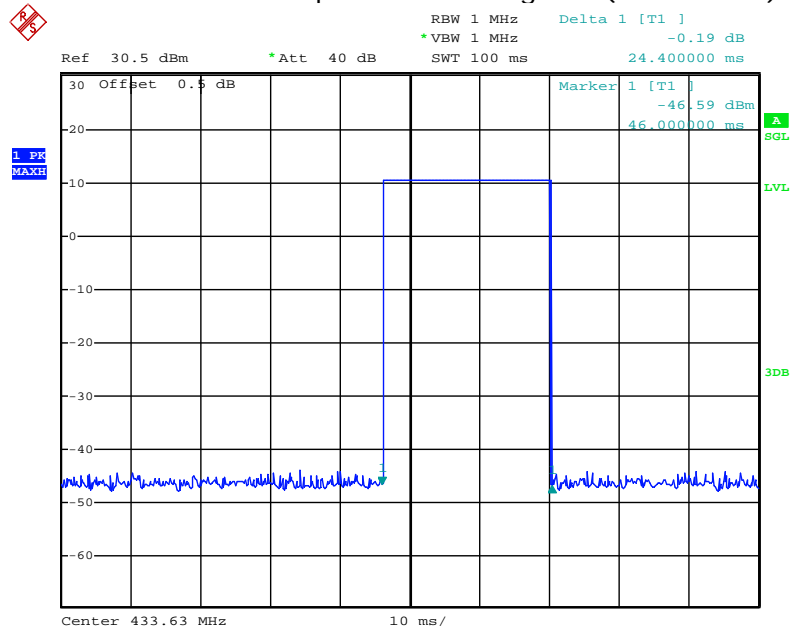

Date: 21.MAY.2012 08:27:31


The new test data of IC: mega328(434.91MHz)

Total pulse on time: 24.4 millisecond

Duty Cycle = TX on/100ms X 100% = 24.4ms/100ms X 100% = 24.4%

Duty Cycle Correction Factor = $20\log(\text{Duty Cycle}) = -12.25$


The new test photo of IC: mega328(434.91MHz)

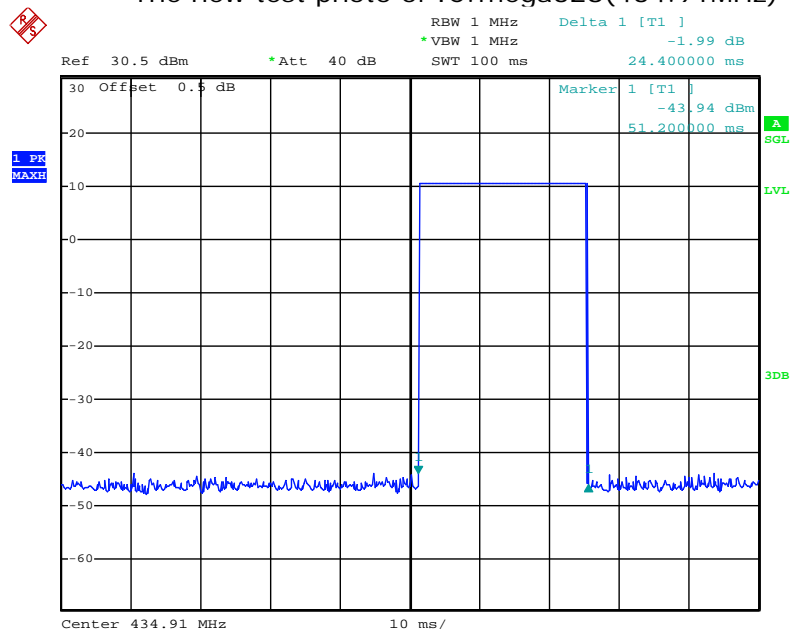

Date: 21.MAY.2012 08:19:20

4.3. Deactivation Time

TEST CONFIGURATION

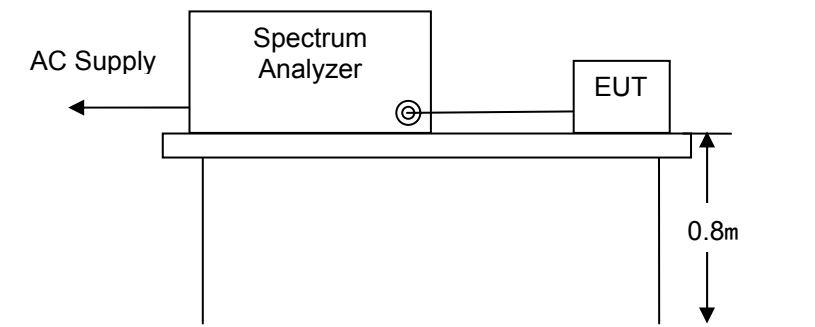

TEST PROCEDURE

- 1 The EUT was placed on a wooded table which is 0.8m height and close to receiver antenna of spectrum analyzer.
- 2 The spectrum analyzer resolution bandwidth was set to 1 MHz and video bandwidth was set to 1 MHz to encompass all significant spectral components during the test. The spectrum analyzer was operated in linear scale and zero span mode after tuning to the transmitter carrier frequency.

Limit

For periodic transmitter, according to FCC Part 15C § 15.231(e)



Item	Limit (second)
One transmission time	not greater than 1 second
Transmission period	at least 30 times the duration of the transmission but in no case less than 10 second

TEST RESULTS


original IC :mega8 test data

Frequency (MHz)	One transmission time (second)	Transmission period (second)	Result
432.70	0.01623	12.02	Pass
433.54	0.01623	12.02	Pass
434.91	0.01623	12.02	Pass


Bottom channel

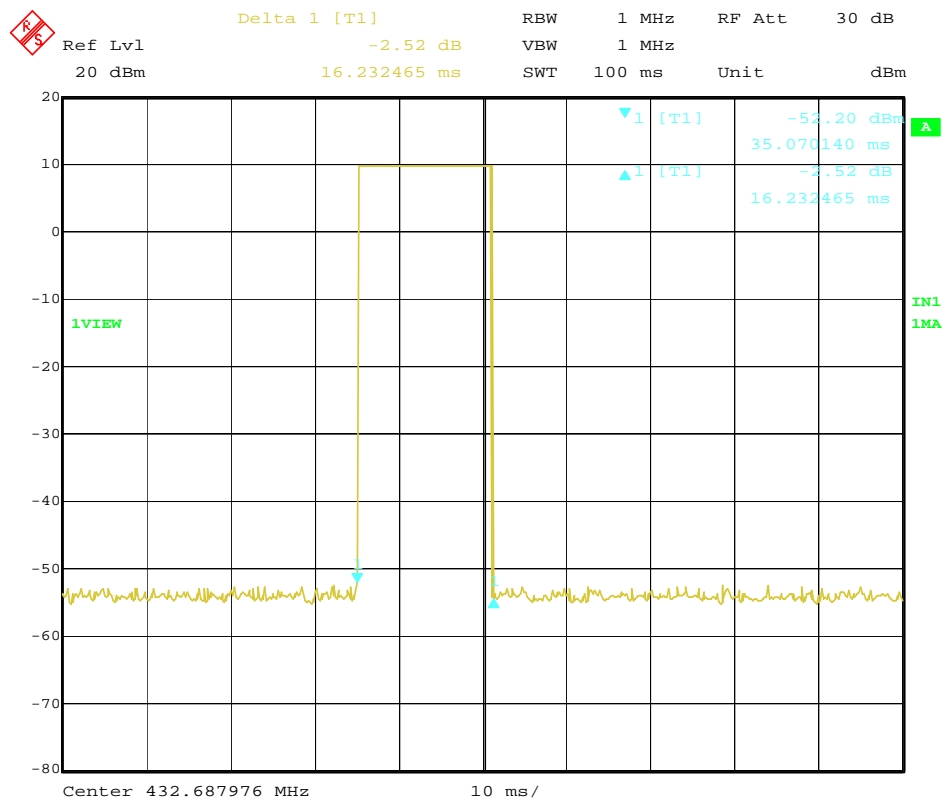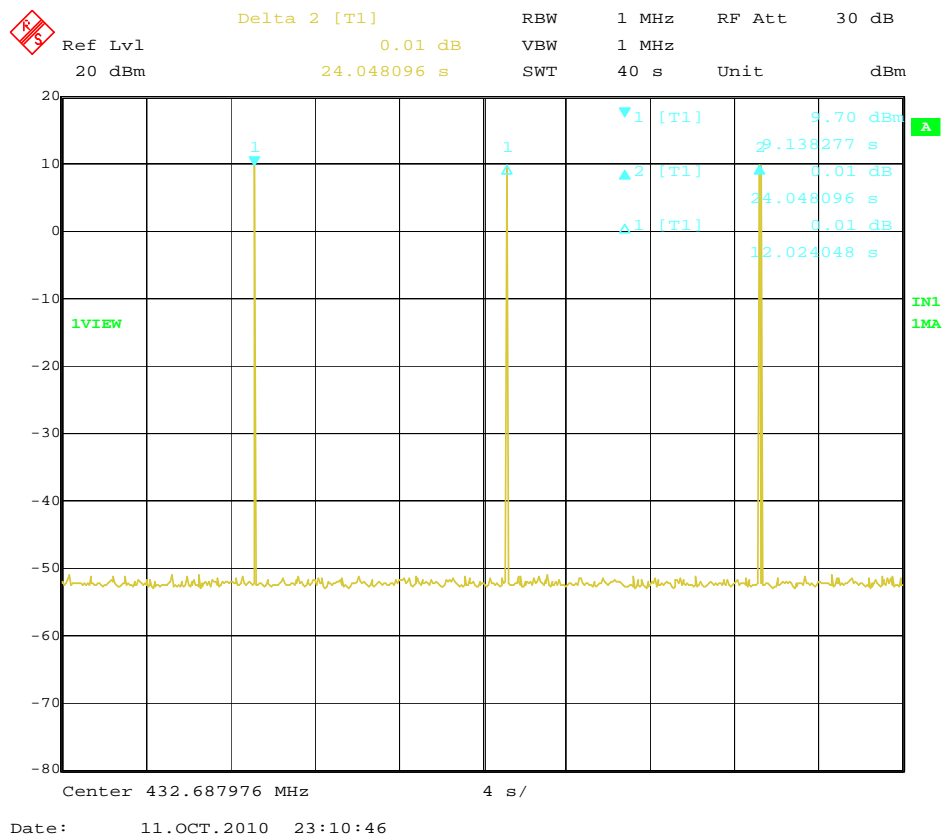The time of one transmissionThe time of transmission period

Middle channel

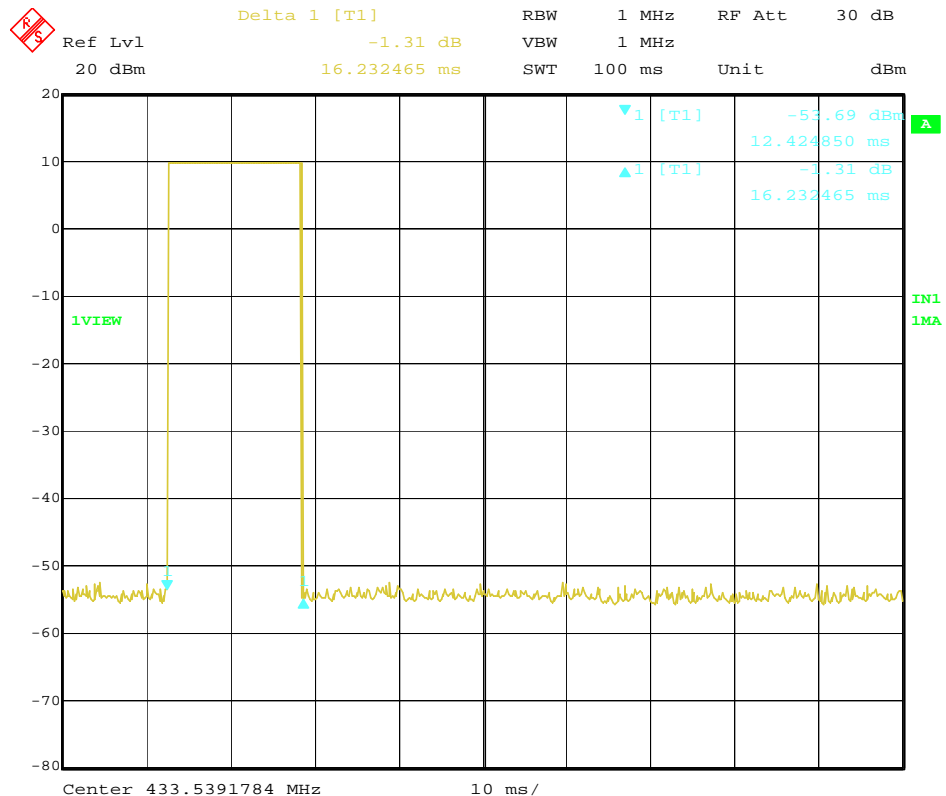
The time of one transmission

Date: 11.OCT.2010 23:08:21

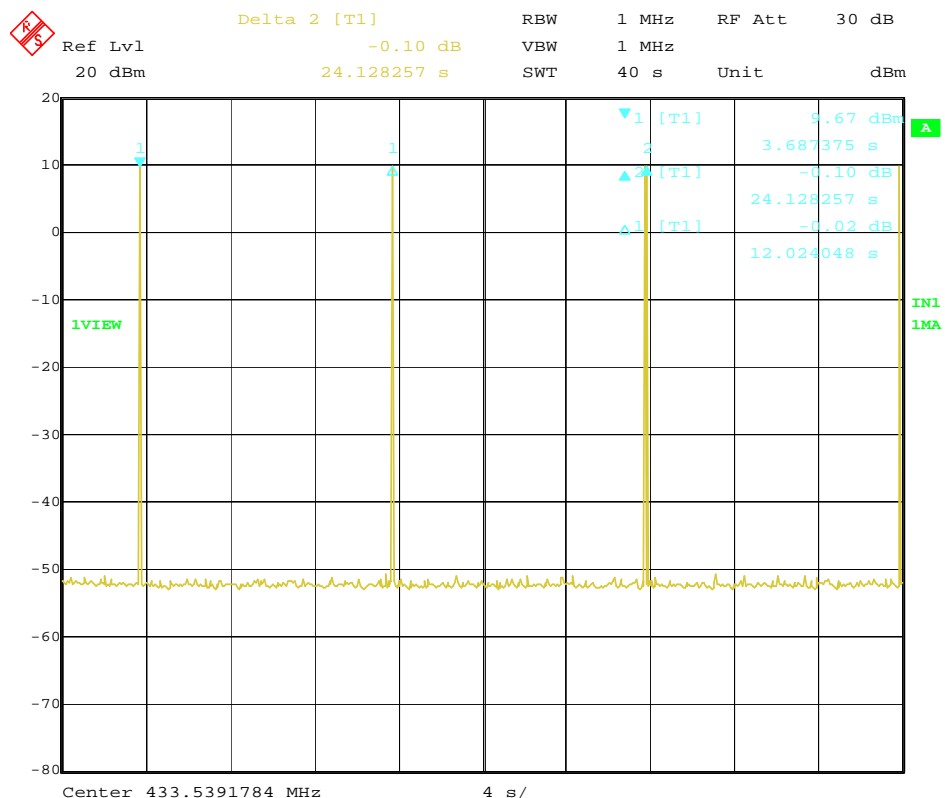
The time of transmission period

Date: 11.OCT.2010 23:07:30

Top channel

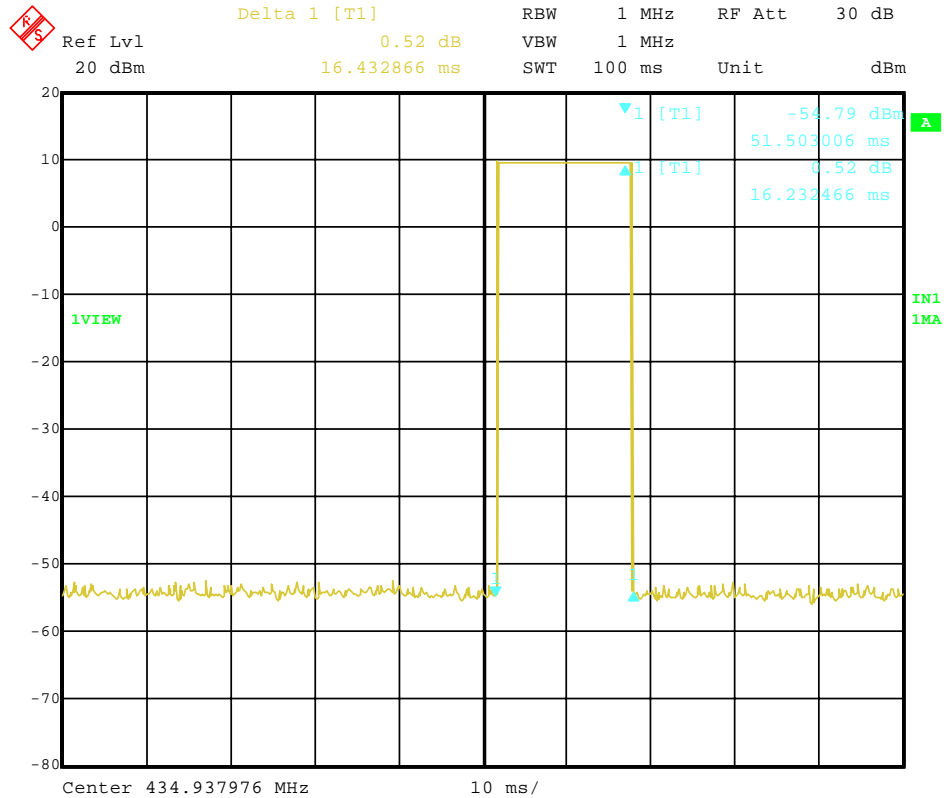The time of one transmission

Date: 11.OCT.2010 22:59:38

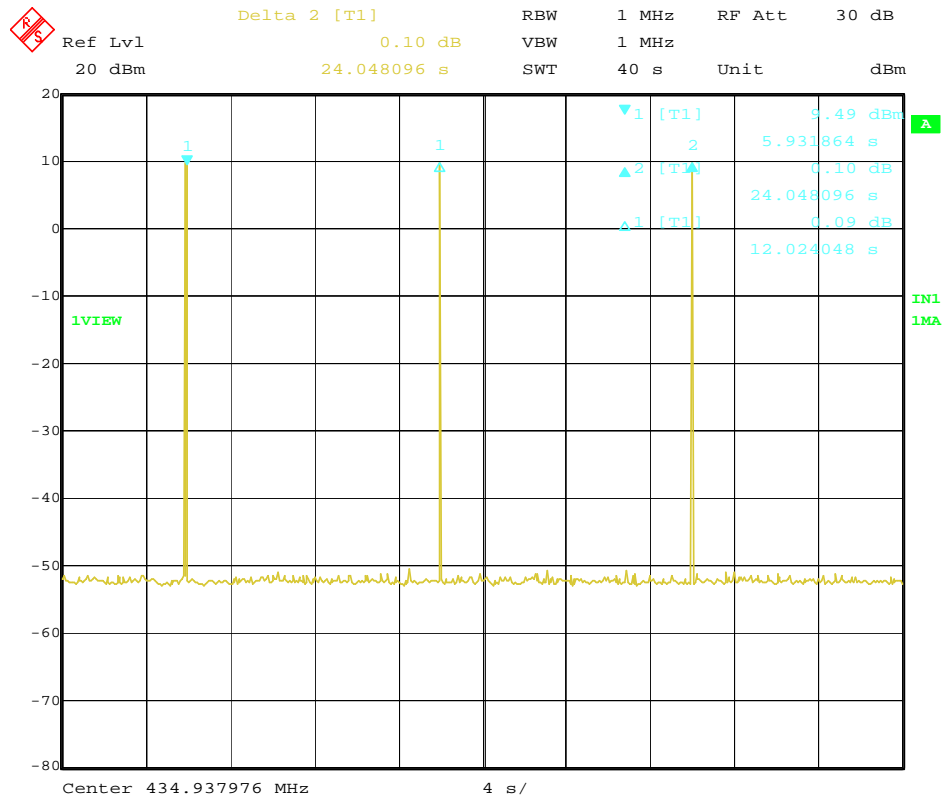The time of transmission period

Date: 11.OCT.2010 23:04:01


new IC :mega8 test data

Frequency (MHz)	One transmission time (second)	Transmission period (second)	Result
433.05 MHz	0.0168	12.08	Pass
433.63 MHz	0.0176	12.08	Pass
434.91 MHz	0.0168	12.08	Pass


new IC :mega328 test data

Frequency (MHz)	One transmission time (second)	Transmission period (second)	Result
433.05 MHz	0.0256	12.08	Pass
433.63 MHz	0.0256	12.08	Pass
434.91 MHz	0.0256	12.08	Pass


The test photo of IC: mega8

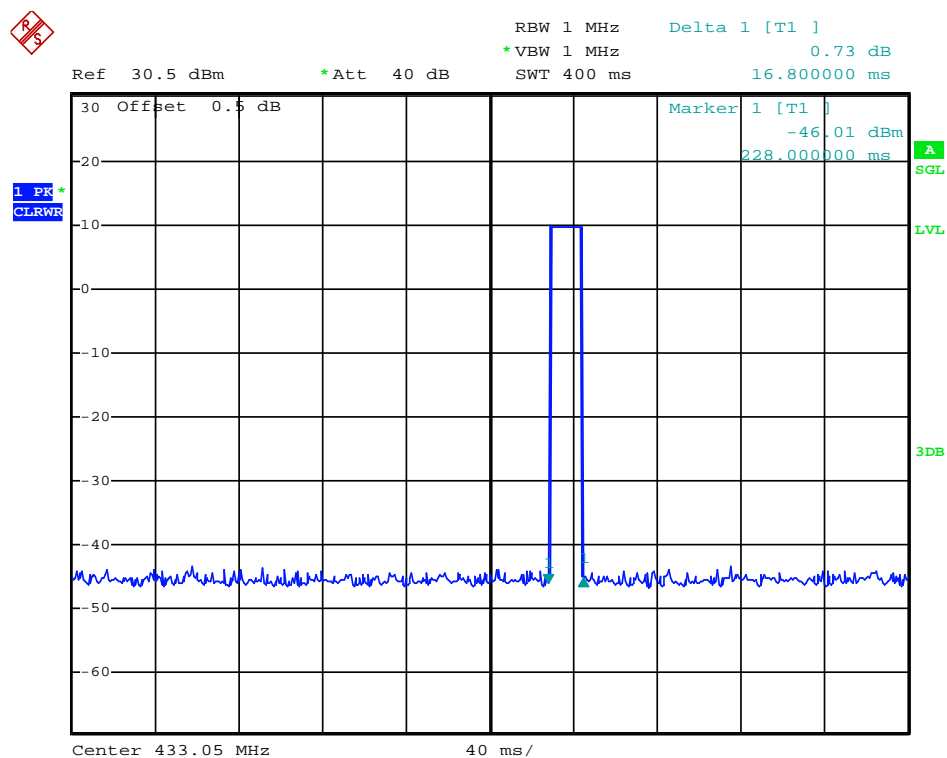


Date: 14.MAY.2012 08:58:41

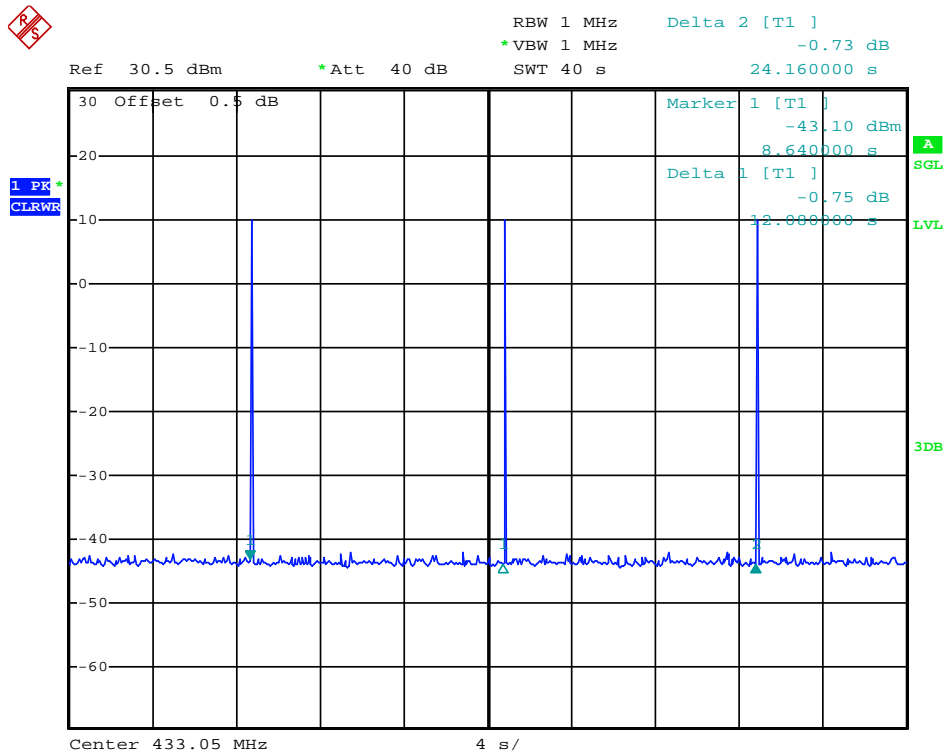


Date: 14.MAY.2012 08:56:03

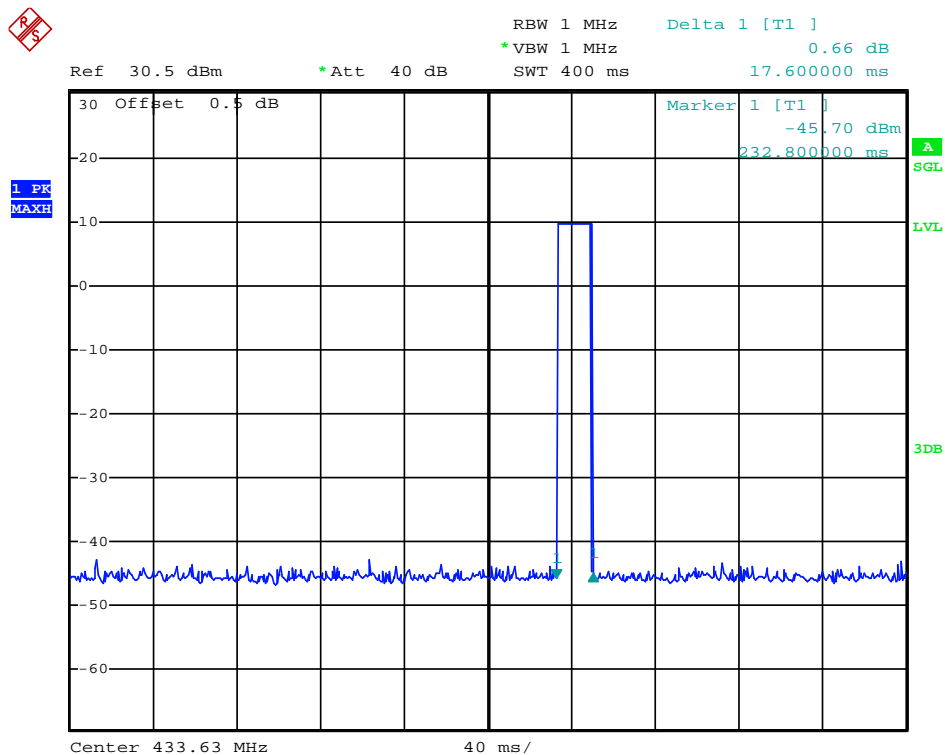


Date: 14.MAY.2012 09:02:13

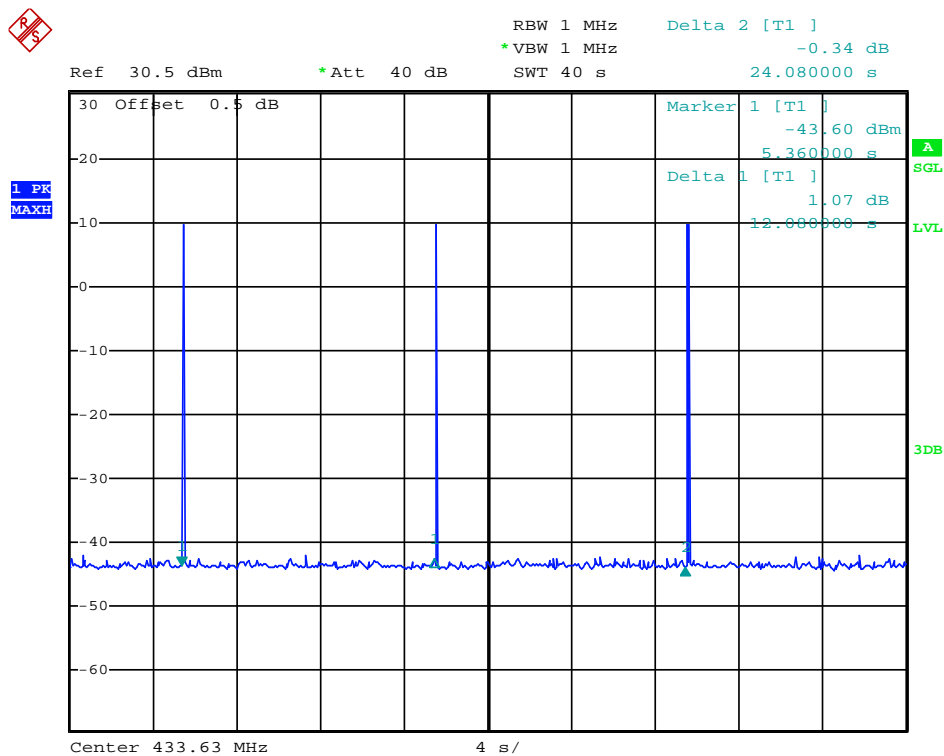

Date: 14.MAY.2012 09:03:41

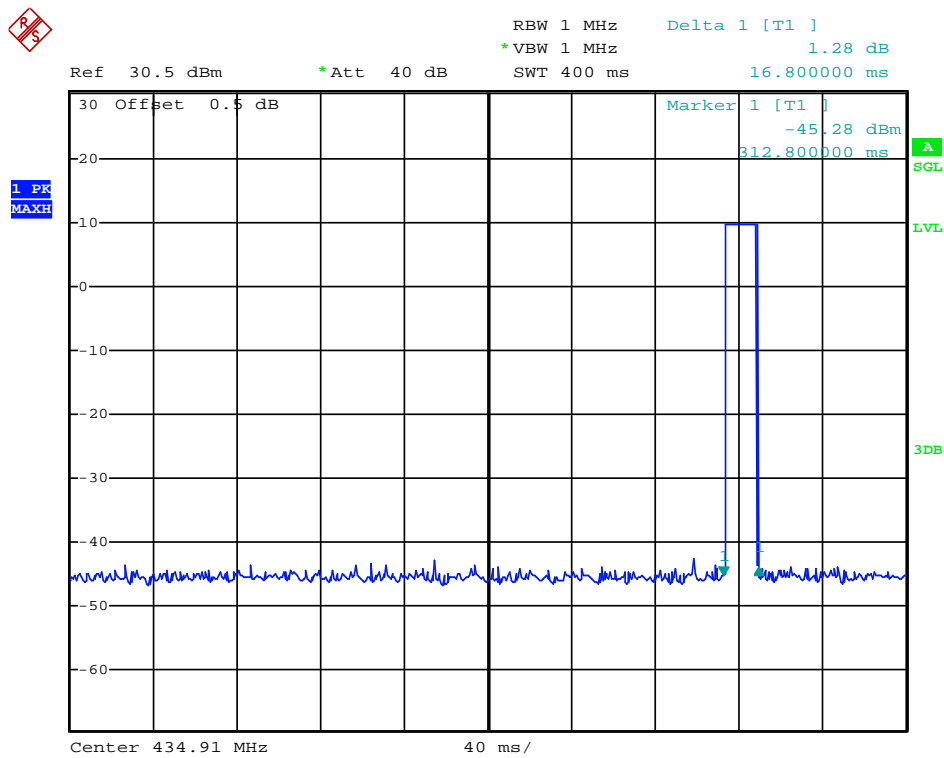


Date: 14.MAY.2012 09:08:24

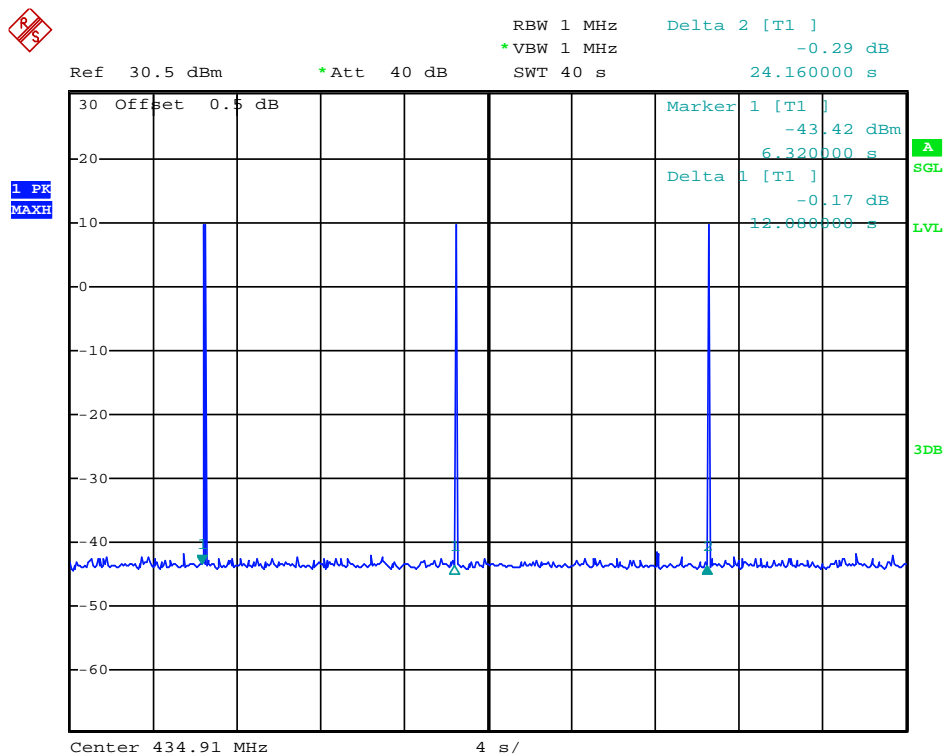


Date: 14.MAY.2012 09:07:00


The test photo of IC: mega328

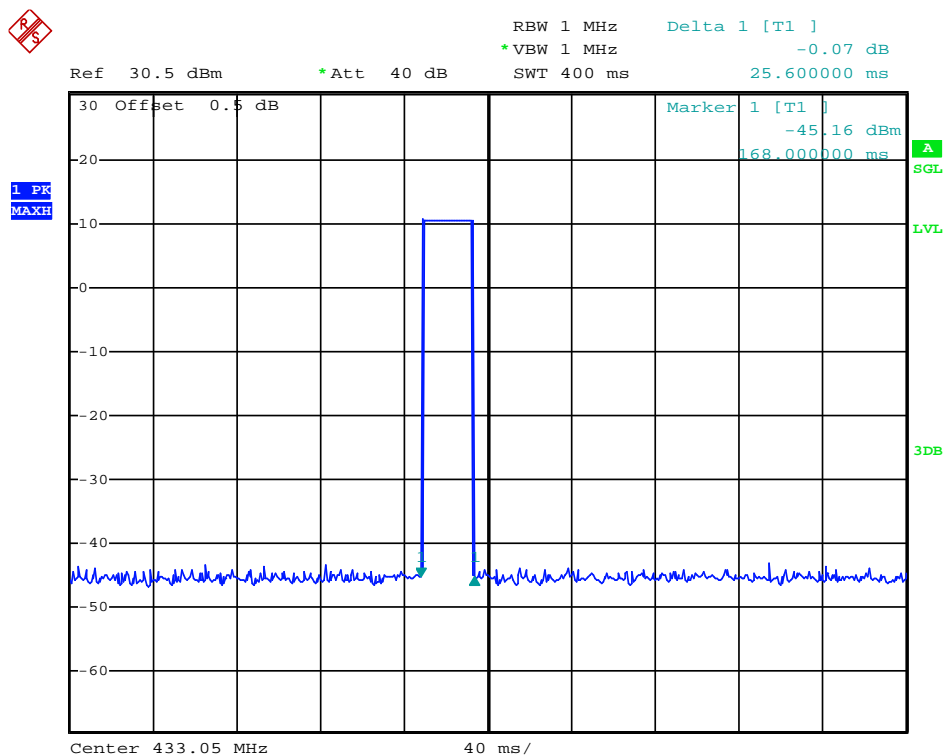



Date: 21.MAY.2012 08:34:52

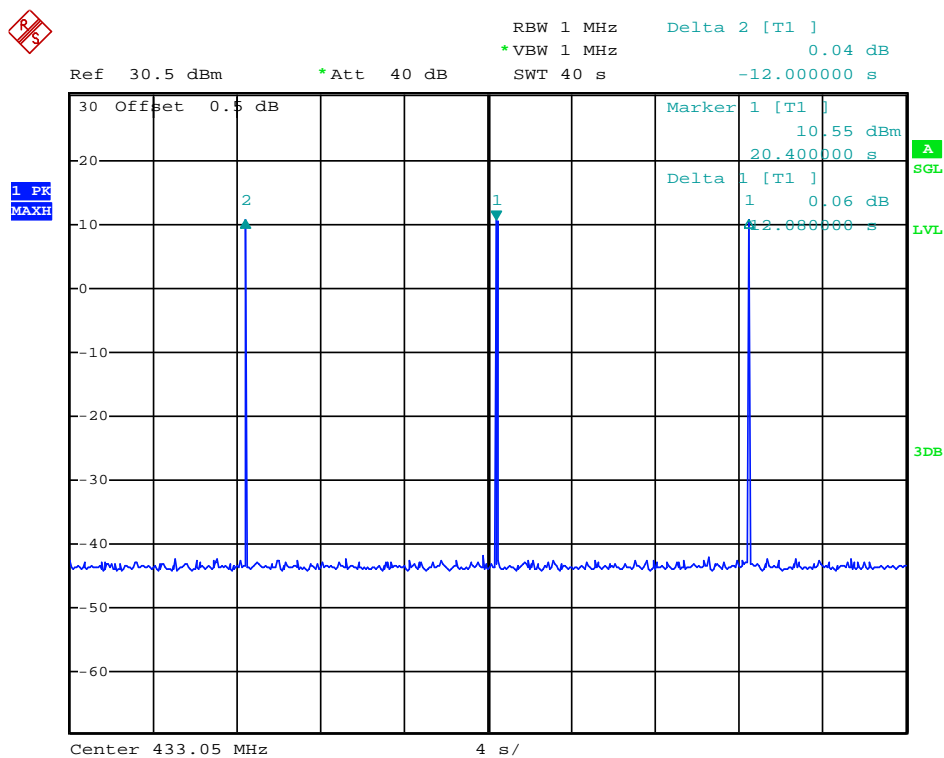


Date: 21.MAY.2012 08:38:15

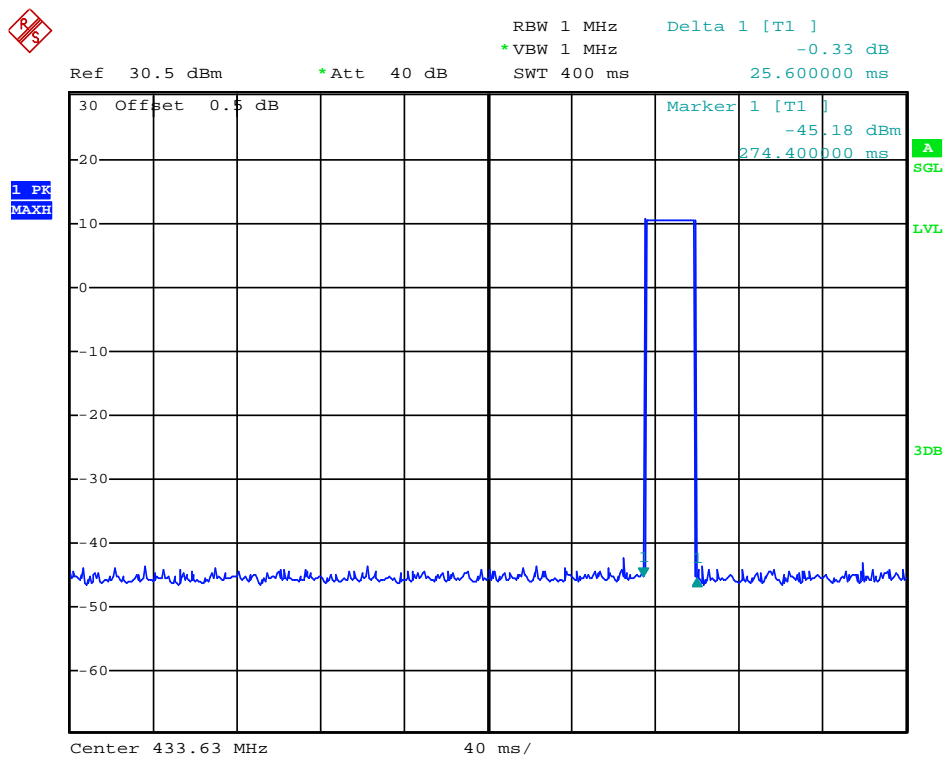

Date: 21.MAY.2012 08:32:40




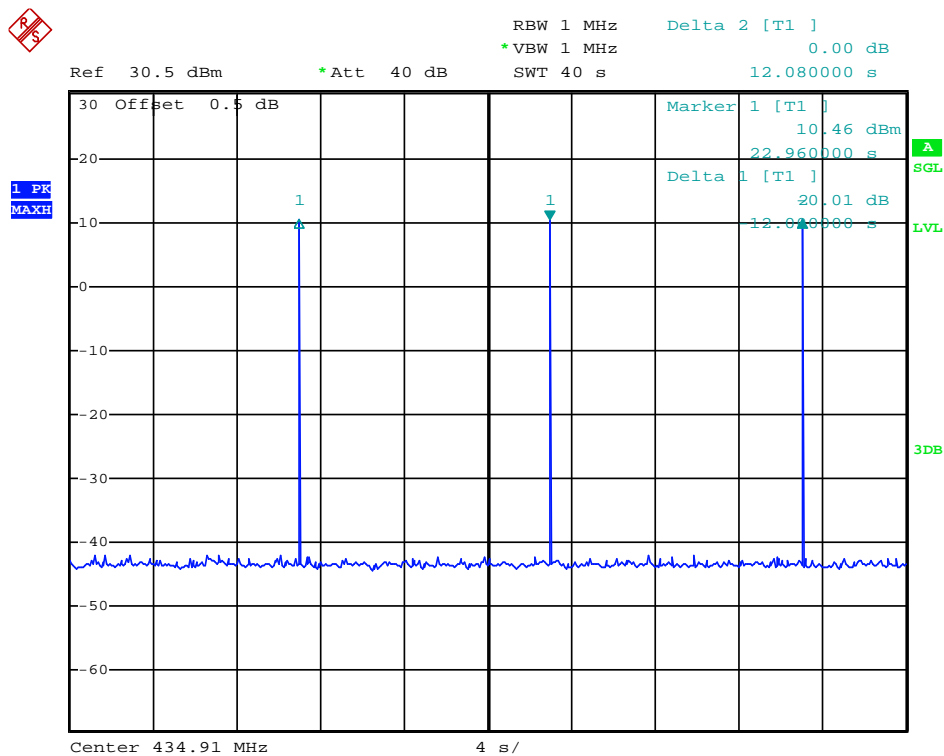

Date: 21.MAY.2012 08:44:57

4.4. 20dB Bandwidth

TEST CONFIGURATION

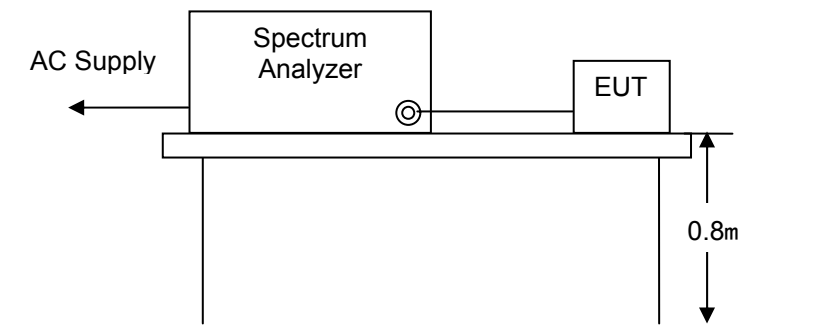

TEST PROCEDURE

- 1 The EUT was placed on a wooded table which is 0.8m height and close to receiver antenna of spectrum analyzer.
- 2 The spectrum analyzer resolution bandwidth was set to 10 kHz and video bandwidth was set to 30 kHz to encompass all significant spectral components during the test. The detector was set to peak and hold mode to clearly observe the components.

Limit

According to FCC Part 15C § 15.231(c)

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz.

TEST RESULTS

The test data of IC: mega8


Frequency (MHz)	20dB Bandwidth Measurement Bandwidth (KHz)	Limit (kHz)	Result
432.70	133.27	1081.75	Pass
433.54	133.27	1083.85	Pass
434.91	133.27	1087.28	Pass

The test data of IC: mega328


Frequency (MHz)	20dB Bandwidth Measurement Bandwidth (KHz)	Limit (kHz)	Result
433.05	137.0	1082.625	Pass
433.63	136.0	1084.075	Pass
434.91	137.0	1087.275	Pass

20dB Bandwidth


Bottom channel

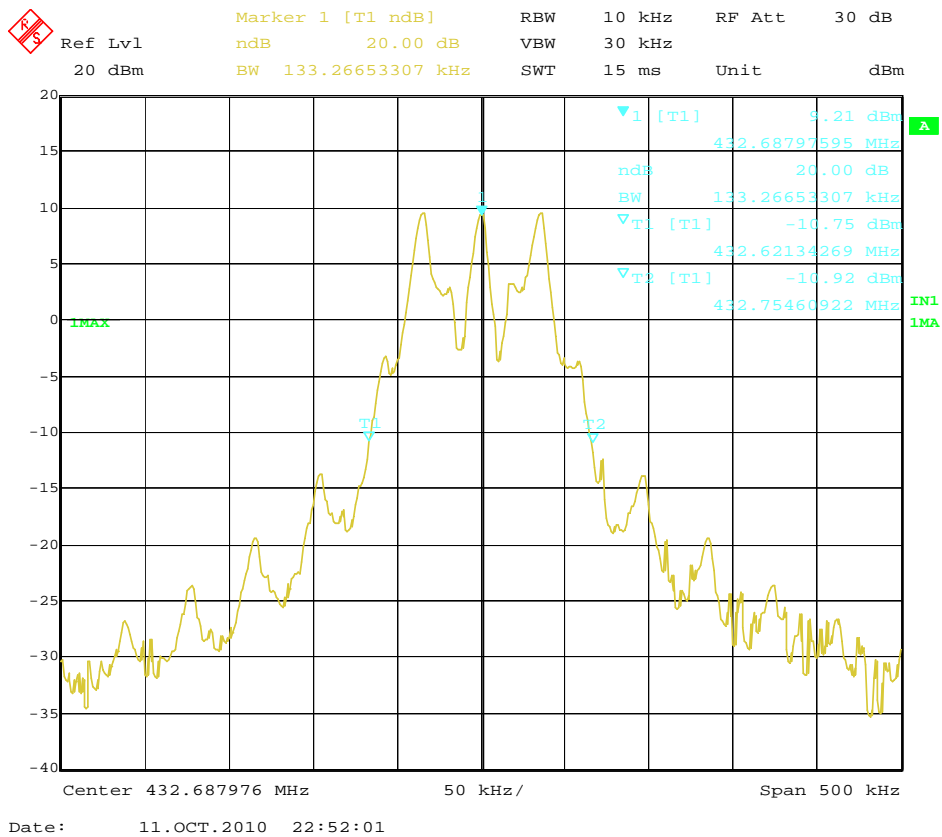


Middle channel

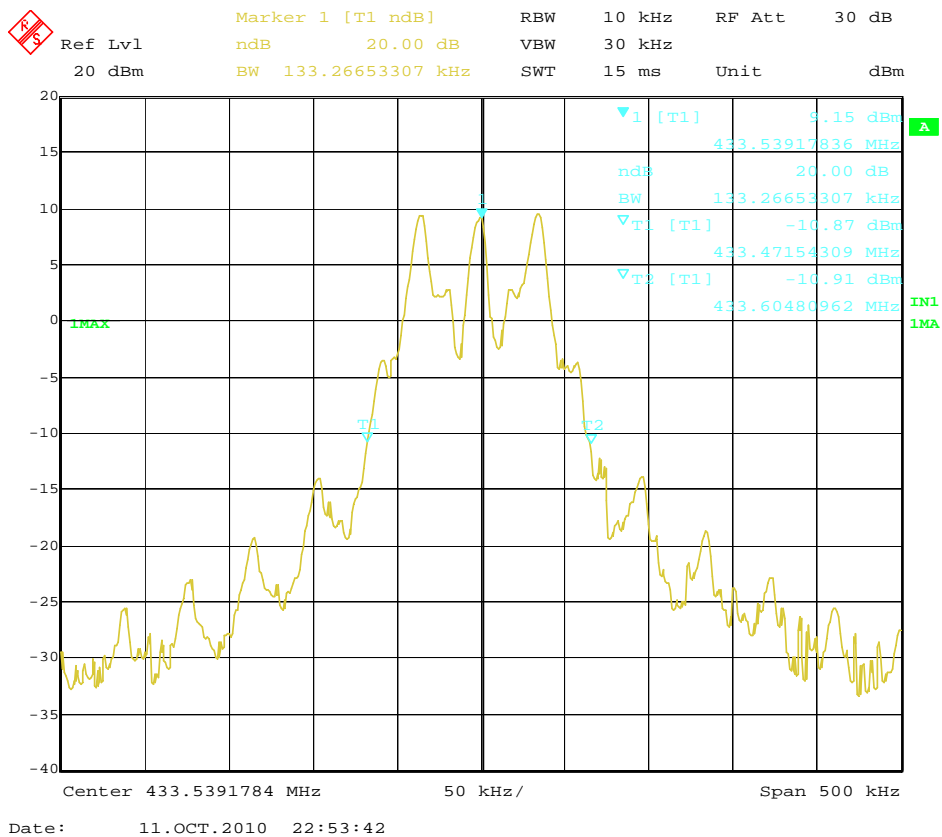


Top channel

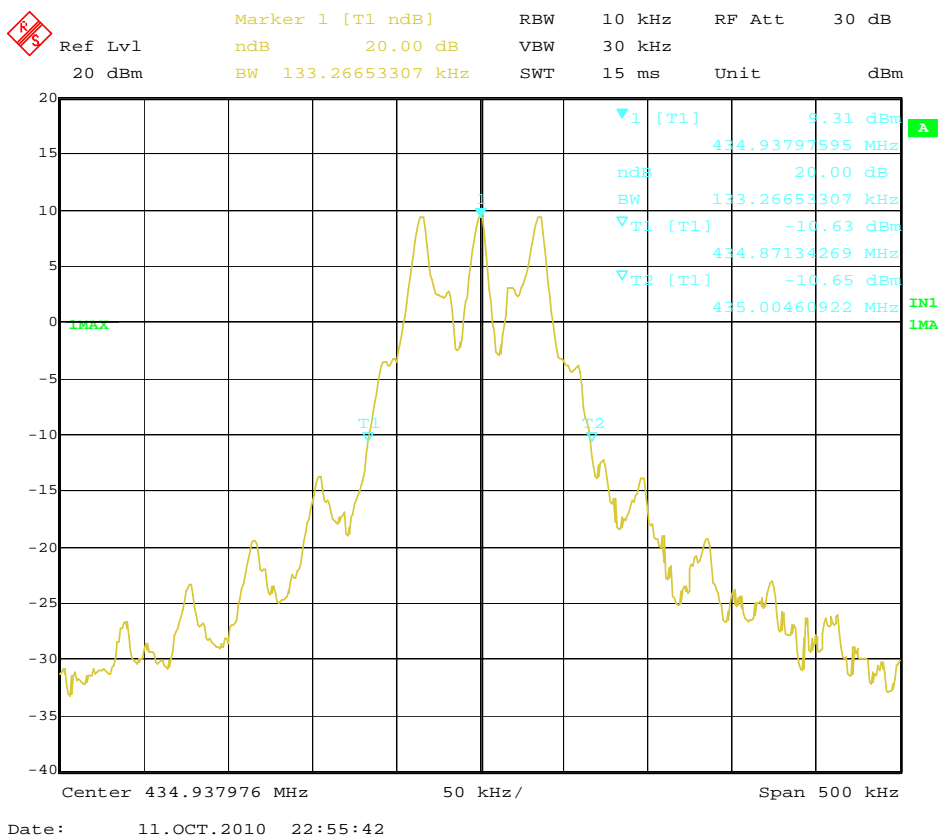


Low channel

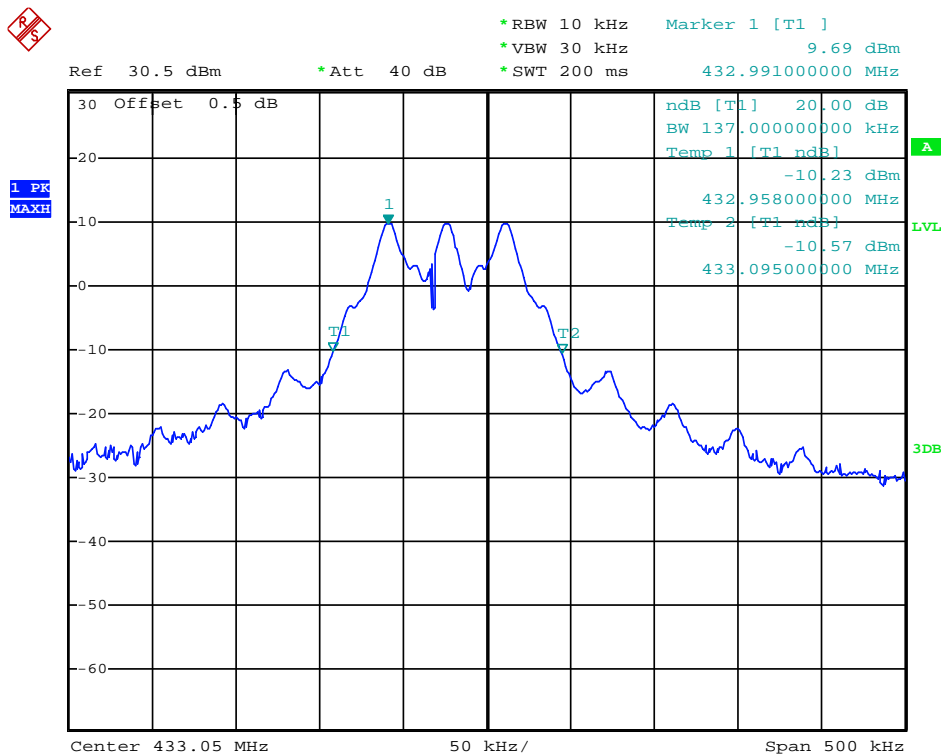

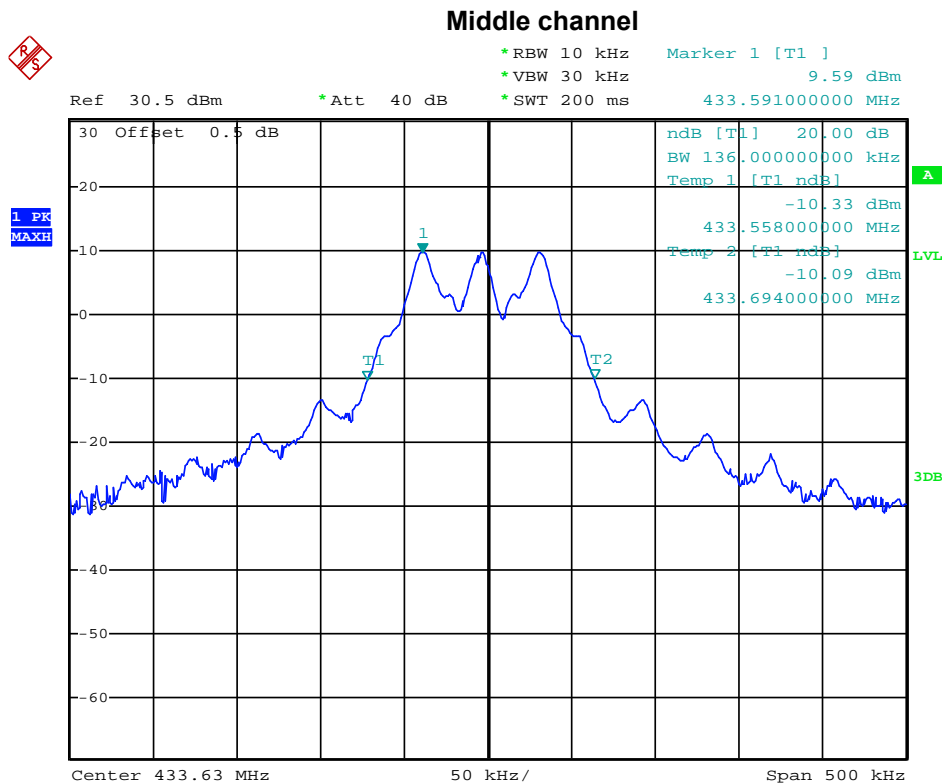

Date: 14.MAY.2012 05:17:29

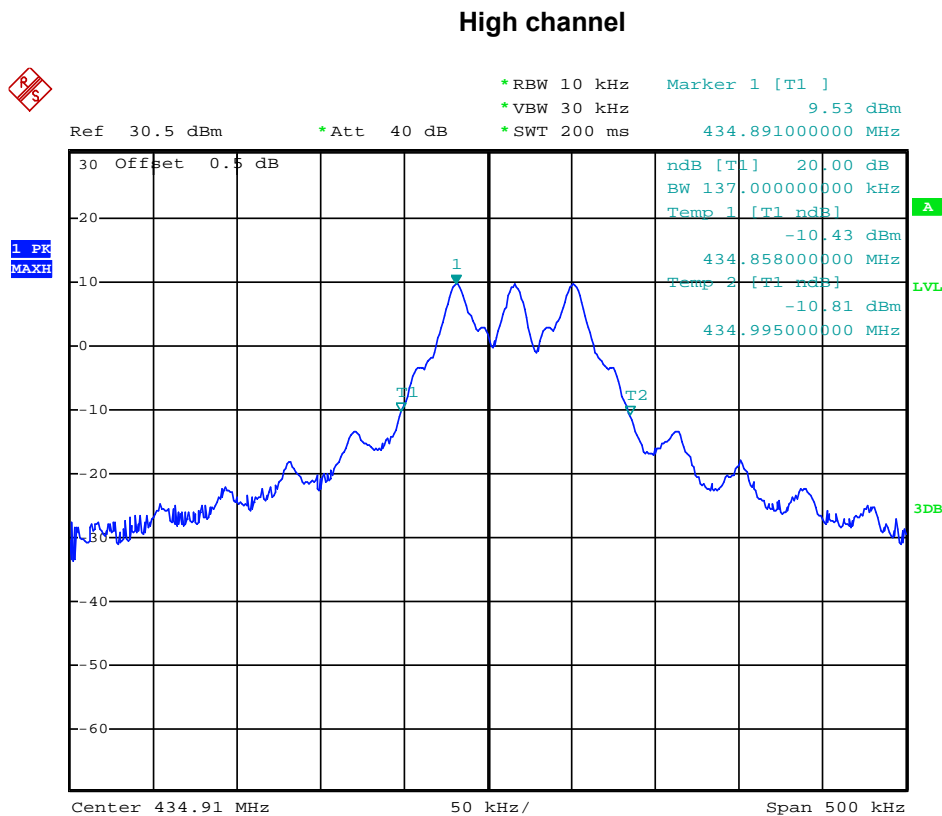

Date: 14.MAY.2012 05:14:11




4.5. Antenna Requirement

According to FCC Part 15C § 15.203,

- a), An intentional radiator shall be de-signed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
- b), The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


The EUT use of a nonstandard antenna connector (Reverse SMA), so the EUT meets the requirements of antenna.

Detial please see the photos as following:

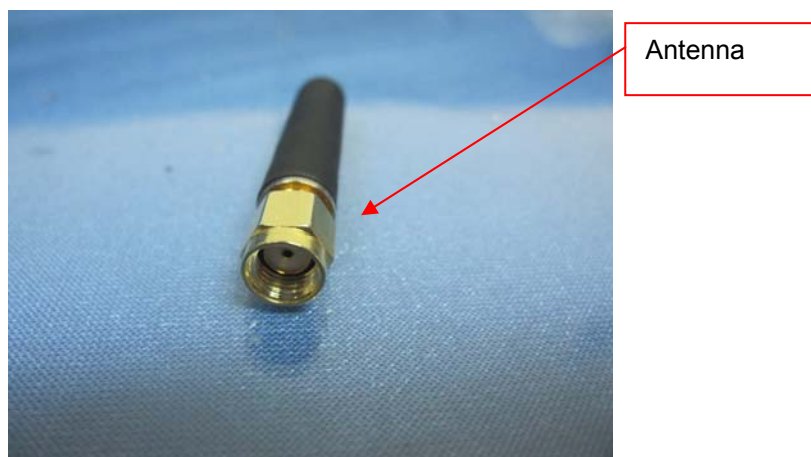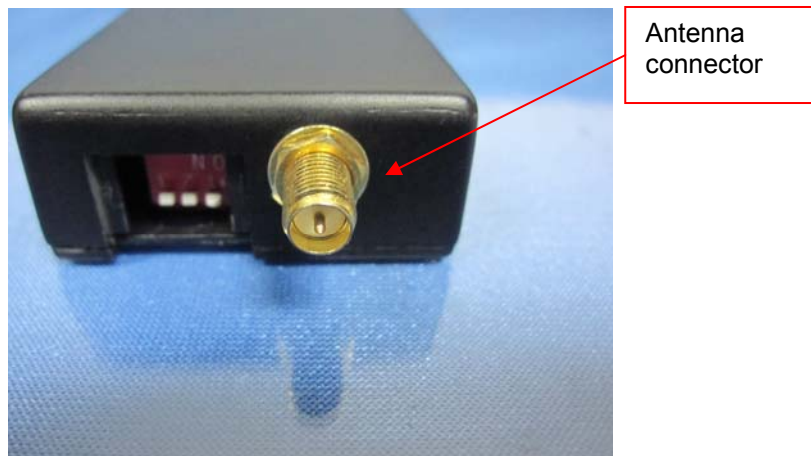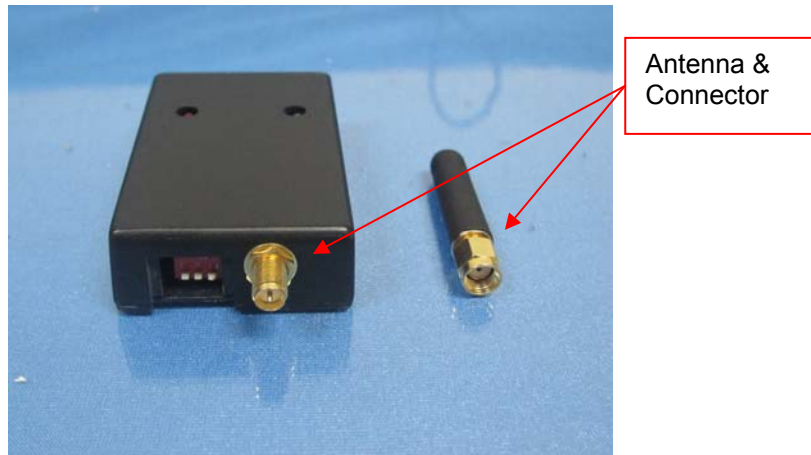



Antenna
connector

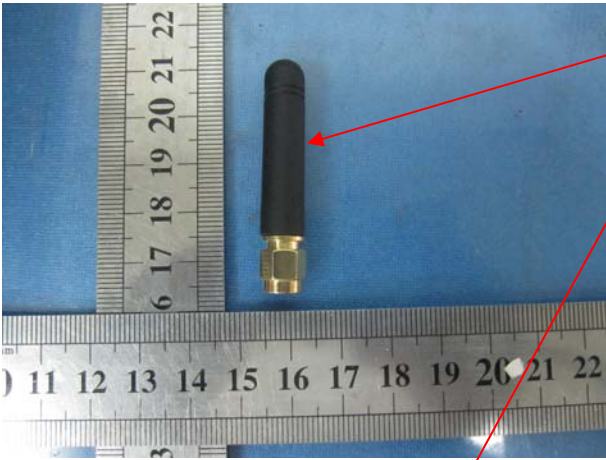

Antenna




5. Test Setup Photos of the EUT

AC conducted emission test photo



Radiated emission test photo



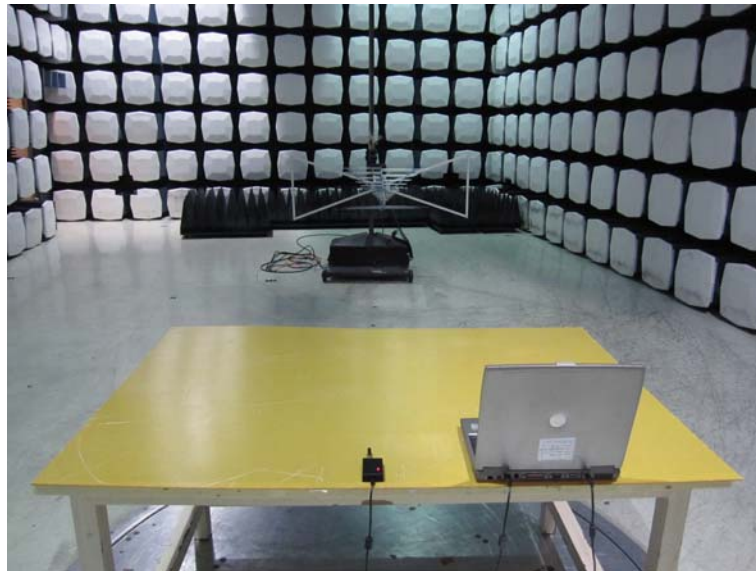

6. External and Internal Photos of the EUT

Original External Photos

TTL and RS232 I/O port



RS422 I/O port




USB I/O port



Original Internal Photos


TTL and RS232 I/O port



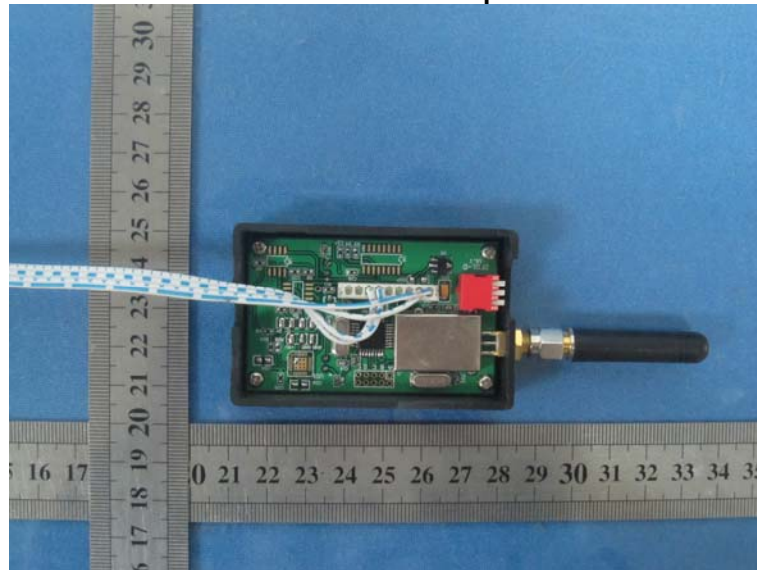




RS232 port and cable



TTL port and cable



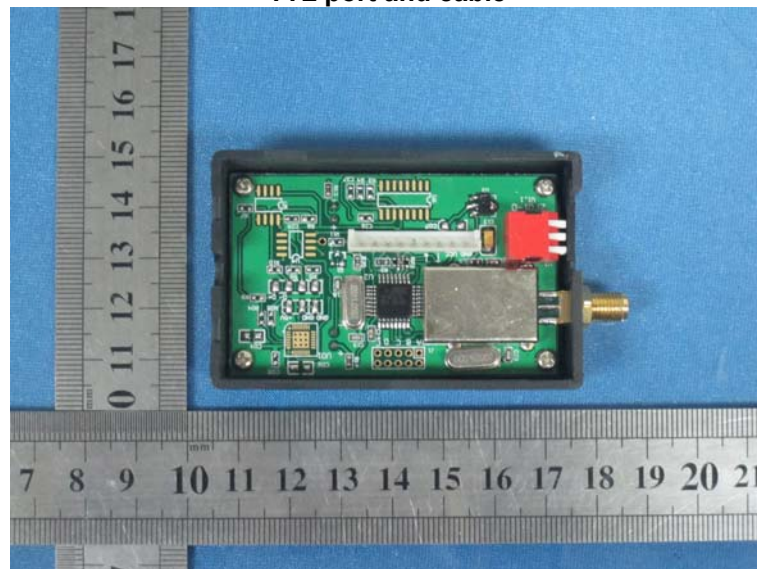


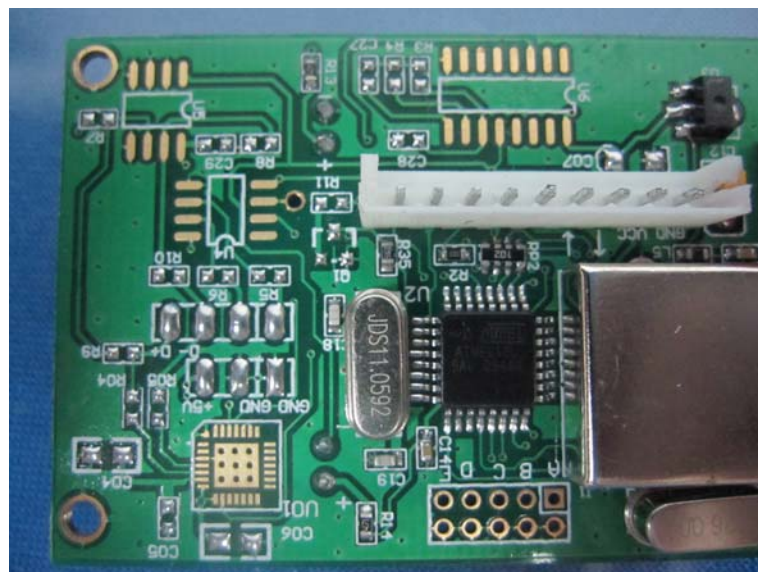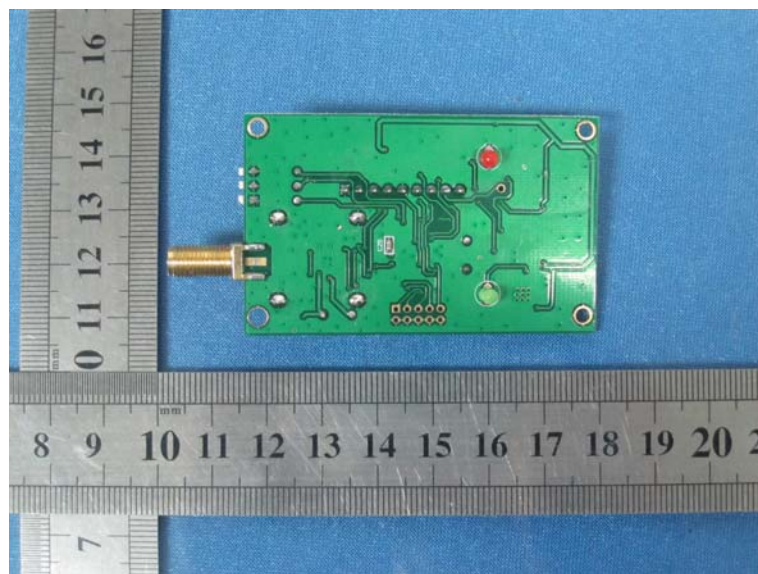
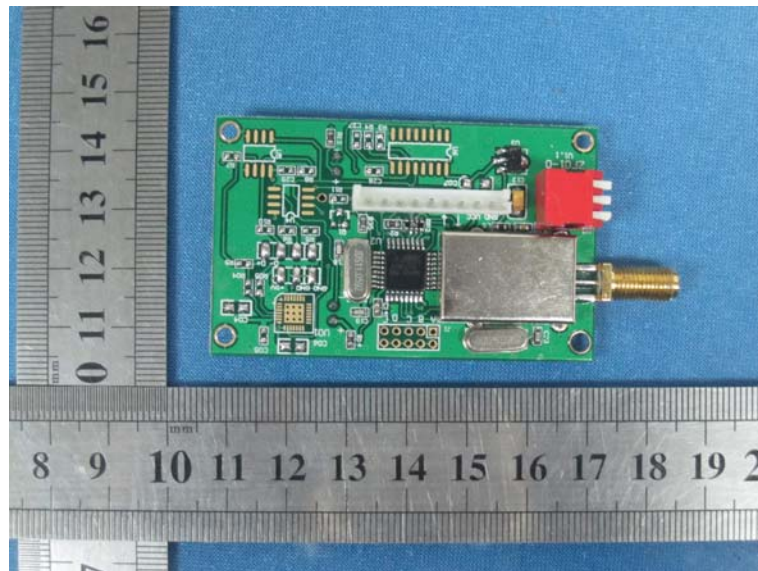


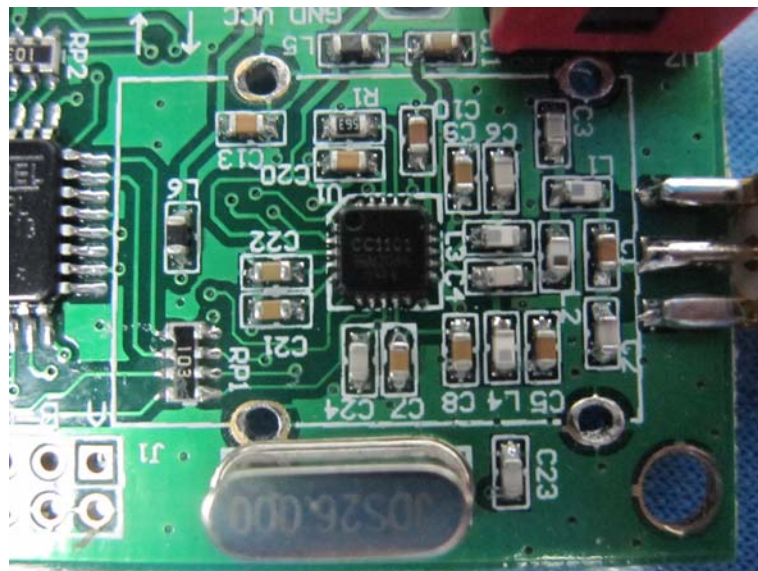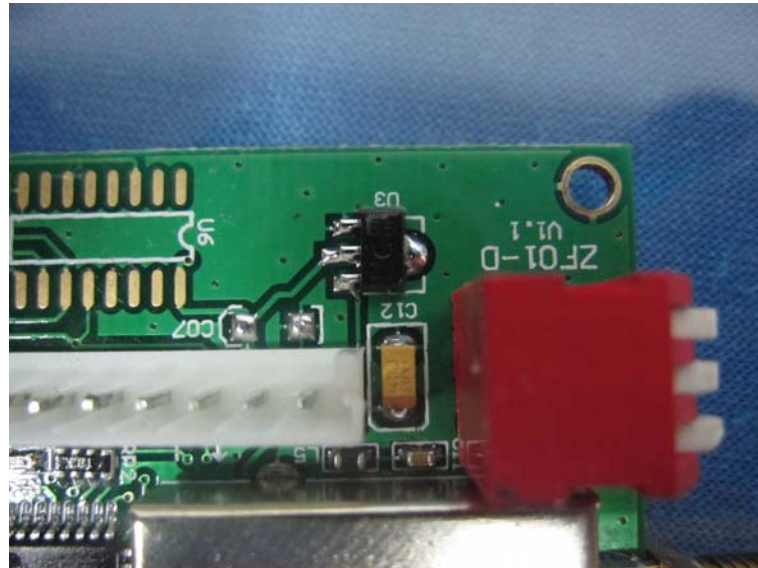



RS422 I/O port




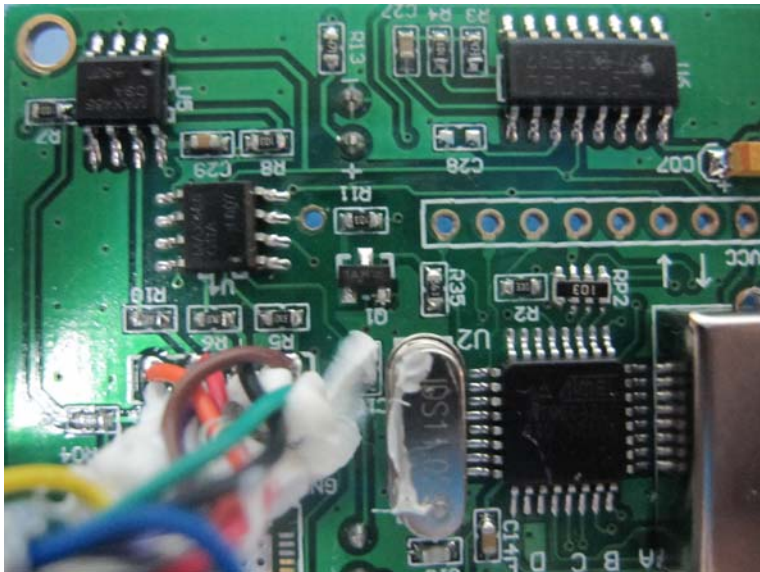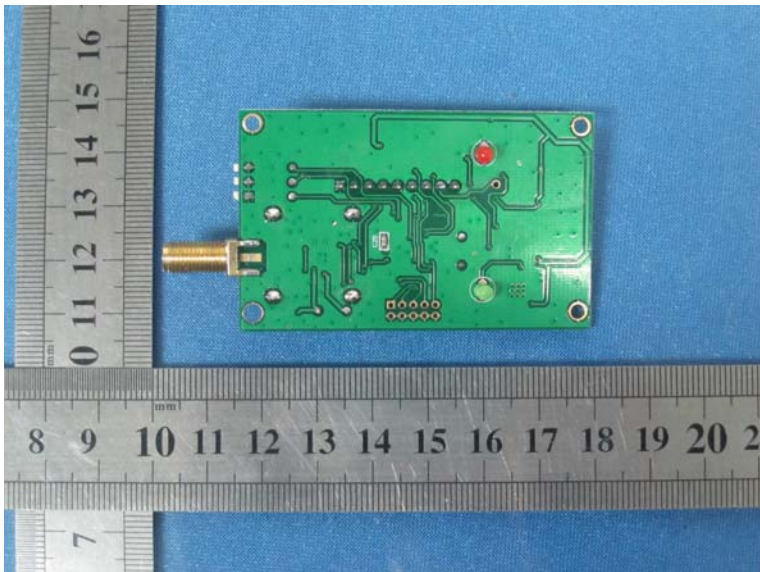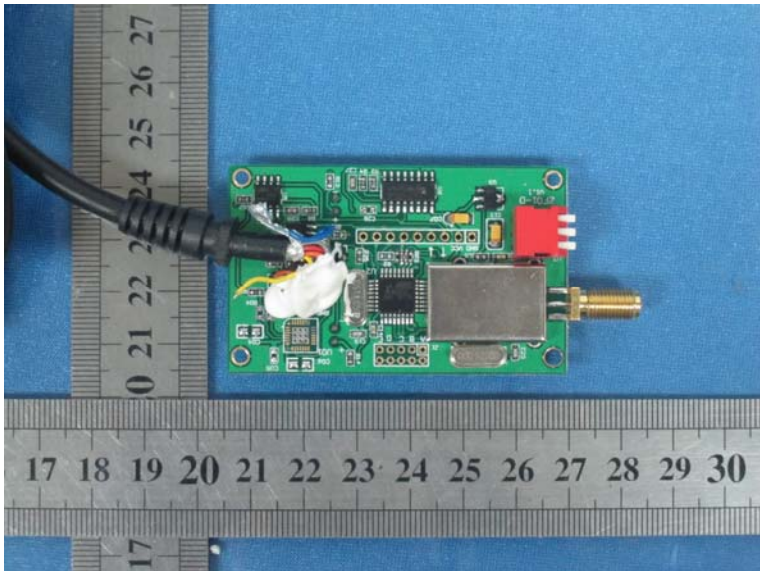


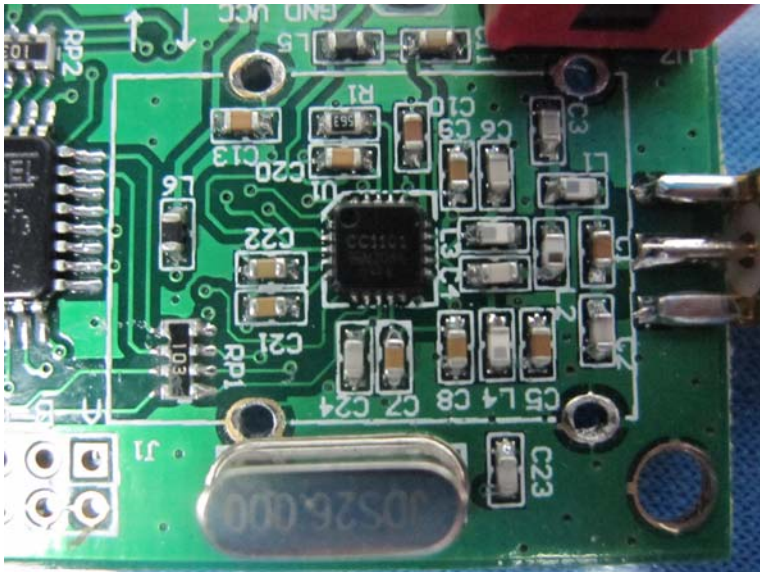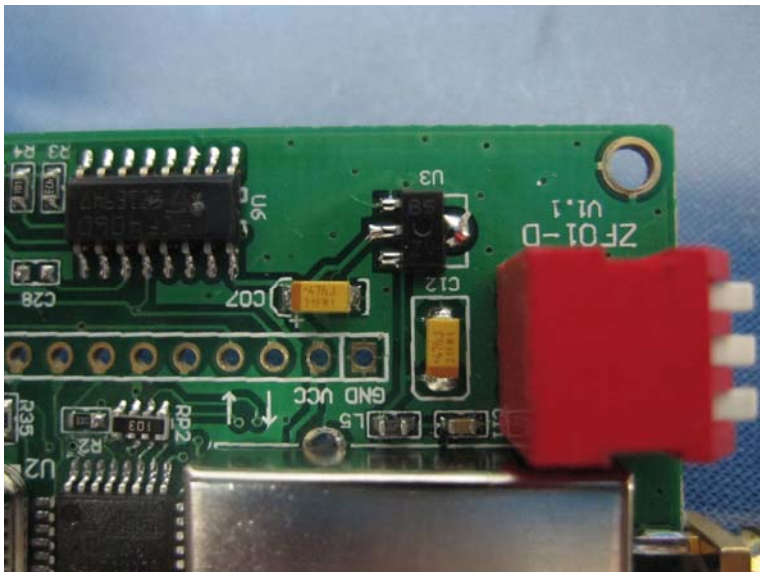

USB I/O port

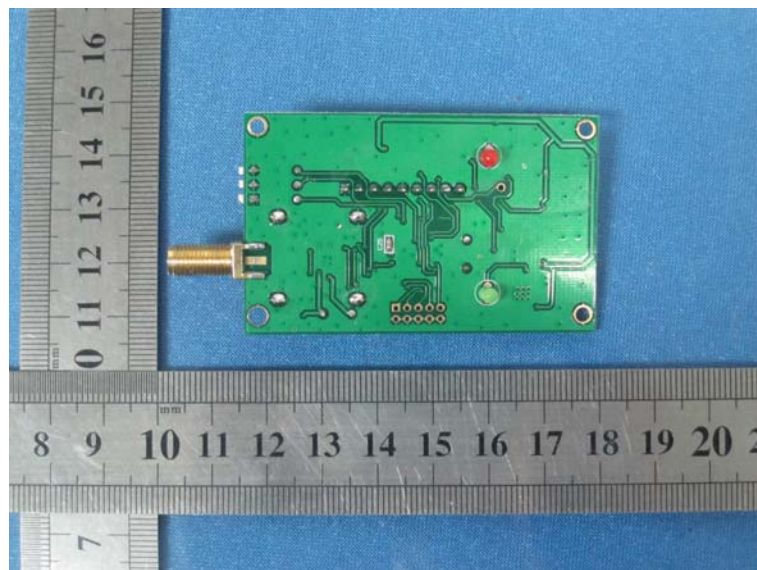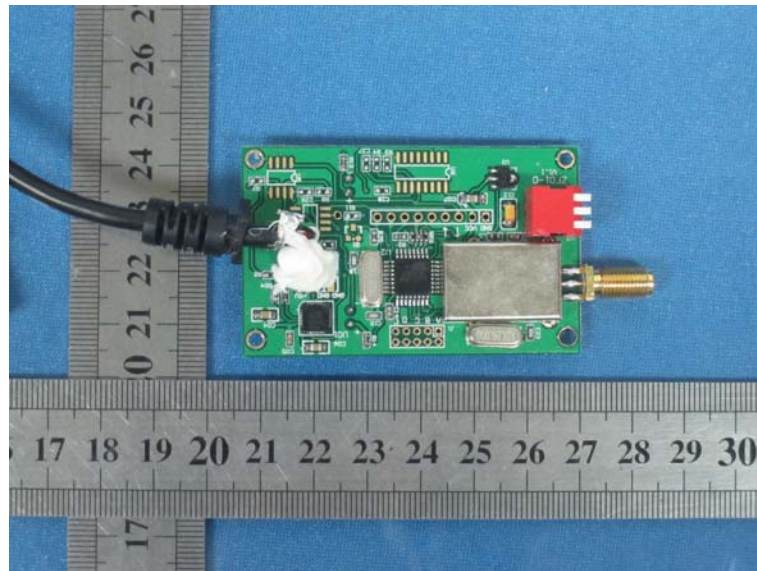


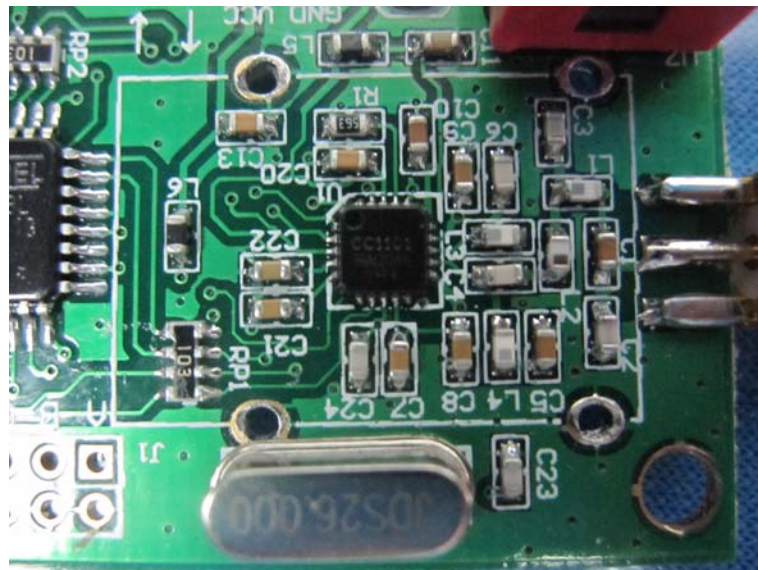

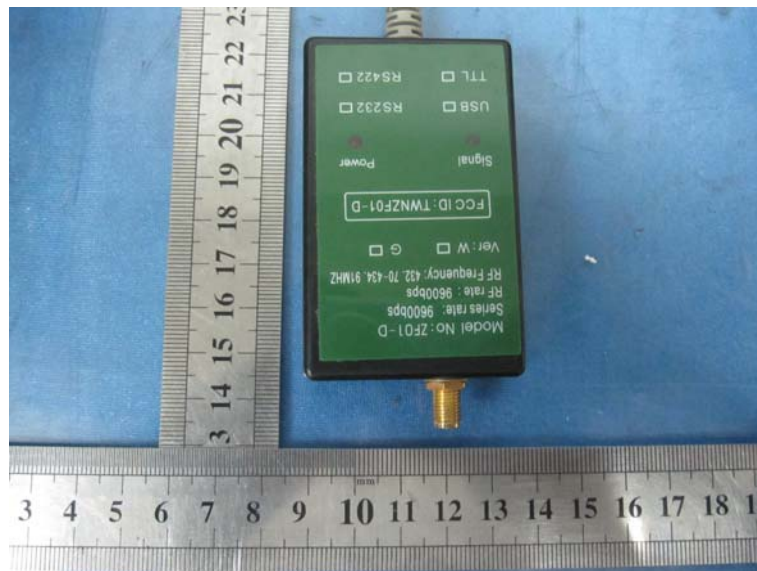
New External Photos




RS232 I/O port

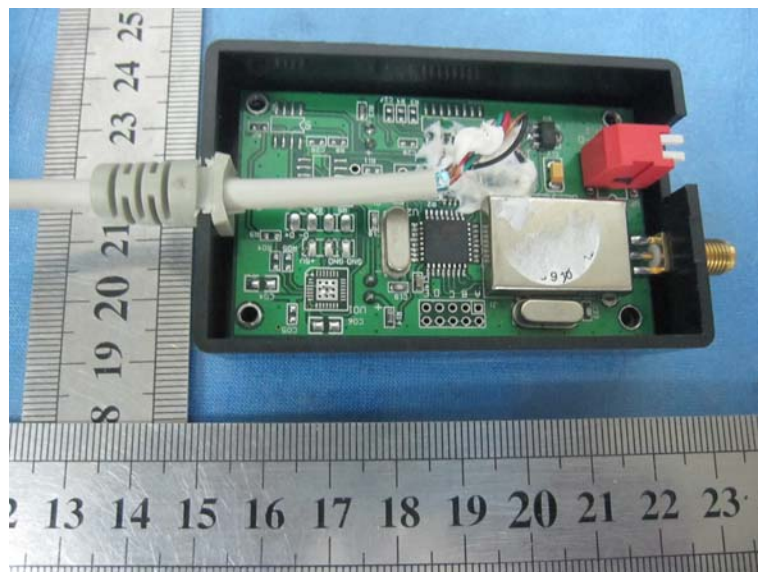

USB I/O port

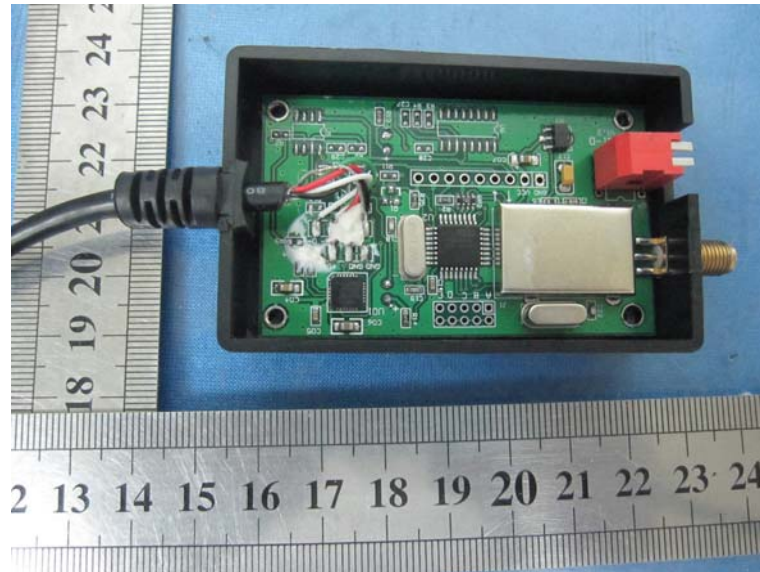

TTL port


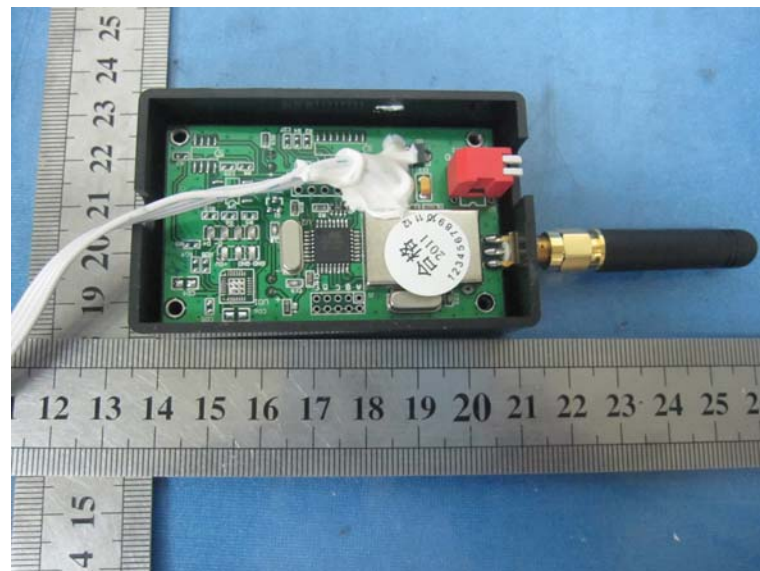


RS422 port






New Internal Photos


The photo of IC: mega328 PCB board

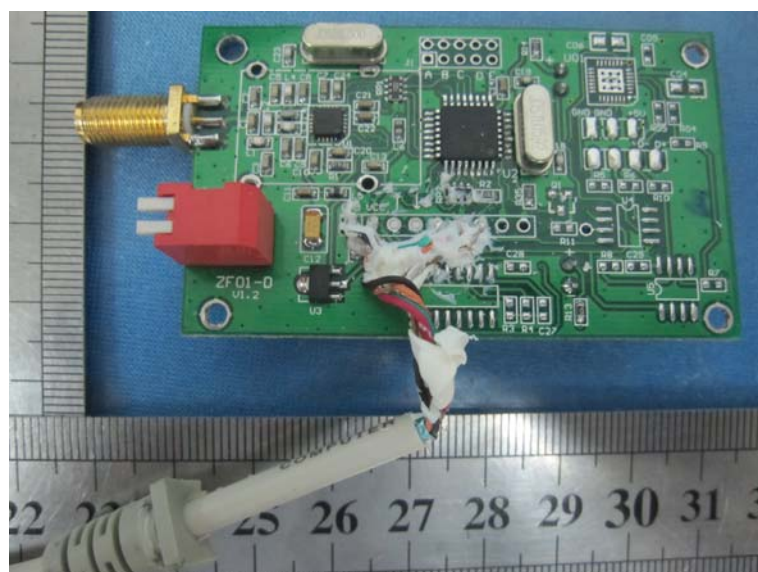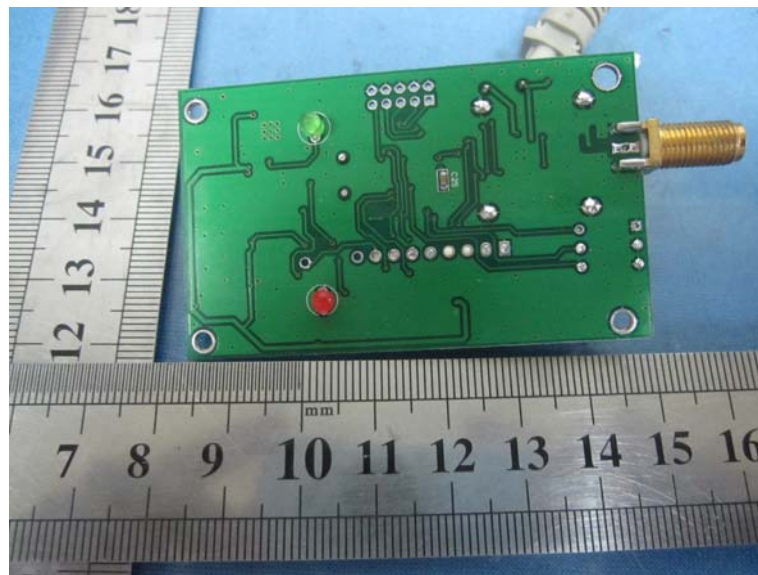

The photo of IC:mega8 PCB board

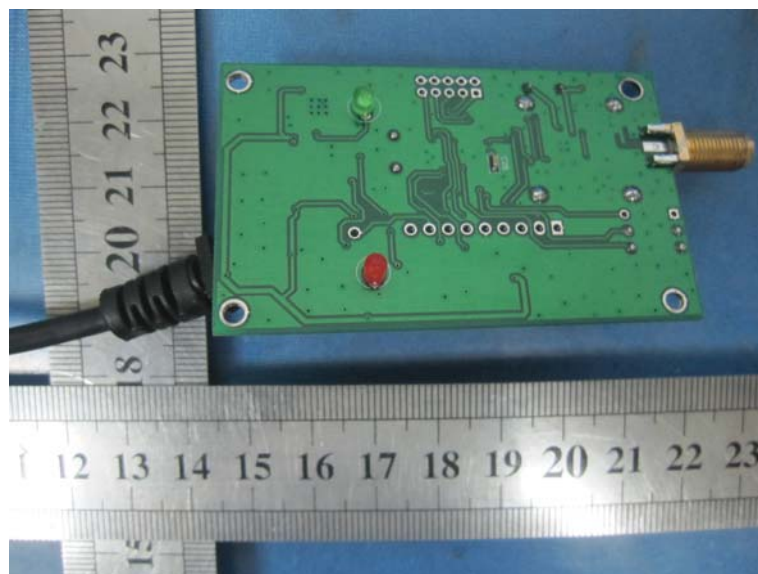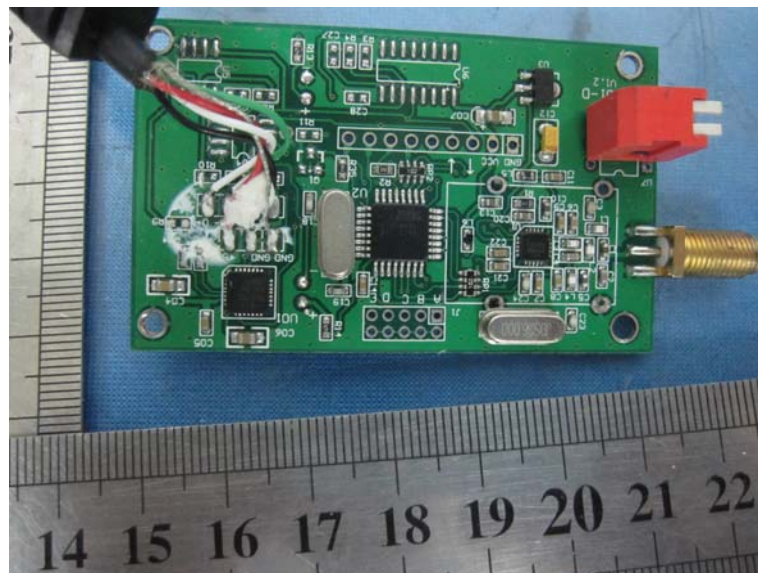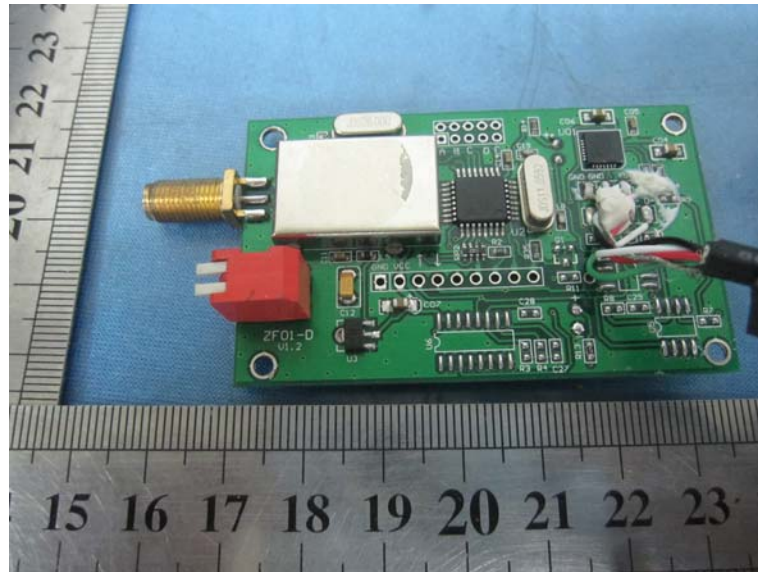

Antenna 1

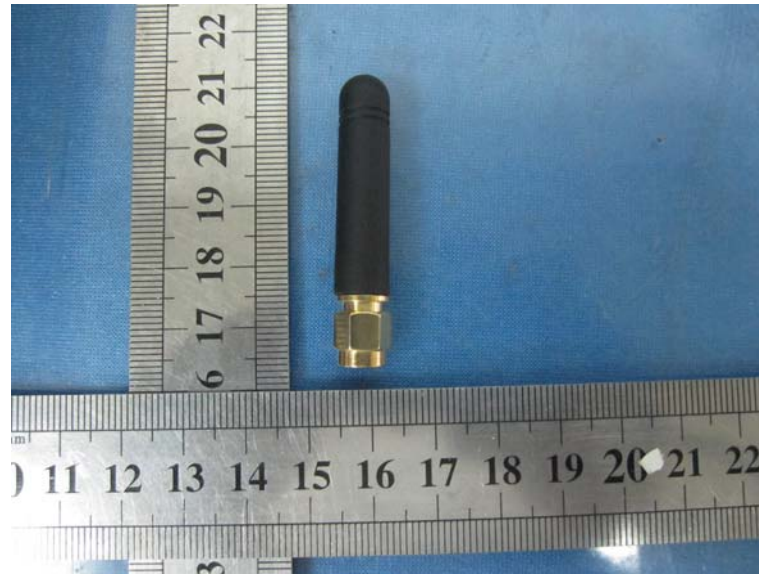

Antenna 2



.....**End of Report**.....