



# FCC Test Report

**EQUIPMENT** : Uplink 2550  
**BRAND NAME** : Uplink 2550  
**MODEL NAME** : Uplink 2550  
**FCC ID** : TWV192513384X  
**STANDARD** : FCC 47 CFR FCC Part 15 Subpart B  
**CLASSIFICATION** : Declaration of Conformity  
**APPLICANT** : Numerex Corp  
1600 Parkwood Circle, Suite 200, Atlanta, GA 30339

The product sample received on Oct. 14, 2008 and completely tested on Nov. 11, 2008. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Roy Wu / Manager

Lab Code: 200079-0

## **SPORTON INTERNATIONAL INC.**

**No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.**

## TABLE OF CONTENTS

<b>SUMMARY OF TEST RESULT .....</b>	<b>3</b>
<b>REVISION HISTORY.....</b>	<b>4</b>
<b>1. GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1 Applicant.....	5
1.2 Manufacturer .....	5
1.3 Feature of Equipment Under Test.....	5
1.4 Test Site .....	6
1.5 Applied Standards .....	6
1.6 Ancillary Equipment List.....	6
<b>2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>	<b>7</b>
2.1 Test Mode .....	7
2.2 Connection Diagram of Test System .....	8
2.3 Test Software .....	8
<b>3. TEST RESULT .....</b>	<b>9</b>
3.1 Test of AC Conducted Emission Measurement .....	9
3.2 Test of Radiated Emission Measurement .....	15
<b>4. LIST OF MEASURING EQUIPMENTS .....</b>	<b>25</b>
<b>5. UNCERTAINTY OF EVALUATION .....</b>	<b>26</b>
<b>6. CERTIFICATION OF NVLAP ACCREDITATION .....</b>	<b>28</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT</b>	
<b>APPENDIX B. SETUP PHOTOGRAPHS</b>	

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.107	7.2.2	AC Conducted Emission	< 15.107 limits < RSS-Gen table 2 limits	PASS	Under limit 10.8 dB at 0.47 MHz
3.2	15.109	7.2.3.2	Radiated Emission	< 15.109 limits or < RSS-Gen table 1 limits (Section 6)	PASS	Under limit 11.36 dB at 223.59 MHz



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FD8O1413	Rev. 01	Initial issue of report	Nov. 11, 2008



## 1. General Description

### 1.1 Applicant

**Numerex Corp**

1600 Parkwood Circle, Suite 200, Atlanta, GA 30339

### 1.2 Manufacturer

**Numerex**

1600 Parkwood Circle, Suite 200, Atlanta, GA 30339

### 1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Uplink 2550
Brand Name	Uplink 2550
Model Name	Uplink 2550
Tx Frequency Range	GSM850 : 824 MHz ~ 849 MHz GSM1900 : 1850 MHz ~1910 MHz
Rx Frequency Range	GSM850 : 869 MHz ~ 894 MHz GSM1900 : 1930 MHz ~ 1990 MHz
Antenna Type	Dipole Antenna
HW Version	2.05
SW Version	308V
Type of Modulation	GMSK
EUT Stage	Production Unit

## 1.4 Test Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	CO05-HY	03CH06-HY	TW1022/4086B-1

## 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR FCC Part 15 Subpart B
- ANSI C63.4-2003
- IC RSS-Gen Issue 2

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

## 1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	GSM Base Station	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

## 2. Test Configuration of Equipment Under Test

### 2.1 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Pre-scanned tests were conducted to determine the final configuration from all possible combinations.

The following tables are showing the test modes as the worst cases and recorded in this report.


EUT Configure Mode	Mode Description	Test Condition		
		EMI AC	EMI RE<1G	EMI RE≥1G
1	Charging Mode (EUT with DC Charger)	✓	✓	✓

#### Abbreviations:

EMI RE ≥ 1G: EUT radiated emissions ≥ 1GHz; EMI RE < 1G: EUT radiated emissions < 1GHz ;

Test Items	EUT Configure Mode	Function Type
AC Conducted Emission	1	Mode 1: GSM850 Idle + Adapter Mode 2: GSM1900 Idle + Adapter
Radiated Emissions < 1GHz	1	Mode 1: GSM850 Idle + Adapter Mode 2: GSM1900 Idle + Adapter
Radiated Emissions ≥ 1GHz	1	Mode 1: GSM850 Idle + Adapter Mode 2: GSM1900 Idle + Adapter

## 2.2 Connection Diagram of Test System

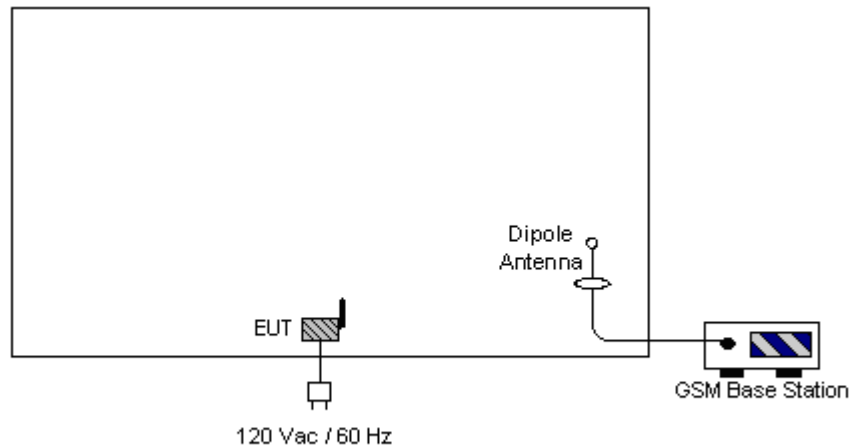

## 2.3 Test Software

In GSM idle mode, the EUT is synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.



### 3. Test Result

#### 3.1 Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.1.4 Test Setup

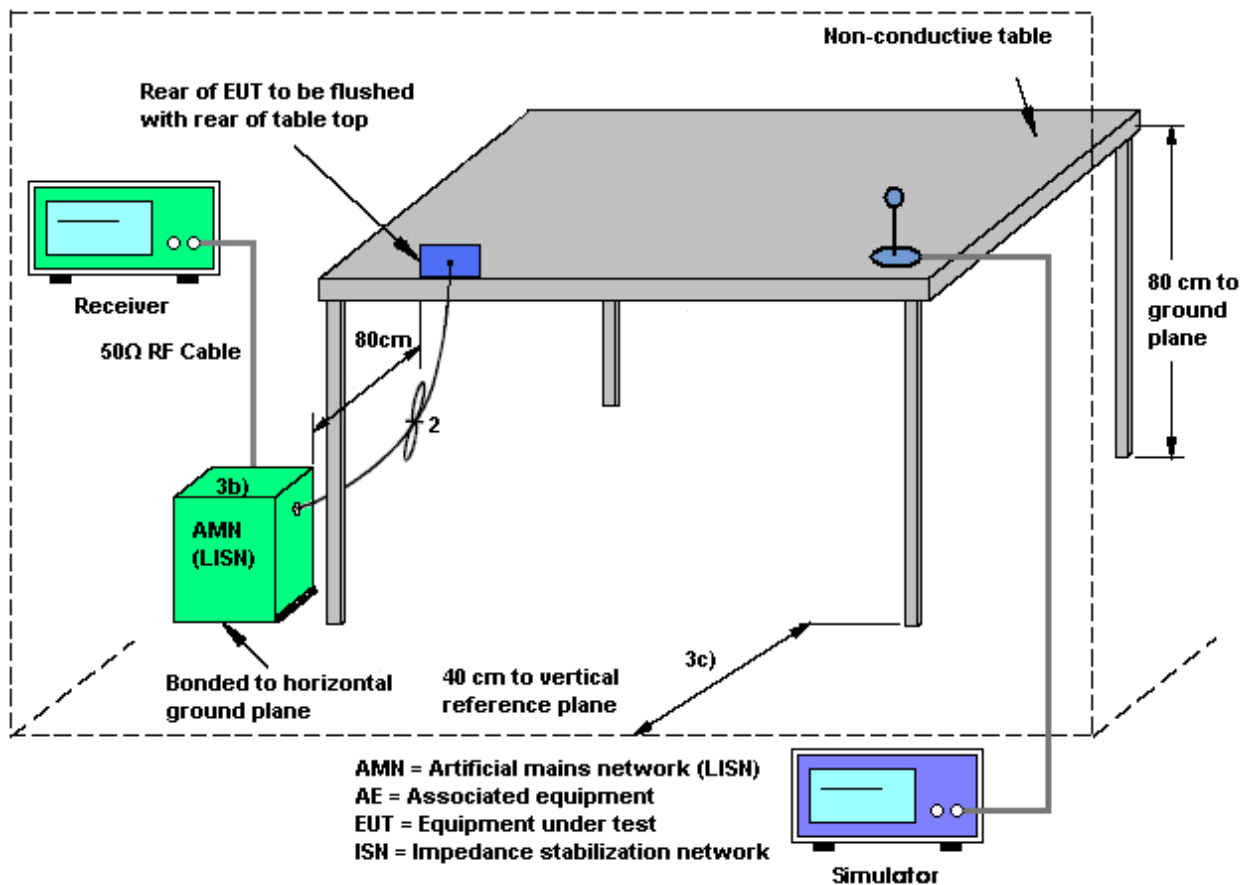

### 3.1.5 Test Result of AC Conducted Emission

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	26~27
<b>Test Engineer :</b>	Cona Huang	<b>Relative Humidity :</b>	49~52%
		<b>Phase :</b>	Line
<b>Function Type :</b>	GSM850 Idle + Adapter		
<b>Remark :</b>	All emissions not reported here are more than 10 dB below the prescribed limit.		

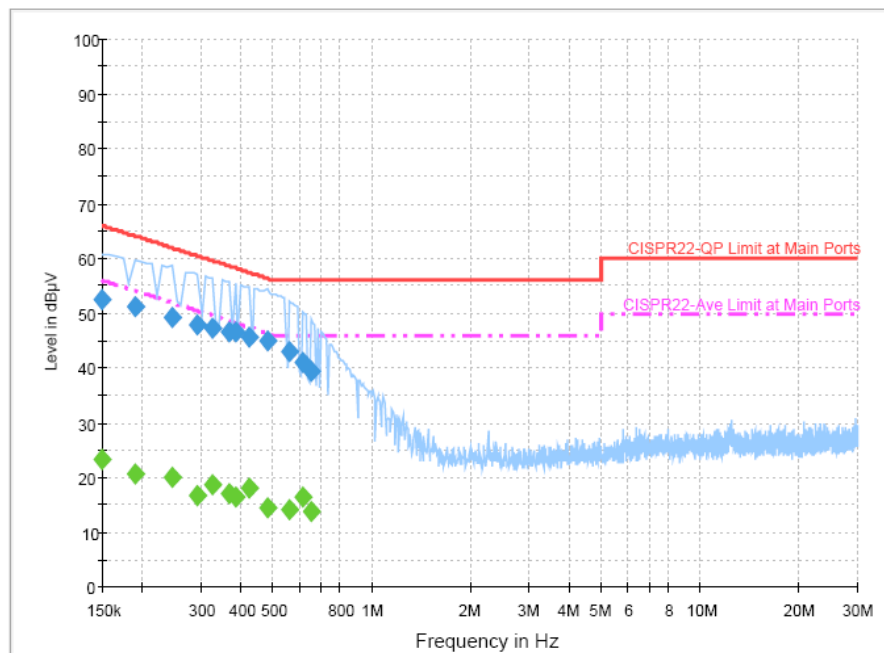


#### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	52.4	Off	L1	19.4	13.6	66.0
0.190000	51.2	Off	L1	19.4	12.8	64.0
0.246000	49.3	Off	L1	19.4	12.6	61.9
0.294000	47.9	Off	L1	19.3	12.5	60.4
0.326000	47.3	Off	L1	19.3	12.3	59.6
0.366000	46.5	Off	L1	19.3	12.1	58.6
0.382000	46.6	Off	L1	19.4	11.6	58.2
0.422000	45.7	Off	L1	19.4	11.7	57.4
0.478000	44.8	Off	L1	19.4	11.6	56.4
0.558000	42.9	Off	L1	19.3	13.1	56.0
0.614000	41.1	Off	L1	19.3	14.9	56.0
0.654000	39.4	Off	L1	19.4	16.6	56.0

#### Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	23.2	Off	L1	19.4	32.8	56.0
0.190000	20.7	Off	L1	19.4	33.3	54.0
0.246000	20.1	Off	L1	19.4	31.8	51.9
0.294000	16.8	Off	L1	19.3	33.6	50.4
0.326000	18.7	Off	L1	19.3	30.9	49.6
0.366000	17.0	Off	L1	19.3	31.6	48.6

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	26~27
<b>Test Engineer :</b>	Cona Huang	<b>Relative Humidity :</b>	49~52%
		<b>Phase :</b>	Neutral
<b>Function Type :</b>	GSM850 Idle + Adapter		
<b>Remark :</b>	All emissions not reported here are more than 10 dB below the prescribed limit.		

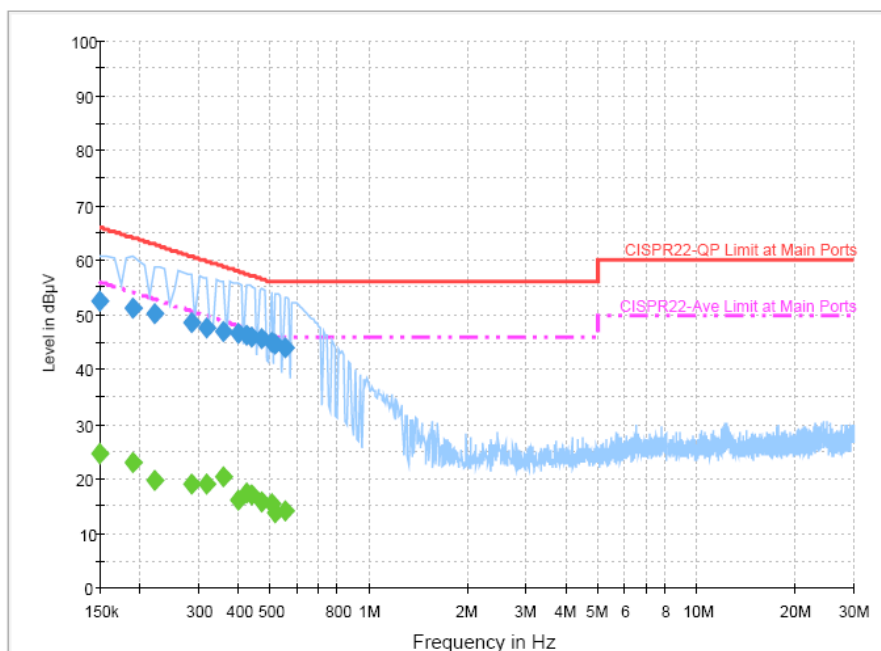

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	52.4	Off	N	19.4	13.6	66.0
0.190000	51.1	Off	N	19.4	12.9	64.0
0.222000	50.1	Off	N	19.3	12.6	62.7
0.286000	48.4	Off	N	19.3	12.2	60.6
0.318000	47.7	Off	N	19.3	12.1	59.8
0.358000	47.0	Off	N	19.3	11.8	58.8
0.398000	46.5	Off	N	19.4	11.4	57.9
0.422000	46.1	Off	N	19.4	11.3	57.4
0.438000	45.7	Off	N	19.4	11.4	57.1
0.470000	45.5	Off	N	19.4	11.0	56.5
0.502000	45.0	Off	N	19.3	11.0	56.0
0.518000	44.6	Off	N	19.3	11.4	56.0
0.550000	43.9	Off	N	19.3	12.1	56.0

**Final Result 2**

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	24.5	Off	N	19.4	31.5	56.0
0.190000	22.9	Off	N	19.4	31.1	54.0
0.222000	19.8	Off	N	19.3	32.9	52.7
0.286000	19.0	Off	N	19.3	31.6	50.6
0.318000	19.0	Off	N	19.3	30.8	49.8

<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	26~27
<b>Test Engineer :</b>	Cona Huang	<b>Relative Humidity :</b>	49~52%
		<b>Phase :</b>	Line
<b>Function Type :</b>	GSM1900 Idle + Adapter		
<b>Remark :</b>	All emissions not reported here are more than 10 dB below the prescribed limit.		

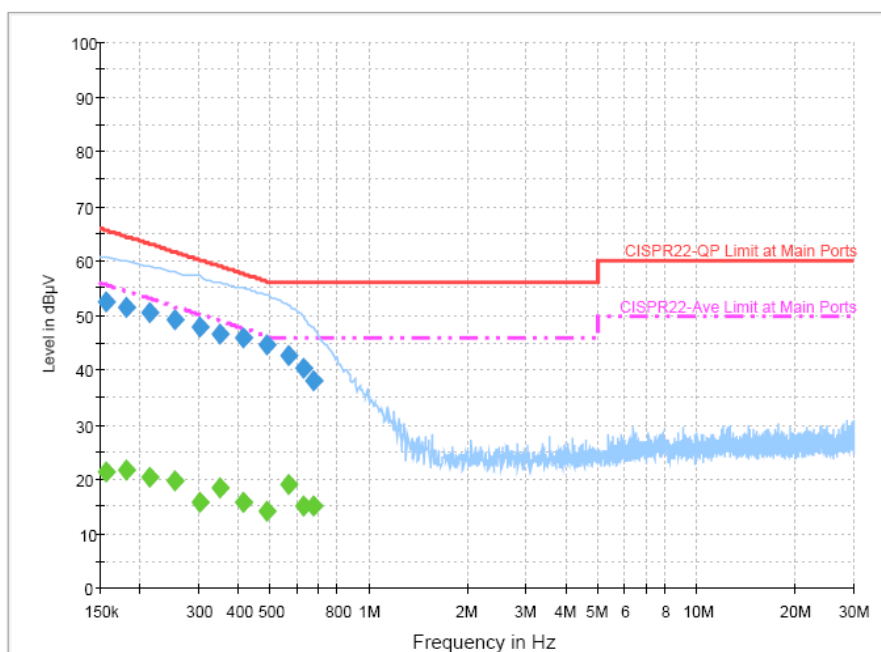

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	52.3	Off	L1	19.3	13.3	65.6
0.182000	51.5	Off	L1	19.4	12.9	64.4
0.214000	50.4	Off	L1	19.3	12.6	63.0
0.254000	49.3	Off	L1	19.3	12.3	61.6
0.302000	47.9	Off	L1	19.3	12.3	60.2
0.350000	46.7	Off	L1	19.3	12.3	59.0
0.414000	45.8	Off	L1	19.4	11.8	57.6
0.486000	44.6	Off	L1	19.4	11.6	56.2
0.566000	42.6	Off	L1	19.3	13.4	56.0
0.630000	40.3	Off	L1	19.4	15.7	56.0
0.678000	38.2	Off	L1	19.4	17.8	56.0

**Final Result 2**

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.158000	21.4	Off	L1	19.3	34.2	55.6
0.182000	21.8	Off	L1	19.4	32.6	54.4
0.214000	20.3	Off	L1	19.3	32.7	53.0
0.254000	19.5	Off	L1	19.3	32.1	51.6
0.302000	15.8	Off	L1	19.3	34.4	50.2
0.350000	18.4	Off	L1	19.3	30.6	49.0
0.414000	15.7	Off	L1	19.4	31.9	47.6

<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	26~27
<b>Test Engineer :</b>	Cona Huang	<b>Relative Humidity :</b>	49~52%
		<b>Phase :</b>	Neutral
<b>Function Type :</b>	GSM1900 Idle + Adapter		
<b>Remark :</b>	All emissions not reported here are more than 10 dB below the prescribed limit.		

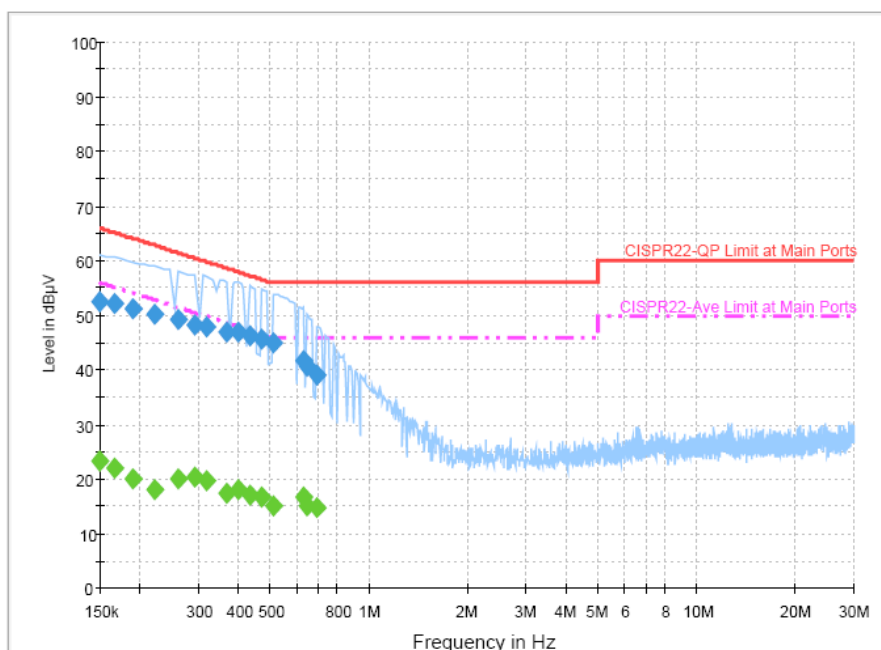

### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	52.5	Off	N	19.4	13.5	66.0
0.166000	52.0	Off	N	19.3	13.2	65.2
0.190000	51.3	Off	N	19.4	12.7	64.0
0.222000	50.2	Off	N	19.3	12.5	62.7
0.262000	49.0	Off	N	19.4	12.4	61.4
0.294000	48.2	Off	N	19.3	12.2	60.4
0.318000	47.9	Off	N	19.3	11.9	59.8
0.366000	46.9	Off	N	19.3	11.7	58.6
0.398000	46.7	Off	N	19.4	11.2	57.9
0.430000	46.3	Off	N	19.4	11.0	57.3
0.470000	45.7	Off	N	19.4	10.8	56.5
0.510000	45.0	Off	N	19.3	11.0	56.0
0.630000	41.5	Off	N	19.4	14.5	56.0
0.646000	40.8	Off	N	19.3	15.2	56.0
0.694000	38.9	Off	N	19.5	17.1	56.0

### Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	23.3	Off	N	19.4	32.7	56.0
0.166000	22.1	Off	N	19.3	33.1	55.2
0.190000	19.8	Off	N	19.4	34.2	54.0

## **3.2 Test of Radiated Emission Measurement**

### **3.2.1 Limit of Radiated Emission**

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

<b>Frequency (MHz)</b>	<b>Field Strength (microvolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3


### **3.2.2 Measuring Instruments**

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the quasi-peak method and reported
8. Emission level (dBuV/m) = 20 log Emission level (uV/m)
9. Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level


### 3.2.4 Test Setup of Radiated Emission

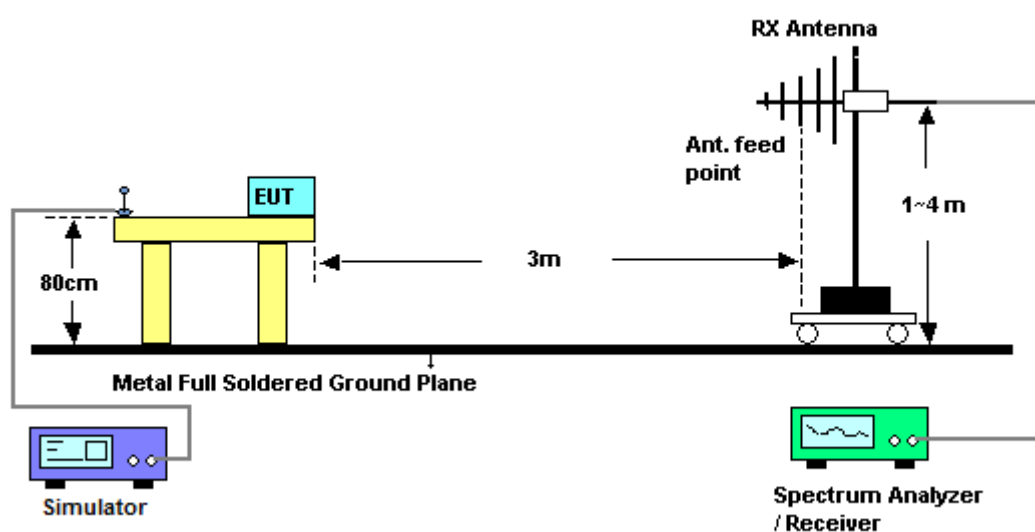



**3.2.5 Test Result of Radiated Emission < 1GHz**

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	22~24°C
<b>Test Engineer :</b>	Andrew Hsiao	<b>Relative Humidity :</b>	48~50%
<b>Test Distance :</b>	3m	<b>Polarization :</b>	Horizontal
<b>Function Type :</b>	GSM850 Idle + Adapter		
<b>Remark :</b>	#6 is Base Station Signal.		

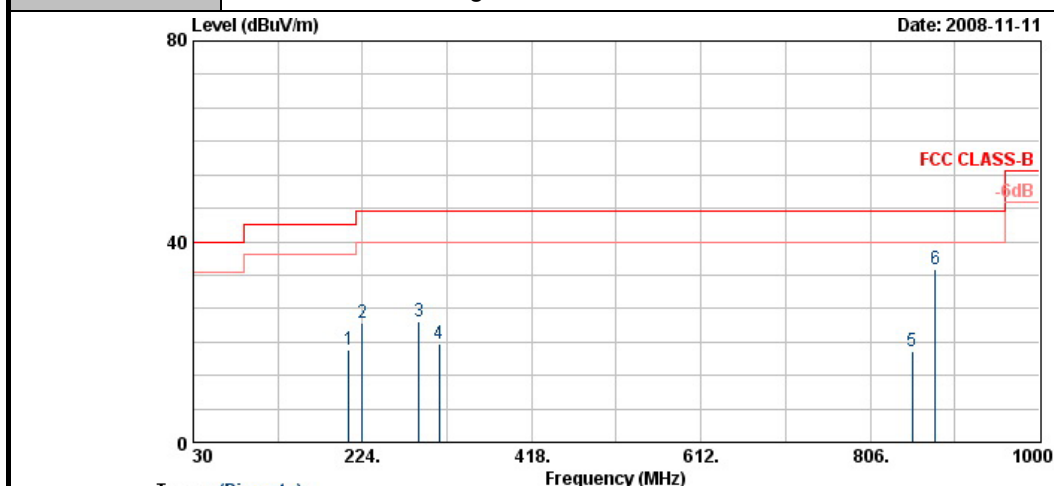


Trace: (Discrete)  
 Site : 03CH06-RV  
 Condition : FCC CLASS-B 3m LF-ANT(951121) HORIZONTAL  
 Model : FD 801413  
 Memo : Mode 1

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	207.93	18.54	-24.96	43.50	40.37	9.76	0.60	32.19	---	---	Peak
2	223.59	23.87	-22.13	46.00	44.38	10.73	0.70	31.94	---	---	Peak
3	288.39	24.17	-21.83	46.00	42.55	12.99	0.70	32.07	100	266	Peak
4	311.90	19.75	-26.25	46.00	37.45	13.53	0.80	32.04	---	---	Peak
5	854.40	18.01	-27.99	46.00	28.94	20.21	1.20	32.33	---	---	Peak
6 @	880.30	34.53			44.79	20.39	1.30	31.95	---	---	Peak




<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	22~24°C
<b>Test Engineer :</b>	Andrew Hsiao	<b>Relative Humidity :</b>	48~50%
<b>Test Distance :</b>	3m	<b>Polarization :</b>	Vertical
<b>Function Type :</b>	GSM850 Idle + Adapter		
<b>Remark :</b>	#6 is Base Station Signal.		

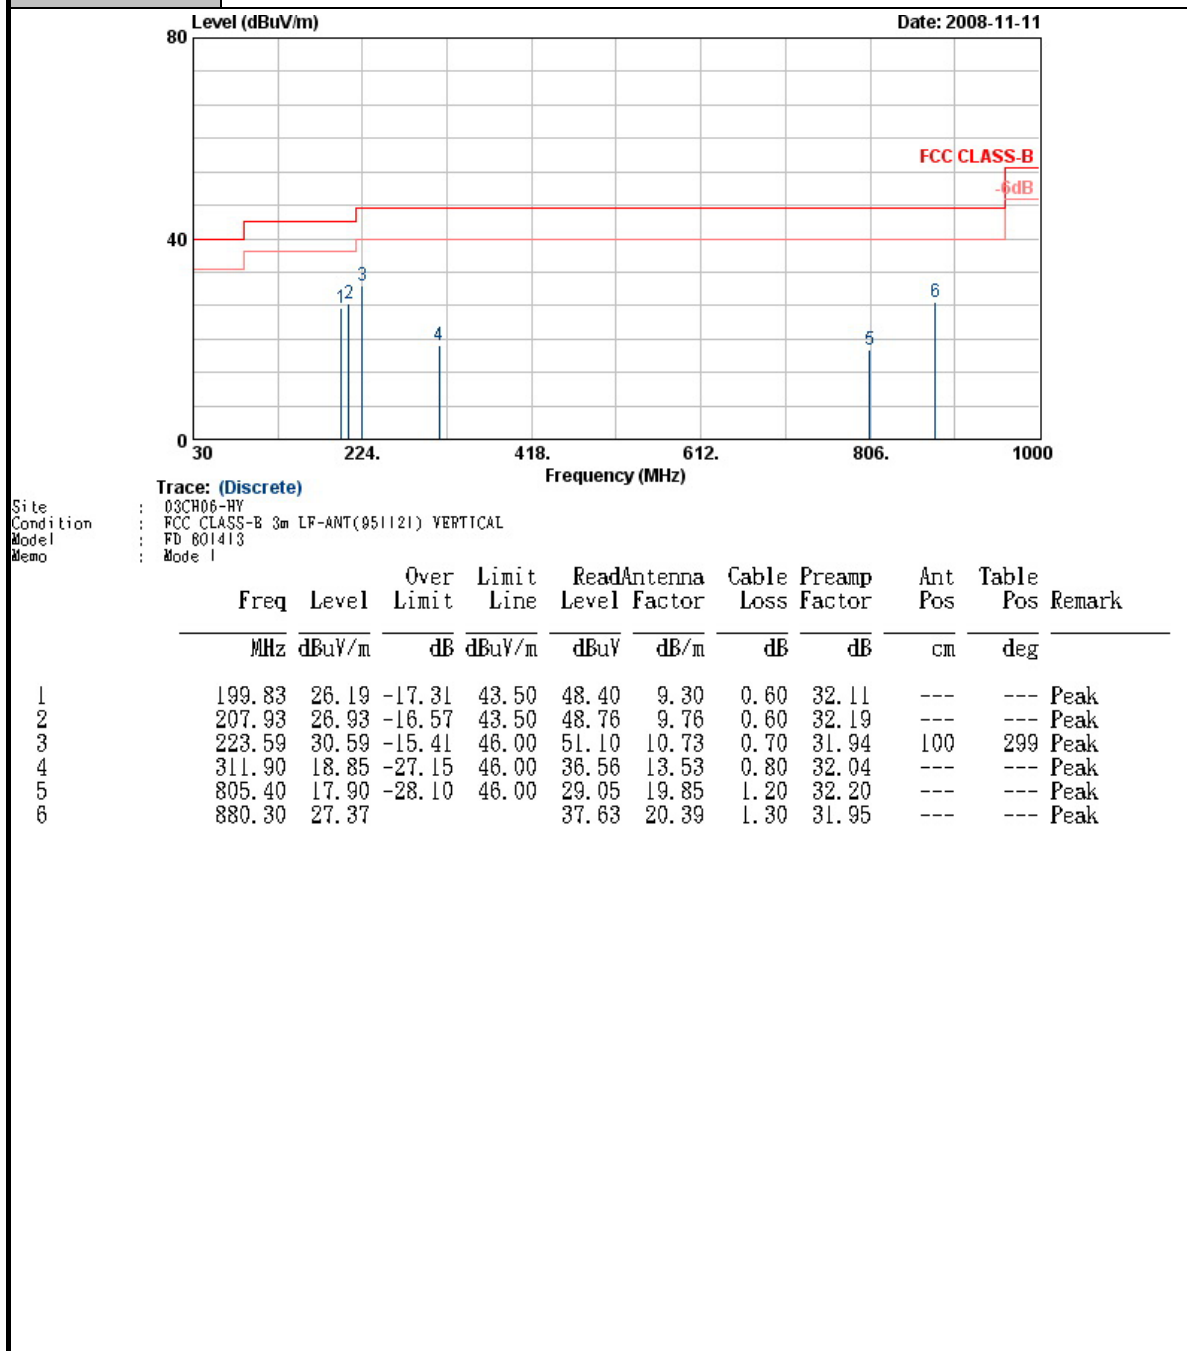



Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Andrew Hsiao	Relative Humidity :	48~50%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	GSM1900 Idle + Adapter		
Remark :	N/A		

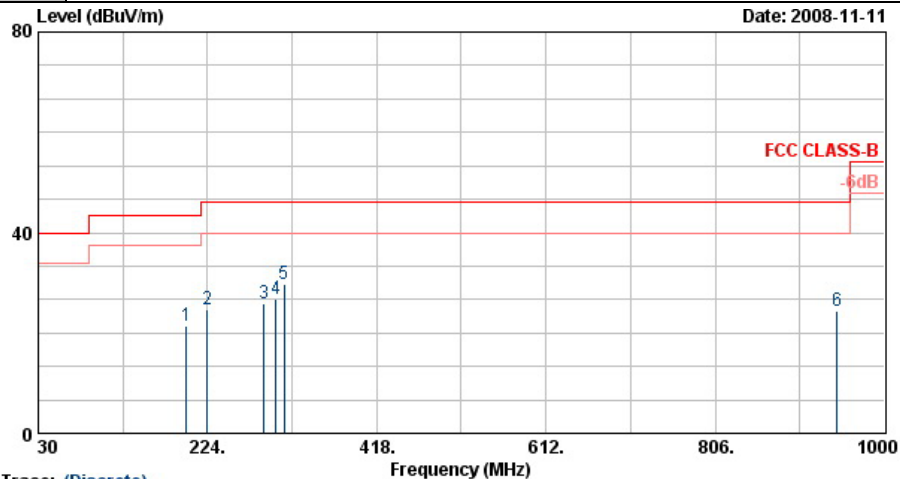


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	199.83	21.31	-22.19	43.50	43.52	9.30	0.60	32.11	---	---	Peak
2	223.59	24.62	-21.38	46.00	45.13	10.73	0.70	31.94	---	---	Peak
3	288.39	25.88	-20.12	46.00	44.26	12.99	0.70	32.07	---	---	Peak
4	302.80	26.88	-19.12	46.00	45.23	13.04	0.73	32.12	---	---	Peak
5 @	311.90	29.86	-16.14	46.00	47.78	13.31	0.80	32.04	100	236	Peak
6	945.40	24.36	-21.64	46.00	30.67	23.95	1.20	31.45	---	---	Peak



# FCC Test Report

Report No. : FD8O1413

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Andrew Hsiao	Relative Humidity :	48~50%
Test Distance :	3m	Polarization :	Vertical
Function Type :	GSM1900 Idle + Adapter		
Remark :	N/A		

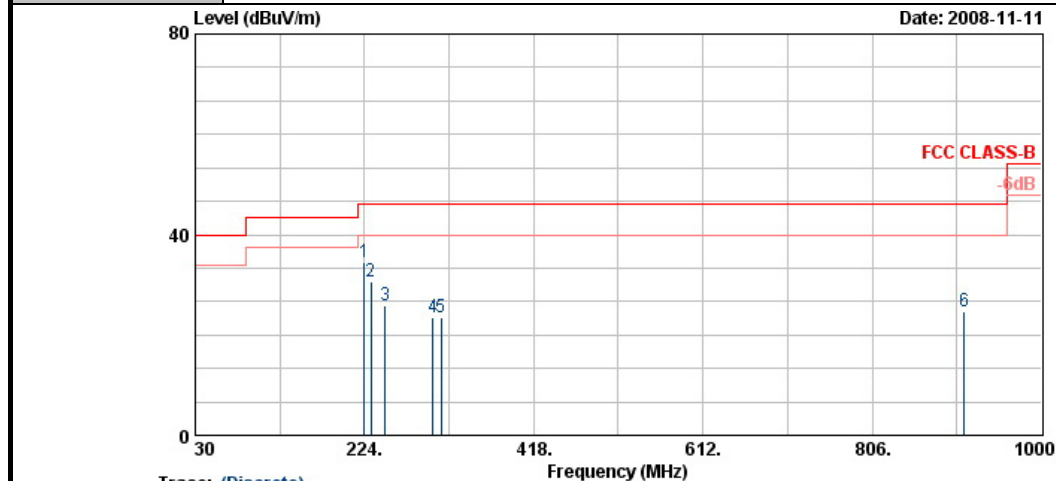


Site : 03CH06-HY  
Condition : FCC CLASS-B 3m LF-ANT(851121) VERTICAL  
Model : FD 801413  
Memo : Mode 2

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 @	223.59	34.64	-11.36	46.00	55.15	10.73	0.70	31.94	100	332	Peak
2 @	231.69	30.63	-15.37	46.00	50.73	11.18	0.70	31.98	---	---	Peak
3	247.89	25.73	-20.27	46.00	44.68	12.16	0.70	31.80	---	---	Peak
4	302.80	23.60	-22.40	46.00	41.71	13.28	0.73	32.12	---	---	Peak
5	311.90	23.38	-22.62	46.00	41.08	13.53	0.80	32.04	---	---	Peak
6	911.80	24.79	-21.21	46.00	34.51	20.61	1.28	31.61	---	---	Peak

**3.2.6 Test Result of Radiated Emission  $\geq 1$ GHz**

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	22~24°C
<b>Test Engineer :</b>	Andrew Hsiao	<b>Relative Humidity :</b>	48~50%
<b>Test Distance :</b>	3m	<b>Polarization :</b>	Horizontal
<b>Function Type :</b>	GSM850 Idle + Adapter		
<b>Remark :</b>	N/A		

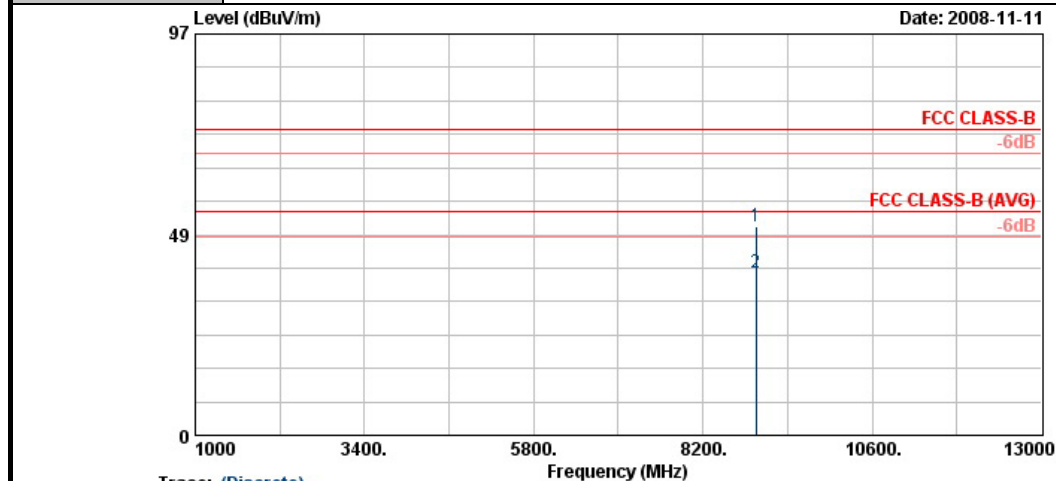

Trace: (Discrete)

Site : 03CH06-HY  
Condition : FCC CLASS-B 3m HF-ANT(8-18)-060918 HORIZONTAL  
Model : FD 801413  
Memo : Mode 1


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8948.00	50.57	-23.43	74.00	43.25	36.15	7.74	36.57	100	0	Peak
2 @	8948.00	39.47	-14.53	54.00	32.15	36.15	7.74	36.57	100	292	Average



# FCC Test Report

Report No. : FD8O1413

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Andrew Hsiao	Relative Humidity :	48~50%
Test Distance :	3m	Polarization :	Vertical
Function Type :	GSM850 Idle + Adapter		
Remark :	N/A		

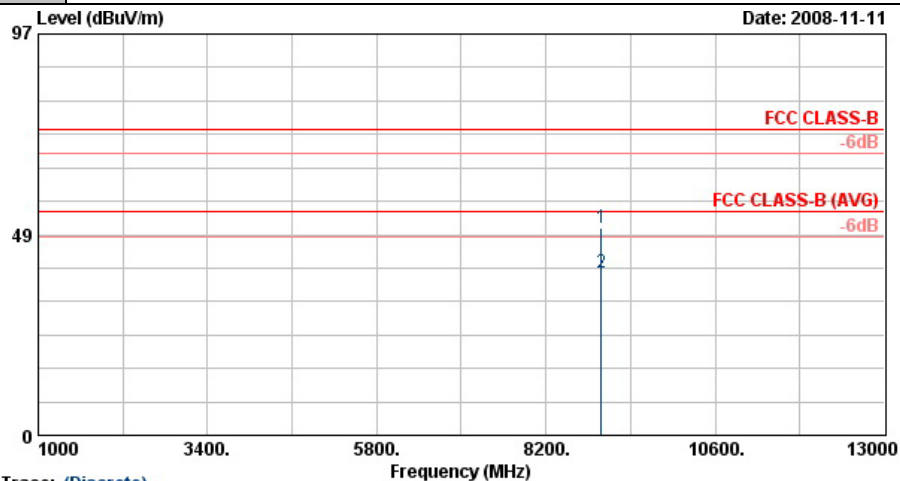


Trace: (Discrete)

Site : 03CH06-HY  
 Condition : FCC CLASS-B 3m HF-ANT(8-16)-060918 VERTICAL  
 Model : FD 801413  
 Memo : Mode 1

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8984.00	50.30	-23.70	74.00	42.90	36.18	7.80	36.59	100	0	Peak
2 @	8984.00	39.24	-14.76	54.00	31.84	36.18	7.80	36.59	100	170	Average



Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Andrew Hsiao	Relative Humidity :	48~50%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	GSM1900 Idle + Adapter		
Remark :	N/A		

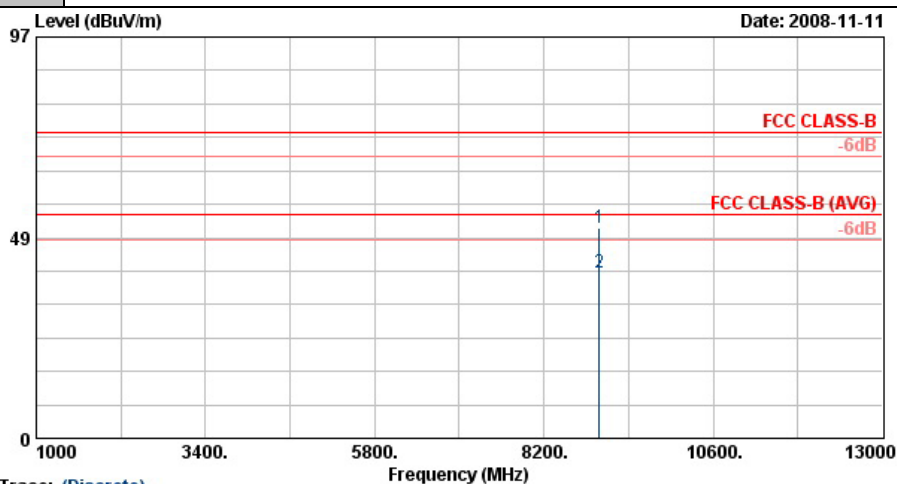

Trace: (Discrete)

Site : 03CH06-HY  
Condition : FCC CLASS-B 3m HP-ANT(8-16)-060918 HORIZONTAL  
Model : FD 801413  
Memo : Mode 2


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	8984.00	50.90	-23.10	74.00	43.50	36.18	7.80	36.59	100	0	Peak
2 @	8984.00	40.01	-13.99	54.00	32.61	36.18	7.80	36.59	100	223	Average



# FCC Test Report

Report No. : FD8O1413

Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Andrew Hsiao	Relative Humidity :	48~50%
Test Distance :	3m	Polarization :	Vertical
Function Type :	GSM1900 Idle + Adapter		
Remark :	N/A		

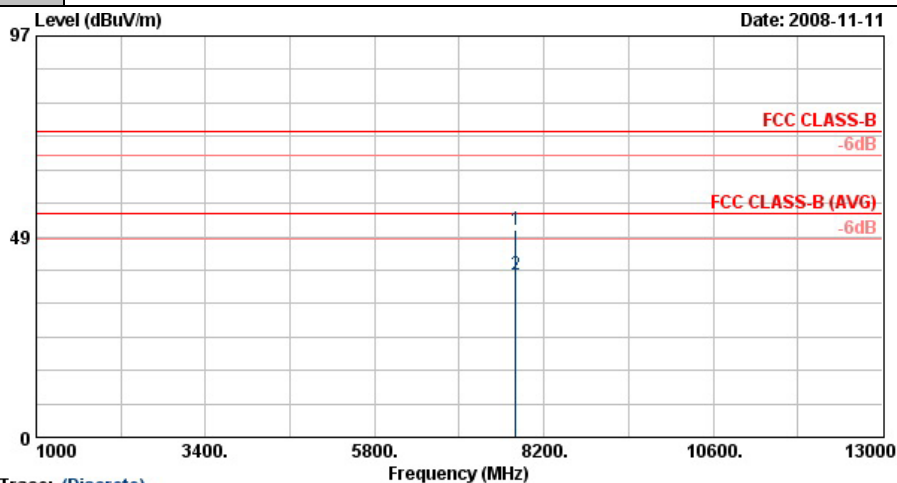

Trace: (Discrete)

Site : 03CH06-HY  
Condition : FCC CLASS-B 3m HF-ANT(8-16)-060018 VERTICAL  
Model : FD 801413  
Memo : Mode 2

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	7804.00	50.24	-23.76	74.00	43.45	35.62	7.42	36.26	100	0	Peak
2 @	7804.00	39.22	-14.78	54.00	32.44	35.62	7.42	36.26	100	332	Average



## 4. List of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
EMI Receiver	R&S	ESCS 30	100356	9kHz – 2.75GHz	Aug. 01, 2008	Jul. 31, 2009	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9kHz – 30MHz	Dec. 06, 2007	Dec. 05, 2008	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9kHz – 30MHz	Dec. 06, 2007	Dec. 05, 2008	Conduction (CO05-HY)
DC- LISN	R&S	ESH3-26	1000485	0.1MHz-200MHz	Feb. 04, 2008	Feb. 03, 2009	Conduction (CO05-HY)
DC- LISN	R&S	ESH3-26	1000484	0.1MHz-200MHz	Feb. 04, 2008	Feb. 03, 2009	Conduction (CO05-HY)
Spectrum Analyzer	Agilent	E4408B	MY44211030	9KHz-26.5GHz	Oct. 24, 2008	Oct. 23, 2009	Radiation (03CH06-HY)
Spectrum Analyzer	R&S	FSP40	100057	9KHz-40GHz	Oct. 16, 2008	Oct. 15, 2009	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESVS10	834468/003	20MHz-1000MHz	Apr. 24, 2008	Apr. 23, 2009	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Dec. 01, 2007	Nov. 30, 2008	Radiation (03CH06-HY)
Double Ridge Horn Antenna	EMCO	3117	00066583	1G~18GHz	Aug. 18, 2008	Aug. 17, 2009	Radiation (03CH06-HY)
Double Ridge Horn Antenna	Training Research	AF-0801	95119	8G~18G	Oct. 28, 2008	Oct. 27, 2009	Radiation (03CH06-HY)
SHF-EHF Horn	SCHWARZBECK	BBHA 9170	9170-251	14G - 40GHz	Oct. 16, 2008	Oct. 15, 2009	Radiation (03CH06-HY)
Pre Amplifier	Agilent	8449B	3008A01917	1G - 26.5GHz	Nov. 22, 2007	Nov. 21, 2008	Radiation (03CH06-HY)
Pre Amplifier	Agilent	310N	186713	9KHz~1GHz	Apr. 21, 2008	Apr. 20, 2009	Radiation (03CH06-HY)
GSM Base Station	R&S	CMU200	116456	NA	Jul. 05, 2008	Jul. 04, 2009	Radiation (03CH06-HY)

## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Contribution	Uncertainty of $x_i$		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.10	Normal(k=2)	0.05
Cable loss	0.10	Normal(k=2)	0.05
AMN insertion loss	2.50	Rectangular	0.63
Receiver Spec	1.50	Rectangular	0.43
Site imperfection	1.39	Rectangular	0.80
Mismatch	+0.34/-0.35	U-shape	0.24
<b>Combined standard uncertainty Uc(y)</b>	<b>1.13</b>		
<b>Measuring uncertainty for a level of confidence of 95% U=2Uc(y)</b>	<b>2.26</b>		

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of $x_i$		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
<b>Combined standard uncertainty Uc(y)</b>	<b>1.27</b>		
<b>Measuring uncertainty for a level of confidence of 95% U=2Uc(y)</b>	<b>2.54</b>		

**Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)**

Contribution	Uncertainty of $x_i$		$u(x_i)$	$C_i$	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1 * \Gamma_2)$	+0.34/-0.35	U-shaped	0.244	1	0.244
<b>Combined standard uncertainty Uc(y)</b>	<b>2.36</b>				
<b>Measuring uncertainty for a level of confidence of 95% U=2Uc(y)</b>	<b>4.72</b>				

## 6. Certification of NVLAP Accreditation

United States Department of Commerce  
National Institute of Standards and Technology

**NVLAP<sup>®</sup>**

---

**Certificate of Accreditation to ISO/IEC 17025:2005**

---

NVLAP LAB CODE: 200079-0

**Sporton International, Inc. Hwa Ya EMC Laboratory**  
Tao Yuan Hsien 333  
TAIWAN

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,  
listed on the Scope of Accreditation, for:*

**ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS**

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.  
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality  
management system (refer to joint ISO-ILAC-IAF Communiqué dated 18 June 2005).*

2008-01-01 through 2008-12-31  
Effective dates



*Dolly J. Bruce*  
For the National Institute of Standards and Technology

NVLAP-01C (REV. 2006-09-13)



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP8O1413 as below.