

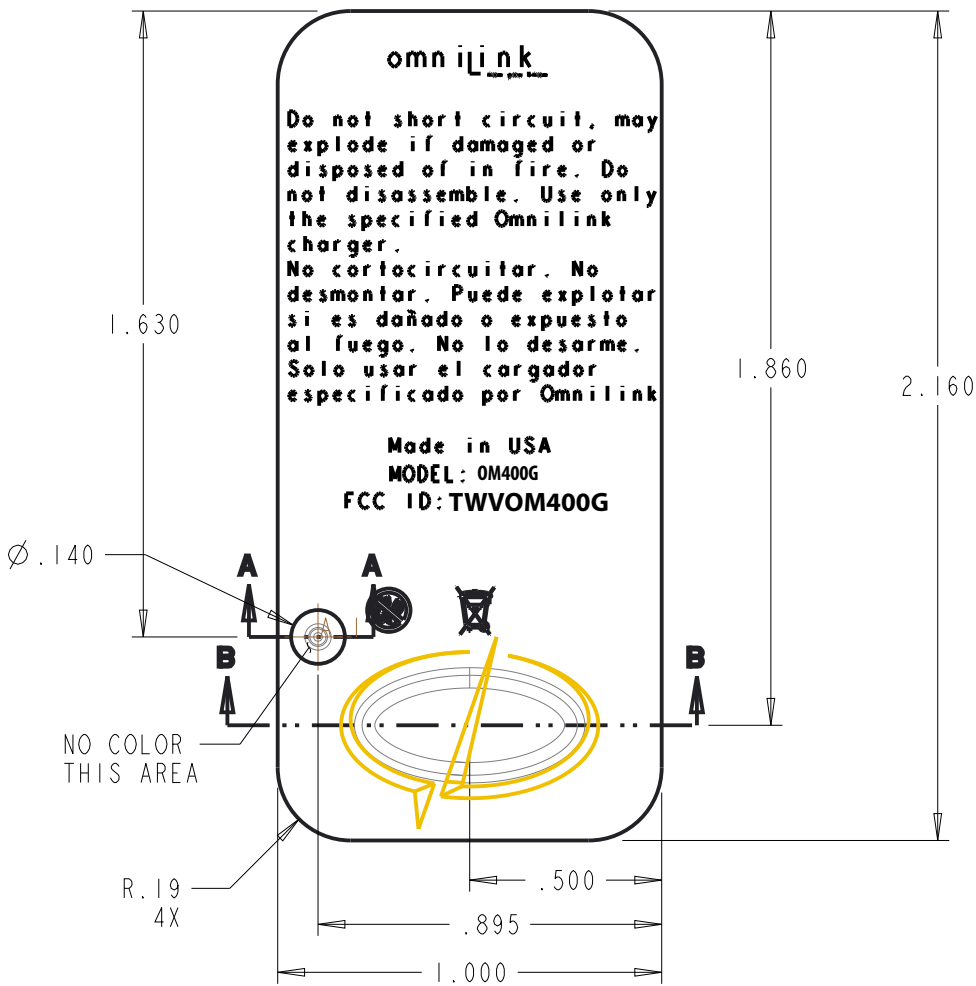


REVISION					
REV	DESCRIPTION	BY	EFF/DISP	CHECK	APPVL
A	RELEASE FOR PRODUCTION	TAD	8/10/12	GWC 8/10/12	DAB 8/10/12
B	CORRECTIONS TO LABEL TEXT	TAD	8/23/12	GWC 8/23/12	DAB 8/23/12
C	REVISED FCC AND IC ID	RW	2-18-13	GWC 2-18-13	GWC 2-18-13
	ADDED MODEL No.: OM400 AND REMOVED THE FCC LOGO FROM LABEL AND WATERMARK PER ECO 12361	RW	7-10-13	GWC 03-13-13	GWC 03-13-13




- NOTES: UNLESS OTHERWISE SPECIFIED
1. MATERIAL - CLEAR POLYESTER, 0.007" THICK, WITH 3M F9469PC ADHESIVE BACK SIDE ONLY (0.005" THICK)
 2. COLOR - BLACK BACKGROUND, WHITE TEXT AND LOGO
 3. THIS IS THE ONLY AREA TO BE FREE OF ANY AND ALL ADHESIVE
 4. UL 94 FLAMMABILITY RATING: V-0

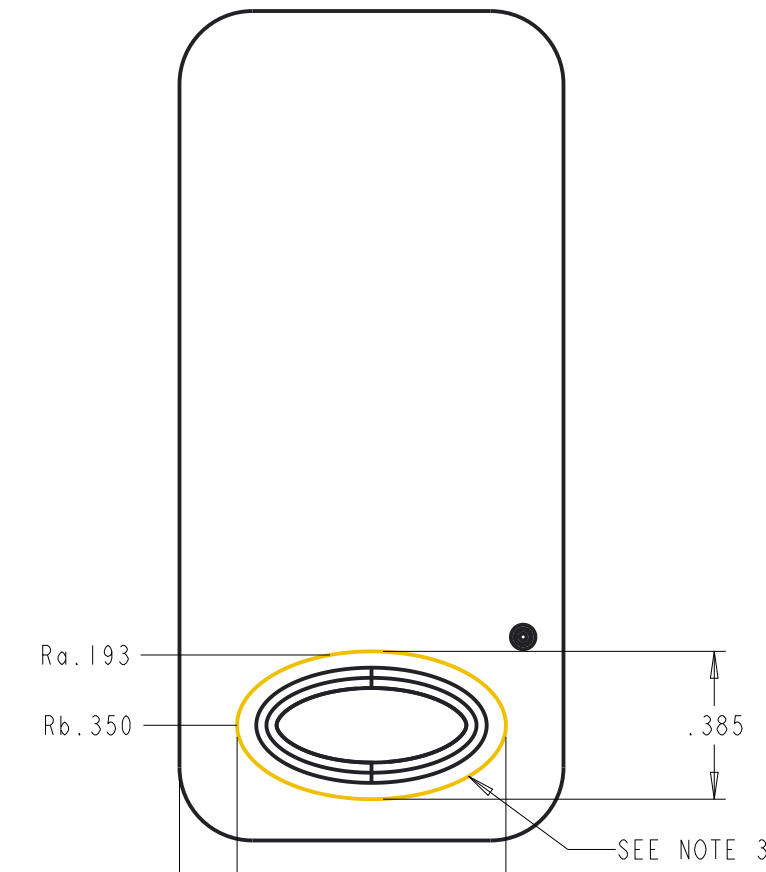

FRONT SIDE

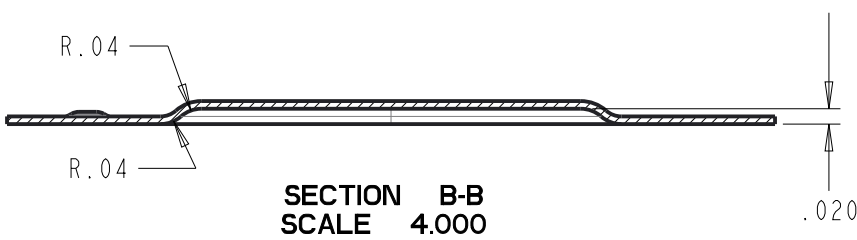


BACK SIDE

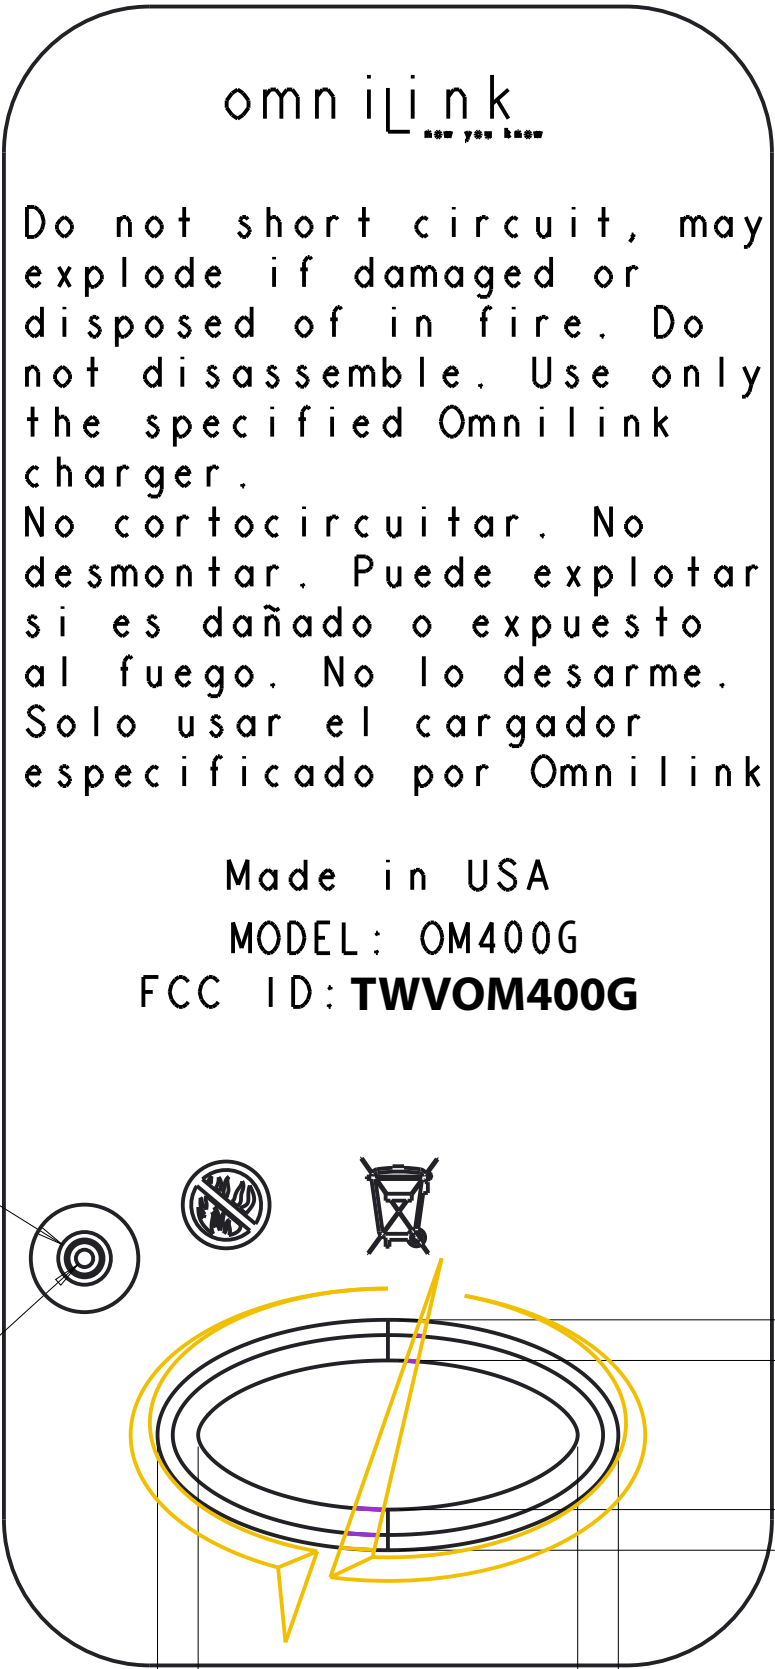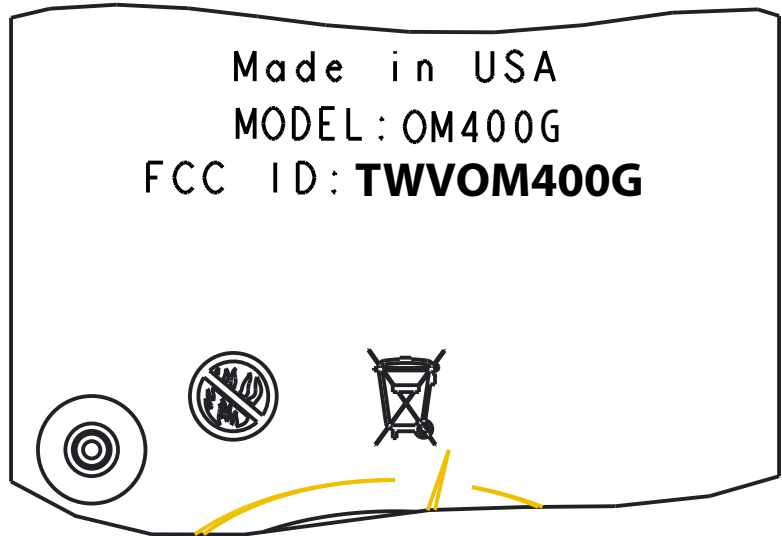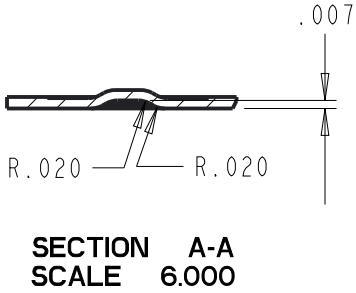

SCALE 4.000

This document is an UNCONTROLLED copy. Prior to use, ensure this document is the most recent revision.

NOTICE: THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF THE MOREY CORPORATION. NEITHER RECEIPT NOR POSSESSION THEREOF CONFERS ANY RIGHT TO REPRODUCE, USE OR DISCLOSE IN WHOLE OR IN PART, ANY SUCH INFORMATION WITHOUT WRITTEN AUTHORIZATION FROM THE MOREY CORPORATION. DOCUMENT GENERATED BY COMPUTER GRAPHICS. CHANGES BY HAND ARE NOT AUTHORIZED.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES			APPROVAL		DATE	 THE MOREY CORPORATION WOODRIDGE, ILLINOIS, 60517 U.S.A.			
TOL	DECIMAL XX = ± .01 XXX = ± .005	ANGLES ± .5°	DRAWN:	J. LEDVORA	12/06/11	TITLE			
	DIMENSIONS APPLY AFTER PLATING ALL OVALED DIMENSIONS ARE CRITICAL CHARACTERISTICS		CHECK:	G. COOPER	12/06/11				
ENGR:									
MFG:			K. HASTINGS	07-10-13					
QA:			C. SMITH	07-10-13					
APVD:									
HOLE TOLERANCES .013 THRU .125 +.004 /-.001 .126 THRU .250 +.005 /-.001 .251 THRU .500 +.006 /-.001						SIZE C	CAGE CODE 04377	DRAWING NO. 32P099	REV D
						SCALE: 2.000		DO NOT SCALE PRINT	SHEET: 1 OF 1

-001