


Appendix D. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	23°C	Humidity	56%
Test Engineer	Howar Sung	Configurations	2.4GHz Bluetooth + 2.4GHz WLAN

Horizontal

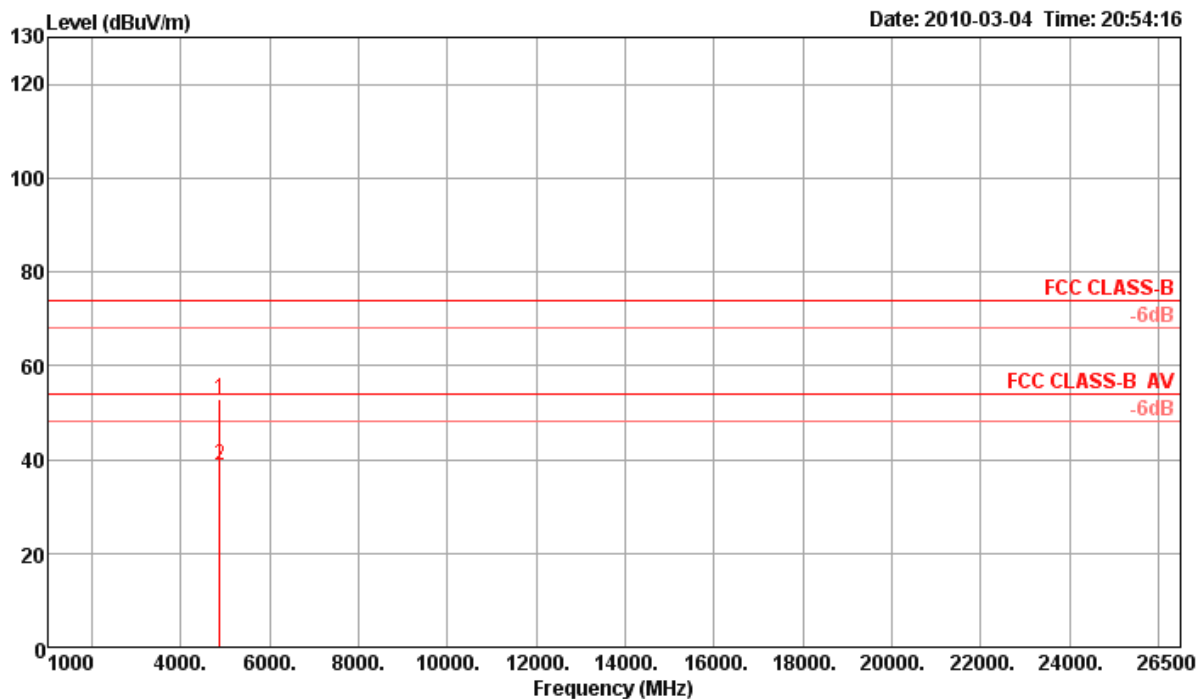

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 p	4870.30	53.05	74.00	-20.95	50.99	3.97	33.12	35.03	220	104 Peak	HORIZONTAL
2 a	4871.19	38.57	54.00	-15.43	36.47	3.97	33.16	35.03	220	104 Average	HORIZONTAL

Vertical

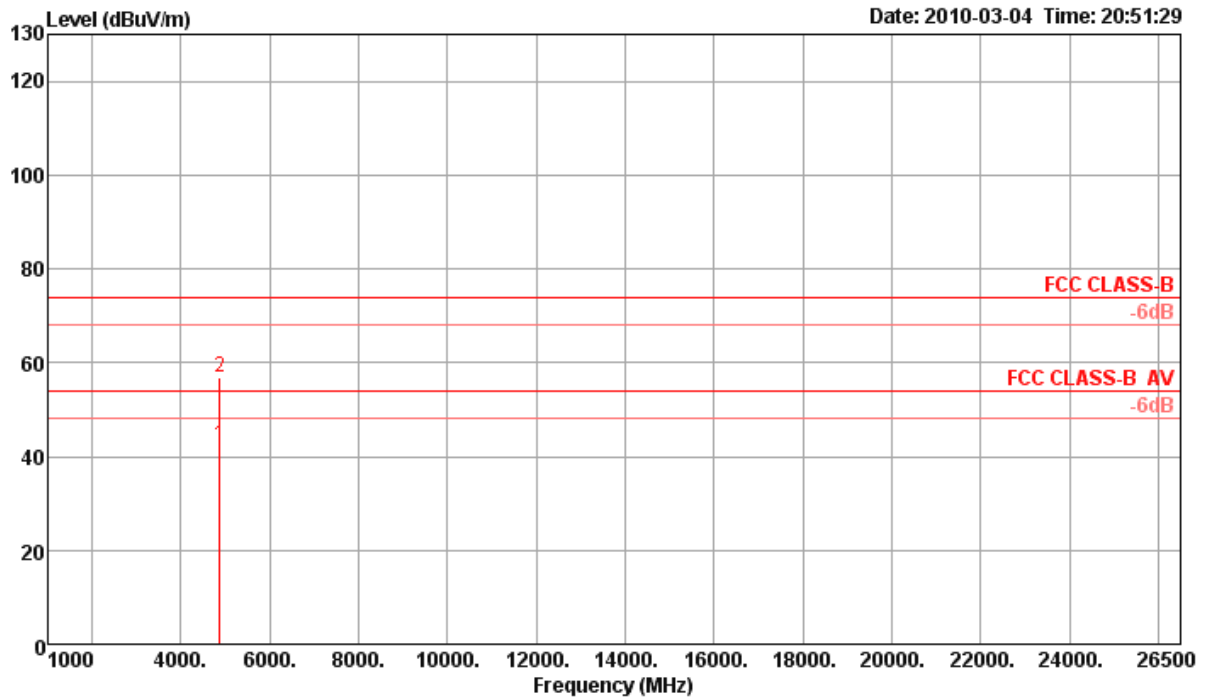

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 a	4869.19	42.44	54.00	-11.56	40.38	3.97	33.12	35.03	157	123 Average	VERTICAL
2 p	4870.25	57.03	74.00	-16.97	54.97	3.97	33.12	35.03	157	123 Peak	VERTICAL