System Check_Body_2450MHz_140622

DUT: D2450V2-924

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1
Medium: MSL_2450_140622 Medium parameters used: f = 2450 MHz; σ = 1.92 S/m; ε$_r$ = 53.118; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃；Liquid Temperature：22.4 ℃

DASY5 Configuration
- Probe: EX3DV4 - SN3770; ConvF(7.15, 7.15, 7.15); Calibrated: 2014/4/24;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2013/12/18
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1173
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Configuration/Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
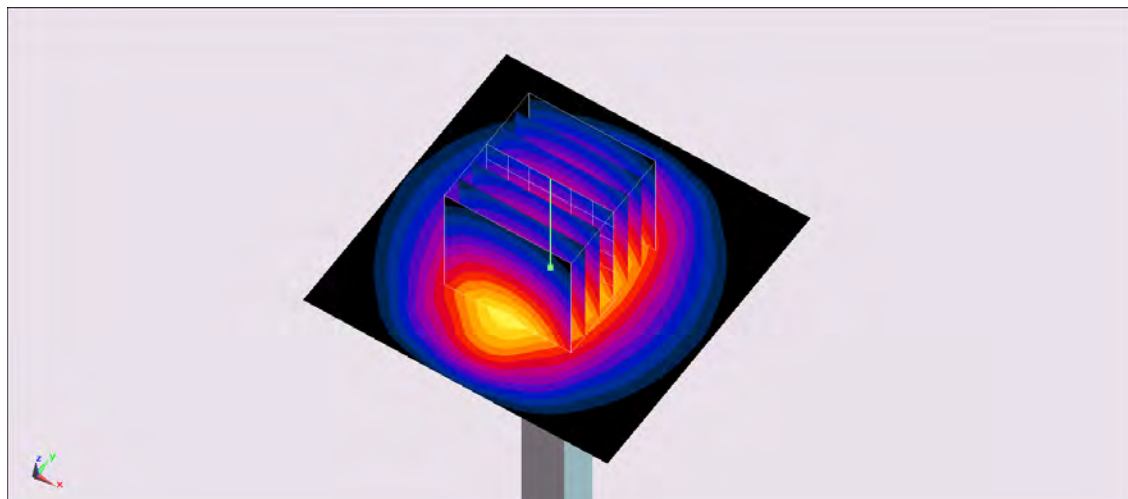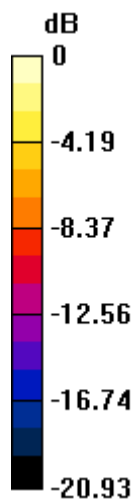Maximum value of SAR (interpolated) = 18.0 W/kg

Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 98.064 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 23.8 W/kg
SAR(1 g) = 11.8 W/kg; SAR(10 g) = 5.53 W/kg
Maximum value of SAR (measured) = 18.0 W/kg

0 dB = 18.0 W/kg = 12.55 dBW/kg