#01_WLAN2.4GHz_802.11b 1Mbps_Edge2_0cm_Ch6;Battery 1

Communication System: 802.11b; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: MSL_2450_141013 Medium parameters used: f = 2437 MHz; σ = 1.946 S/m; ε_r = 53.883; ρ = 1000 kg/m^3
Ambient Temperature：23.4 ℃；Liquid Temperature：22.4 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3925; ConvF(7.36, 7.36, 7.36); Calibrated: 2014/5/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2014/5/19
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1127
- Measurement SW: DASY52, Version 52.8 (6);SEMCAD X Version 14.6.9 (7117)
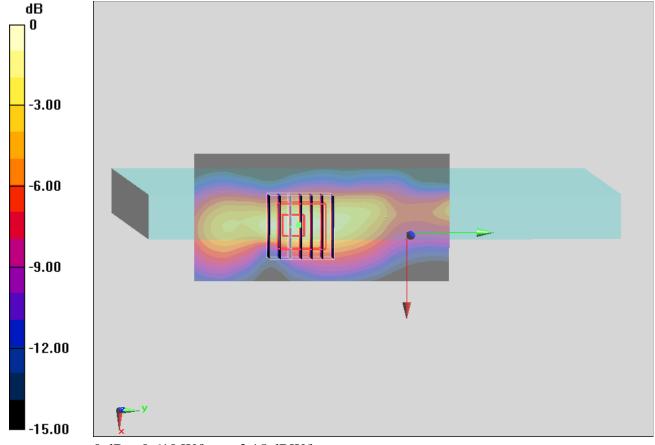
Configuration/Ch6/Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.652 W/kg

Configuration/Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 17.442 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.876 W/kg
SAR(1 g) = 0.378 W/kg; SAR(10 g) = 0.172 W/kg
Maximum value of SAR (measured) = 0.610 W/kg

0 dB = 0.610 W/kg = -2.15 dBW/kg