System Check_Body_2450MHz_140411

DUT: D2450V2-SN:924

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1
Medium: MSL_2450_140411 Medium parameters used: f = 2450 MHz; σ = 1.904 S/m; ε_r = 51.836; ρ = 1000 kg/m^3
Ambient Temperature：23.3 ℃；Liquid Temperature：22.3 ℃

DASY5 Configuration:
- Probe: EX3DV4 - SN3954; ConvF(7.34, 7.34, 7.34); Calibrated: 2013/11/4;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2014/1/30
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Configuration/Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
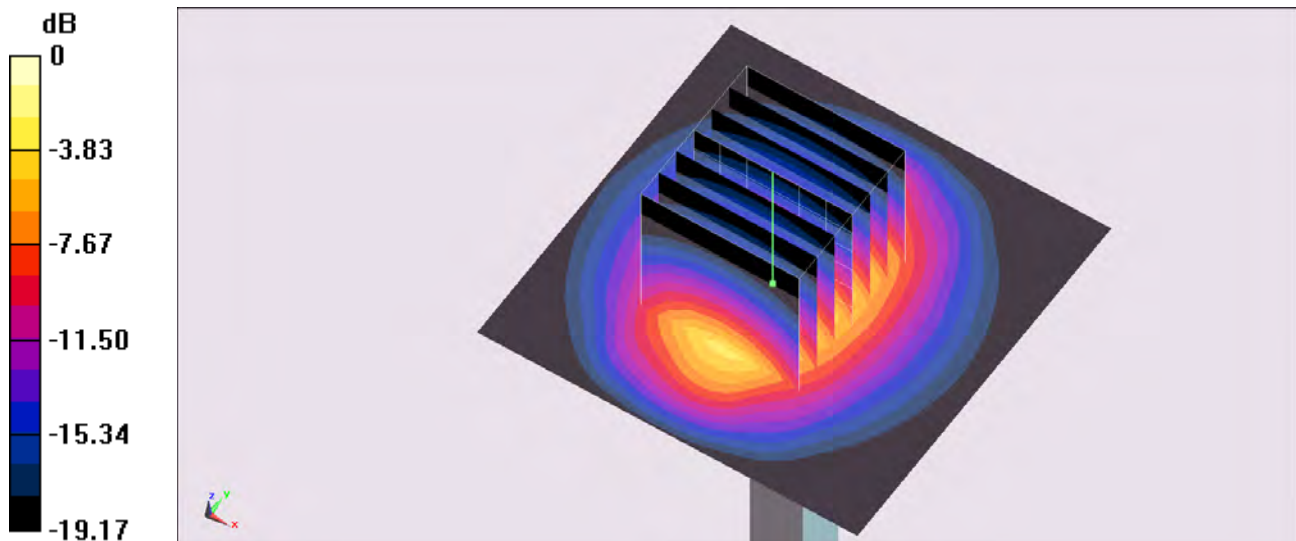Maximum value of SAR (interpolated) = 18.6 W/kg

Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 98.106 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 25.6 W/kg
SAR(1 g) = 11.8 W/kg; SAR(10 g) = 5.34 W/kg
Maximum value of SAR (measured) = 18.4 W/kg

0 dB = 18.4 W/kg = 12.65 dBW/kg