


Mechanical Drawing

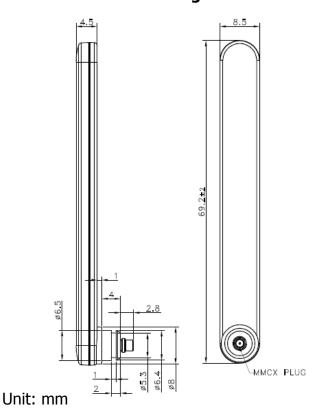

Electrical Specification

| Frequency Range | 2.4~2.4835GHz |
|-----------------|---------------|
| Impedance | 50Ω |
| V.S.W.R. | ≦2.0 |
| Radiation | Omni |
| Gain | 2dBi |
| Polarization | Vertical |

Mechanical Specification

| Connector Type | MMCX Plug (Brass) |
|---------------------|-------------------|
| Material | PC |
| Cable | |
| Bushing Type | |
| Length | 69.2mm |
| Water Proof | |
| Weight | 3g (est.) |

Environmental Specification

| Operating Temp | - 20℃ ~ + 65℃ |
|-----------------------|------------------------|
| Storage Temp | - 30℃ ~ + 70℃ |
| Substance | Meets RoHs requirement |

