


## **Mechanical Drawing**

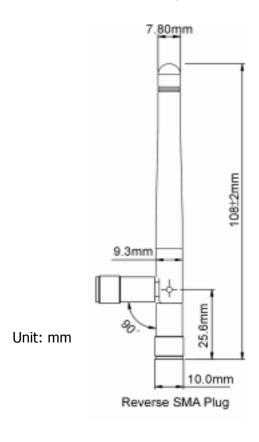

## **Electrical Specification**

Frequency Range	2.4~2.4835GHz
Impedance	50Ω
V.S.W.R.	2.0
Radiation	Omni
Gain	2dBi
Polarization	Vertical

## **Mechanical Specification**

Connector Type	Reverse SMA Plug (Brass)
Material	Cover(PU) / Base(PC)
Cable	
Bushing Type	Swivel 0°,45°, 90°
Length	108mm
Water Proof	
Weight	11g (est.)

## **Environmental Specification**

Operating Temp	- 20 ~ + 65
Storage Temp	- 30 ~ + 70
Substance	Meets RoHs requirement

