





ISO/IEC17025 Accredited Lab.

Report No: FCC1007132 File reference No: 2010-09-07

Applicant: SHEN ZHEN WFLY TECHNOLOGY DEVELOPMENT

CO.,LTD.

Product: RADIO CONTROL SYSTEM

Model No: WFT07

Brand Name: WFLY

Test Standards: FCC Part 15 Subpart C, Paragraph 15.249

Test result: It is herewith confirmed and found to comply with the requirements set up by ANSI C63.4&FCC Part 15 Subpart C,

Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: September 07, 2010

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to

withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 1007132 Page 2 of 41

Date: 2010-09-07



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Page 3 of 41

Report No: 1007132 Date: 2010-09-07



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	4
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	5
3.0	Technical Details	6
3.1	Summary of Test Results.	6
3.2	Test Standards.	6
4.0	EUT Modification.	6
5.0	Power Line Conducted Emission Test.	7
5.1	Schematics of the Test.	7
5.2	Test Method and Test Procedure.	7
5.3	Configuration of the EUT.	7
5.4	EUT Operating Condition.	8
5.5	Conducted Emission Limit.	8
5.6	Test Result.	8
6.0	Radiated Emission test	10
6.1	Test Method and Test Procedure.	10
5.2	Configuration of the EUT.	10
6.3	EUT Operation Condition.	10
6.4	Radiated Emission Limit.	12
6.5	Test Result.	13
7.0	Band Edge	27
7.1	Test Method and Test Procedure.	27
7.2	Radiated Test Setup.	27
7.3	Configuration of the EUT.	27
7.4	EUT Operating Condition.	27
7.5	Band Edge Limit.	27
7.6	Band Edge Test Result.	28
8.0	Antenna Requirement.	30
9.0	20dB bandwidth measurement	31
10.0	FCC ID Label	34
11.0	Photo of Test Setup and EUT View	35

Report No: 1007132 Page 4 of 41

Date: 2010-09-07



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-01

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: SHEN ZHEN WFLY TECHNOLOGY DEVELOPMENT CO.,LTD.

Address: Flat 618、619,6/F Chuangye Building No.1 Qilin Road, Nanshan District Shenzhen, P.R. China

Telephone: +86-755-26978916 Fax: +86-755-26581821

1.3 Description of EUT

Product: RADIO CONTROL SYSTEM

Manufacturer: SHEN ZHEN WFLY TECHNOLOGY DEVELOPMENT CO.,LTD

Brand Name: WFLY
Model Number: WFT07
Additional Model Name N/A
Additional Trade Name N/A

Rating: DC 6V (4pcs AA batteries)

Modulation Type: DSSS

Operation Frequency 2411-2470MHz

Antenna Designation Dipole antenna and the maximum Gain of the antenna is 2.5dBi.

1.4 Submitted Sample

1 Sample

1.5 Test Duration

2010-07-13 to 2010-09-07

The report refers only to the sample tested and does not apply to the bulk.

Page 5 of 41

Report No: 1007132 Date: 2010-09-07



1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

2.0		Test Equipm	ents		
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2009-12-05	2010-12-04
Absorbing Clamp	ROHDE&SCHWARZ	MDS-21	100126	2009-12-05	2010-12-04
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2009-12-05	2010-12-04
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2009-12-05	2010-12-04
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2009-12-05	2010-12-04
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2010-03-29	2011-03-28
4-WIRE ISN	ROHDE&SCHWARZ	ENY 41	830663/044	2010-02-17	2011-02-16
GG ENY22 Double 2-Wire ISN	ROHDE&SCHWARZ	ENY22	83066/016	2010-02-17	2011-02-16
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2010-02-17	2011-02-16
System Controller	CT	SC100	-	2010-02-17	2011-02-16
Printer	EPSON	РНОТО ЕХЗ	CFNH234850	2010-02-17	2011-02-16
FM-AM Signal Generator	JUNG.JIN	SG-150M	389911177	2010-02-17	2011-02-16
Color TV Pattern Generator	PHILIPS	PM5418	LO621747	2010-02-17	2011-02-16
Computer	IBM	8434	1S8434KCE99 BLXLO*	-	-
Oscillator	KENWOOD	AG-203D	3070002	2010-02-17	2011-02-16
Spectrum Analyzer	HAMEG	HM5012	-	-	-
Power Supply	LW	APS1502	-	-	-

Page 6 of 41

5K VA AC Power Source	California Instruments	5001iX	56060	2010-02-17	2011-02-16
CDN	EM TEST	CDN M2/M3	-	2010-02-17	2011-02-16
Attenuation	EM TEST	ATT6/75	-	2010-02-17	2011-02-16
Resistance	EM TEST	R100	-	2010-02-17	2011-02-16
Electromagnetic Injection Clamp	LITTHI	EM101	35708	2010-02-17	2011-02-16
Inductive Components	EM TEST	MC2630	-	2010-02-17	2011-02-16
Antenna	EM TEST	MS100	-	2010-02-17	2011-02-16
Signal Generator	ROHDE&SCHWARZ	SMT03	100029	2010-02-17	2011-02-16
Power Amplifier	AR	150W1000	300999	2010-02-17	2011-02-16
Field probe	Holaday	HI-6005	105152	2010-02-17	2011-02-16
Bilog Antenna	Chase	CBL6111C	2576	2010-02-17	2011-02-16
Loop Antenna	EMCO	6502	00042960	2010-02-17	2011-02-16
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2010-02-17	2011-02-16
3m OATS			N/A	2010-02-17	2011-02-16
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2009-08-15	2010-08-14
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2010-07-03	2011-07-02
Power meter	Anritsu	ML2487A	6K00003613	2010-02-17	2011-02-16
Power sensor	Anritsu	MA2491A	32263	2010-02-17	2011-02-16
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2010-05-14	2011-05-13
LISN	AFJ	LS16C	10010947251	2010-5-14	2011-05-13
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2010-5-14	2011-05-13
9*6*6 Anechoic			N/A	2010-5-14	2011-05-13

Page 7 of 41

Report No: 1007132 Date: 2010-09-07



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according	to the following specifications:
-----------------------------------	----------------------------------

Standard	Test Type	Result	Notes
ECC Part 15 Parrament 15 207	Conducted	NT/A	Not
FCC Part 15, Paragraph 15.207	Emission Test	N/A	Complies
ECC D. 4 15 C L 4 C D 1 15 240(2)	Field Strength		
FCC Part 15 Subpart C Paragraph 15.249(a)	of	PASS	Complies
& 15.249(b) Limit	Fundamental		
FCC Part 15, Paragraph 15.209	Radiated Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(d)	Band Edge	DA CC	G P
Limit	Test	PASS	Complies

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249

4.0 EUT Modification


No modification by Shenzhen Timeway Technology Consulting Co.,Ltd

Report No: 1007132 Date: 2010-09-07



5. Power Line Conducted Emission Test

5.1 Schematics of the test

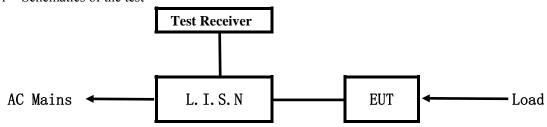


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

Block diagram of Test setup

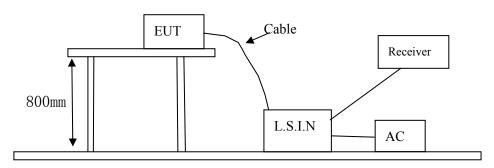

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

One channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID
RADIO CONTROL	SHEN ZHEN WFLY TECHNOLOGY	WFT07	TZVWFT07
SYSTEM	DEVELOPMENT CO.,LTD.		

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

The report refers only to the sample tested and does not apply to the bulk.

Page 9 of 41

Report No: 1007132 Date: 2010-09-07



C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Eraguanay (MHz)	Class A L		Class B Limits (dB µ V)	
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Note: Due to DC Operation, this test item not applicable

Report No: 1007132 Page 10 of 41


Date: 2010-09-07



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
 - with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

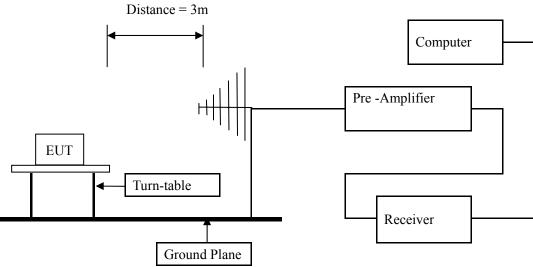


Page 11 of 41

Report No: 1007132 Date: 2010-09-07



Block diagram of Test setup for frequency below 30MHz

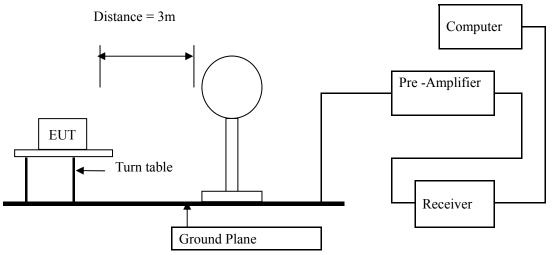

Configuration of The EUT Same as section 5.3 of this report

EUT Operating Condition
Same as section 5.4 of this report.

Page 12 of 41

Report No: 1007132 Date: 2010-09-07



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Strength of Fundamental (3m)			Field S	trength of Harmo	onics (3m)
(MHz)	mV/m	dBuV/m		uV/m	dBu	V/m
2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)

Note:

- 1. RF Field Strength $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
0.009-0.490	3	20log 2400/F (kHz) + 80
0.490-1.705	3	20log 24000/F (kHz) + 40
1.705-30	3	20log 30 + 40
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz. As to 1G-25G, the final emission level got using PK and AV detector.
- 6. If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula Ld1 = Ld2 * (d2/d1)

Report No: 1007132 Page 13 of 41

Date: 2010-09-07



6.5 Test result

Fundamental & Harmonics Radiated Emission Data \mathbf{A}

Product:	RADIO CONTROL SYSTEM	Test Mode:	Low Channel
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	6VDC	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
2411	78.6 (PK)	Н	114/94	-15.4
2411	81.3 (PK)	V	114/94	-12.7
4822		H/V	74/54	
7233		H/V	74/54	
9644		H/V	74/54	
12055		H/V	74/54	
14466		H/V	74/54	
16877		H/V	74/54	
19288		H/V	74/54	
21699		H/V	74/54	
24110		H/V	74/54	

Page 14 of 41

Product:	RADIO CONTROL SYSTEM	Test Mode:	Middle Channel					
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃					
Test Voltage:	6VDC	Humidity:	56%					
Test Result:	Pass							

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin	
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)	
2441	84.5(PK)	Н	114/94	-9.5	
2441	88.2 (PK)	V	114/94	-5.8	
4882		V	74/54		
4882		Н	74/54		
7323		H/V	74/54		
9764		H/V	74/54		
12205		H/V	74/54		
14646		H/V	74/54		
17087		H/V	74/54		
19528		H/V	74/54		
21969		H/V	74/54		
24410		H/V	74/54		

Page 15 of 41

Report No: 1007132 Date: 2010-09-07

Product:	RADIO CONTROL SYSTEM	Test Mode:	High Channel
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	6VDC	Humidity:	56%
Test Result:	Pass		

Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
2470	87.6(PK)	Н	114/94	-6.4
2470	90.3 (PK)	V	114/94	-3.7
4940		V	74/54	
4940		Н	74/54	
7410		H/V	74/54	
9880		H/V	74/54	
12350		H/V	74/54	
14820		H/V	74/54	
17290		H/V	74/54	
19760		H/V	74/54	
22230		H/V	74/54	
24700		H/V	74/54	

Note: (1) PK= Peak, AV= Average

- (2) Emission Level = Reading Level + Probe Factor + Cable Loss.
- (3)Margin=Emission-Limits
- (4)According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) The measured PK value less than the AV limit.

Page 16 of 41


Report No: 1007132 Date: 2010-09-07



Test Figure above 1G

Low Channel

Horizontal

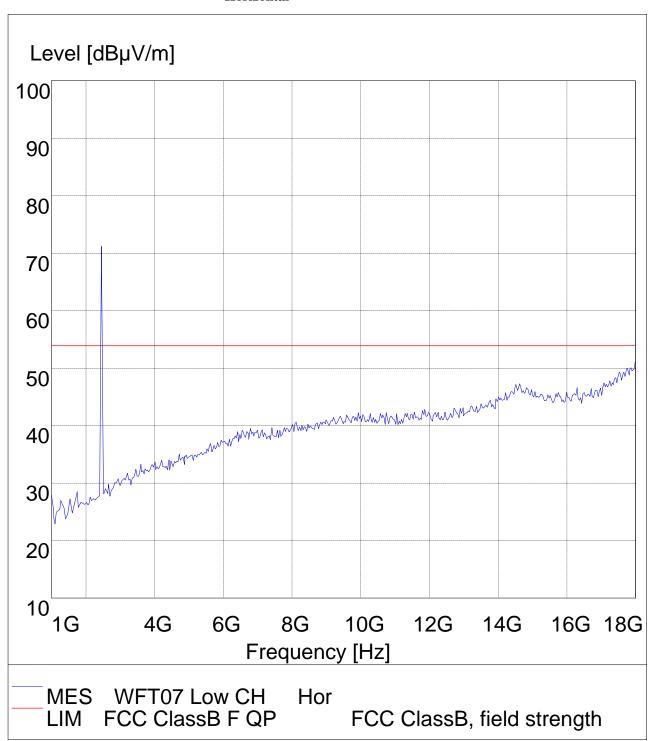

The report refers only to the sample tested and does not apply to the bulk.


Page 17 of 41

Report No: 1007132 Date: 2010-09-07



Low Channel

Vertical

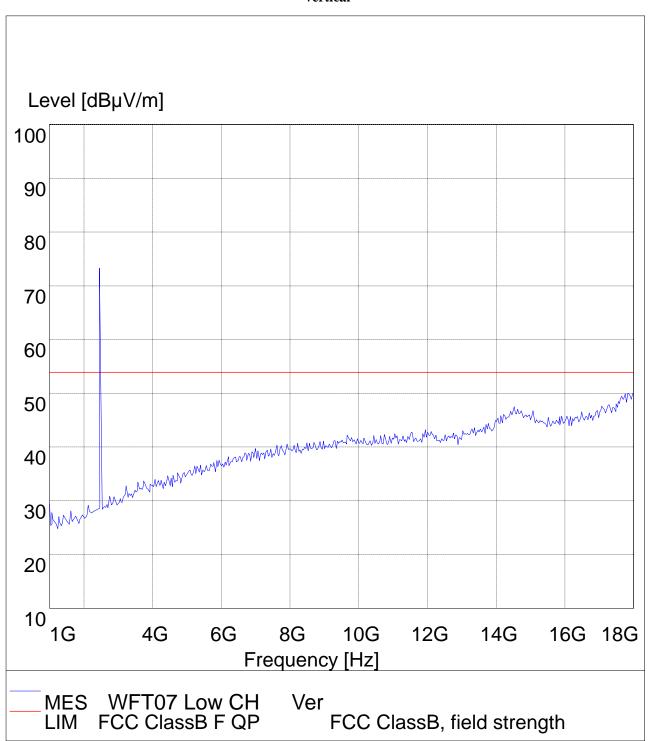

The report refers only to the sample tested and does not apply to the bulk.


Page 18 of 41

Report No: 1007132 Date: 2010-09-07



Middle Channel

Horizontal

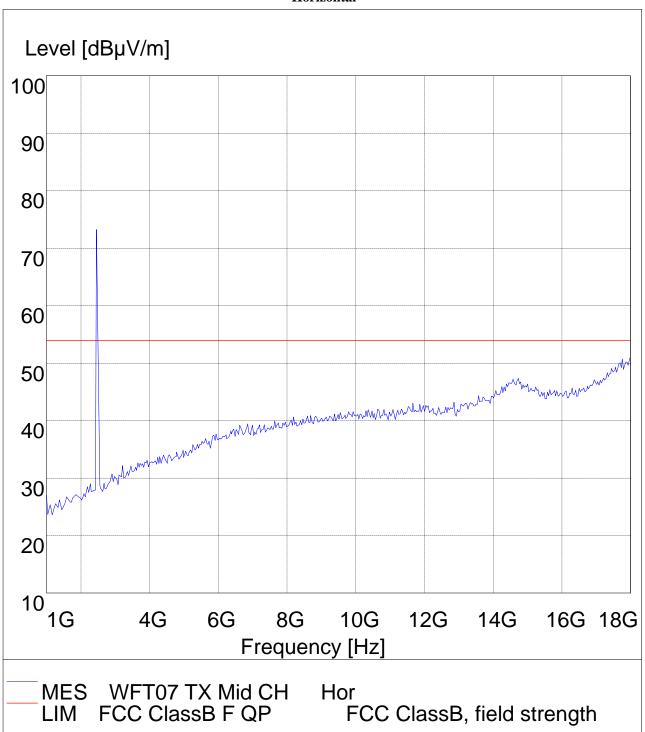

The report refers only to the sample tested and does not apply to the bulk.


Page 19 of 41

Report No: 1007132 Date: 2010-09-07



Middle Channel

Vertical

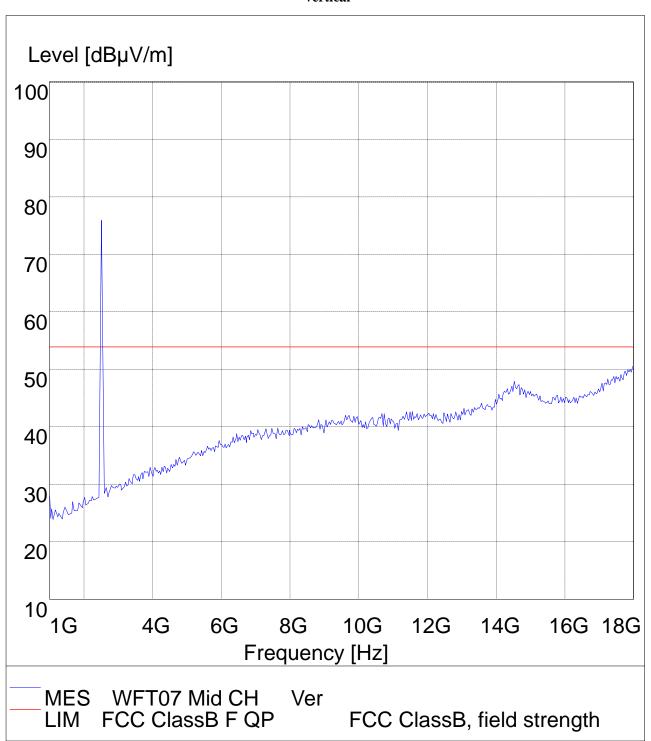

The report refers only to the sample tested and does not apply to the bulk.


Page 20 of 41

Report No: 1007132 Date: 2010-09-07



High Channel

Horizontal

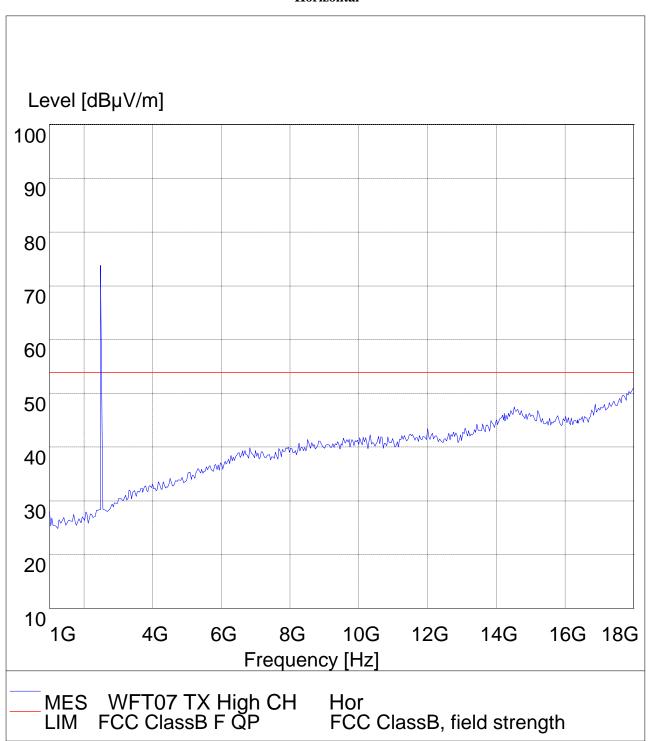

The report refers only to the sample tested and does not apply to the bulk.


Page 21 of 41

Report No: 1007132 Date: 2010-09-07



High Channel

Vertical

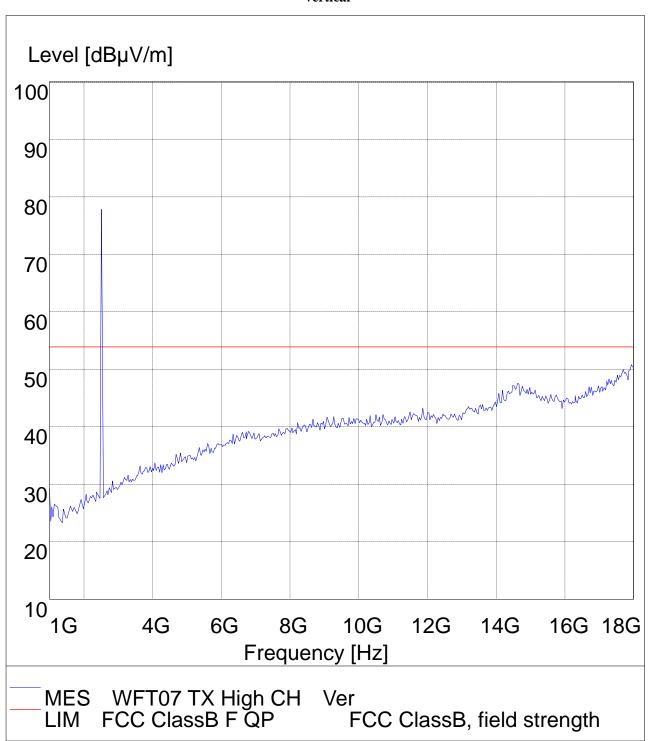


The report refers only to the sample tested and does not apply to the bulk.

Page 22 of 41




18-25G High Channel

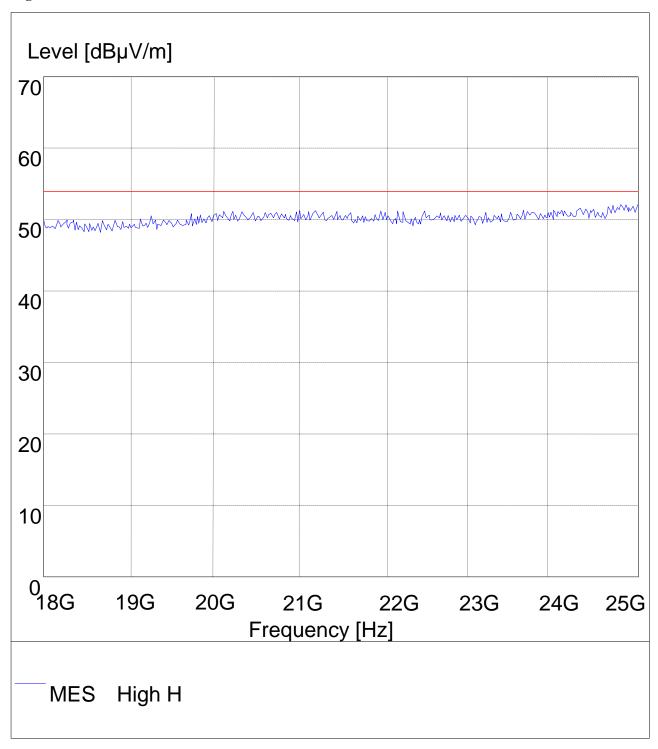

Page 23 of 41



18-25G High Channel

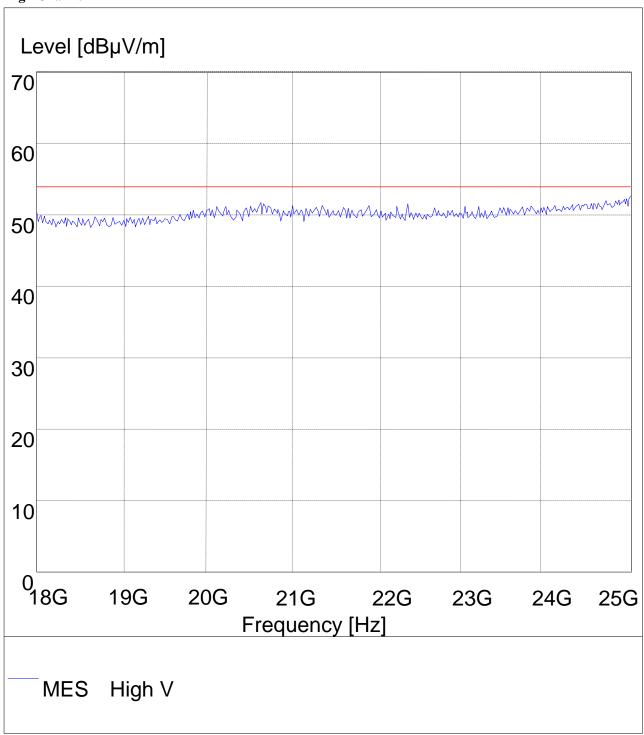

Page 24 of 41

Report No: 1007132 Date: 2010-09-07




B. General Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep transmitting Mode: Normal work

Results: Pass

Please refer to following diagram for individual

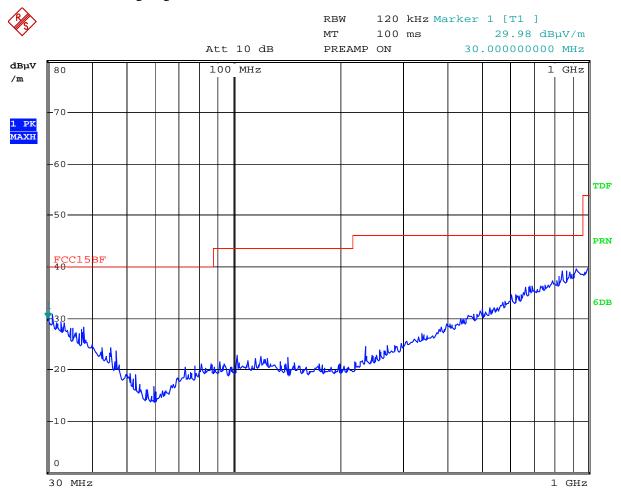

Date: 17.AUG.2010 08:06:10

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
	-	Н	

Report No: 1007132 Page 25 of 41

Date: 2010-09-07




Radiated Emission In Vertical (30MHz---1000MHz

EUT set Condition: Keep transmitting Mode: Normal work

Results: Pass

Please refer to following diagram for individual

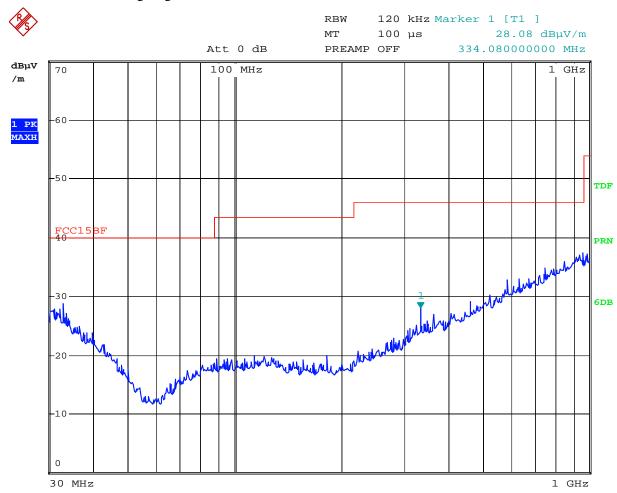


Date: 20.JAN.2010 20:18:05

Frequency (MHz)	uency (MHz) Level@3m (dB \mu V/m)		Limit@3m (dB µ V/m)	
		V		

Report No: 1007132 Page 26 of 41


Date: 2010-09-07



EUT set Condition: Keep transmitting Mode: Low Channel

Results: Pass

Please refer to following diagram for individual

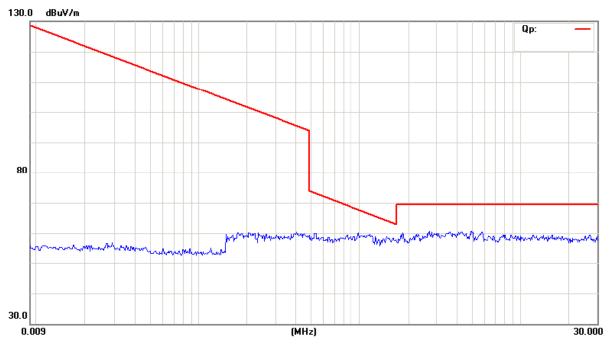

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
	-		

Report No: 1007132 Date: 2010-09-07




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) Set Spectrum as peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and Peak detector used
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

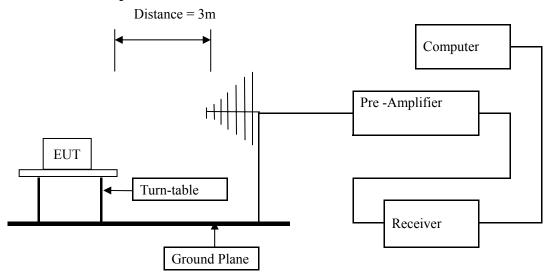

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of The EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.

Page 28 of 41

Report No: 1007132 Date: 2010-09-07



7.6 Test Result

P	roduct:	RA	ADIO CON	TROL SY	STEM	Test	Mode:		Low Cł	nannel	
	Mode	Keeping Transmitting			Test	Test Voltage		DC6V			
Ter	nperature		24 deg. C Humidity		Humidity 56% RH			56% RH			
Tes	Test Result:		I	Pass	_		Detector		Pk	ζ	
The	Max. FS in	PK (dBμV/m)	4	16.7	т	imit		74(dBµ	ιV/m)	
Res	trict Band	AV(dBμV/m)				Limit		54(dBµ	ιV/m)	
			Marker	1 [T1]		RBW	1 M	Hz R	FAtt	20 dB	
	Ref Lvl				$7 \text{ dB}\mu\text{V}$	VBW	1 M				
443	117 dB μ V		2	.411425	85 GHz	SWT	5 m	s U	nit	dBμV	
117							v ₁	[T1]	87.	.87 dBμV	
110									2.41142	585 GHz	Α
							∇2	[T 1]	1	70 dBµV	
100							V-0	F.T. 4.3		000 GHz	
							∆3	[T 1]	1	.93 dBµV 1000 GHz	
90									2.40000	1	
										Λ	
80	1MAX										1MA
										/ /	
70										/ \	
70											
60									3	W	
							M	2	Munion,		
50	mermonia	4 B/L4 B/L/	munumber	~~~~~	mangerella	Man Man	White V	MININGS	V		
		JOF 4 W 44									
40											
30											
20											
17	Start 2.3	1 CU-			10.35	MUə		(I Stop 2 /	1135 GHz	l
				F0 05	10.33	11114/		Ş	ıı∩h ⊂. ₅	7110 PCI+	
Date	: 14	.JUL.2	2U1U 14:	:52:28							

Note: Field Strength in restrict band measured in conventional manner

Page 29 of 41

Report No: 1007132 Date: 2010-09-07

Product:	RADIO CO	NTROL SY	STEM	Test	Mode:		High Cl	nannel	
Mode	Keeping Transmitting			Test	Test Voltage		DC6V		
Temperature		24 deg. C			Humidity		56% RH		
Test Result:		Pass		Detector PK					
The Max. FS in	FS in PK ($dB\mu V/m$) 51.7		_	,		74(dBµ	V/m)		
Restrict Band	AV(dBμV/m)	3	38.2		imit		54(dBµ	.V/m)	
	Marker	1 [T1]		RBW	1 M	Hz R	F Att	20 dB	
Ref Lvl			$1 \ dB\muV$	VBW	1 M	Hz			
117 dBμV		2.469611	22 GHz	SWT	5 m	s U	nit	dB μ V	
117					v ₁	[T1]	94.	11 dBμV	Α
110					_		2.46961	122 6Hz	
					∇2	[T1]		08 dB μ V	
100							2.40330	000 0112	
<u> </u>	\neg								
90 /									
1MAX									1MA
80									
70	The last of the la	manny	w	2					
			A.,	Killymy	many	when	whylowy	phulmy	
50									
40									
30									
20									
Start 2.4	66 GHz		3.4 1	1Hz/			Stop	2.5 GHz	-
Date: 14.	.JUL.2010 15	5:01:58							

Note: 1. Field Strength in restrict band measured in conventional manner

2. Emission Level = Reading Level + Probe Factor + Cable Loss.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Report No: 1007132 Page 30 of 41

Date: 2010-09-07



8.0 Antenna Requirement


Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.


An RF cable connected to the PCB board and antenna, the RF cable soldered on the PCB board. The maximum Gain of the antennas is 2.5dBi.

Test Result: Pass


Page 31 of 41

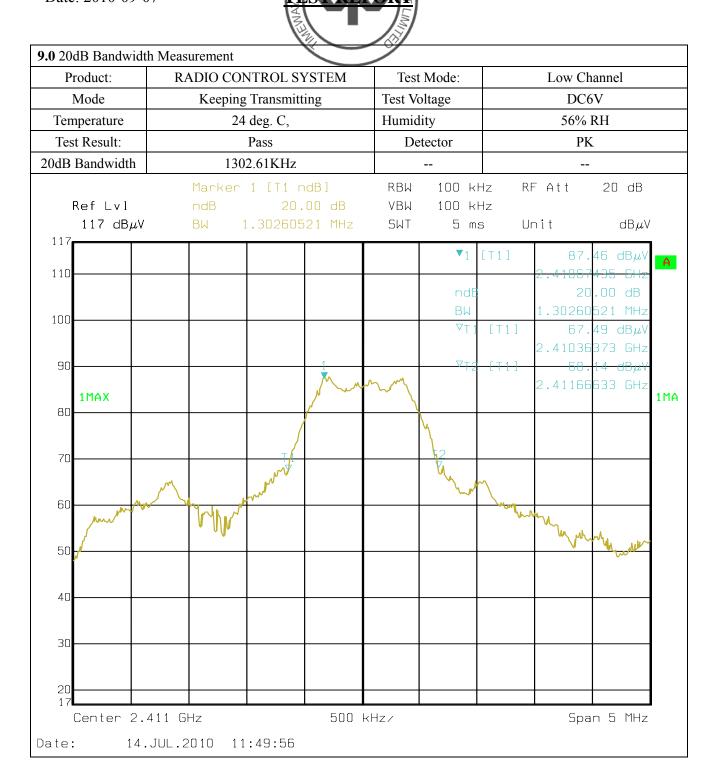

Page 32 of 41

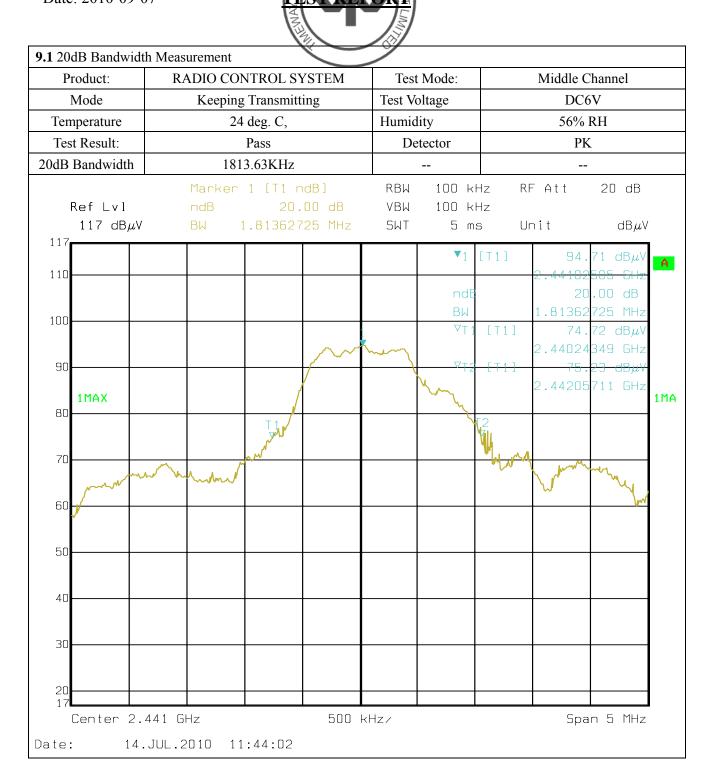

Page 33 of 41

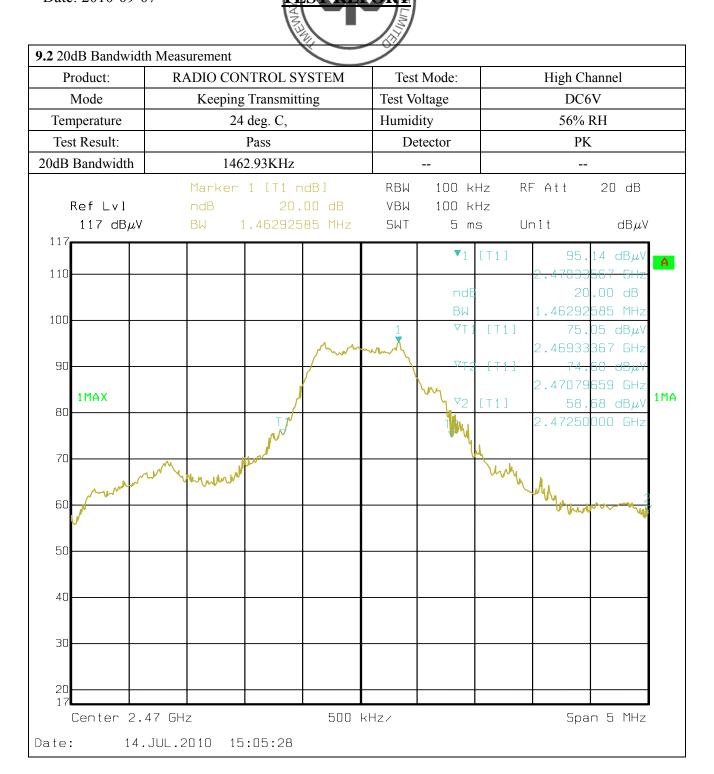

Page 34 of 41

Report No: 1007132 Date: 2010-09-07




10.0 FCC ID Label

FCC ID: TZVWFT07

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

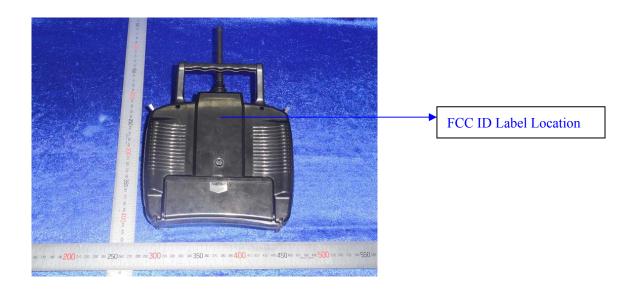

Page 35 of 41

Report No: 1007132 Date: 2010-09-07



11.0 Photo of testing

11.1 Conducted test View--

N/A

11.2 Radiated emission test view



Report No: 1007132 Date: 2010-09-07



11.3 Photo for the EUT

5. Photographs - EUT



Top of the Tx



Bottom of the Tx

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Page 37 of 41

Report No: 1007132 Date: 2010-09-07



Inside of the Tx

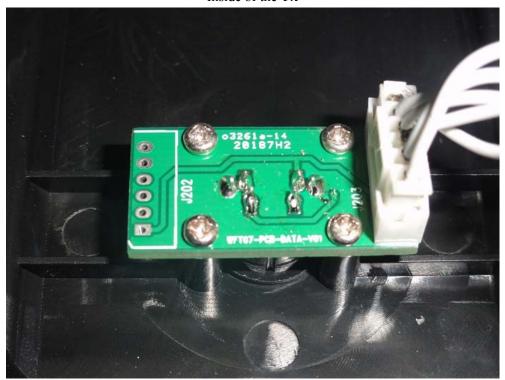

Inside of the Tx

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Page 38 of 41

Report No: 1007132 Date: 2010-09-07





Inside of the Tx

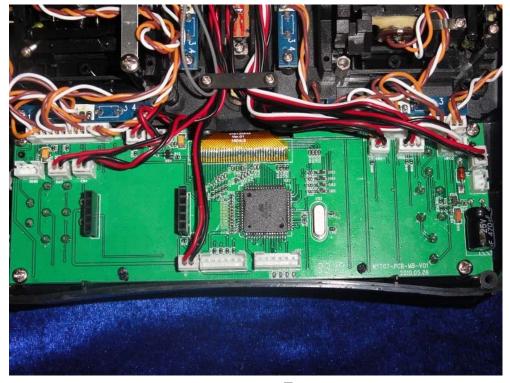

Inside of the Tx

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 39 of 41

Report No: 1007132 Date: 2010-09-07





Inside of the Tx

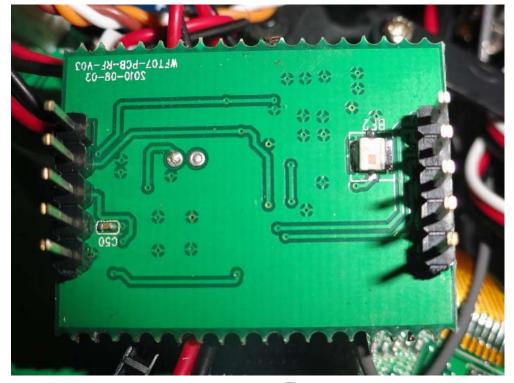

Inside of the Tx

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Page 40 of 41

Report No: 1007132 Date: 2010-09-07

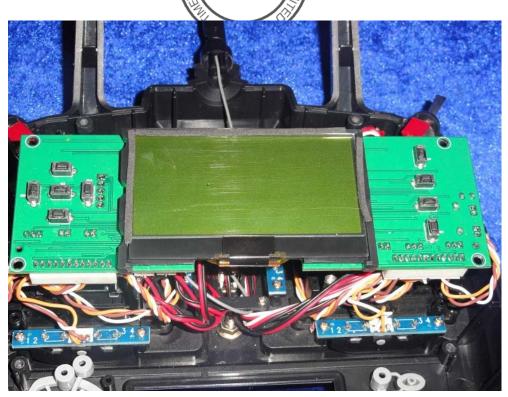

Inside of the Tx

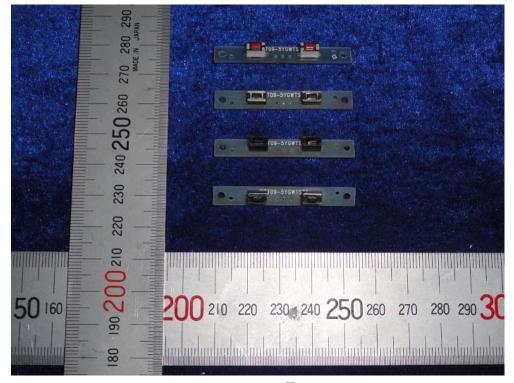

Inside of the Tx

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No: 1007132 Page 41 of 41



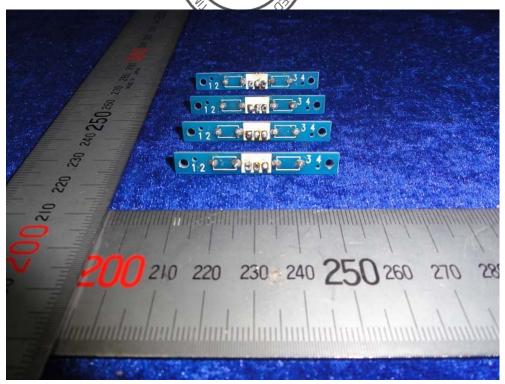

Inside of the Tx

-- End of the report--