FCC Test Report

FCC ID	:	**U28N01**
Equipment	:	**EduMic**
Model No.	:	**N01**
Brand Name	:	**Oticon**
Applicant	:	**Oticon A/S**
Address	:	**Kongebakken 9 DK-2765 Smorum, Denmark**
Standard	:	**47 CFR FCC Part 15.247**
Received Date	:	**Jun. 27, 2019**
Tested Date	:	**Jul. 04 ~ Jul. 10, 2019**

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: **Approved by:**

Along Chen / Assistant Manager **Gary Chang / Manager**

Testing Laboratory 2732

Table of Contents

1 GENERAL DESCRIPTION 5

1.1 Information 5
1.2 Local Support Equipment List 7
1.3 Test Setup Chart 7
1.4 Test Equipment List and Calibration Data 8
1.5 Test Standards 9
1.6 Deviation from Test Standard and Measurement Procedure 9
1.7 Measurement Uncertainty 9

2 TEST CONFIGURATION 10

2.1 Testing Condition 10
2.2 The Worst Test Modes and Channel Details 10

3 TRANSMITTER TEST RESULTS 11

3.1 Conducted Emissions 11
3.2 6dB and Occupied Bandwidth 16
3.3 RF Output Power 21
3.4 Power Spectral Density 24
3.5 Emissions in Restricted Frequency Bands 29
3.6 Emissions in non-restricted Frequency Bands 47

4 TEST LABORATORY INFORMATION 50

Release Record

Report No.	Version	Description	Issued Date
FR962701-2	Rev. 01	Initial issue	Oct. 16, 2019

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.507MHz 31.94 (Margin -14.06dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 4960.00MHz 49.15 (Margin -4.85dB) - AV	Pass
15.247(b)(3)	Maximum Output Power	Power [dBm]: 7.95	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	**Bluetooth Mode**	**Ch. Freq. (MHz)**	**Channel Number**	**Data Rate**	**Radio Chipset**
2400-2483.5	LE	2402-2480	0-39 [40]	1 Mbps	CSR
2400-2483.5	LE	2402-2480	0-39 [40]	1 Mbps	Aurora
Note 1: Bluetooth LE (Low energy) uses GFSK modulation.					

1.1.2 Antenna Details

Ant. No.	Type	Connector	Gain (dBi)	Radio Chipset
1	PIFA	NA	1.1	CSR
2	PIFA	NA	0.9	Aurora

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5Vdc from adapter 5Vdc from host 3.7Vdc from battery

1.1.4 Accessories

Accessories		
No.	**Equipment**	**Description**
1	AC adapter	Brand: PHIHONG Model: AM05A-050A I/P: 100-240Vac, 50/60Hz, 0.2A O/P: 5Vdc, 1A Power Line: 1.8m non-shielded without core
2	Battery	Brand: SYNergy ScienTech Corp. Model: AHB651935PC Power Rating: 3.7Vdc, 420mAh
3	USB cable	1m shielded without core
4	Audio cable 1	1.05m shielded with two cores.
5	Audio cable 2	1.05m shielded with two cores.

1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

1.1.6 Test Tool and Duty Cycle

Test Tool	Nebula Developer, Version: 3.4.10.0		
Radio Chipset	Modulation Mode	Duty Cycle Of Test Signal (%)	Duty Factor (dB)
CSR	GFSK-1Mbps	67.94	1.68
Aurora	GFSK-1Mbps	100%	0.00

1.1.7 Power Index of Test Tool

Radio Chipset	Modulation Mode	Test Frequency (MHz)		
		2402	2440	2480
CSR	GFSK-1Mbps	Default	Default	Default
Aurora	GFSK-1Mbps	Default	Default	Default

1.2 Local Support Equipment List

Support Equipment List					
No.	**Equipment**	**Brand**	**Model**	**FCC ID**	**Remarks**
1	iPod Nano	Apple	A1446	---	---

1.3 Test Setup Chart

Test Setup Diagram

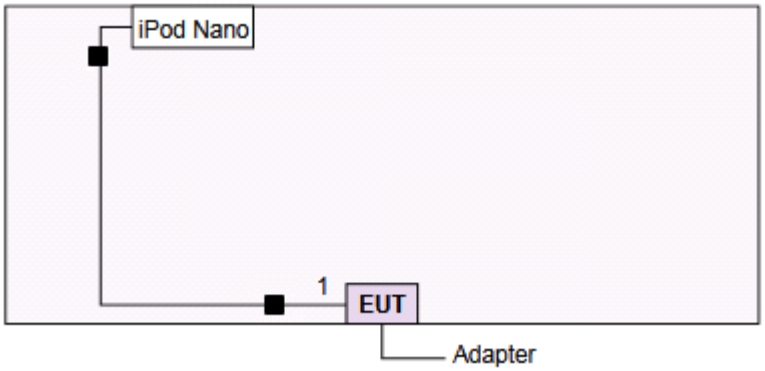

No.	Signal cable / Length (m)
1	Audio, 1.05m shielded with two cores

1.4 Test Equipment List and Calibration Data

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	**Manufacturer**	**Model No.**	**Serial No.**	**Calibration Date**	**Calibration Until**
Receiver	R&S	ESR3	101657	Jan. 08, 2019	Jan. 07, 2020
LISN	R&S	ENV216	101579	Mar. 08, 2019	Mar. 07, 2020
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 23, 2018	Oct. 22, 2019
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber 3 / (03CH03-WS)				
Instrument	**Manufacturer**	**Model No.**	**Serial No.**	**Calibration Date**	**Calibration Until**
Spectrum Analyzer	R&S	FSV40	101499	Jan. 07, 2019	Jan. 06, 2020
Receiver	R&S	ESR3	101658	Dec. 11, 2018	Dec. 10, 2019
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 17, 2019	Apr. 16, 2020
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Jan. 07, 2019	Jan. 06, 2020
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2018	Nov. 14, 2019
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 09, 2018	Nov. 08, 2019
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 08, 2018	Oct. 07, 2019
Preamplifier	EMC	EMC02325	980187	Aug. 24, 2018	Aug. 23, 2019
Preamplifier	Agilent	83017A	MY53270014	Aug. 09, 2018	Aug. 08, 2019
Preamplifier	EMC	EMC184045B	980192	Aug. 09, 2018	Aug. 08, 2019
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/**4**	Oct. 01, 2018	Sep. 30, 2019
RF cable-8M	EMC	EMC104-SM-SM-8000	181107	Oct. 01, 2018	Sep. 30, 2019
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Oct. 01, 2018	Sep. 30, 2019
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Oct. 01, 2018	Sep. 30, 2019
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Oct. 01, 2018	Sep. 30, 2019
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Oct. 01, 2018	Sep. 30, 2019
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Apr. 17, 2019	Apr. 16, 2020
Spectrum Analyzer	R&S	FSV40	101499	Jan. 07, 2019	Jan. 06, 2020
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Dec. 05, 2018	Dec. 04, 2019
Power Meter	Anritsu	ML2495A	1241002	Oct. 09, 2018	Oct. 08, 2019
Power Sensor	Anritsu	MA2411B	1207366	Oct. 09, 2018	Oct. 08, 2019
DC POWER SOURCE	GW INSTEK	GPC-6030D	EM892433	Oct. 25, 2018	Oct. 24, 2019
AC POWER SOURCE	APC	AFC-500W	F312060012	Nov. 29, 2018	Nov. 28, 2019
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247
ANSI C63.10-2013
FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.6 Deviation from Test Standard and Measurement Procedure

None

1.7 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.130 Hz
Conducted power	±0.808 dB
Power density	±0.583 dB
Conducted emission	±2.715 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.96 dB
Radiated emission > 1GHz	±4.51 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	24°C / 65%	Alex Tsai
Radiated Emissions	03CH03-WS	24-25°C / 60-63%	Roger Lu
RF Conducted	TH01-WS	22°C / 63%	Brad Wu

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISED#: 10807C-1
- CAB identifier: TW0009

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions Radiated Emissions ≤ 1GHz	GFSK	2480	1Mbps	1, 2
Maximum Output Power 6dB bandwidth Power spectral density Radiated Emissions > 1GHz	GFSK	2402, 2440, 2480	1Mbps	1, 2

NOTE:

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.
2. Test Configurations are listed as follows:
   1) Test Configuration 1: CSR chipset
   2) Test Configuration 2: Aurora chipset

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	**Quasi-Peak**	**Average**
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

3.1.3 Test Setup

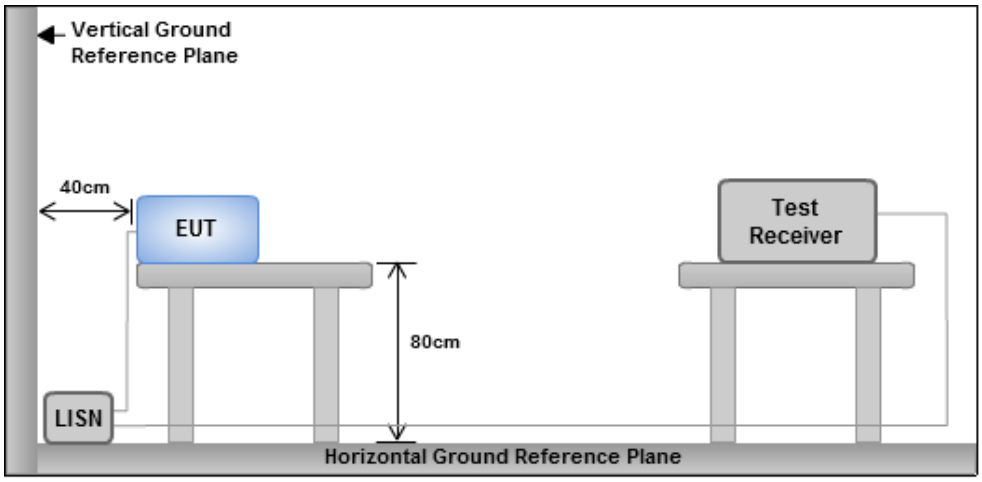

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions

Test Configuration 1: CSR chipset

Modulation Mode	GFSK	**Test Freq. (MHz)**	2480
Power Phase	Line		

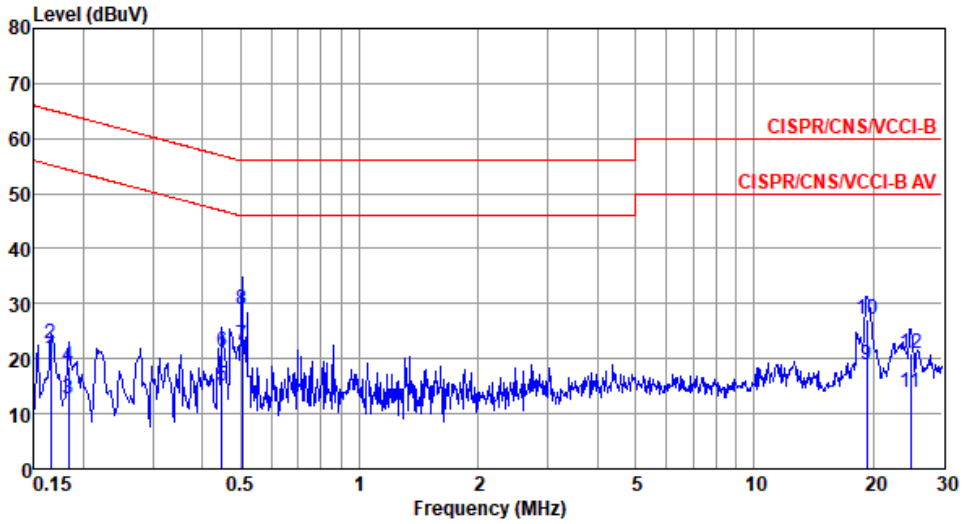

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.165	20.05	55.21	-35.16	10.32	9.53	0.06	Average
2	0.165	22.84	65.21	-42.37	13.11	9.53	0.06	QP
3	0.183	12.70	54.33	-41.63	2.93	9.54	0.06	Average
4	0.183	18.51	64.33	-45.82	8.74	9.54	0.06	QP
5	0.449	15.01	46.89	-31.88	5.10	9.57	0.08	Average
6	0.449	21.40	56.89	-35.49	11.49	9.57	0.08	QP
7*	0.505	22.54	46.00	-23.46	12.61	9.58	0.08	Average
8	0.505	29.07	56.00	-26.93	19.14	9.58	0.08	QP
9	19.326	18.87	50.00	-31.13	8.01	9.66	0.60	Average
10	19.326	27.27	60.00	-32.73	16.41	9.66	0.60	QP
11	24.922	13.92	50.00	-36.08	2.92	9.64	0.68	Average
12	24.922	20.92	60.00	-39.08	9.92	9.64	0.68	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Modulation Mode	GFSK	Test Freq. (MHz)	2480
Power Phase	Neutral		

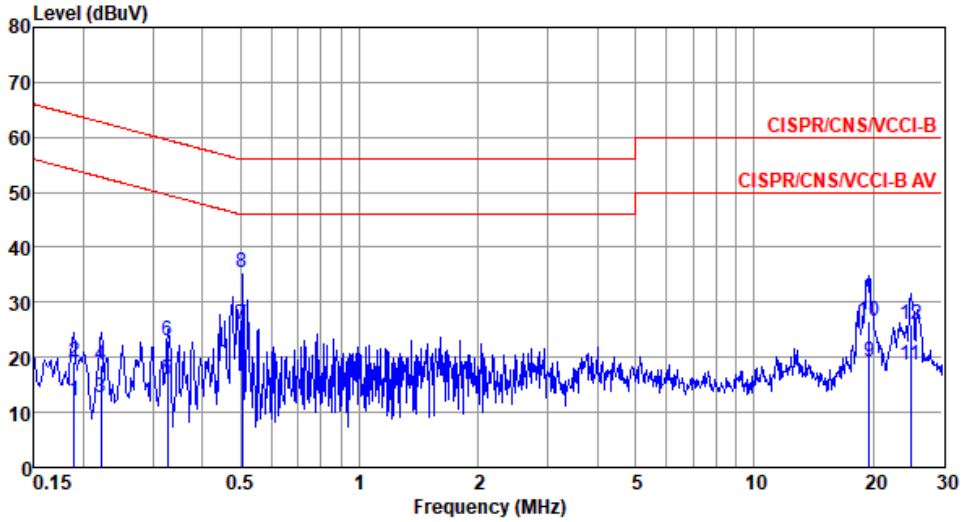

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.189	12.23	54.06	-41.83	2.45	9.58	0.07	Average
2	0.189	19.09	64.06	-44.97	9.31	9.58	0.07	QP
3	0.222	12.58	52.74	-40.16	2.79	9.58	0.07	Average
4	0.222	18.60	62.74	-44.14	8.81	9.58	0.07	QP
5	0.327	15.82	49.53	-33.71	6.01	9.60	0.08	Average
6	0.327	23.10	59.53	-36.43	13.29	9.60	0.08	QP
7*	0.505	25.98	46.00	-20.02	16.13	9.62	0.08	Average
8	0.505	35.34	56.00	-20.66	25.49	9.62	0.08	QP
9	19.532	19.21	50.00	-30.79	8.35	9.81	0.60	Average
10	19.532	26.67	60.00	-33.33	15.81	9.81	0.60	QP
11	24.922	18.73	50.00	-31.27	7.60	9.82	0.68	Average
12	24.922	26.03	60.00	-33.97	14.90	9.82	0.68	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Test Configuration 2: Aurora chipset

Modulation Mode	GFSK	**Test Freq. (MHz)**	2480
Power Phase	Line		

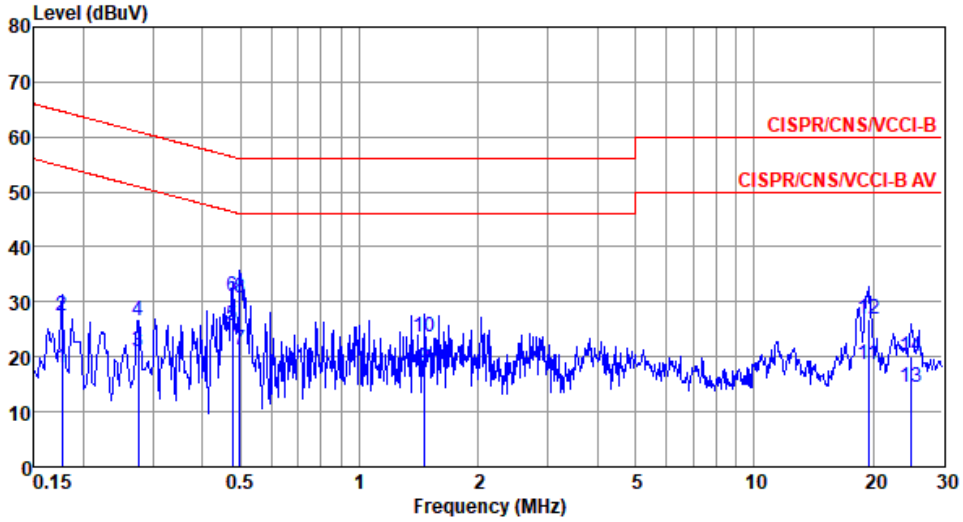

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.177	18.00	54.64	-36.64	8.24	9.54	0.06	Average
2	0.177	27.33	64.64	-37.31	17.57	9.54	0.06	QP
3	0.276	20.84	50.94	-30.10	11.00	9.55	0.07	Average
4	0.276	26.43	60.94	-34.51	16.59	9.55	0.07	QP
5*	0.476	25.71	46.41	-20.70	15.78	9.58	0.08	Average
6	0.476	31.03	56.41	-25.38	21.10	9.58	0.08	QP
7	0.497	21.15	46.05	-24.90	11.22	9.58	0.08	Average
8	0.497	30.57	56.05	-25.48	20.64	9.58	0.08	QP
9	1.464	17.96	46.00	-28.04	7.90	9.60	0.13	Average
10	1.464	23.52	56.00	-32.48	13.46	9.60	0.13	QP
11	19.428	18.66	50.00	-31.34	7.80	9.66	0.60	Average
12	19.428	26.82	60.00	-33.18	15.96	9.66	0.60	QP
13	25.055	14.48	50.00	-35.52	3.48	9.64	0.68	Average
14	25.055	20.08	60.00	-39.92	9.08	9.64	0.68	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Modulation Mode	GFSK	Test Freq. (MHz)	2480
Power Phase	Neutral		

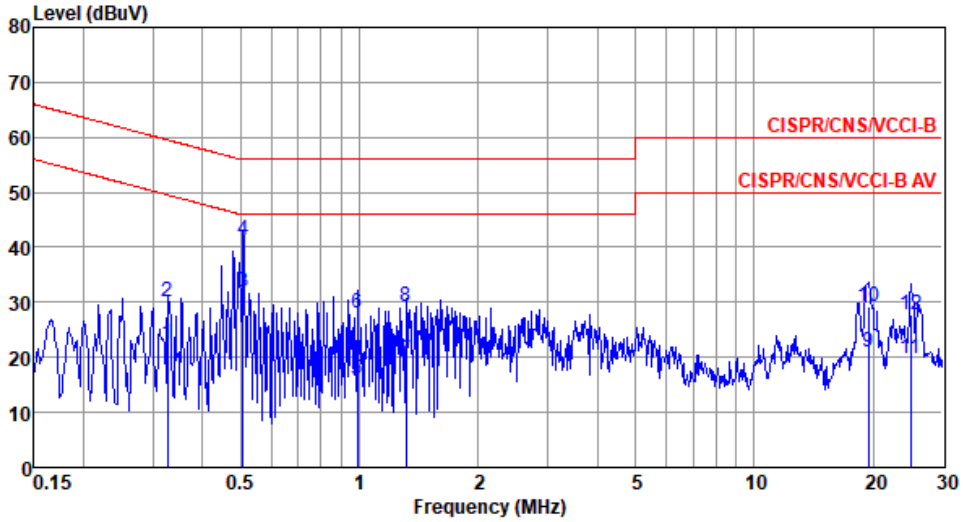

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.327	22.56	49.53	-26.97	12.75	9.60	0.08	Average
2	0.327	30.11	59.53	-29.42	20.30	9.60	0.08	QP
3*	0.507	31.94	46.00	-14.06	22.08	9.62	0.09	Average
4	0.507	41.29	56.00	-14.71	31.43	9.62	0.09	QP
5	0.989	15.94	46.00	-30.06	5.97	9.64	0.10	Average
6	0.989	28.15	56.00	-27.85	18.18	9.64	0.10	QP
7	1.310	19.44	46.00	-26.56	9.44	9.64	0.12	Average
8	1.310	29.15	56.00	-26.85	19.15	9.64	0.12	QP
9	19.428	21.02	50.00	-28.98	10.16	9.81	0.60	Average
10	19.428	29.24	60.00	-30.76	18.38	9.81	0.60	QP
11	24.922	19.81	50.00	-30.19	8.68	9.82	0.68	Average
12	24.922	27.71	60.00	-32.29	16.58	9.82	0.68	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures

6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3 Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.2.3 Test Setup



3.2.4 Test Result of 6dB and Occupied Bandwidth

Test Configuration 1: CSR chipset

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	684.783k	1.017M	1M02F1D	673.913k	1.013M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	677.536k	1.017M
2440MHz	Pass	500k	684.783k	1.013M
2480MHz	Pass	500k	673.913k	1.013M

Port X-N dB = Port **X** 6dB down bandwidth; **Port X-OBW** = Port **X** 99% occupied bandwidth;

BT-LE(1Mbps) **EBW**

2402MHz

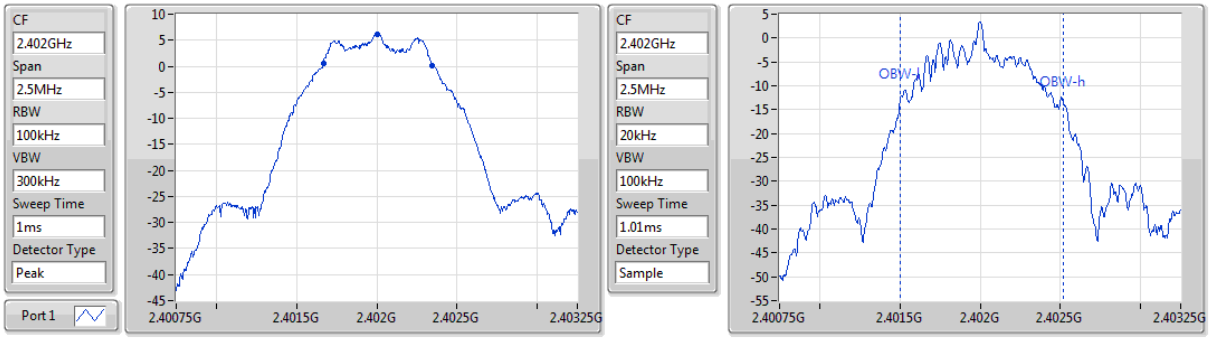

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
677.536k	2.401667G	2.402344G	1.017M	2.401504G	2.402521G	500k	1

BT-LE(1Mbps) **EBW**

2440MHz

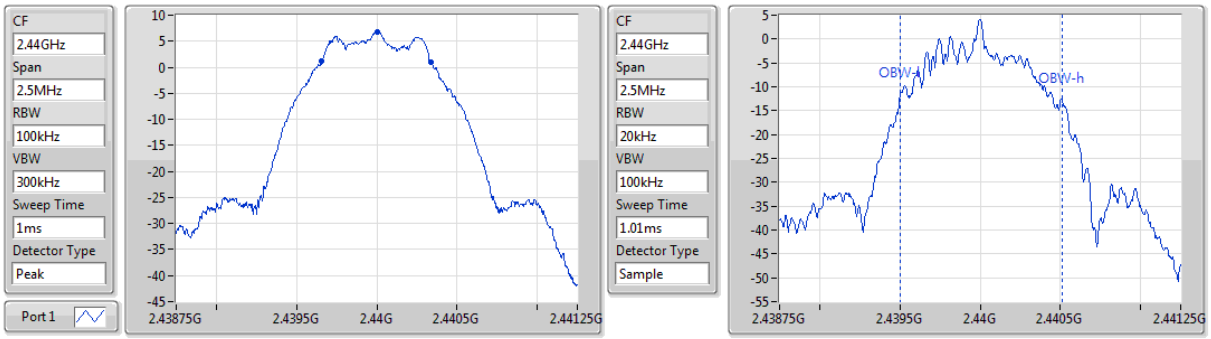

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
684.783k	2.439656G	2.440341G	1.013M	2.439501G	2.440514G	500k	1

BT-LE(1Mbps) **EBW**

2480MHz

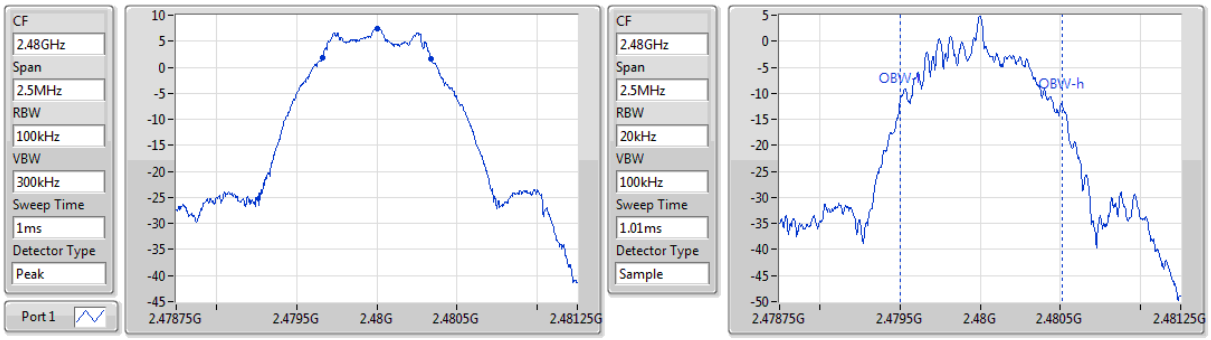

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
673.913k	2.479663G	2.480337G	1.013M	2.479501G	2.480514G	500k	1

Test Configuration 2: Aurora chipset

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	735.507k	1.056M	1M06F1D	724.638k	1.056M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	724.638k	1.056M
2440MHz	Pass	500k	731.884k	1.056M
2480MHz	Pass	500k	735.507k	1.056M

Port X-N dB = Port **X** 6dB down bandwidth; **Port X-OBW** = Port **X** 99% occupied bandwidth;

BT-LE(1Mbps) **EBW**

2402MHz

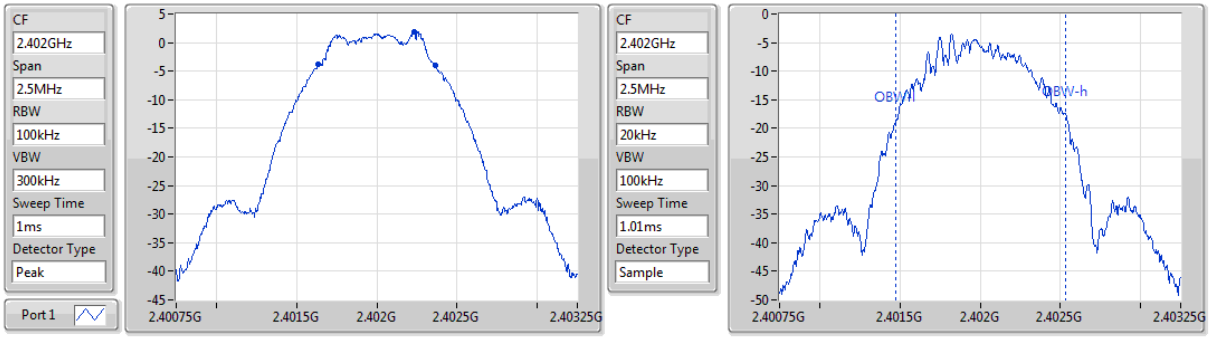

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
724.638k	2.401638G	2.402362G	1.056M	2.401475G	2.402532G	500k	1

BT-LE(1Mbps) **EBW**

2440MHz

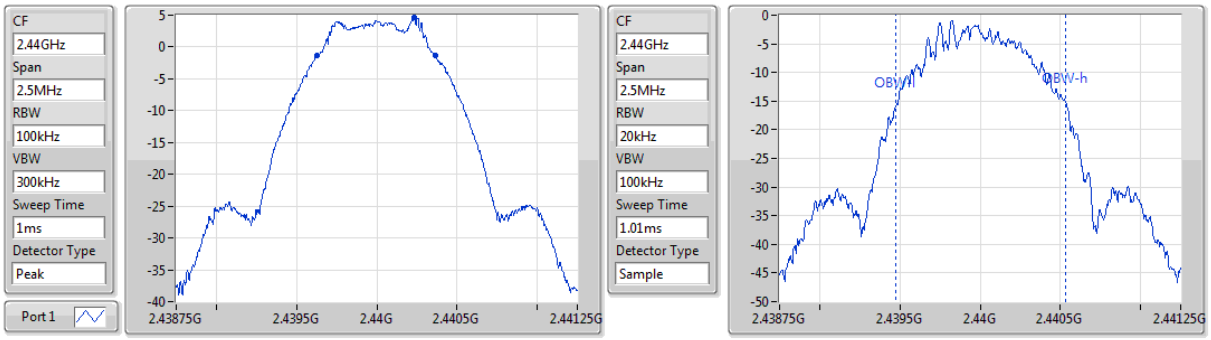

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
731.884k	2.43963G	2.440362G	1.056M	2.439475G	2.440532G	500k	1

BT-LE(1Mbps) **EBW**

2480MHz

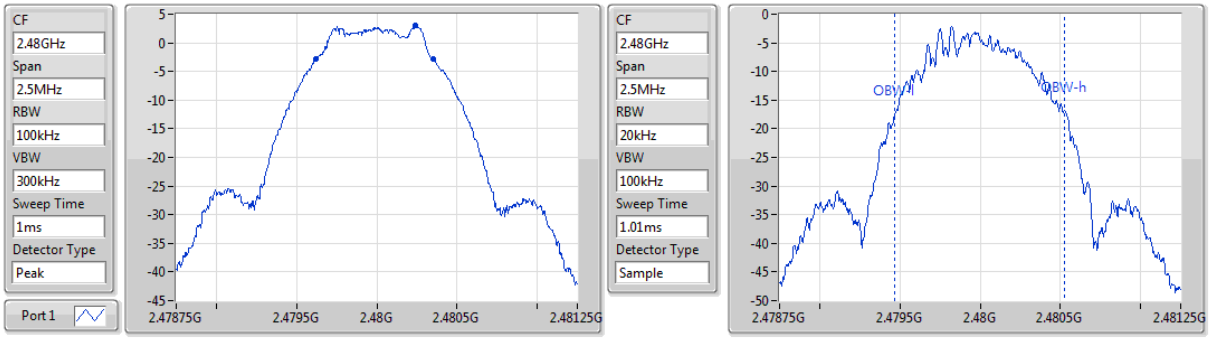

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
735.507k	2.47962G	2.480355G	1.056M	2.479468G	2.480525G	500k	1

3.3 RF Output Power

3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup

3.3.4 Test Result of Maximum Output Power

Test Configuration 1: CSR chipset

Peak Power

Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	7.95	0.00624

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.10	6.76	30.00
2440MHz	Pass	1.10	7.38	30.00
2480MHz	Pass	1.10	7.95	30.00

Average Power

Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	7.65	0.00582

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.10	6.41	-
2440MHz	Pass	1.10	7.08	-
2480MHz	Pass	1.10	7.65	-

Note: Average power is for reference only.

Test Configuration 2: Aurora chipset

Peak Power

Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	6.59	0.00456

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	0.90	3.98	30.00
2440MHz	Pass	0.90	6.59	30.00
2480MHz	Pass	0.90	5.32	30.00

Average Power

Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	6.41	0.00438

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	0.90	3.79	-
2440MHz	Pass	0.90	6.41	-
2480MHz	Pass	0.90	4.96	-

Note: Average power is for reference only.

3.4 Power Spectral Density

3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test Setup



3.4.4 Test Result of Power Spectral Density

Test Configuration 1: CSR chipset

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-8.16

Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	1.10	-9.64	8.00
2440MHz	Pass	1.10	-8.90	8.00
2480MHz	Pass	1.10	-8.16	8.00

BT-LE(1Mbps) **PSD**

2402MHz

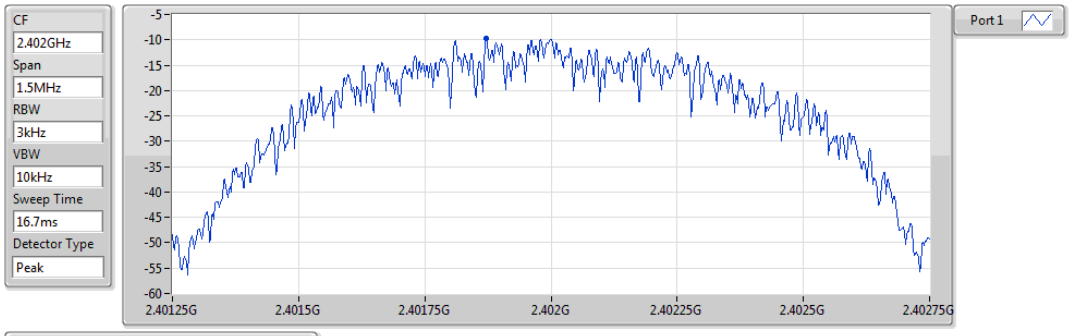

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.64	-9.64	-9.64

BT-LE(1Mbps) **PSD**

2440MHz

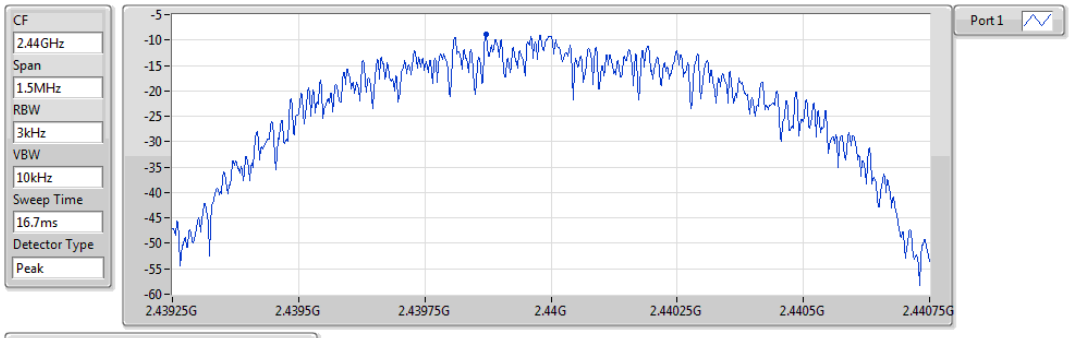

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.90	-8.90	-8.90

BT-LE(1Mbps) **PSD**

2480MHz

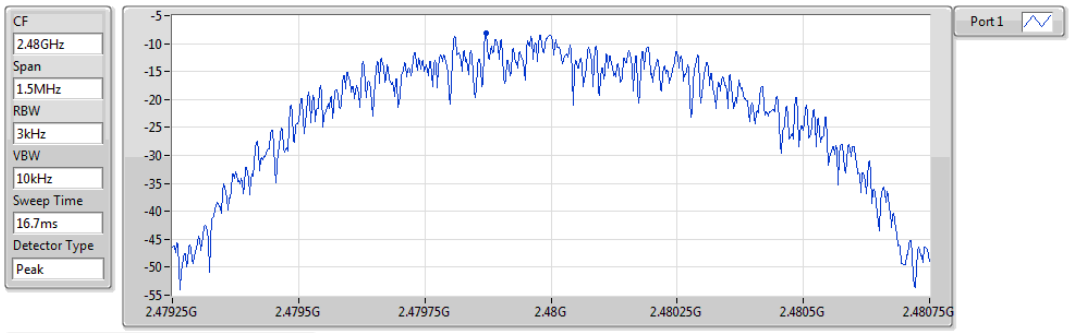

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.16	-8.16	-8.16

Test Configuration 2: Aurora chipset

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-11.83

Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	0.90	-14.37	8.00
2440MHz	Pass	0.90	-11.83	8.00
2480MHz	Pass	0.90	-13.28	8.00

BT-LE(1Mbps) **PSD**

2402MHz

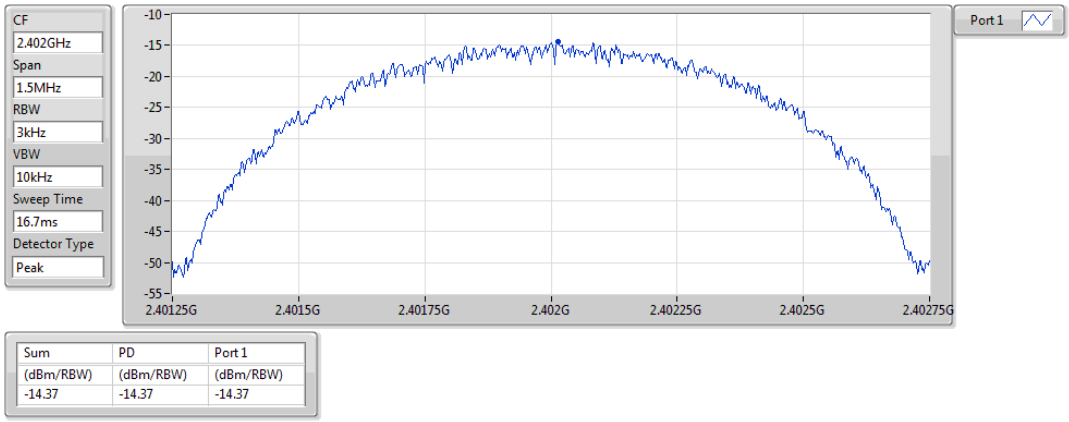

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-14.37	-14.37	-14.37

BT-LE(1Mbps) **PSD**

2440MHz

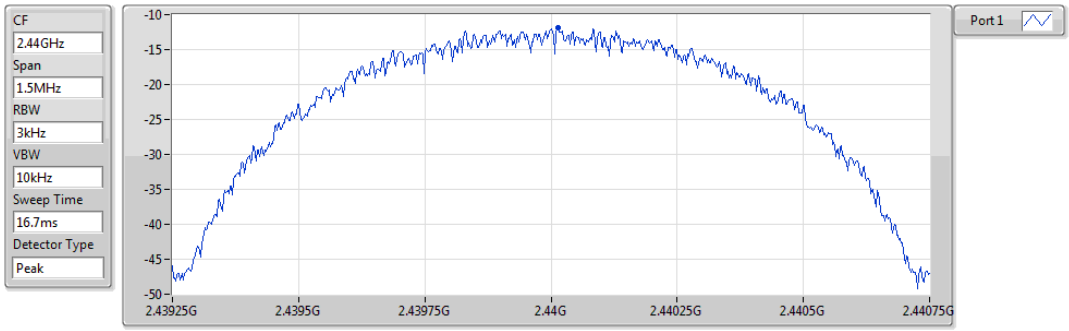

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-11.83	-11.83	-11.83

BT-LE(1Mbps) **PSD**

2480MHz

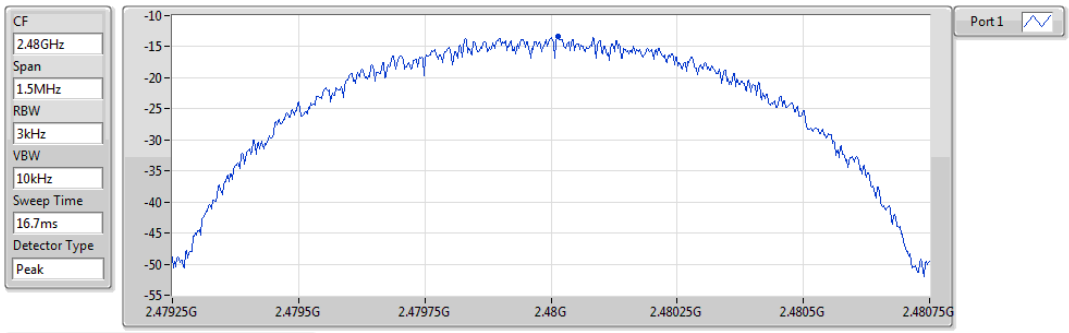

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-13.28	-13.28	-13.28

3.5 Emissions in Restricted Frequency Bands

3.5.1 Limit of Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	**Field Strength (uV/m)**	**Field Strength (dBuV/m)**	**Measure Distance (m)**
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit
Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.5.3 Test Setup

Radiated Emissions below 1 GHz

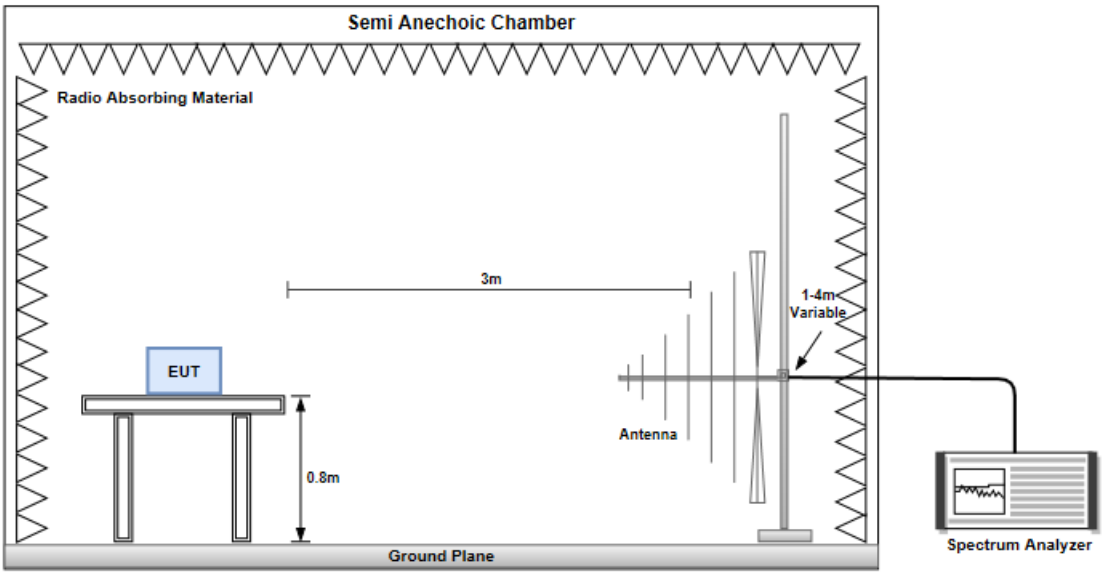

Radiated Emissions above 1 GHz

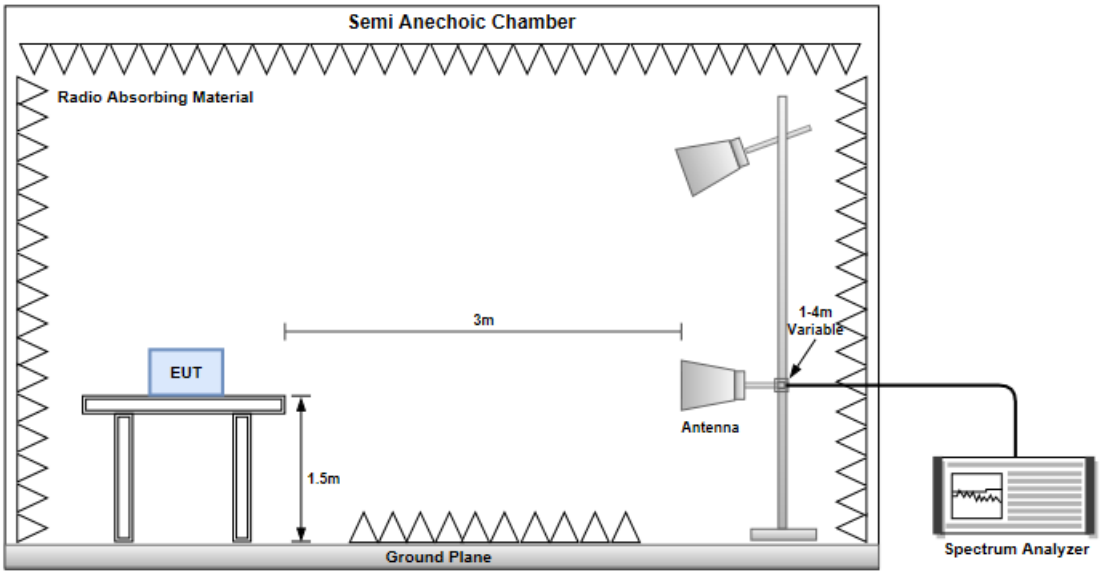

Test Configuration 1: CSR chipset

3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	GFSK	**Test Freq. (MHz)**	2480
Polarization	Horizontal		

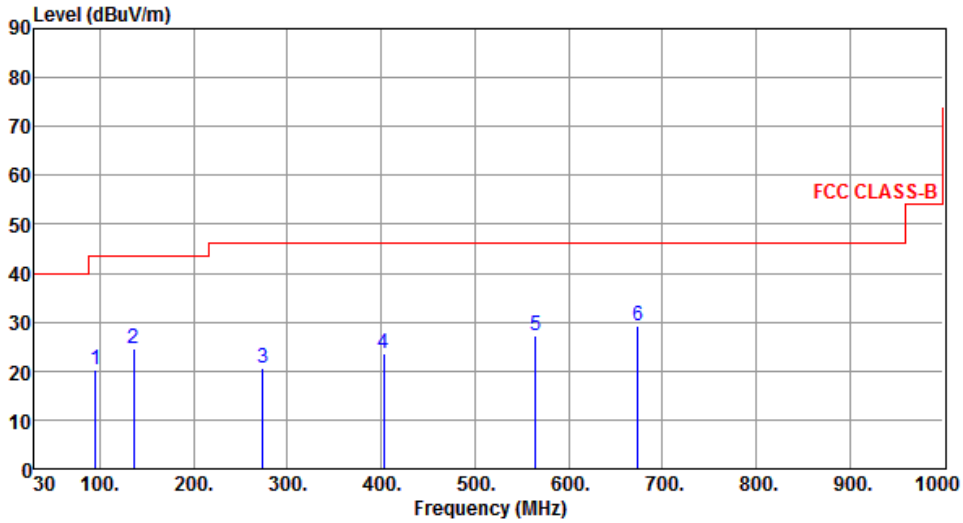

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	94.99	20.14	43.50	-23.36	34.50	-14.36	Peak	---	---
2	135.73	24.66	43.50	-18.84	34.32	-9.66	Peak	---	---
3	273.47	20.56	46.00	-25.44	29.80	-9.24	Peak	---	---
4	402.48	23.53	46.00	-22.47	29.29	-5.76	Peak	---	---
5	564.47	27.35	46.00	-18.65	29.51	-2.16	Peak	---	---
6	674.08	29.24	46.00	-16.76	29.23	0.01	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical		

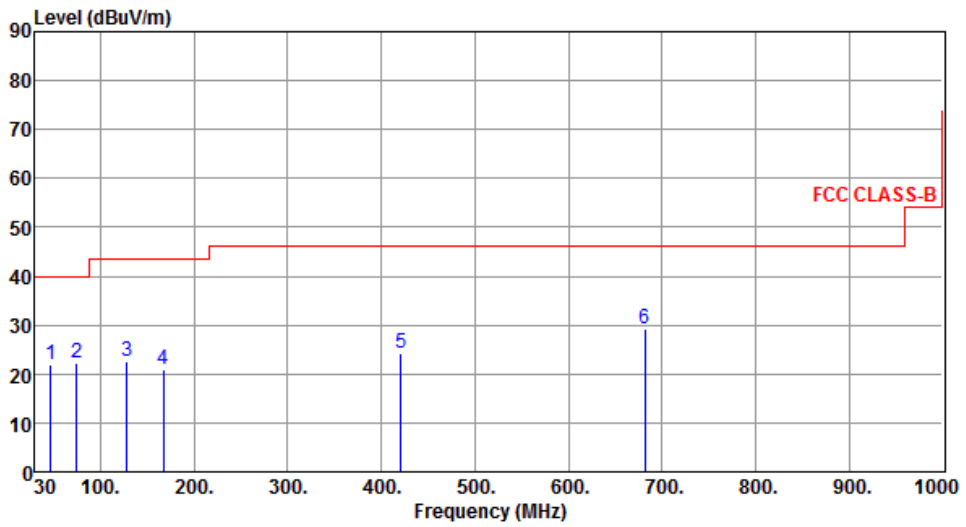

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	46.49	21.95	40.00	-18.05	30.60	-8.65	Peak	---	---
2	74.62	22.31	40.00	-17.69	34.23	-11.92	Peak	---	---
3	127.97	22.56	43.50	-20.94	32.94	-10.38	Peak	---	---
4	166.77	21.01	43.50	-22.49	30.07	-9.06	Peak	---	---
5	420.91	24.31	46.00	-21.69	29.53	-5.22	Peak	---	---
6	681.84	29.25	46.00	-16.75	29.06	0.19	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

Modulation	GFSK	**Test Freq. (MHz)**	2402
Polarization	Horizontal		

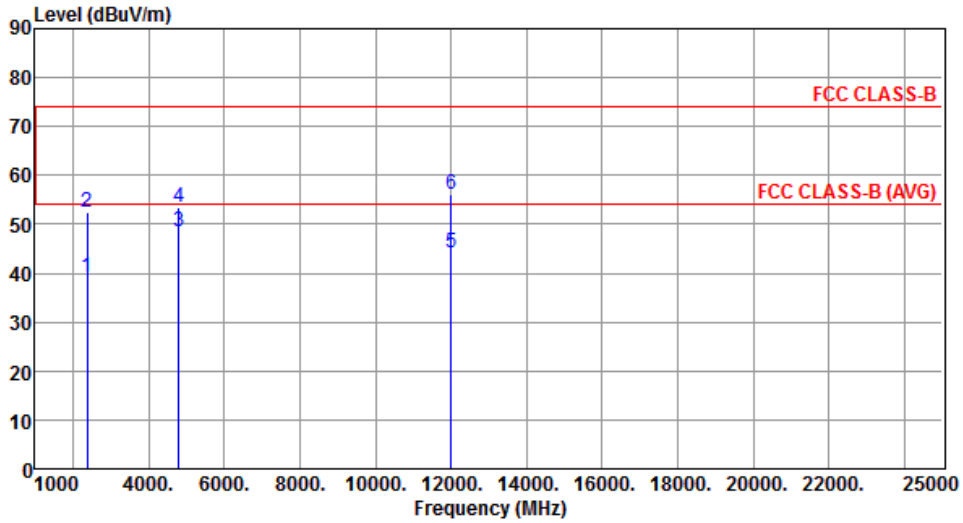

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.30	54.00	-14.70	40.26	-0.96	Average	122	235
2	2390.00	52.50	74.00	-21.50	53.46	-0.96	Peak	122	235
3	4804.00	48.37	54.00	-5.63	43.57	4.80	Average	269	138
4	4804.00	53.49	74.00	-20.51	48.69	4.80	Peak	269	138
5	12010.00	44.06	54.00	-9.94	29.26	14.80	Average	100	40
6	12010.00	56.16	74.00	-17.84	41.36	14.80	Peak	100	40

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical		

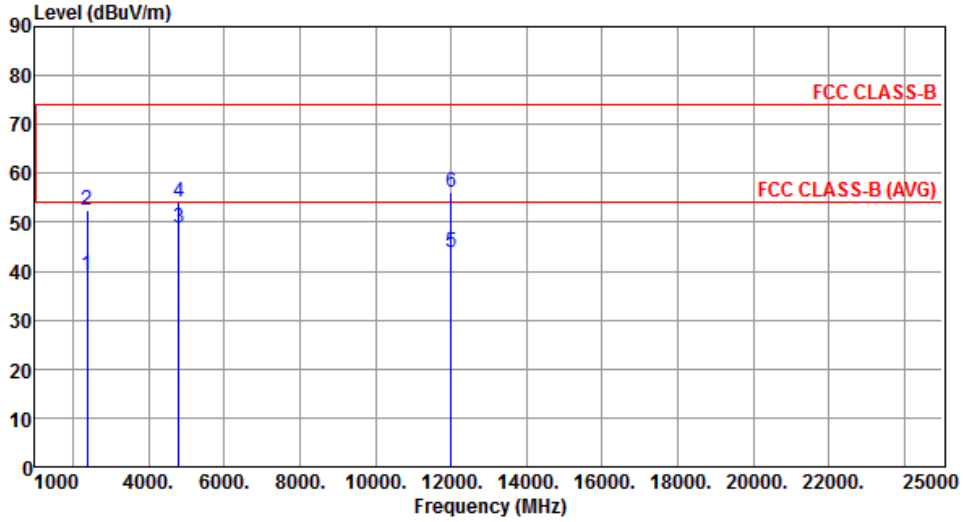

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.35	54.00	-14.65	40.31	-0.96	Average	288	162
2	2390.00	52.51	74.00	-21.49	53.47	-0.96	Peak	288	162
3	4804.00	48.89	54.00	-5.11	44.09	4.80	Average	248	162
4	4804.00	54.22	74.00	-19.78	49.42	4.80	Peak	248	162
5	12010.00	43.92	54.00	-10.08	29.12	14.80	Average	100	30
6	12010.00	56.03	74.00	-17.97	41.23	14.80	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2440
Polarization	Horizontal		

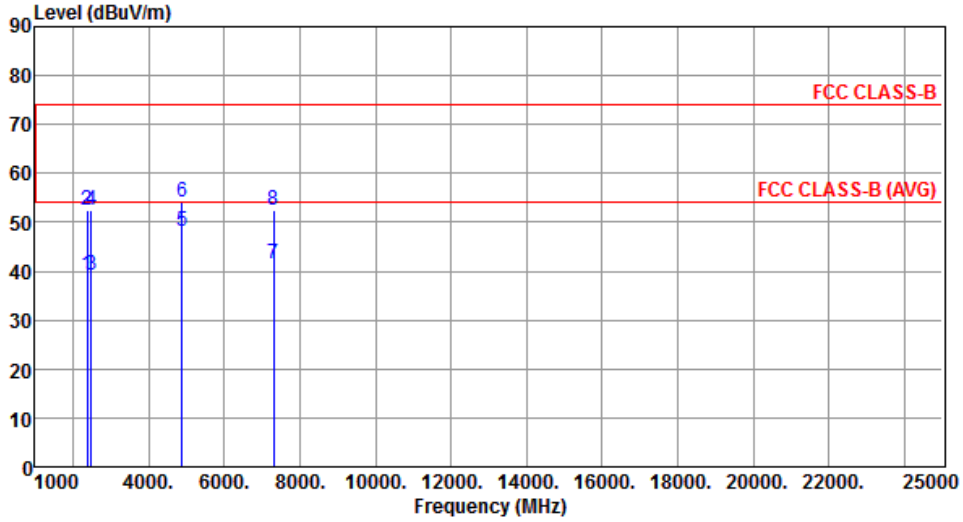

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.30	54.00	-14.70	40.26	-0.96	Average	122	240
2	2390.00	52.49	74.00	-21.51	53.45	-0.96	Peak	122	240
3	2483.50	39.17	54.00	-14.83	40.29	-1.12	Average	122	240
4	2483.50	52.50	74.00	-21.50	53.62	-1.12	Peak	122	240
5	4880.00	48.23	54.00	-5.77	43.32	4.91	Average	270	134
6	4880.00	54.09	74.00	-19.91	49.18	4.91	Peak	270	134
7	7320.00	41.47	54.00	-12.53	31.15	10.32	Average	100	113
8	7320.00	52.48	74.00	-21.52	42.16	10.32	Peak	100	113

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2440
Polarization	Vertical		

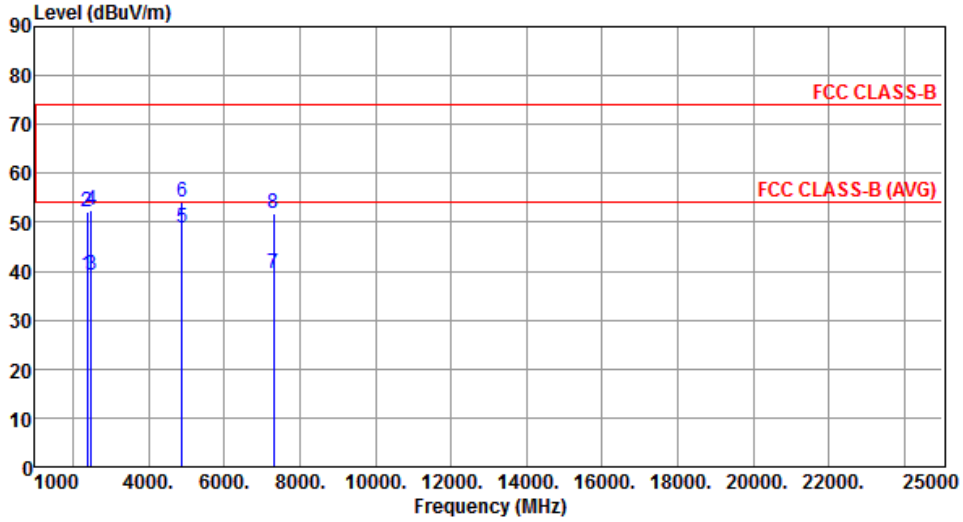

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.30	54.00	-14.70	40.26	-0.96	Average	284	129
2	2390.00	52.20	74.00	-21.80	53.16	-0.96	Peak	284	129
3	2483.50	39.13	54.00	-14.87	40.25	-1.12	Average	284	129
4	2483.50	52.44	74.00	-21.56	53.56	-1.12	Peak	284	129
5	4880.00	48.87	54.00	-5.13	43.96	4.91	Average	226	172
6	4880.00	54.03	74.00	-19.97	49.12	4.91	Peak	226	172
7	7320.00	39.57	54.00	-14.43	29.25	10.32	Average	100	127
8	7320.00	51.68	74.00	-22.32	41.36	10.32	Peak	100	127

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Horizontal		

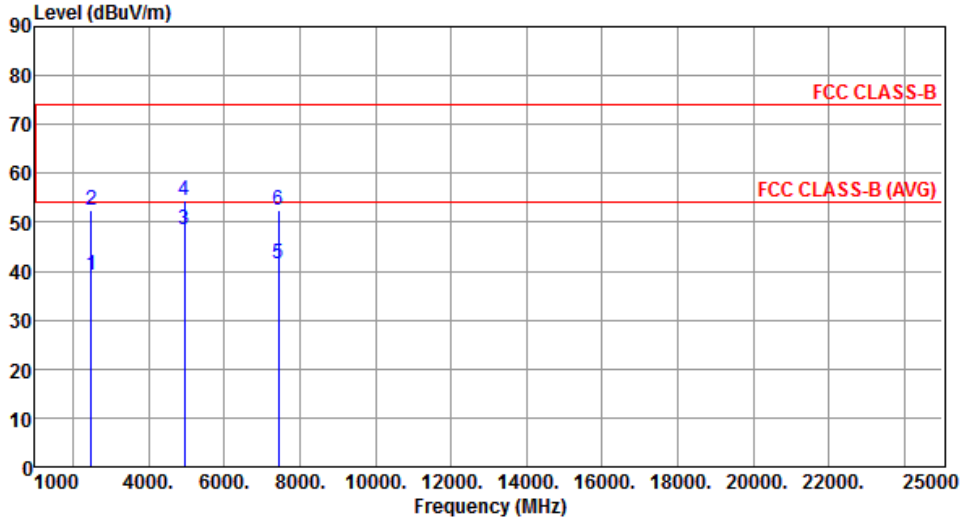

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.27	54.00	-14.73	40.39	-1.12	Average	145	236
2	2483.50	52.34	74.00	-21.66	53.46	-1.12	Peak	145	236
3	4960.00	48.57	54.00	-5.43	43.38	5.19	Average	268	135
4	4960.00	54.34	74.00	-19.66	49.15	5.19	Peak	268	135
5	7440.00	41.47	54.00	-12.53	31.12	10.35	Average	100	115
6	7440.00	52.58	74.00	-21.42	42.23	10.35	Peak	100	115

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical		

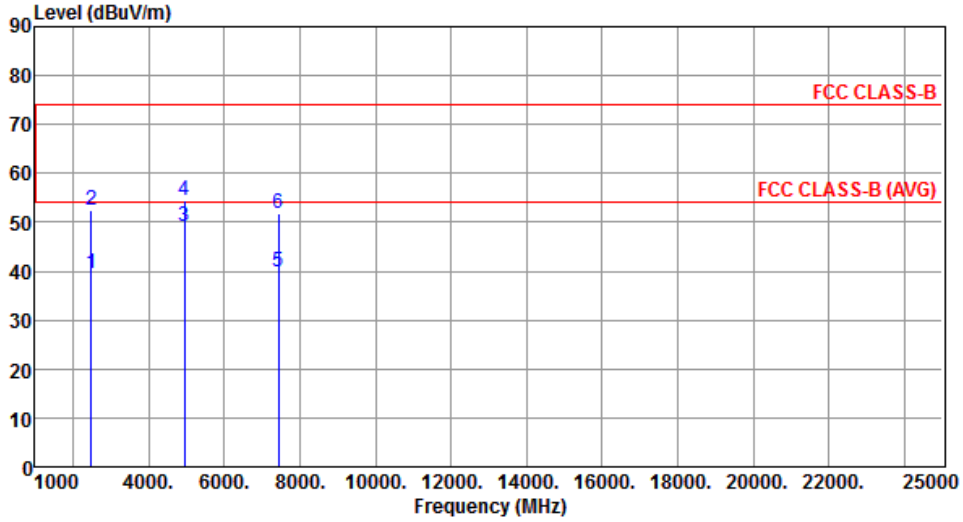

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	39.44	54.00	-14.56	40.56	-1.12	Average	285	165
2	2483.50	52.47	74.00	-21.53	53.59	-1.12	Peak	285	165
3	4960.00	49.15	54.00	-4.85	43.96	5.19	Average	248	178
4	4960.00	54.62	74.00	-19.38	49.43	5.19	Peak	248	178
5	7440.00	39.81	54.00	-14.19	29.46	10.35	Average	100	123
6	7440.00	51.76	74.00	-22.24	41.41	10.35	Peak	100	123

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Test Configuration 2: Aurora chipset

3.5.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	GFSK	**Test Freq. (MHz)**	2480
Polarization	Horizontal		

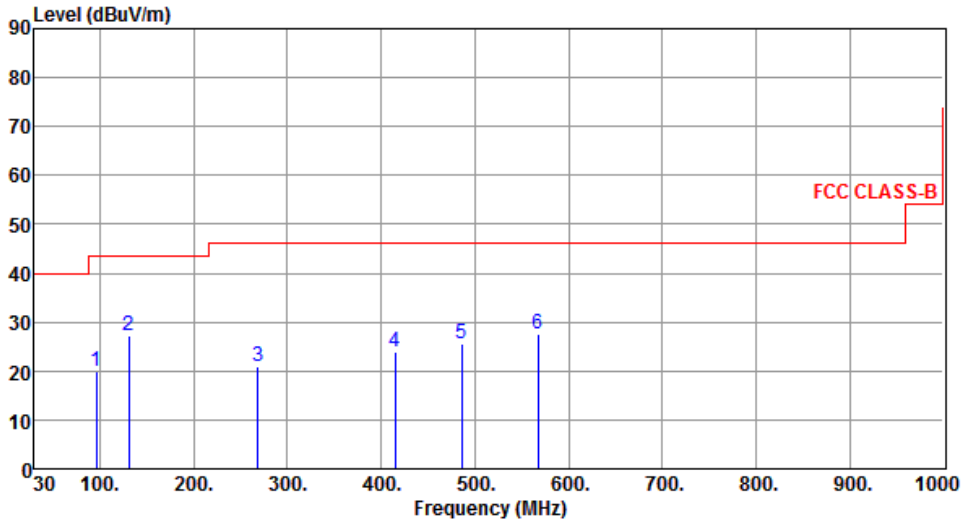

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	95.96	19.80	43.50	-23.70	34.09	-14.29	Peak	---	---
2	130.88	27.28	43.50	-16.22	37.36	-10.08	Peak	---	---
3	268.62	20.80	46.00	-25.20	30.28	-9.48	Peak	---	---
4	415.09	23.81	46.00	-22.19	29.27	-5.46	Peak	---	---
5	485.90	25.68	46.00	-20.32	29.32	-3.64	Peak	---	---
6	567.38	27.66	46.00	-18.34	29.74	-2.08	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical		

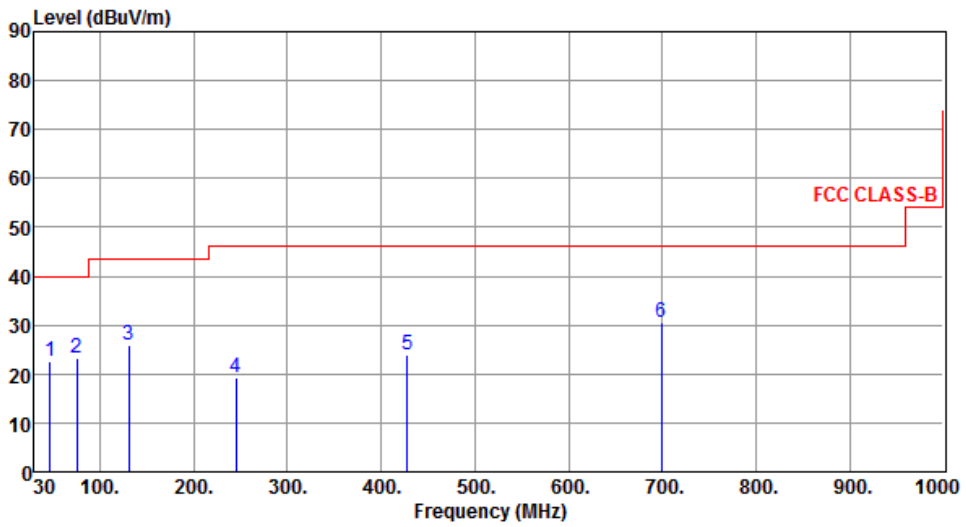

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	46.49	22.42	40.00	-17.58	31.07	-8.65	Peak	---	---
2	75.59	23.29	40.00	-16.71	35.43	-12.14	Peak	---	---
3	130.88	25.97	43.50	-17.53	36.05	-10.08	Peak	---	---
4	245.34	19.34	46.00	-26.66	29.51	-10.17	Peak	---	---
5	427.70	23.93	46.00	-22.07	28.94	-5.01	Peak	---	---
6	699.30	30.52	46.00	-15.48	29.91	0.61	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK

Modulation	GFSK	**Test Freq. (MHz)**	2402
Polarization	Horizontal		

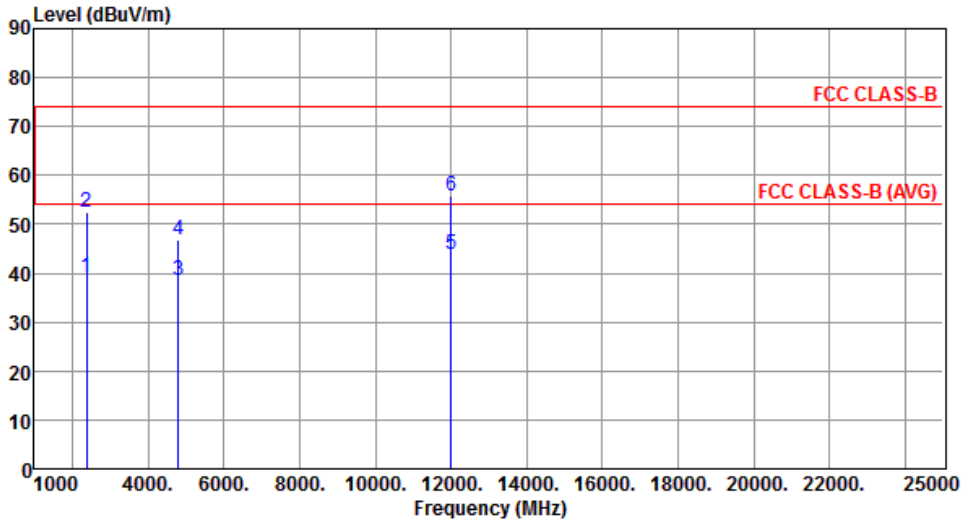

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.30	54.00	-14.70	40.26	-0.96	Average	129	169
2	2390.00	52.49	74.00	-21.51	53.45	-0.96	Peak	129	169
3	4804.00	38.37	54.00	-15.63	33.57	4.80	Average	100	223
4	4804.00	46.92	74.00	-27.08	42.12	4.80	Peak	100	223
5	12010.00	43.82	54.00	-10.18	29.02	14.80	Average	100	60
6	12010.00	55.80	74.00	-18.20	41.00	14.80	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical		

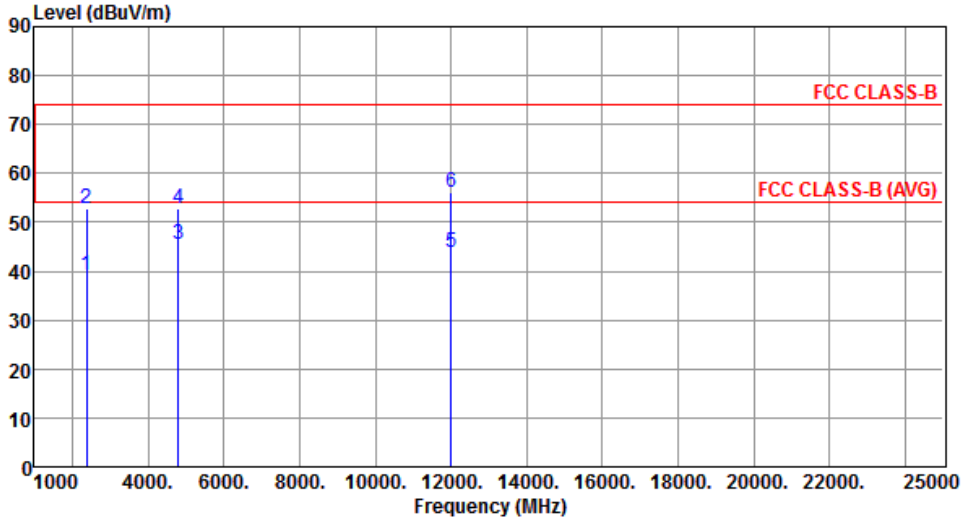

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.35	54.00	-14.65	40.31	-0.96	Average	116	255
2	2390.00	52.65	74.00	-21.35	53.61	-0.96	Peak	116	255
3	4804.00	45.63	54.00	-8.37	40.83	4.80	Average	125	171
4	4804.00	52.76	74.00	-21.24	47.96	4.80	Peak	125	171
5	12010.00	43.96	54.00	-10.04	29.16	14.80	Average	100	30
6	12010.00	56.05	74.00	-17.95	41.25	14.80	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2440
Polarization	Horizontal		

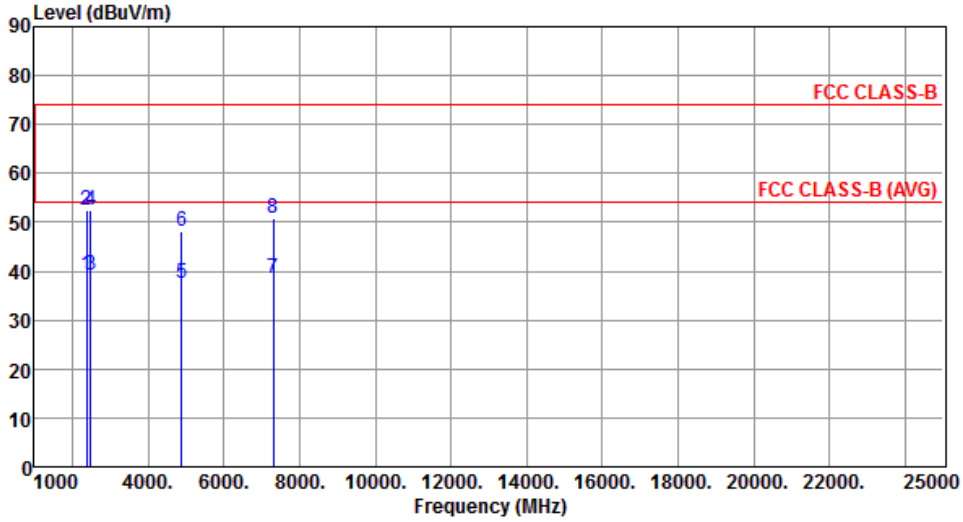

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.30	54.00	-14.70	40.26	-0.96	Average	100	173
2	2390.00	52.50	74.00	-21.50	53.46	-0.96	Peak	100	173
3	2483.50	39.20	54.00	-14.80	40.32	-1.12	Average	100	173
4	2483.50	52.50	74.00	-21.50	53.62	-1.12	Peak	100	173
5	4880.00	37.69	54.00	-16.31	32.78	4.91	Average	100	221
6	4880.00	48.10	74.00	-25.90	43.19	4.91	Peak	100	221
7	7320.00	38.44	54.00	-15.56	28.12	10.32	Average	100	30
8	7320.00	50.88	74.00	-23.12	40.56	10.32	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2440
Polarization	Vertical		

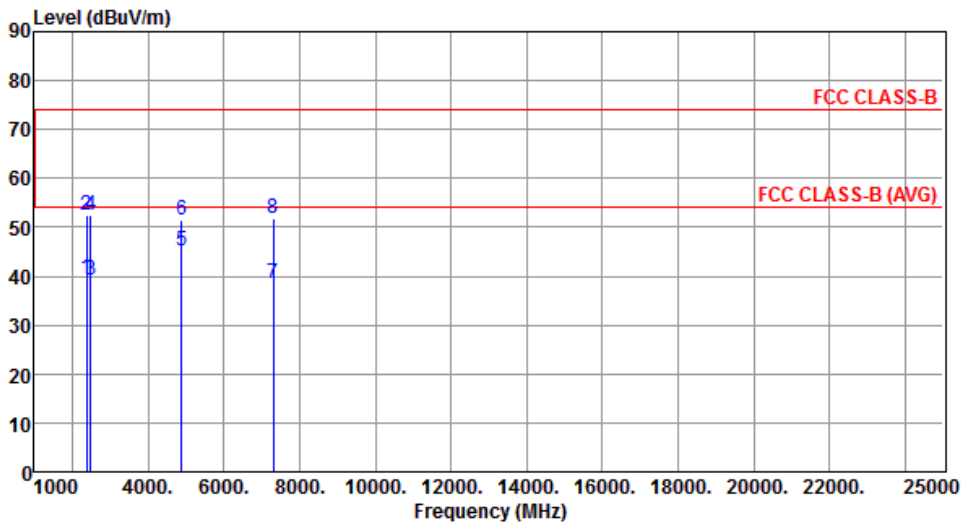

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	39.67	54.00	-14.33	40.63	-0.96	Average	114	261
2	2390.00	52.49	74.00	-21.51	53.45	-0.96	Peak	114	261
3	2483.50	39.12	54.00	-14.88	40.24	-1.12	Average	114	261
4	2483.50	52.49	74.00	-21.51	53.61	-1.12	Peak	114	261
5	4880.00	45.09	54.00	-8.91	40.18	4.91	Average	133	182
6	4880.00	51.55	74.00	-22.45	46.64	4.91	Peak	133	182
7	7320.00	38.60	54.00	-15.40	28.28	10.32	Average	100	164
8	7320.00	51.73	74.00	-22.27	41.41	10.32	Peak	100	164

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Horizontal		

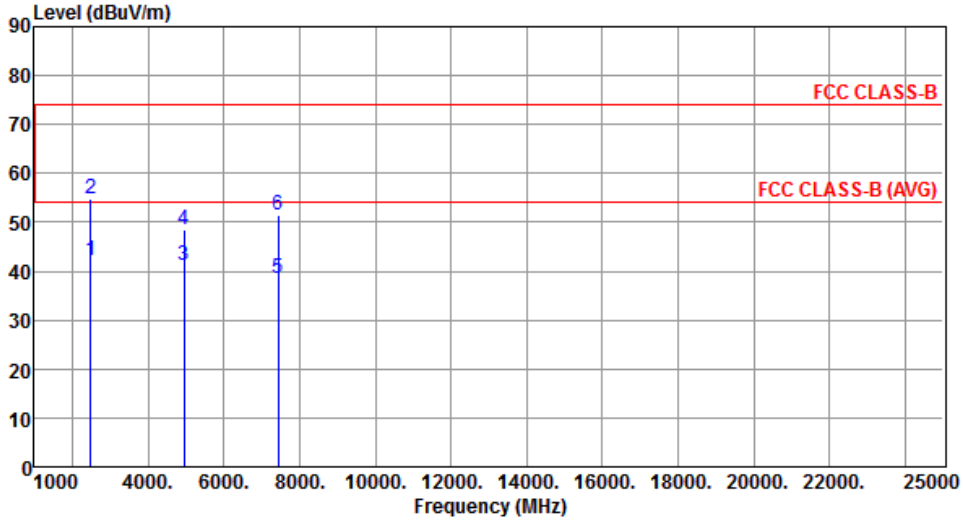

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	42.34	54.00	-11.66	43.46	-1.12	Average	100	173
2	2483.50	54.91	74.00	-19.09	56.03	-1.12	Peak	100	173
3	4960.00	41.04	54.00	-12.96	35.85	5.19	Average	100	222
4	4960.00	48.64	74.00	-25.36	43.45	5.19	Peak	100	222
5	7440.00	38.66	54.00	-15.34	28.31	10.35	Average	100	50
6	7440.00	51.58	74.00	-22.42	41.23	10.35	Peak	100	50

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical		

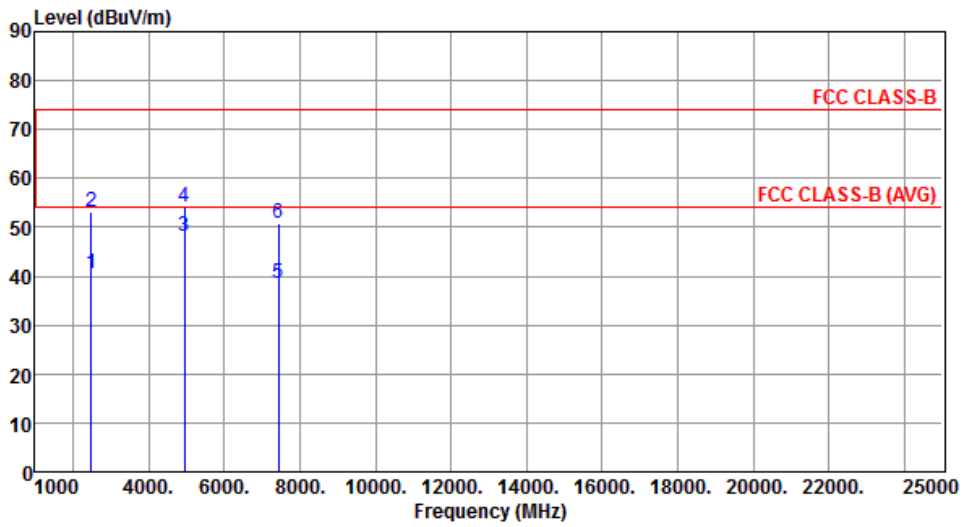

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	40.44	54.00	-13.56	41.56	-1.12	Average	115	260
2	2483.50	53.14	74.00	-20.86	54.26	-1.12	Peak	115	260
3	4960.00	48.12	54.00	-5.88	42.93	5.19	Average	117	165
4	4960.00	54.08	74.00	-19.92	48.89	5.19	Peak	117	165
5	7440.00	38.60	54.00	-15.40	28.25	10.35	Average	100	40
6	7440.00	50.91	74.00	-23.09	40.56	10.35	Peak	100	40

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.6 Emissions in non-restricted Frequency Bands

3.6.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.6.2 Test Procedures

Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

3.6.3 Test Setup



3.6.4 Test Result of Emissions in non-restricted Frequency Bands

Test Configuration 1: CSR chipset

BT-LE(1Mbps) **CSE NdB**

2402MHz

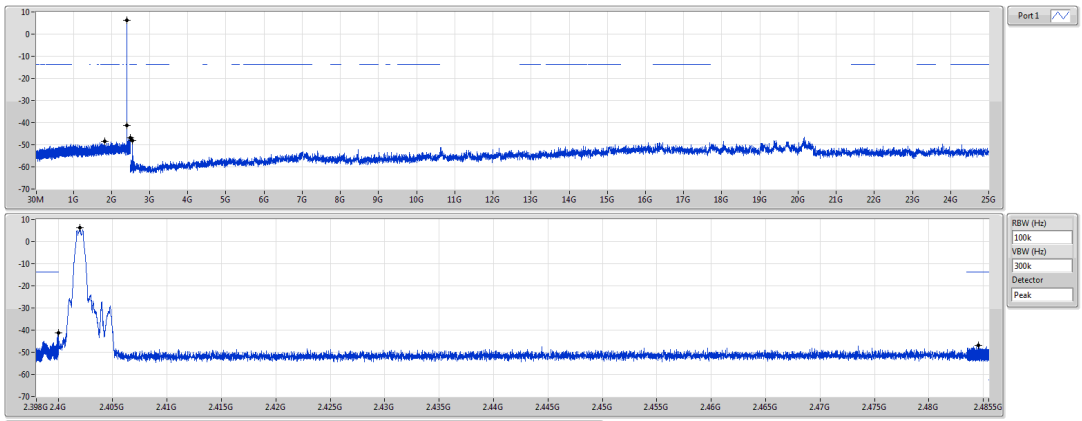

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.40199G	6.13	-13.87	1.81429G	-48.53	2.4G	-41.23	2.48457G	-46.97	2.55586G	-48.23	1

BT-LE(1Mbps) **CSE NdB**

2440MHz

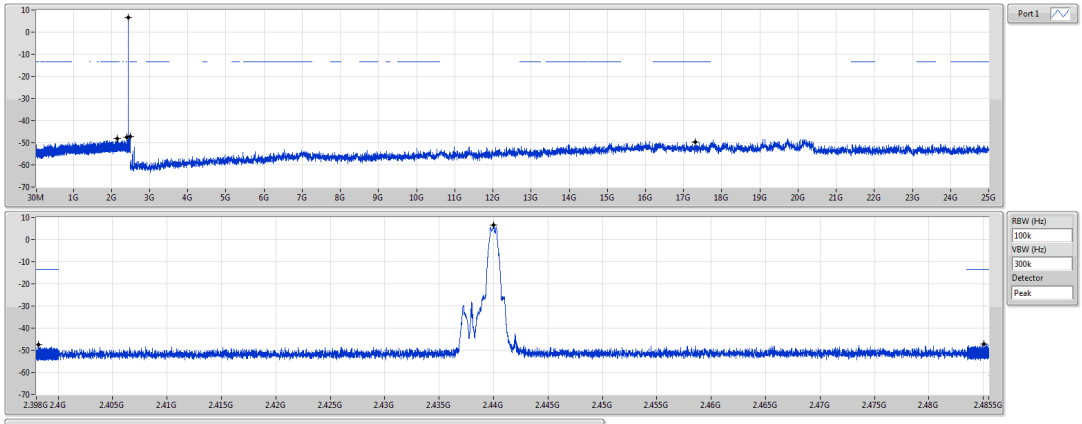

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44G	6.62	-13.38	2.14196G	-48.10	2.39819G	-47.40	2.48505G	-47.04	17.3113G	-49.60	1

BT-LE(1Mbps) **CSE NdB**

2480MHz

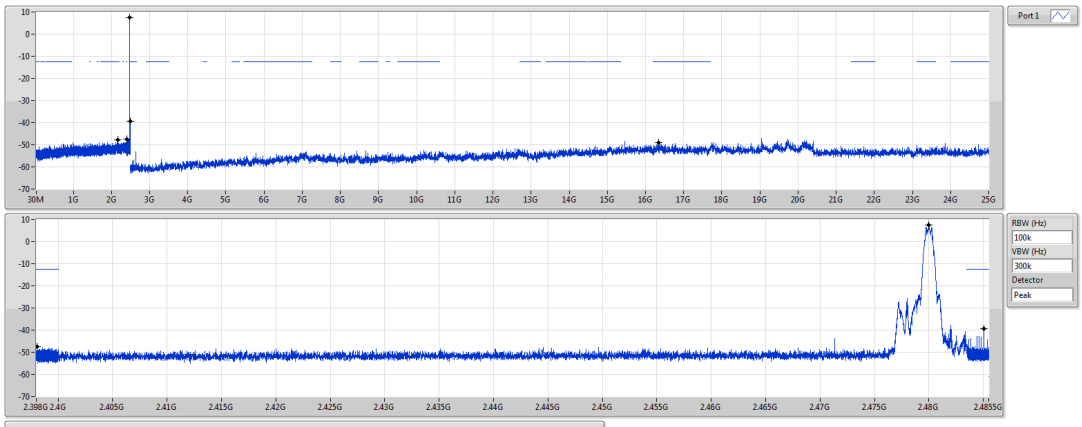

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.48G	7.35	-12.65	2.16653G	-47.87	2.39809G	-47.46	2.48505G	-39.39	16.34599G	-49.20	1

Test Configuration 2: Aurora chipset

BT-LE(1Mbps) **CSE NdB**

2402MHz

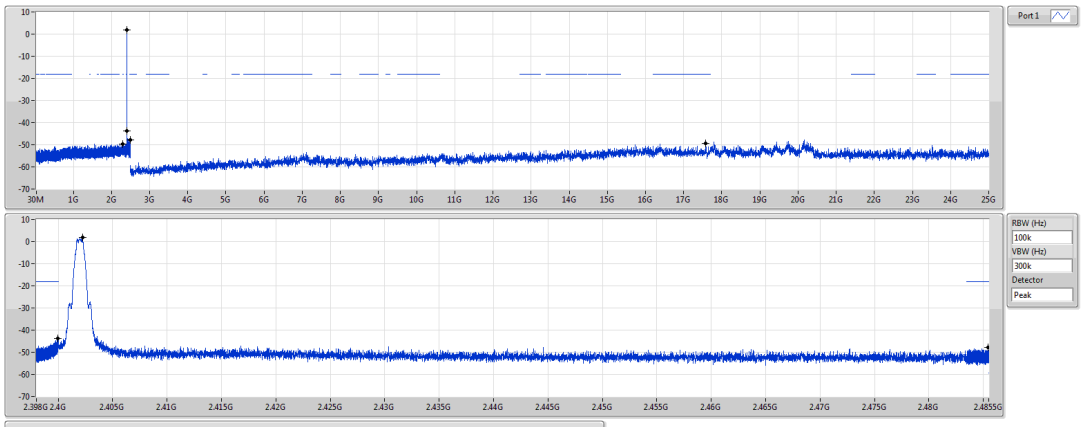

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.40223G	1.96	-18.04	2.3015G	-49.66	2.39998G	-43.61	2.48546G	-47.91	17.57303G	-49.23	1

BT-LE(1Mbps) **CSE NdB**

2440MHz

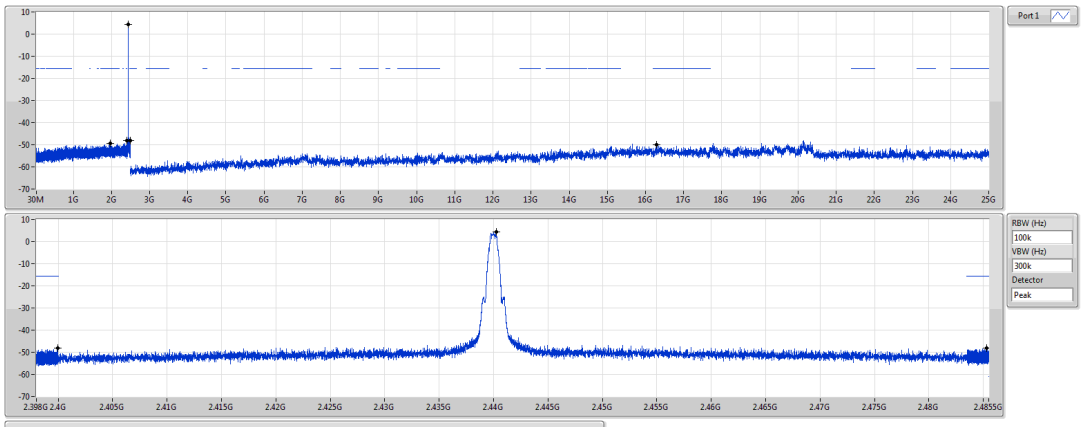

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.44025G	4.46	-15.54	1.96406G	-49.24	2.39994G	-48.09	2.48534G	-48.04	16.29252G	-50.14	1

BT-LE(1Mbps) **CSE NdB**

2480MHz

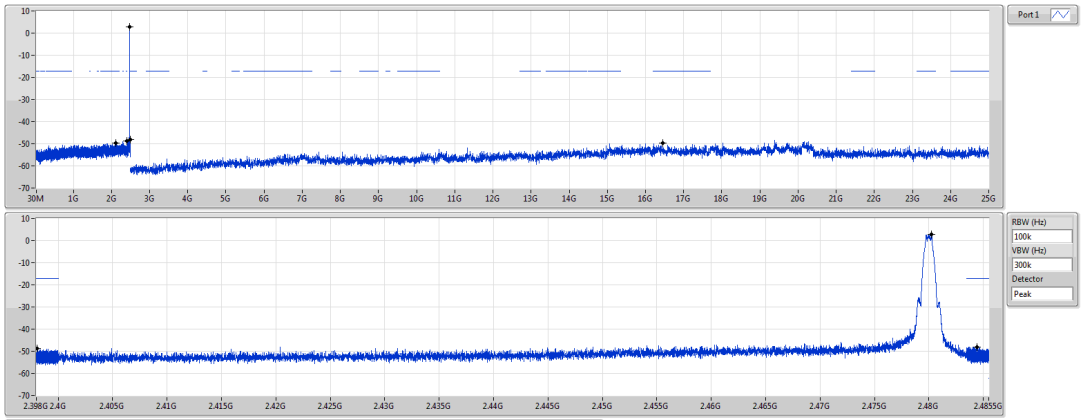

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.48023G	2.75	-17.25	2.10792G	-49.75	2.39808G	-48.69	2.48439G	-48.00	16.4473G	-49.59	1

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website http://www.icertifi.com.tw.

Linkou	**Kwei Shan**	**Kwei Shan Site II**
Tel: 886-2-2601-1640	Tel: 886-3-271-8666	Tel: 886-3-271-8640
No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C.	No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.	No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666
Fax: 886-3-318-0155
Email: ICC_Service@icertifi.com.tw

═END═