



Test report no. : 80946/2

Item tested : UW-CM-08-24-XT-11

**Type of equipment : IEEE 802.15.4, 2.4GHz
Evaluation Module**

FCC ID : U2VCM-08-24-XT-11

Client : UBIWAVE

FCC Part 15.247
Digital Transmission System

13 March 2007

Authorized by :



Frode Sveinsen
Technical Verificator

CONTENTS

1	GENERAL INFORMATION	3
1.1	Testhouse Info	3
1.2	Client Information	3
1.3	Manufacturer	3
2	Test Information	4
2.1	Test Item	4
2.2	Test Environment	5
2.2.1	Normal test condition	5
2.3	Test Period	5
3	TEST REPORT SUMMARY	6
3.1	General	6
3.2	Test Summary	7
3.3	Description of modification for Modification Filing	7
3.4	Comments	7
3.5	Family List Rationale	7
4	TEST RESULTS	8
4.1	Power-line Conducted Emissions	8
4.2	Minimum 6 dB Bandwidth	9
4.3	Peak Power Output	10
4.4	Spurious Emissions (Radiated)	13
4.5	Power Spectral Density (PSD)	26
5	LIST OF TEST EQUIPMENT	27
6	BLOCK DIAGRAM	28
6.1	System set up	28
6.2	Powerline Conducted Emission	28
6.3	Test Site Radiated Emission	29

1 GENERAL INFORMATION

1.1 Testhouse Info

Name : Nemko Comlab
Address : Gåsevikveien 8, Box 96
N-2027 Kjeller, Norway
Telephone : +47 64 84 57 00
Fax : +47 64 84 57 05
E-mail: comlab@nemko.com
FCC test firm registration # : 994405
IC OATS registration # : 4443
Total Number of Pages: 29

1.2 Client Information

Name : Ubiwave
Address : Lindestraat 19, BE-9240 ZELE, Belgium
Telephone : +32 52 45 87 23
Fax : --

Contact:

Name : Wim De Kimpe
Telephone : +32 52 45 87 23
E-mail : wim.de.kimpe@ubiwave.com

1.3 Manufacturer

Name : Ubiwave
Address : Lindestraat 19, BE-9240 ZELE, Belgium
Telephone : +32 52 45 87 23

2 Test Information

2.1 Test Item

Name :	UW-CM-08-24-XT-11
FCC ID :	U2VCM-08-24-XT-11
Model/version :	UW-CM-08-24-XT-11
Serial number :	2
Hardware identity and/or version:	1.00 200647
Software identity and/or version :	UW-CM-08 basic test software
Frequency Range :	2405 – 2480 MHz
Tunable Bands :	1
Number of Channels :	16 ¹
Operating Modes :	TX & RX
Type of Modulation :	O-QPSK
Emissions Designator :	G1D
User Frequency Adjustment :	None, Software controlled
Rated Output Power :	70 mW
Type of Power Supply :	DC 2.6 – 3.6V
Antenna Connector :	Only soldering contacts on PCB
Antenna Diversity Supported :	None

1) 16 channels in use.

Theory of Operation

The UW-CM-08-24-XT-11 transceiver module is an IEEE® 802.15.4-compliant surface-mounted device that operates in the 2.4 GHz ISM frequency band. This transceiver module specially designed for the Zigbee protocol stack for wireless star and mesh networks.

Description of Test Item

The UW-CM-08-24-XT-11 is a complete shielded module with dimension of 16.5 x 29.2x3.5 mm.

2.2 Test Environment

2.2.1 Normal test condition

Temperature:	20 - 22 °C
Relative humidity:	20 - 40 %
Normal test voltage:	2.7 – 3.6 V DC

The values are the limit registered during the test period.

2.3 Test Period

Item received date:	2007-02-07
Test period :	from 2007-02-07

3 TEST REPORT SUMMARY

3.1 General

Manufacturer: Ubiwave
Model No.: UW-CM-08-24-XT-11
Serial No.: 2

All measurements are traceable to national standards.

The tests were conducted for the purpose of demonstrating compliance with FCC CFR 47 Part 15.247 and Industry Canada RSS-210 Issue 6.

Radiated tests were conducted in accordance with ANSI C63.4-2003. The radiated tests were made in a semi-anechoic chamber at measuring distances of 3 and 10 meters.


<input checked="" type="checkbox"/> New Submission	<input checked="" type="checkbox"/> Production Unit
<input type="checkbox"/> Class II Permissive Change	<input type="checkbox"/> Pre-production Unit
DTS Equipment Code	<input type="checkbox"/> Family Listing

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

Deviations from, additions to, or exclusions from the test specifications are described in "Summary of Test Data".



TEST REPORT #: 80946/2

TESTED BY: 
G. Suhanthakumar, Test engineer

DATE: 13.03.2007

Nemko Comlab authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any reproduction of parts of this report requires approval in writing from Nemko Comlab.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Comlab accepts no responsibility for damages suffered by any third party as a result of decisions made or actions based on this report.

This test report applies only to the items and configurations tested.

3.2 Test Summary

Name of test	Paragraph #	Result
Supply voltage variations	15.31 (e)	Complies ²
Number of operating frequencies	15.31 (m)	Complies
Power-line Conducted Emissions (Receiver)	15.107(a)	ref. 15.207(a)
Radiated Emissions limits (receiver)	15.109(a)	ref. 15.209(a)
Antenna requirement	15.203	Complies ¹
Radiated emissions limits for restricted bands	15.205(a)	Complies
Power Line Conducted Emissions	15.207(a)	Ref. FCC ID: U2VCM-08-24-CP-11
Radiated emission limits	15.209(a)	Complies
Bandwidth	15.247(a)(2)	Ref. FCC ID: U2VCM-08-24-CP-11
Peak Power Output	15.247(b)(3)	Complies
Power Spectral Density	15.247(d)	Ref. FCC ID: U2VCM-08-24-CP-11
Out-of-band emissions (Antenna Conducted)	15.247(c)	Ref. FCC ID: U2VCM-08-24-CP-11
Out-of-band emissions (Radiated)	15.247(c)	Complies
Upper band edge radiated emission	15.247(c)	Complies

¹ An external antenna is soldered to the PCB.

² The manufacturer specified voltage range is 2.7 – 3.6 V DC

3.3 Description of modification for Modification Filing

Not applicable.

3.4 Comments

The channels are selected with a laptop PC connected to the EUT. The laptop is only used for selection of channels. The measurements are performed at channels near top Ch 26, near middle Ch 18 and near bottom Ch 11. And the output level is set to maximum in the software. The EUT complies at these channels.

An external laboratory DC power supply is used for measurements. Model type Oltronix B32-10R (belongs to Nemko testlab)

The measurements were done with external DC supply of 3.4V. It was checked that power variations between 2.7 – 3.6 V DC did not have any influence on the measurements. The manufacturer specified voltage range is 2.7 – 3.6 V DC.

All ports were populated during spurious emission measurements.

An external antenna is soldered to the PCB. The antenna used for these tests is Antenova type Titanis (quarter-wave monopole whip antenna)

3.5 Family List Rationale

The equipment covered by this test report (**FCC ID: U2VCM-08-24-XT-11**) is identical to the previously approved **FCC ID: U2VCM-08-24-CP-11**, except for the antenna.

4 TEST RESULTS

4.1 Power-line Conducted Emissions

Para. No.: 15.207 (a)

Test Performed By: G.Suwanthakumar

Date of Test: 05.12.2006

Measurement procedure: ANSI C63.4-2003 using 50 μ H/50 ohms LISN.

Test Results: Complies.

Measurement Data:

Please the test report for **FCC ID: U2VCM-08-24-CP-11** for conducted measurements.

4.2 Minimum 6 dB Bandwidth

Para. No.: 15.247 (a)(2)

Test Performed By: G.Suwanthakumar

Date of Test: 04.12.2006

Test Results: Complies

Measurement Data:

Please the test report for **FCC ID: U2VCM-08-24-CP-11** for conducted measurements.

Requirements:

For Digital Transmission Systems in the 2400-2483.5 MHz band the minimum 6 dB bandwidth shall be at least 500 KHz.

4.3 Peak Power Output

Para. No.: 15.247 (b)

Test Performed By: G.Suwanthakumar

Date of Test: 07.02.2007

Test Results: Complies

Measurement Data:

Maximum field strength in dB μ V/m

RF channel	Ch11	Ch18	Ch26
Measured value (dB μ V/m)	109.2	116.1	102.2
Eirp (mW) Calculated	24.95	122.23	4.98
Conducted power (mW)	64.6	71.1	23.3
Antenna gain (dBi)	-4.1	2.4	-6.7

Please the test report for FCC ID: U2VCM-08-24-CP-11 for conducted measurements.

$E_{irp} = (FS \times D)^2 / (30 \times G)$ mW , FS in mV/m , D = 3 m

The antenna used here is from Antenova type Titanis (quarter-wave monopole whip antenna).

Antenna gain = $10 \times \log(EIRP / \text{Conducted power})$ dBi

Detachable antenna?

☐ Yes ☒ No

If detachable, is the antenna connector non-standard?

☒ Yes ☐ No


The EUT has only soldering contacts on the PCB for external antenna.

Requirements:

The maximum peak output power shall not exceed the following limits:


For Digital Transmission Systems in the 2400 - 2483.5 MHz band: 1 Watt

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced below the stated value above by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

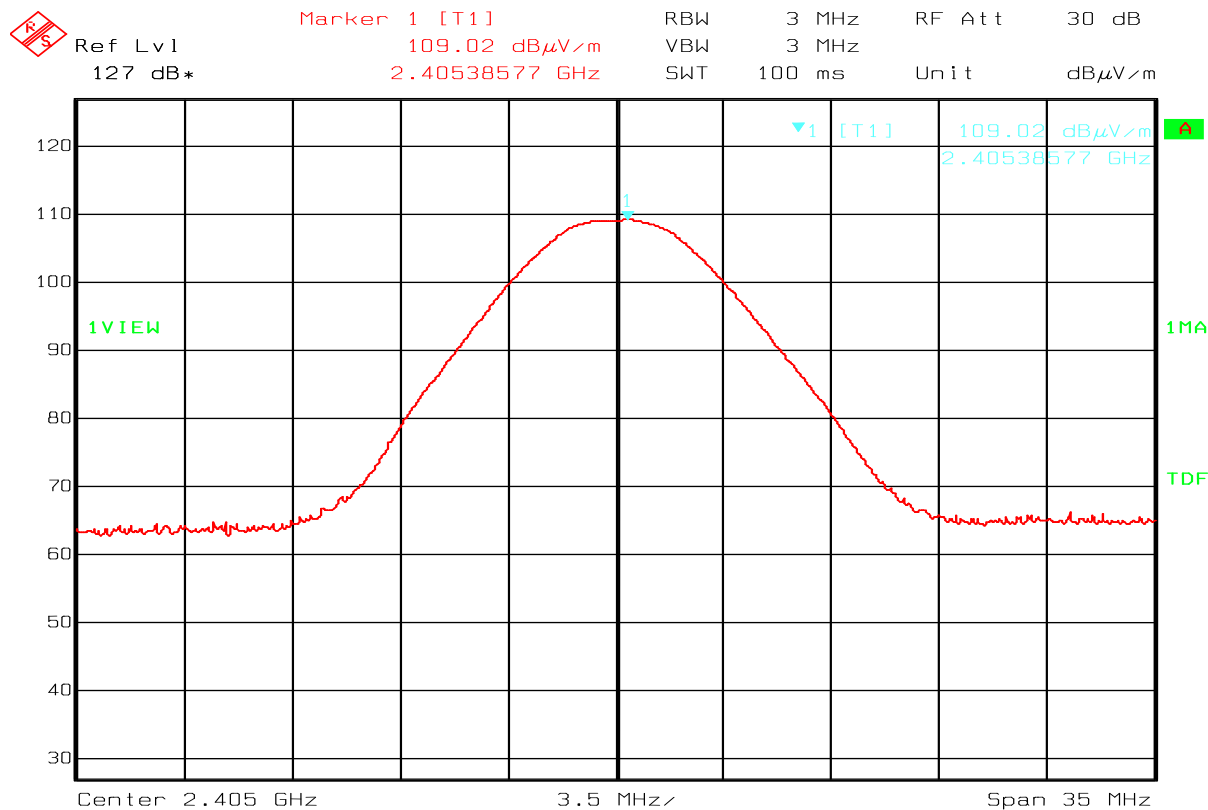


Date: 7.FEB.2007 9:59:45

Ch11 – Maximum field strength with external antenna

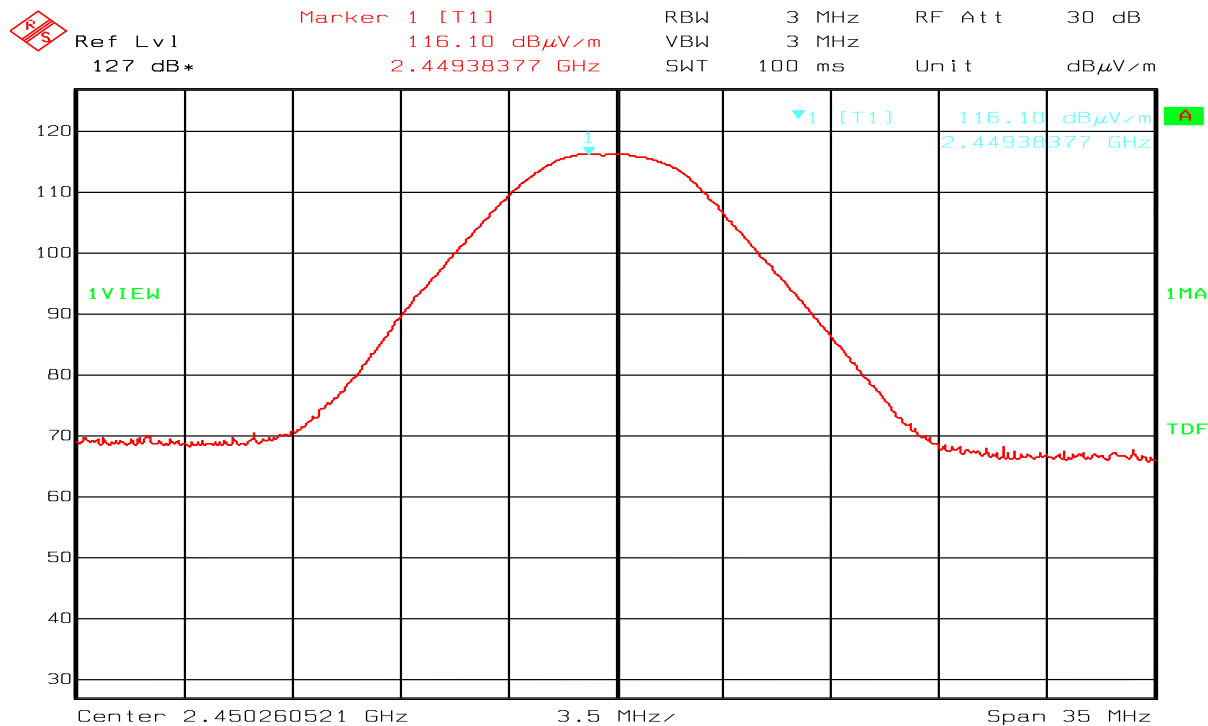

Date: 7.FEB.2007 9:44:17

Ch18 – Maximum field strength with external antenna

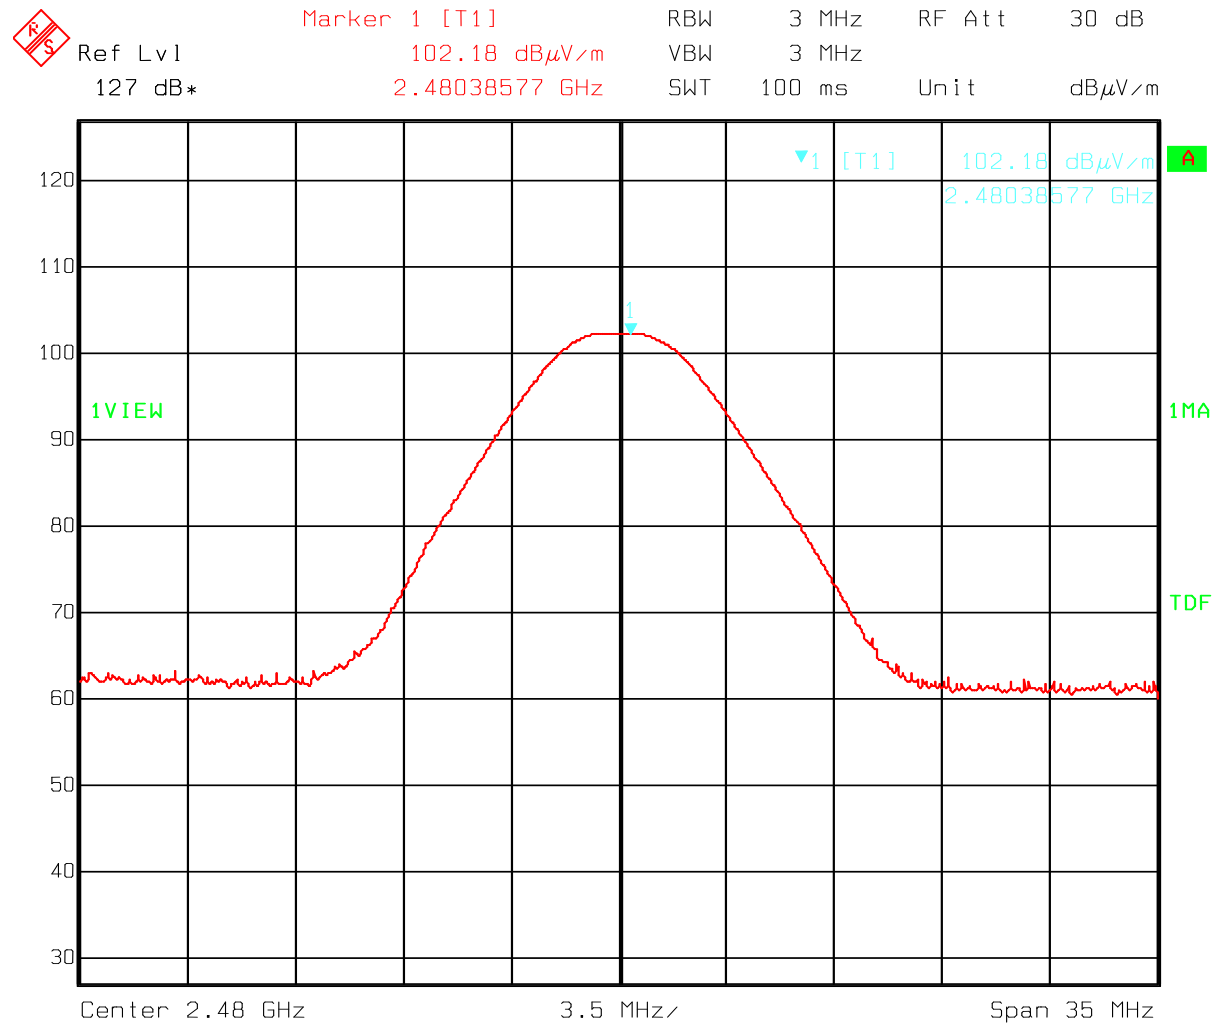

Date: 7.FEB.2007 9:49:22

Ch26 – Maximum field strength with external antenna

4.4 Spurious Emissions (Radiated)

Para. No.: 15.247 (c)

Test Performed By: G.Suwanthakumar

Date of Test: 07.02.2007

Test Results: Complies

Measurement Data:

Lower Band-edge radiated measurements

Frequency	Power below nearest channel, dB	Limit	Margin
GHz	RF ch 11 DSS	dB	dB
2.4	39	-20	19

Band-edge field strength 2.4 GHz.

Marker Delta 100kHz RBW: 39dB

Peak Field Strength $108.5 - 39 = 69.5$ dB μ V/m

Average Field Strength: 69.5 dB μ V/m – 20.0 dB = 49.5 dB μ V/m

Upper Band-edge radiated measurements

Frequency	Power below nearest channel, dB	Limit	Margin
GHz	RF ch 26 DSS	dB	dB
2.4835	31.8	-20	11.8

Band-edge field strength 2.4835 GHz.


Marker Delta 100kHz RBW: 31.8dB


Peak Field Strength $101.7 - 31.8 = 69.9$ dB μ V/m

Average Field Strength: 69.9 dB μ V/m – 20.0 dB = 49.9 dB μ V/m


RF conducted emissions to 25 GHz

Please refer the test report for FCC ID: U2VCM-08-24-CP-11 for conducted measurements.

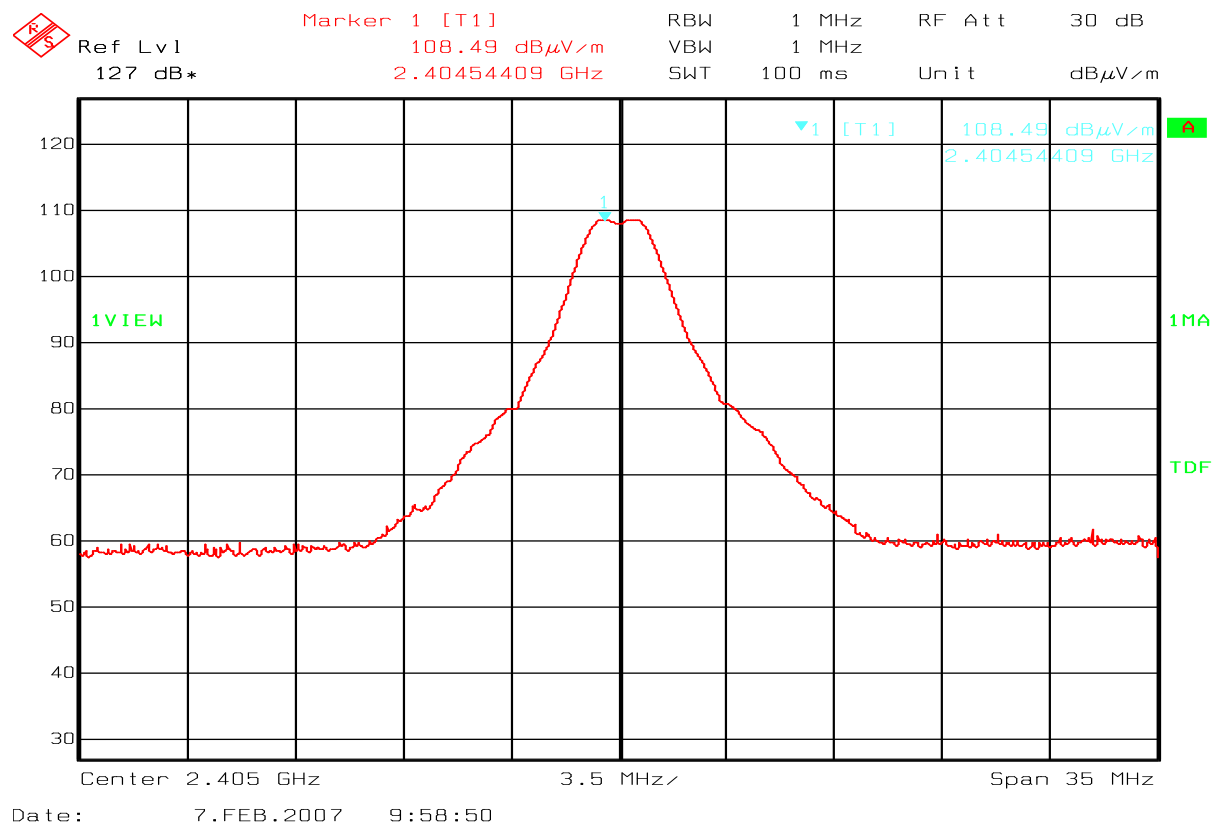

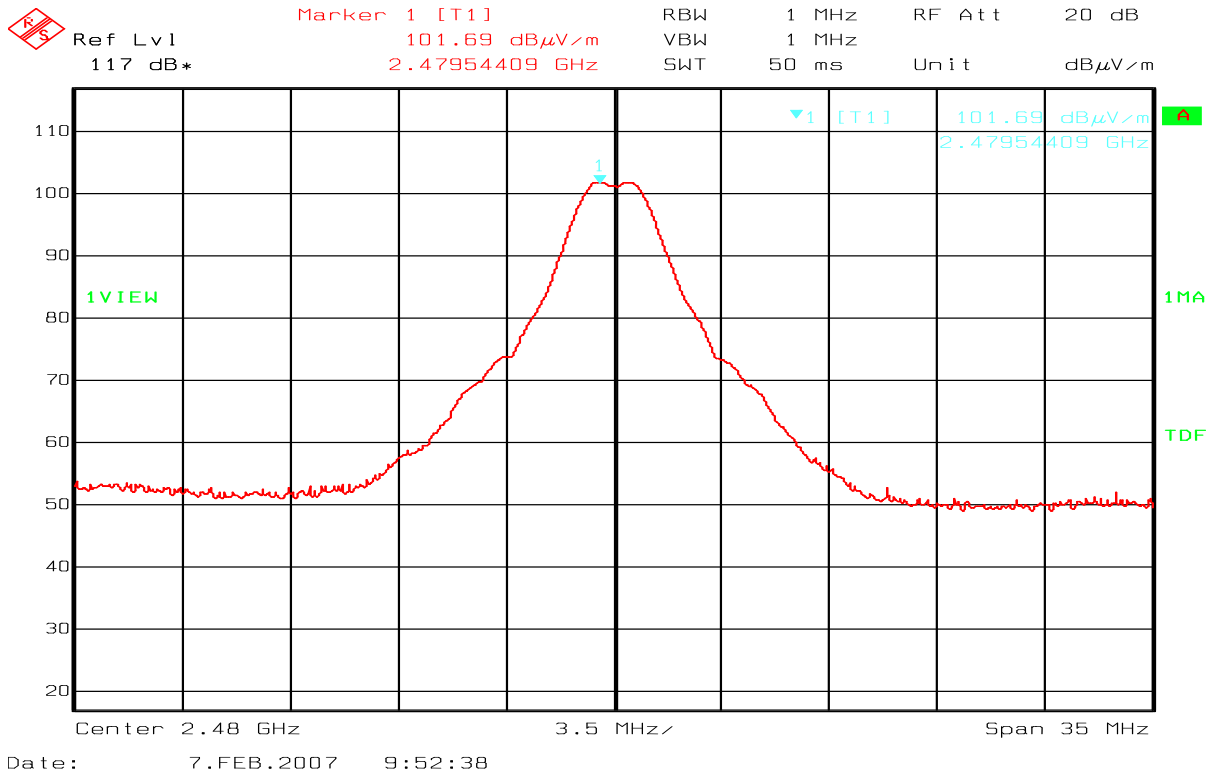

Ch26 – upper-band –field strength

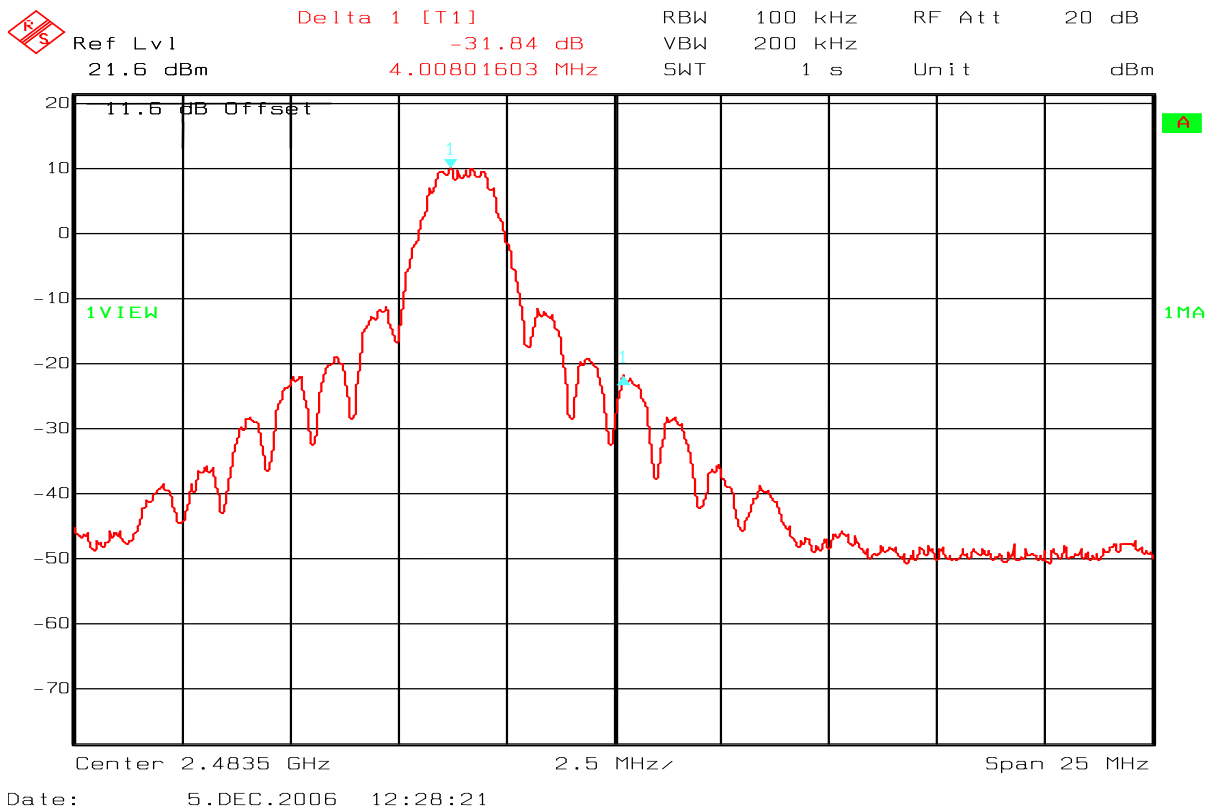

Ch26 – Upper-band-edge – Delta-marker


Duty Cycle Calculation:

RF duty cycle: Calculation according to RF burst Para 15.35 (c)

$$-20 \cdot \log(0.865 \text{ ms} / 10 \text{ ms}) = 21.25 \text{ dB}$$


Maximum duty cycle according to Para 15.35 (b): 20 dB

This value is used when measuring average field strength above 1 GHz with Peak Detector function employed on spectrum analyzer.

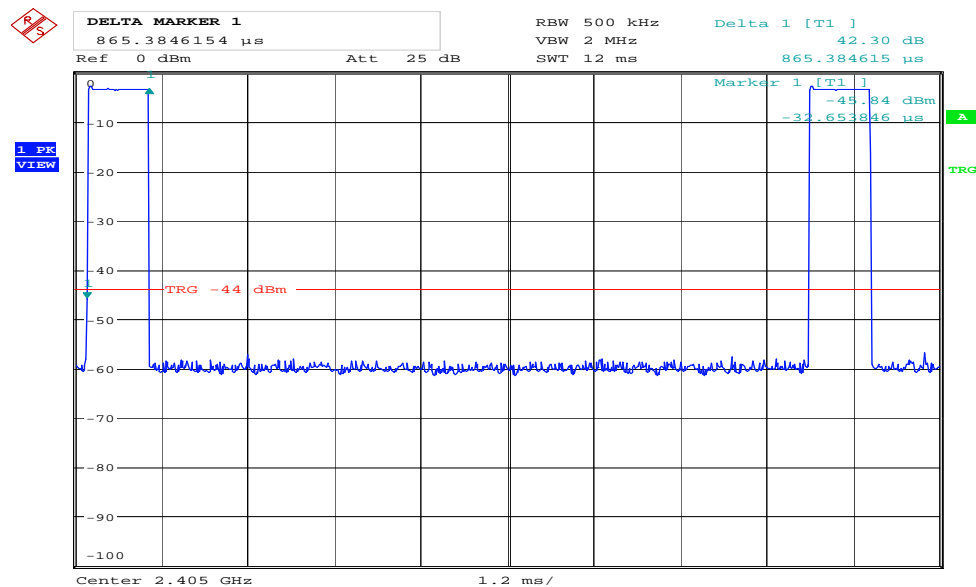

Date: 4.DEC.2006 16:54:42

Duty Cycle – ON-time

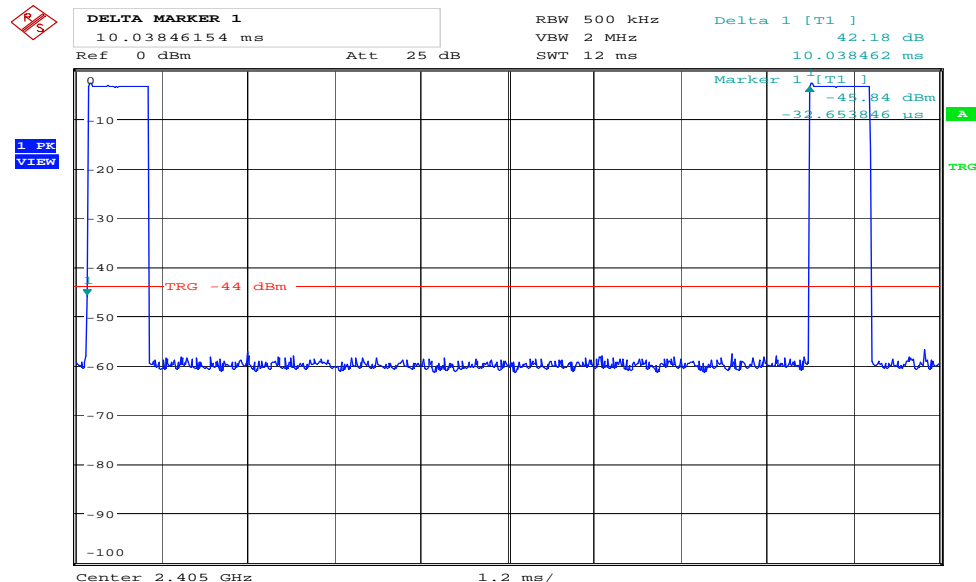

Date: 4.DEC.2006 16:55:38

Duty Cycle – OFF time

Radiated Emissions, 1-25 GHz

1-18 GHz measured at a distance of 3m, 18-25 GHz measured at 1m.

The radiated emissions were checked in both vertical & horizontal polarization. The maximum or worst case emissions were obtained in Vertical polarization only. The table below shows the maximum emissions obtained in vertical polarization.

No radiated spurious emissions detected with 50 ohm load.

Radiated Emission 1 – 25 GHz, Peak

Measured with Peak Detector


Frequency	RF channel	Dist. corr. factor	Field strength, Peak, 3m	Duty cycle corr. factor	Limit	Margin
GHz	11-26	dB	dBμV/m	dB	dBμV/m	dB
4.810	11	0	46.6	-	74	27.4
4.870	18	0	61.7	-	74	12.3
4.960	26	0	43.7	-	74	30.3
7.210	11	0	> 20 dB below the limit	-	74	-
7.321	18	0	> 20 dB below the limit	-	74	-
7.437	26	0	65.7	-	74	8.3
8 - 25	11,18,26	0	None detected	-	-	-

Radiated emission 1- 25 GHz, Average


Calculated value from Peak Detector

Frequency	RF channel	Dist. corr. factor	Field strength, Peak, 3 meters	Duty Cycle correction factor	Limit	Margin
GHz	11-26	dB	dBμV/m	DB	dBμV/m	dB
4.810	11	0	46.6	20	54	27.4
4.880	18	0	61.7	20	54	12.3
4.960	26	0	43.7	20	54	30.3
7.210	11	0	> 20 dB below the limit	20	54	-
7.321	18	0	> 20 dB below the limit	20	54	-
7.437	26	0	65.7	20	54	8.3
8 - 25	11,18,26	0	None detected	20	-	-


Antenna factor, amplifier gain and cable loss are included in spectrum analyzer "Transducer factor".

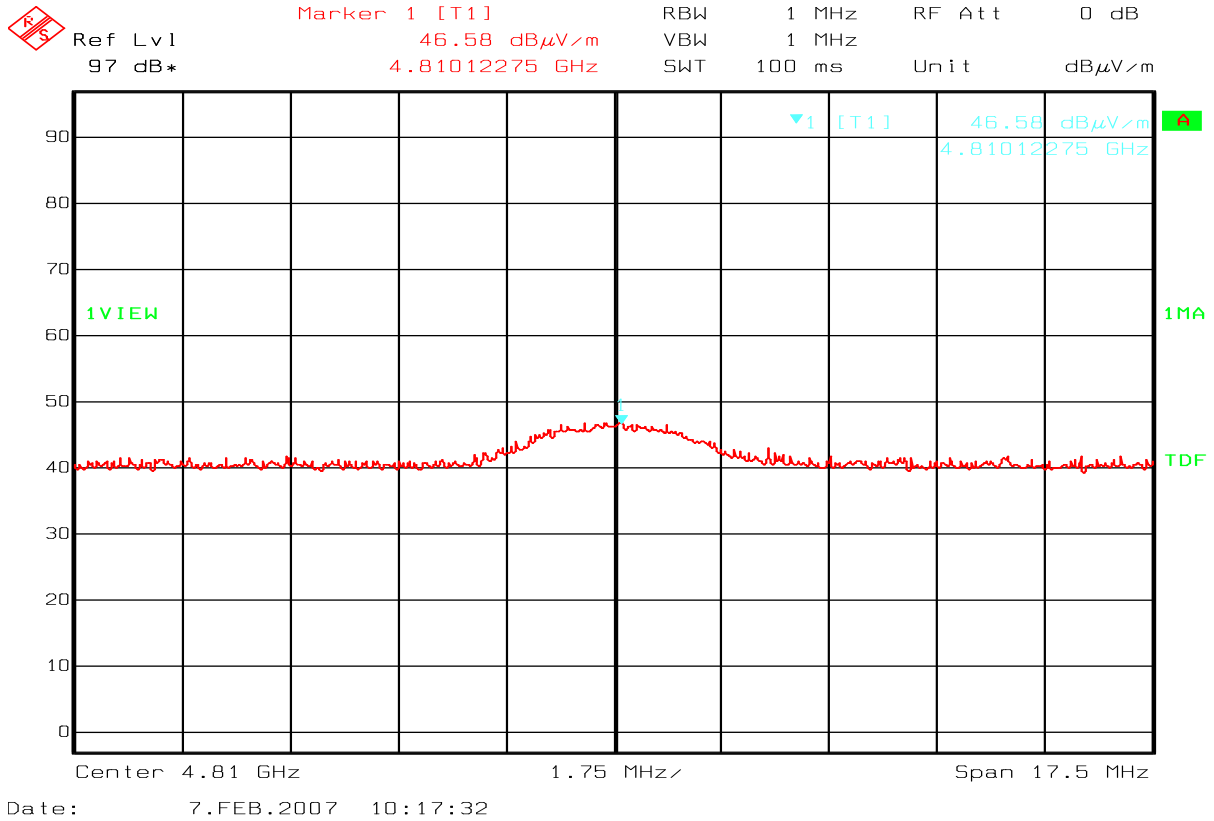


Ch11 – 2nd harmonic

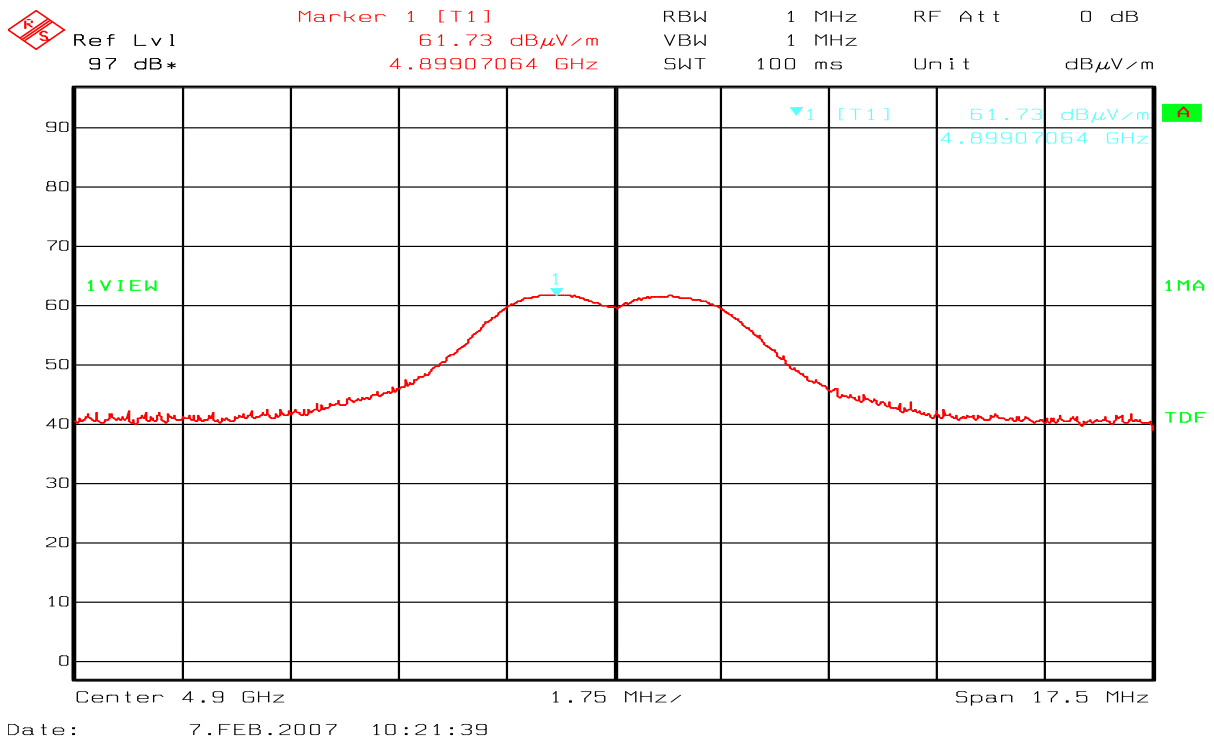

Ch18 – 2nd Harmonic

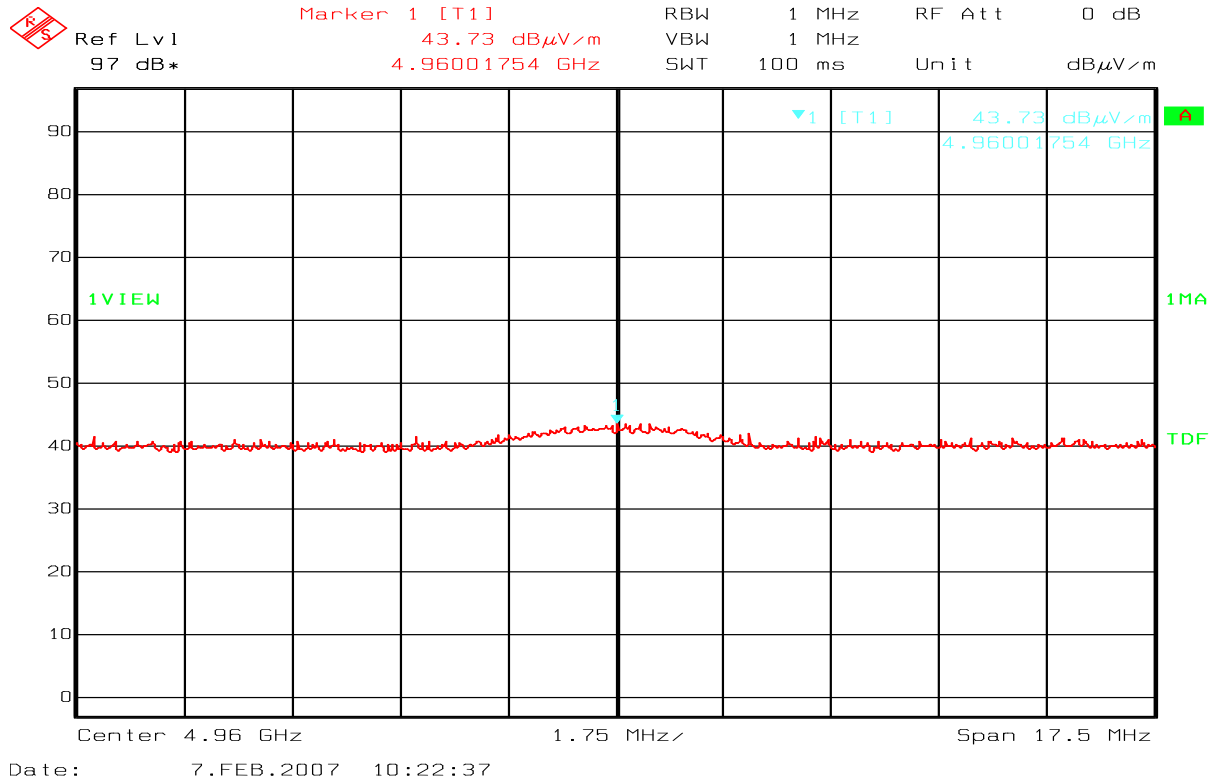

Ch26 – 2nd Harmonic

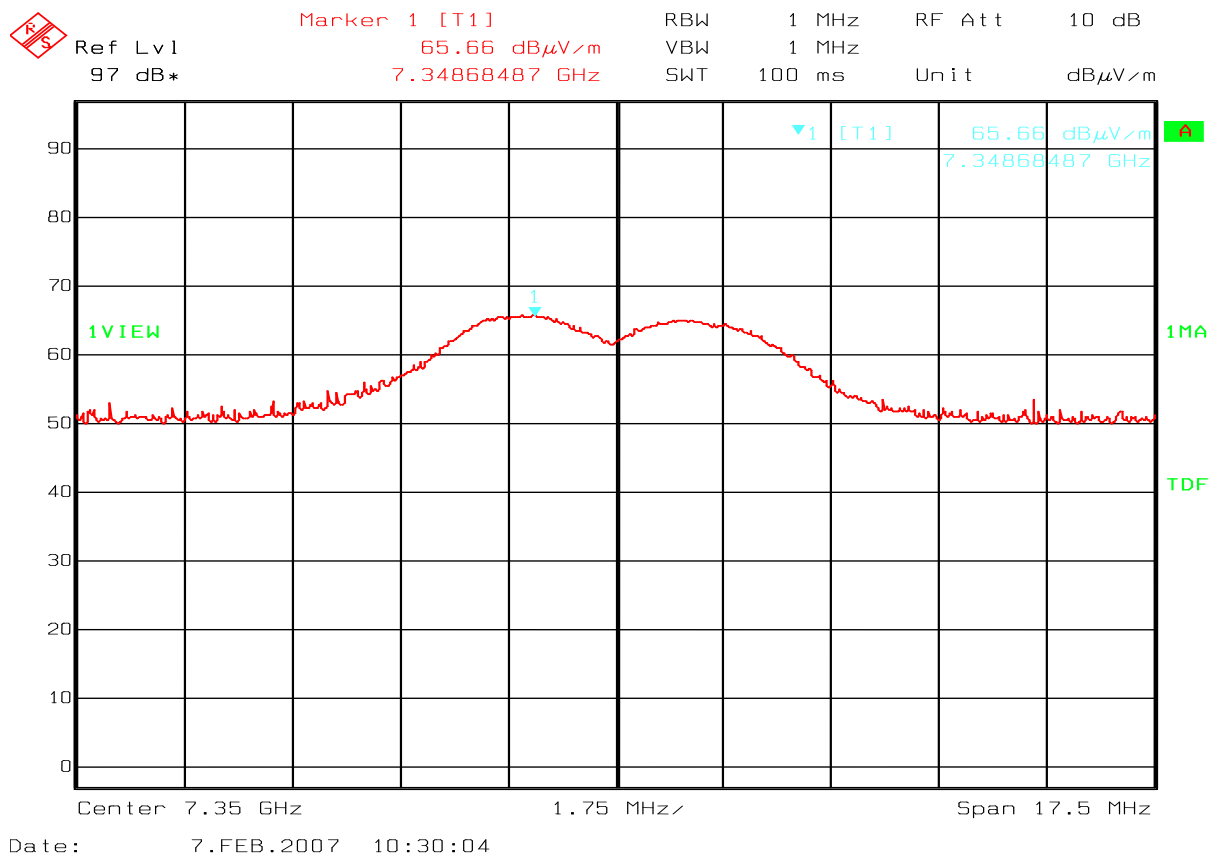

CH 26 – 3rd harmonic

Radiated emissions 30 – 1000 MHz.

Detector: Quasi-Peak

Measuring distance 3m.

Tested in active mode.

Frequency	Operational condition	Field strength	Measuring distance	Limit FCC15.209	Margin
MHz		dBμV/m	m	dBμV/m	dB
30 -200	TX ON/RX	< 30	3	40	>10
200 -1000	TX on/RX	< 30	3	40	>10

Nemko Comlab

PK

07. Feb 07 11:45

EUT: UW-CM-08-24-XT-11

Manuf: UBIWAVE

Op Cond: 1m vp

Operator: gns

Test Spec: FCC part 15

Comment: 3m dist

Scan Settings (1 Range)

----- Frequencies -----					----- Receiver Settings -----				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
30M	200M	50k	120k	PK	50ms	AUTO	LN ON	60dB	


Transducer No.

Start

Stop

Name

20	30M	200M	HK116
----	-----	------	-------

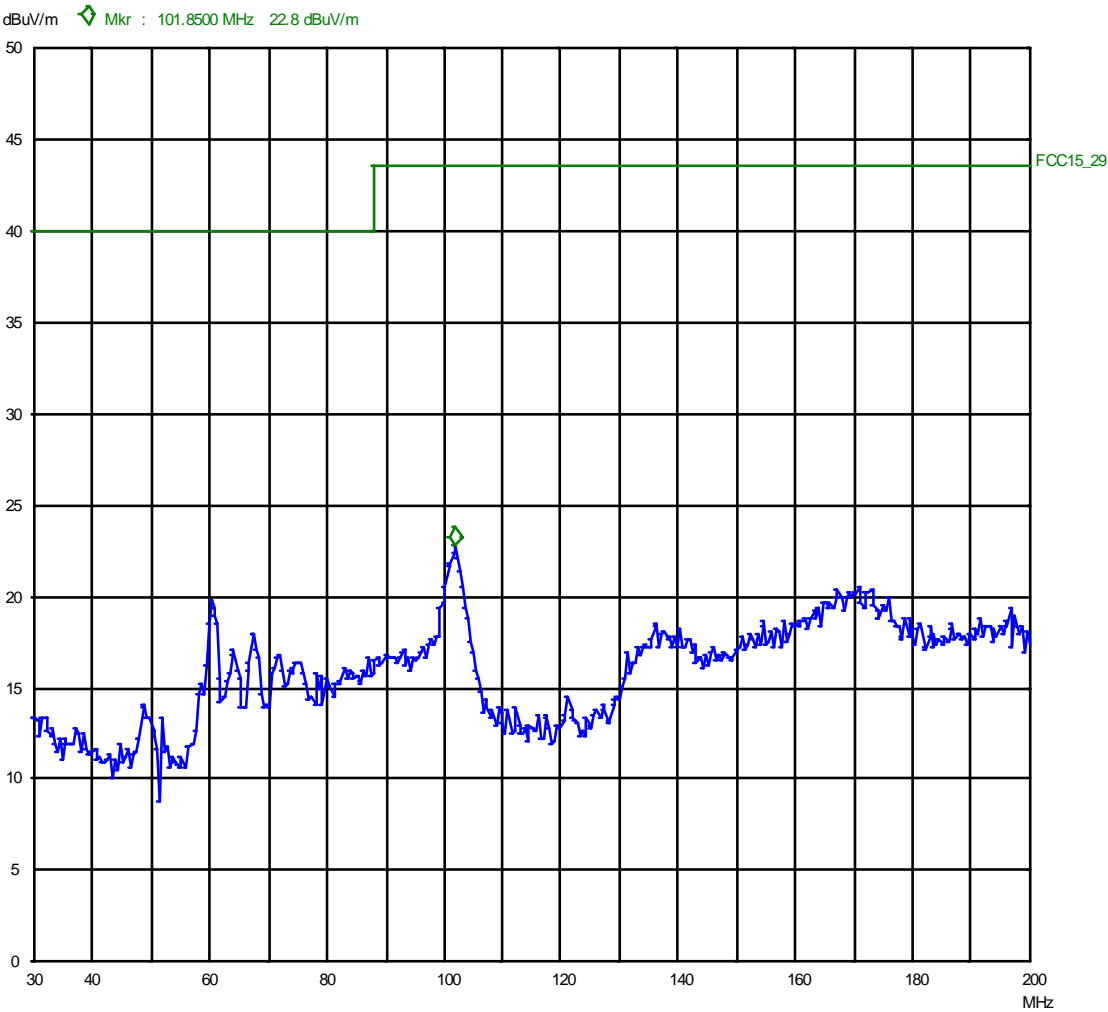

VP – 30 – 200 MHz


Nemko Comlab
PK

07. Feb 07 11:51

EUT: UW-CM-08-24-XT-11
Manuf: UBIWAVE
Op Cond: 4m hp
Operator: gns
Test Spec: FCC part 15
Comment: 3m dist

Scan Settings (1 Range)
----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
30M 200M 50k 120k PK 50ms AUTO LN ON 60dB

Transducer No. Start Stop Name
20 30M 200M HK116

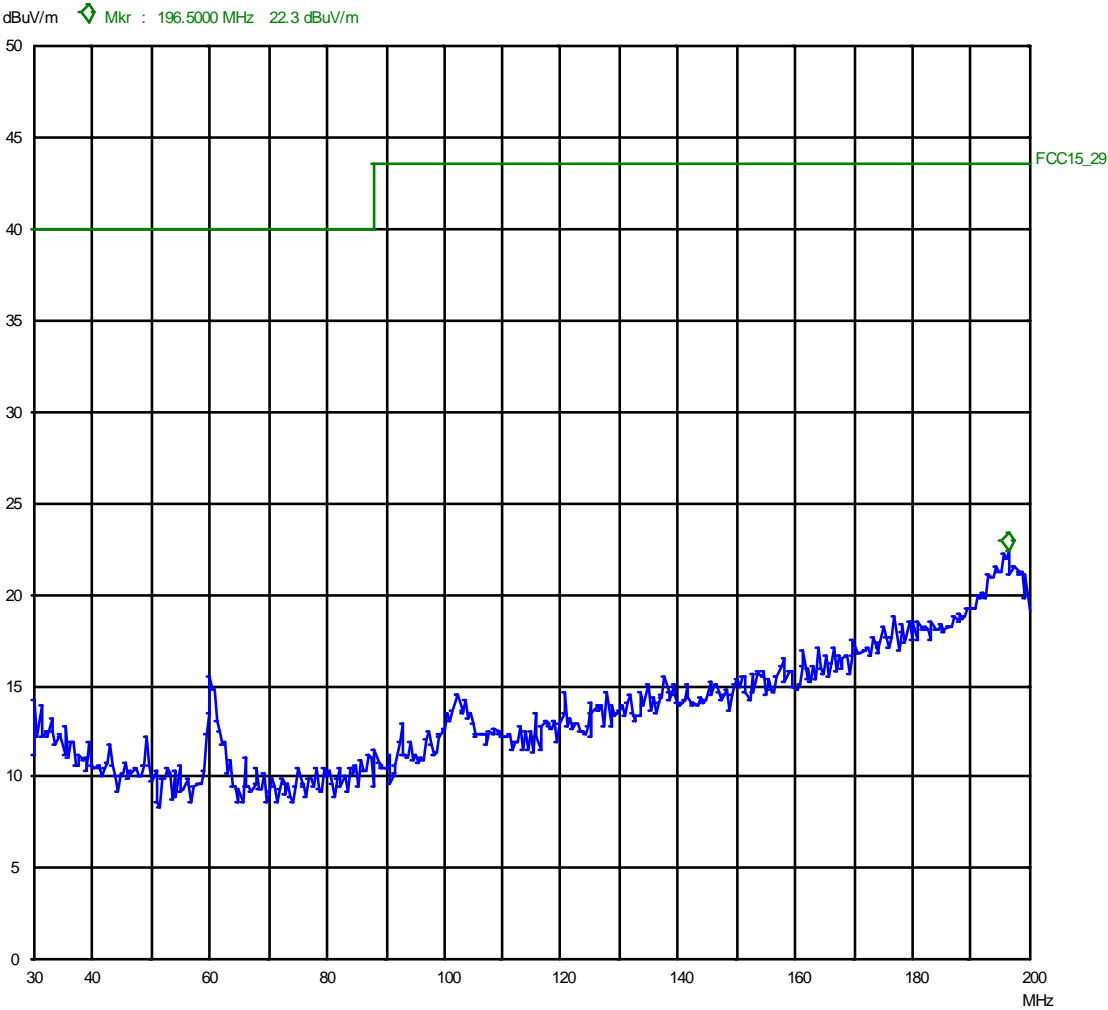

HP – 30 – 200MHz


Nemko Comlab
PK

07. Feb 07 12:01

EUT: UW-CM-08-24-XT-11
Manuf: UBIWAVE
Op Cond: 1m vp
Operator: gns
Test Spec: FCC part 15
Comment: 3m dist

Scan Settings (1 Range)
|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preampl OpRge
200M 1000M 50k 120k PK 50ms AUTO LN ON 60dB

Transducer No. Start Stop Name
21 200M 1000M HL223

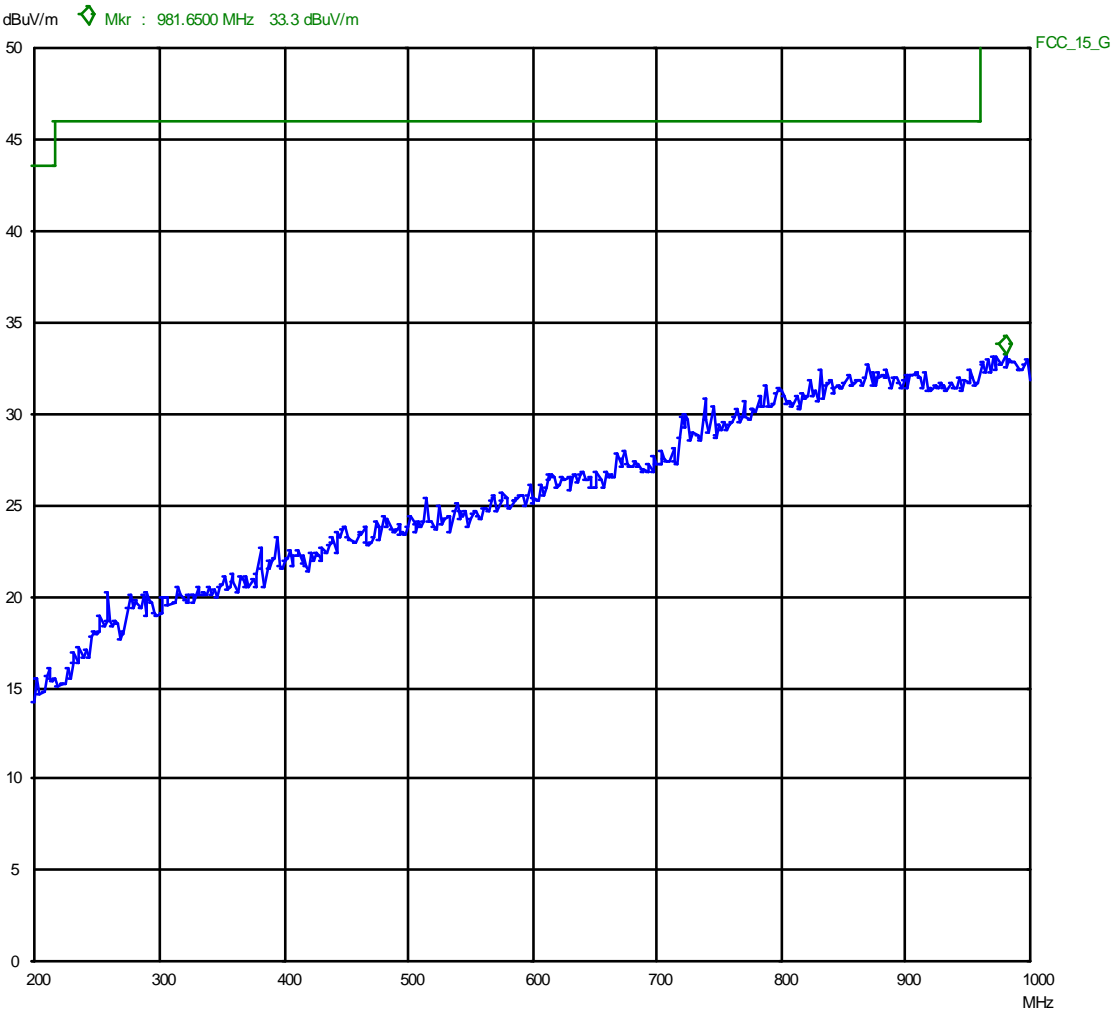

VP – 200 – 1000GHz

Nemko Comlab
PK


07. Feb 07 12:18

EUT: UW-CM-08-24-XT-11
Manuf: UBIWAVE
Op Cond: 4m hp
Operator: gns
Test Spec: FCC part 15
Comment: 3m dist

Scan Settings (1 Range)

----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
200M 1000M 50k 120k PK 50ms AUTO LN ON 60dB

Transducer No. Start Stop Name
21 200M 1000M HL223

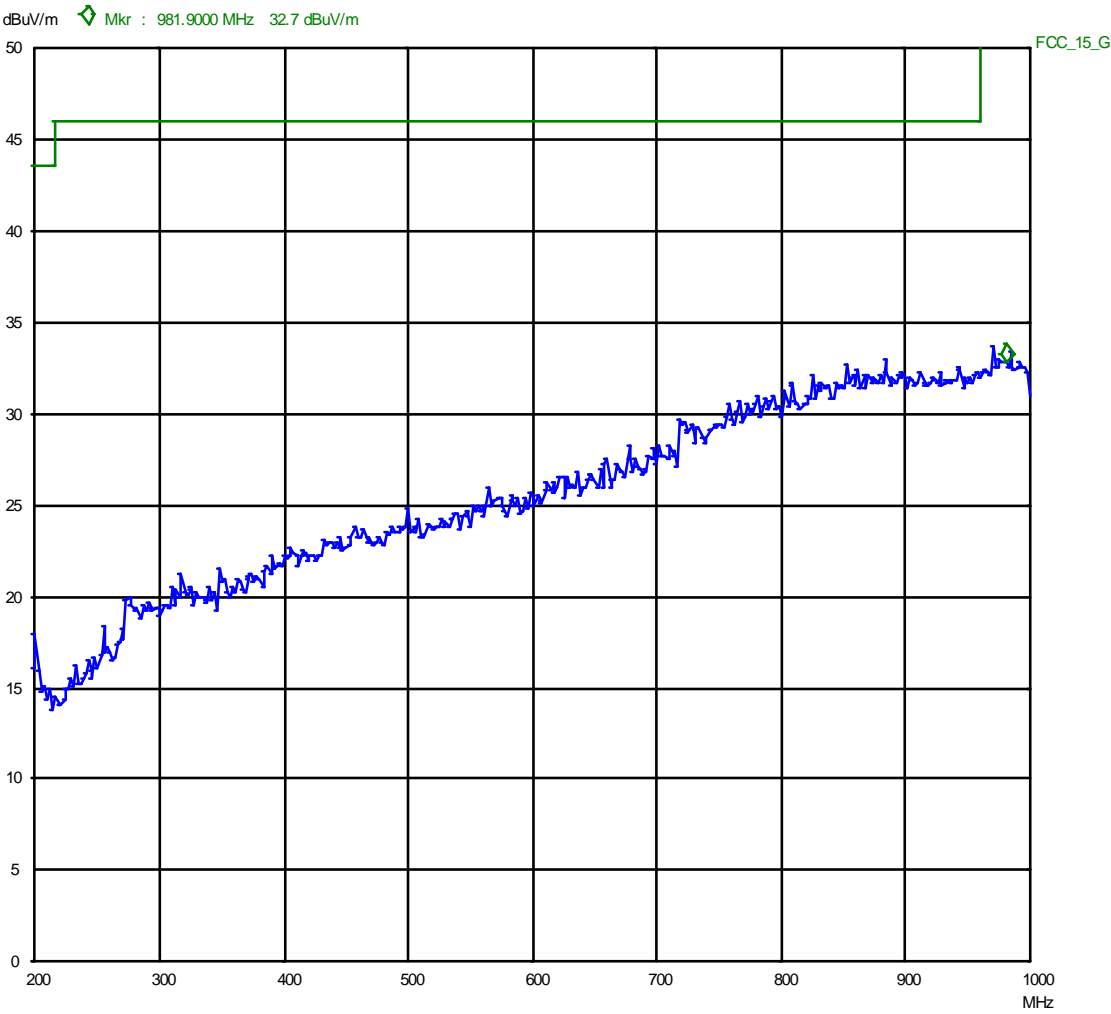

HP 200 – 1000MHz

Radiated emission 10 kHz-30 MHz.

Measuring distance 10m, measured with Peak detector.

No component detected, see attached graph.

Limit is converted to 10m using 40 dB/decade according to 15.31 (f) (2).

NEMKO COMLAB


05. Dec 06 14:12

Peak

Operator: gns
FCC 15

Scan Settings (4 Ranges)				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
10k	100k	1k	1k	PK	20ms	0dB	LN OFF 60dB
20k	20k	5k	9k	PK	20ms	AUTO	LN ON 60dB
20k	10M	5k	9k	PK	20ms	AUTO	LN OFF 60dB
10M	30M	5k	9k	PK	20ms	AUTO	LN OFF 60dB

Transducer No.	Start	Stop	Name
13	10k	30M	HFH2Z2

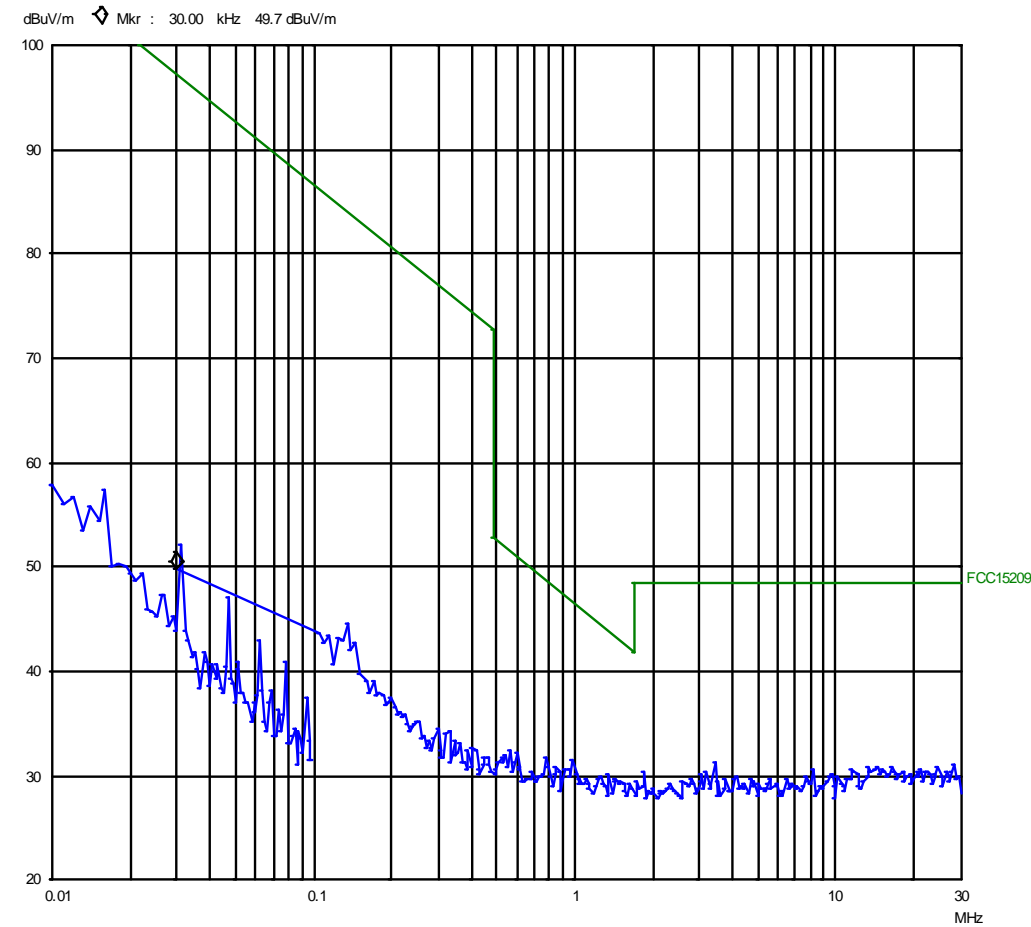

4.5 Power Spectral Density (PSD)

Para. No.: 15.247 (d)

Test Performed By: G.Suwanthakumar

Date of Test: 06.12.2006

Test Results: Passed

Measured and Calculated Data:

Please the test report for **FCC ID: U2VCM-08-24-CP-11** for conducted measurements.

Requirements:

The Power Spectral Density of a Digital Transmission System shall be no greater than +8 dBm in any 3 kHz band

No requirements for Frequency Hopping Systems.


5 LIST OF TEST EQUIPMENT

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the Test Laboratory.


No.	Instrument/ancillary	Type of instrument/ancillary	Manufacturer	Ref. no.
1	FSEK	Spectrum Analyzer	Rohde & Schwarz	LR 1337
2	ESN	EMI Receiver	Rohde & Schwarz	LR 1237
3	3115	Antenna horn	EMCO	LR 1330
4	643	Antenna horn	Narda	LR 093
5	642	Antenna horn	Narda	LR 220
6	PM7320X	Antenna horn	Sivers lab	LR 103
7	DBF-520-20	Antenna horn	Systron Donner	LR 101
8	638	Antenna horn	Narda	LR 098
9	Sucoflex 102E	Cable microwave	Suhner	LR 1370
10	6032A	Power supply	HP	LR 1062
11	ESH3-Z3	LISN	Rohde & Schwarz	LR 1076
12	8449B	Amplifier	Hewlett Packard	LR 1322
13	959C	Printer	Hewlett Packard	LR 1414
14	HFH2-Z2	Antenna loop	Rohde and Schwarz	LR 285
15	10855A	Amplifier	Hewlett Packard	LR 1445
16	HL223	Antenna log.per	Rohde & Schwarz	LR 1261
17	HK116	Antenna biconic	Rohde & Schwarz	LR 1260
18	ESVS 30	Test Receiver	Rohde & Schwarz	LR 1101
19	R3271	Spectrum Analyzer	Advantest	LR 1123
20	B32-10R	Power supply	Oltronix	LR 126
21	FSU26	Spectrum Analyzer	Rohde & Schwarz	LR 1504

6 BLOCK DIAGRAM

6.1 System set up

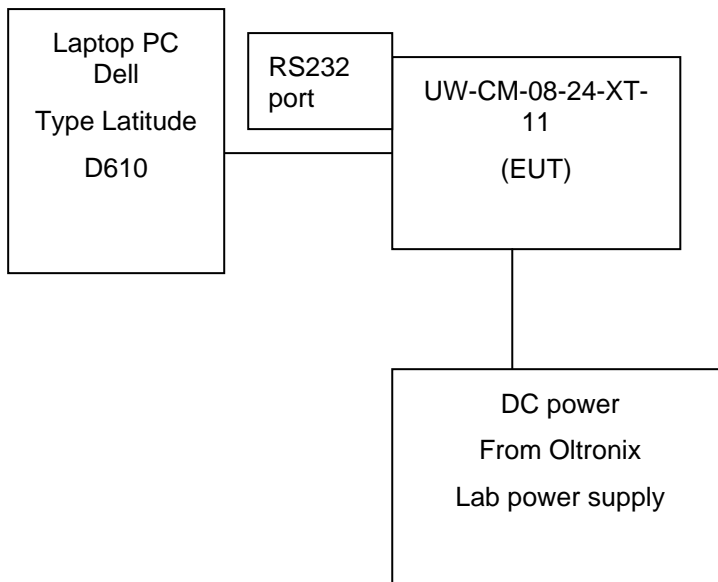

6.2 Powerline Conducted Emission

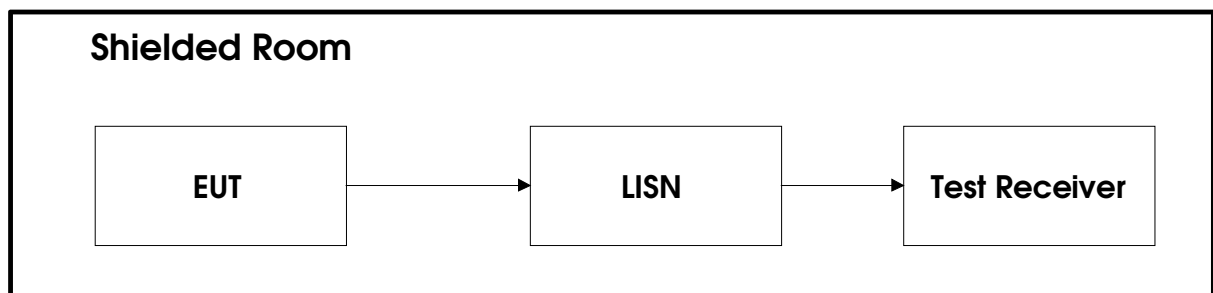

6.3 Test Site Radiated Emission

