

2.4 GHz 3 dBi Reverse Polarity-SMA "Rubber Duck" Wireless LAN Antenna - Model: HG2403RD-RSF

Applications and Features

Applications:

- 2.4 GHz ISM Band
- IEEE 802.11b and 802.11g Wireless LAN
- Bluetooth®
- \//iFi
- Wireless Video Systems
- Multipoint and Mobile Applications



- Compact size, only 5.4" long
- Flexible "Rubber Duck" antenna
- Tilt and swivel design
- RP-SMA Connector
- RoHS Compliant
- Optional Magnetic Mount Available



Description

This compact 2.4GHz omnidirectional "rubber-duck" WiFi antenna provides broad coverage and 3 dBi gain. It is a coaxial sleeve design with an omni-directional pattern. It is ideally suited for IEEE 802.11b and 802.11g wireless LANs, Bluetooth® and other WLAN applications.

Only 5.4" long, this flexible antenna features a tilt-and-swivel reverse-polarity SMA plug connector, allowing them to be used vertically, at a right angle, or any angle in-between. It is suitable as a replacement antenna for many access points and radios that are equipped with reverse-polarity SMA connectors including D-Link®, Linksys® WET11 and others (Note: This RF antenna is used as a "replacement" antenna rather than a "range extender" antenna. It should yield similar range to most radio's stock RF antennas)

Application Note: This antenna is not for use with U.S.Robotics® RP-SMA equipped devices.


Specifications

| Frequency | 2400-2500 MHz | |
|---|---------------------------|--|
| Gain | 3 dBi | |
| Impedance | 50 Ohm | |
| VSWR | < 2.0 | |
| Weight | 0.81 oz. (23 g) | |
| Length | 5.4" (137 mm) | |
| Diameter | 0.5" (13 mm) | |
| Finish | Matte Black | |
| Connector | Reverse Polarity SMA Plug | |
| Operating Temperature -40° C to to 85° C (-40° F to 185° F) | | |
| Flame Rating | UL 94HB | |
| Polarization | Vertical | |
| RoHS Compliant | Yes | |






Antenna Gain Pattern



Dimensional Drawing

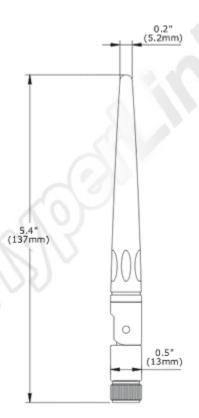

Guaranteed Quality

This product is backed by Hyperlink's Limited Warranty

Magnetic Mount

| Model | Description |
|-------------|---|
| HMA6-RSPA10 | Reverse-Polarity SMA-Jack (RP-SMA Jack) magnetic mount with 5 ft. high performance low-loss 100 series cable terminated with a Reverse-Polarity SMA Plug (RP-SMA Plug) connector. Custom connectors and cable lengths also available. |

