

FCC TEST REPORT  
for  
Shanghai Nine Eagles Electronic Technology Co., Ltd.

Transmitter

Model No.: NE-TXOS219, NE-TXOS223, NE-TXOS225, NE-TXOS226,  
NE-TXOS227, NE-TXOS228, NE-TXO8203, NE-TXO8205, NE-TXO8207,  
NE-TXO8209, NE-TXO8211, NE-TXO8208, NE-TXO8206, NE-TXO8218

Prepared for : Shanghai Nine Eagles Electronic Technology Co., Ltd.  
Address : Room 1104, Huaxiang Building, No. 80 Moling Road, Shanghai,  
200070, China

Prepared By : Shenzhen Anbotech Compliance Laboratory Limited  
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road,  
Nanshan District, Shenzhen, Guangdong, China  
Tel: (86) 755-26066544  
Fax: (86) 755-26014772

Report Number : R011601905I  
Date of Test : Sept. 01~ 31, 2016  
Date of Report : Oct. 27, 2016

## TABLE OF CONTENTS

Description

Page

Test Report

<b>1. GENERAL INFORMATION</b>	<b>5</b>
1.1 Description of Device (EUT)	5
1.2 Auxiliary Equipment Used during Test	6
1.3 Description of Test Facility	6
1.4 Measurement Uncertainty	6
<b>2. TEST PROCEDURE</b>	<b>7</b>
<b>3. CONDUCTED EMISSION</b>	<b>8</b>
3.1 Block Diagram of Test Setup	8
3.2 Power Line Conducted Emission Measurement Limits (15.207)	8
3.3 Configuration of EUT on Measurement	8
3.4 Operating Condition of EUT	8
3.5 Test Procedure	9
3.6 Power Line Conducted Emission Measurement Results	9
<b>4. RADIATION INTERFERENCE</b>	<b>14</b>
4.1 Requirements (15.247, 15.209):	14
4.2 Test Procedure	14
4.3 Test Configuration	15
4.4 Test Results	16
<b>5. CHANNEL SEPARATION TEST</b>	<b>25</b>
5.1 Measurement Procedure	25
5.2 Test SET-UP	25
5.3 Test Equipment	25
5.4 Test Results	26
<b>6. 20DB BANDWIDTH TEST</b>	<b>28</b>
6.1 Measurement Procedure	28
6.2 Test SET-UP	28
6.3 Test Equipment	28
6.4 Test Results	28
<b>7. QUANTITY OF HOPPING CHANNEL TEST</b>	<b>31</b>
7.1 Measurement Procedure	31
7.2 Test SET-UP	31
7.3 Test Equipment	31
7.4 Test Results	31
<b>8. DWELL TIME TEST</b>	<b>33</b>

8.1 Measurement Procedure .....	33
8.2 Test SET-UP .....	33
8.3 Test Equipment .....	33
8.4 Test Results .....	33
<b>9. MAXIMUM PEAK OUTPUT POWER TEST .....</b>	<b>35</b>
9.1 Measurement Procedure .....	35
9.2 Test SET-UP .....	35
9.3 Test Equipment .....	35
9.4 Test Results .....	36
<b>10. BAND EDGE TEST .....</b>	<b>38</b>
10.1 Measurement Procedure .....	38
10.2 Test SET-UP .....	38
10.3 Test Equipment .....	39
10.4 Test Results .....	39
<b>11. ANTENNA APPLICATION .....</b>	<b>41</b>
11.1 Antenna requirement .....	41
11.2 Result .....	41
<b>12. PHOTOGRAPH .....</b>	<b>42</b>
12.1 Photo of Power Line Conducted Emission Measurement .....	42
12.2 Photo of Radiation Emission Test .....	42
<b>APPENDIX I (EXTERNAL PHOTOS) .....</b>	<b>44</b>
<b>APPENDIX II (INTERNAL PHOTOS) .....</b>	<b>47</b>

## TEST REPORT

Applicant : Shanghai Nine Eagles Electronic Technology Co., Ltd.  
Manufacturer : Shanghai Nine Eagles Electronic Technology Co., Ltd.  
EUT : Transmitter  
Model No. : NE-TXOS219, NE-TXOS223, NE-TXOS225, NE-TXOS226,  
NE-TXOS227, NE-TXOS228, NE-TXO8203, NE-TXO8205,  
NE-TXO8207, NE-TXO8209, NE-TXO8211, NE-TXO8208,  
NE-TXO8206, NE-TXO8218  
Serial No. : N.A.  
Trade Mark : N.A.  
Rating : DC 11.1V, 1A

Measurement Procedure Used:

FCC Part15 Subpart C 2016, Paragraph 15.207, 15.247 & 15.209

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Sept. 01~ 31, 2016

Prepared by :

*Baron Wen*  
(Tested Engineer / Baron Wen)

Reviewer :

*Amy Ding*  
(Project Manager / Amy Ding)

Approved & Authorized Signer :

*Tom Chen*  
(Manager / Tom Chen)

## 1. GENERAL INFORMATION

### 1.1 Description of Device (EUT)

EUT : Transmitter

Model Number : NE-TXOS219, NE-TXOS223, NE-TXOS225, NE-TXOS226, NE-TXOS227, NE-TXOS228, NE-TXO8203, NE-TXO8205, NE-TXO8207, NE-TXO8209, NE-TXO8211, NE-TXO8208, NE-TXO8206, NE-TXO8218  
(Note: All samples are the same except the model number and colour, so we prepare “NE-TXOS219” for test only.)

Test Power Supply : DC 11.1V, from the battery

Frequency :	Types of module	Operating Frequency
	FHSS	2403-2479MHz
	WiFi 5G (802.11a/ n(HT20))	5745-5825MHz
	WiFi 5G (802.11n(HT40))	5755-5795MHz

Antenna Spec. : 2.4G:0.5dBi  
: WIFI 5G:5.3dBi

Modulation : FHSS 2.4G: GFSK  
WiFi: OFDM

Applicant : Shanghai Nine Eagles Electronic Technology Co., Ltd.  
Address : Room 1104, Huaxiang Building, No. 80 Moling Road, Shanghai, 200070, China

Manufacturer/  
Factory : Shanghai Nine Eagles Electronic Technology Co., Ltd.  
Address : Room 1104, Huaxiang Building, No. 80 Moling Road, Shanghai, 200070, China

Date of receipt : Sept. 01, 2016

Date of Test : Sept. 01~ 31, 2016

Remark : This report is for 2.4GHz module only.

## 1.2 Auxiliary Equipment Used during Test

N/A

## 1.3 Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### **FCC-Registration No.: 752021**

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, July 06, 2016.

### **IC-Registration No.: 8058A-1**

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A, June 13, 2016.

### **Test Location**

All Emissions tests were performed at  
Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC  
Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong,  
China

## 1.4 Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal) Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

## 2. Test Procedure

**GENERAL:** This report shall NOT be reproduced except in full without the written approval of Shenzhen Anbotek Compliance Laboratory Limited. The EUT was transmitting a test signal during the testing.

**RADIATION INTERFERENCE:** The test procedure used was ANSI STANDARD C63.10-2013 using a spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz up to 1.0GHz and 1.0MHz with a video BW of 3.0MHz above 1.0GHz. The ambient temperature of the EUT was 74.3oF with a humidity of 69%.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

**Example:**

Freq (MHz) METER READING + ACF = FS  
20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m


**ANSI STANDARD C63.10-2013 10.1.7 MEASUREMENT PROCEDURES:** The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

### 3. Conducted Emission

#### 3.1 Block Diagram of Test Setup

3.1.1. Block diagram of connection between the EUT and simulators

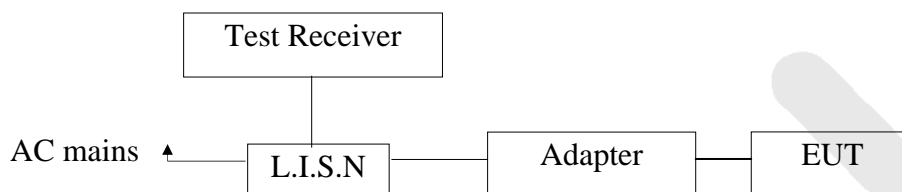

#### 3.2 Power Line Conducted Emission Measurement Limits (15.207)

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. \*Decreasing linearly with logarithm of frequency.  
2. The lower limit shall apply at the transition frequencies.

#### 3.3 Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

#### 3.4 Operating Condition of EUT

3.4.1. Setup the EUT and simulator as shown as Section 3.1.

3.4.2. Turn on the power of all equipment.

3.4.3. Let the EUT work in test mode (Charging and On) and measure it.



### 3.5 Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test results are reported on Section 3.6.

#### Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Two-Line V-network	Rohde & Schwarz	ENV216	100055	Apr. 16, 2016	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Apr. 16, 2016	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Apr. 16, 2016	1 Year

### 3.6 Power Line Conducted Emission Measurement Results

**PASS.**

The frequency range from 150KHz to 30 MHz is investigated.


Please refer the following pages.

**CONDUCTED EMISSION TEST DATA**

Test Site: 1# Shielded Room  
Operating Condition: Charging and On  
Test Specification: AC 120V, 60Hz for adapter  
Comment: Live Line  
Tem.:25°C Hum.:50%

**SCAN TABLE: "Voltage (150K~30M) FIN"**

Short Description: 150K-30M Disturbance Voltages

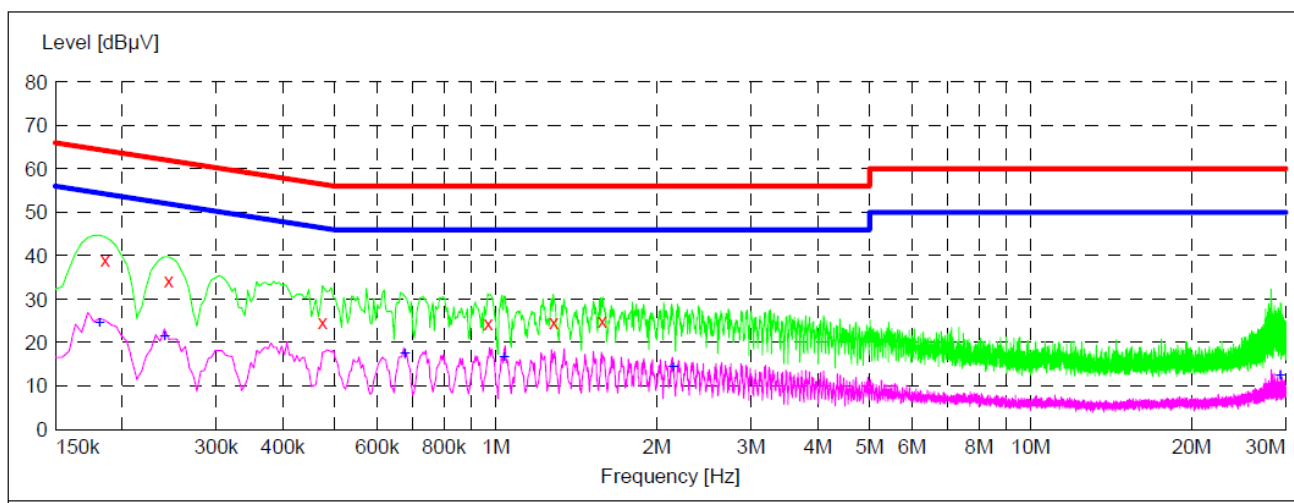

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.186000	39.20	20.1	64	25.0	QP	L1	GND
0.244500	34.30	20.1	62	27.6	QP	L1	GND
0.474000	24.80	20.1	56	31.6	QP	L1	GND
0.969000	24.60	20.2	56	31.4	QP	L1	GND
1.283500	24.70	20.2	56	31.3	QP	L1	GND
1.580500	25.10	20.3	56	30.9	QP	L1	GND


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.181500	24.50	20.1	54	29.9	AV	L1	GND
0.240000	21.40	20.1	52	30.7	AV	L1	GND
0.676500	17.50	20.1	46	28.5	AV	L1	GND
1.036000	16.80	20.2	46	29.2	AV	L1	GND
2.147500	14.30	20.3	46	31.7	AV	L1	GND
29.305000	12.40	20.9	50	37.6	AV	L1	GND

**CONDUCTED EMISSION TEST DATA**

Test Site: 1# Shielded Room  
Operating Condition: Charging and On  
Test Specification: AC 120V, 60Hz for adapter  
Comment: Neutral Line  
Tem.:25°C Hum.:50%

**SCAN TABLE: "Voltage (150K~30M) FIN"**

Short Description: 150K-30M Disturbance Voltages

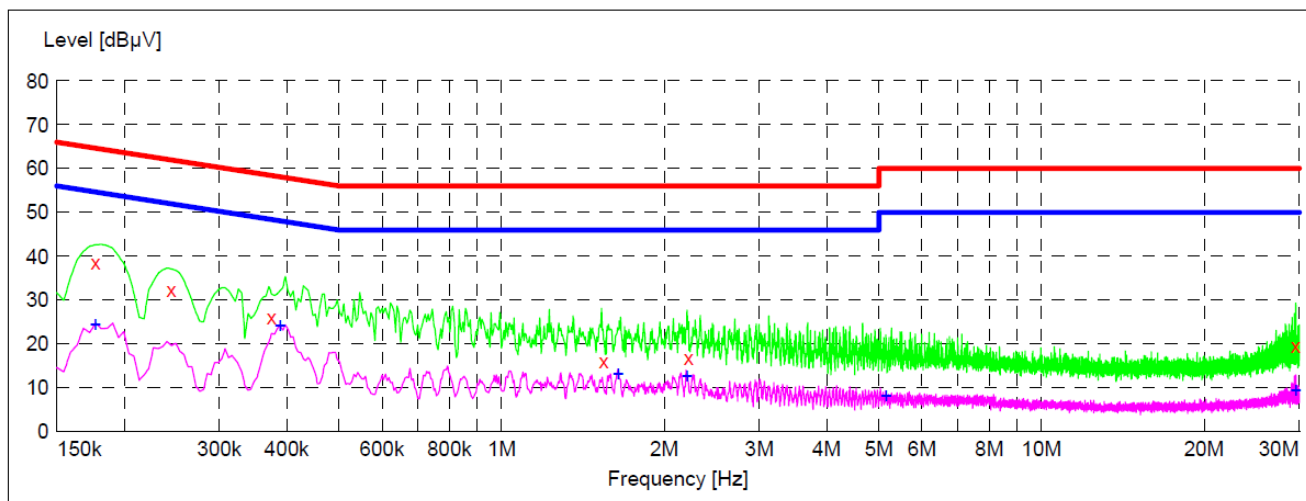

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.177000	38.50	20.1	65	26.1	QP	N	GND
0.244500	32.40	20.1	62	29.5	QP	N	GND
0.375000	26.00	20.1	58	32.4	QP	N	GND
1.544500	16.00	20.3	56	40.0	QP	N	GND
2.219500	16.90	20.3	56	39.1	QP	N	GND
29.561500	19.60	20.9	60	40.4	QP	N	GND


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.177000	24.50	20.1	55	30.1	AV	N	GND
0.388500	24.40	20.1	48	23.7	AV	N	GND
1.643500	13.20	20.3	46	32.8	AV	N	GND
2.206000	12.80	20.3	46	33.2	AV	N	GND
5.153500	8.40	20.5	50	41.6	AV	N	GND
29.561500	9.70	20.9	50	40.3	AV	N	GND

**CONDUCTED EMISSION TEST DATA**

Test Site: 1# Shielded Room  
Operating Condition: Charging and On  
Test Specification: AC 240V, 60Hz for adapter  
Comment: Live Line  
Tem.:25°C Hum.:50%

**SCAN TABLE: "Voltage (150K~30M) FIN"**

Short Description: 150K-30M Disturbance Voltages

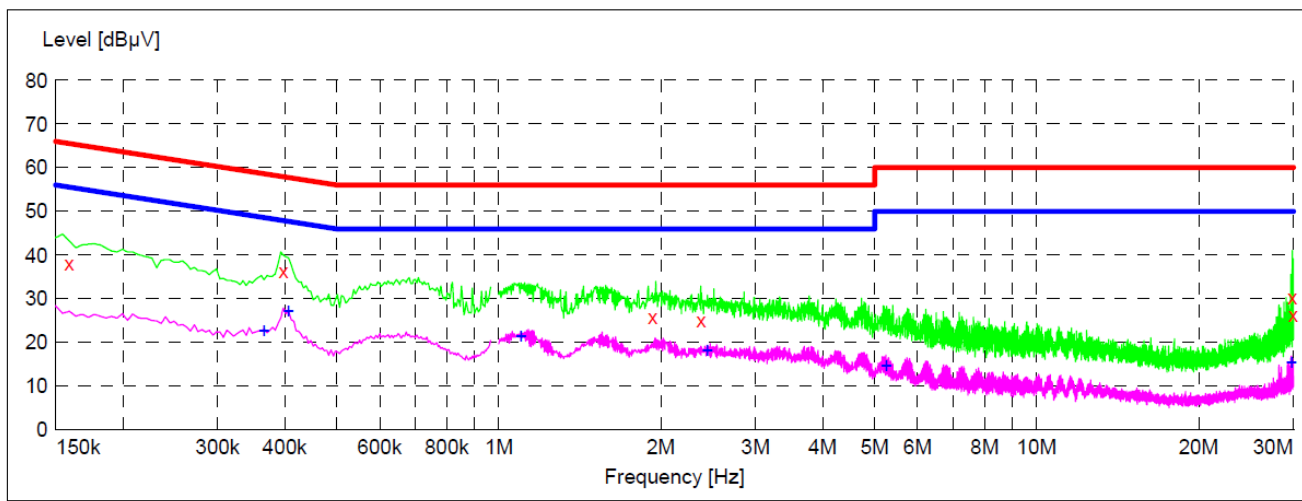

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.159000	38.10	20.1	66	27.4	QP	L1	GND
0.397500	36.40	20.1	58	21.5	QP	L1	GND
1.931500	25.80	20.3	56	30.2	QP	L1	GND
2.377000	25.10	20.3	56	30.9	QP	L1	GND
29.876500	30.30	20.9	60	29.7	QP	L1	GND
29.939500	26.40	20.9	60	33.6	QP	L1	GND


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.366000	22.80	20.1	49	25.8	AV	L1	GND
0.406500	27.30	20.1	48	20.4	AV	L1	GND
1.099000	21.70	20.2	46	24.3	AV	L1	GND
2.440000	18.30	20.3	46	27.7	AV	L1	GND
5.252500	14.90	20.5	50	35.1	AV	L1	GND
29.750500	15.60	20.9	50	34.4	AV	L1	GND

**CONDUCTED EMISSION TEST DATA**

Test Site: 1# Shielded Room  
Operating Condition: Charging and On  
Test Specification: AC 240V, 60Hz for adapter  
Comment: Neutral Line  
Tem.:25°C Hum.:50%

**SCAN TABLE: "Voltage (150K~30M) FIN"**

Short Description: 150K-30M Disturbance Voltages

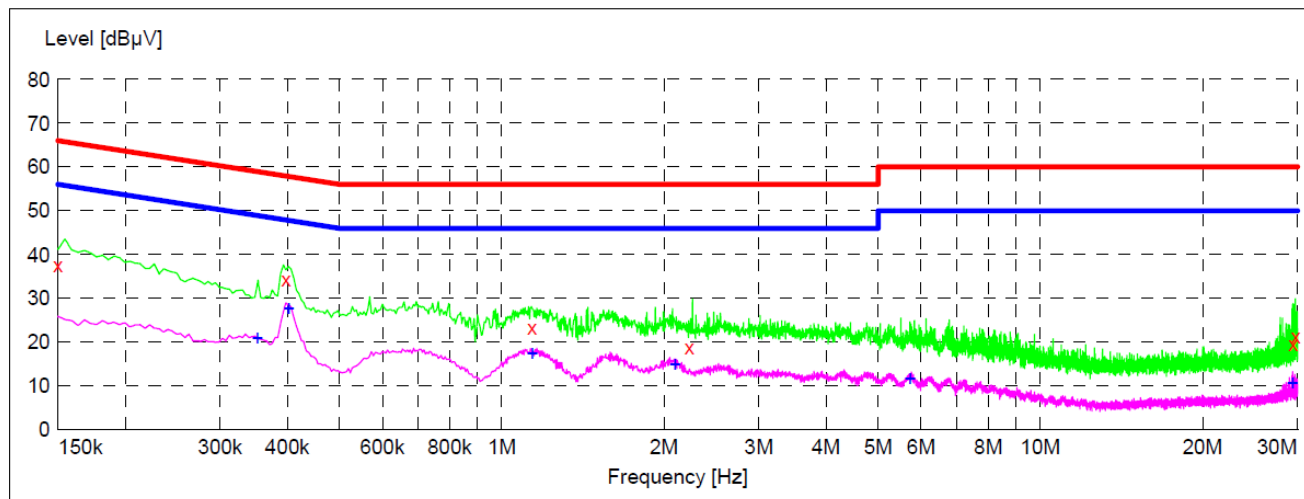

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	37.70	20.1	66	28.3	QP	N	GND
0.397500	34.40	20.1	58	23.5	QP	N	GND
1.139500	23.30	20.2	56	32.7	QP	N	GND
2.228500	18.80	20.3	56	37.2	QP	N	GND
29.435500	19.50	20.9	60	40.5	QP	N	GND
29.755000	21.40	20.9	60	38.6	QP	N	GND

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.352500	21.10	20.1	49	27.8	AV	N	GND
0.402000	27.90	20.1	48	19.9	AV	N	GND
1.139500	17.70	20.2	46	28.3	AV	N	GND
2.098000	15.10	20.3	46	30.9	AV	N	GND
5.725000	11.80	20.5	50	38.2	AV	N	GND
29.368000	10.90	20.9	50	39.1	AV	N	GND

## 4. Radiation Interference

### 4.1 Requirements (15.247, 15.209):

#### 4.1.1. Test Limits (< 30 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

#### 4.1.2. Test Limits ( $\geq$ 30 MHz)

FIELD STRENGTH of Fundamental: @3M	FIELD STRENGTH of Harmonics	S15.209 30 - 88 MHz	40 dBuV/m
902-928 MHz		88 - 216 MHz	43.5
2.4-2.4835 GHz		216 - 960 MHz	46
94 dBuV/m @3m	54 dBuV/m @3m	ABOVE 960 MHz	54dBuV/m

For range 9KHz~30MHz, The measured value is really too low to be recorded.

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation.

### 4.2 Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.  
For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.  
The turn table can rotate 360 degrees to determine the position of the maximum emission level.  
The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower.  
The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

#### For 30MHz to 1000MHz:

Set the spectrum analyzer as:  
RBW = 100kHz, VBW =300kHz,  
Detector= Quasi-Peak  
Trace mode= Max hold.  
Sweep- auto couple.

#### For Above 1GHz:

Set the spectrum analyzer as:  
RBW = 1MHz, VBW =3MHz,  
Detector= Peak

Trace mode= Max hold.  
Sweep- auto couple.


Set the spectrum analyzer as:  
RBW =1MHz, VBW =10Hz  
Detector= Average  
Trace mode= Max hold.  
Sweep- auto couple.

#### Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	Apr. 17, 2016	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	Apr. 17, 2016	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Apr. 17, 2016	1 Year
4.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 20, 2016	1 Year
5.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 20, 2016	1 Year
6.	Pre-amplifier	SONOMA	310N	186860	Apr. 17, 2016	1 Year
7.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
8	Power Sensor	DAER	RPR3006 W	15I00041SN046	Jun 30, 2016	1 Year
9	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Jun 30, 2016	1 Year
10	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Jun 30, 2016	1 Year
11	Signal Generator	Agilent	E4421B	MY41000743	Jun 30, 2016	1 Year
12	DC Power supply	IV	IV-8080	YQSB0096	Jun 30, 2016	1 Year
13	TEMP&HUMI PROGRAMMABLE CHAMBER	Bell Group	BE-THK-150M8	SE-0137	Mar 16, 2016	1 Year


### 4.3 Test Configuration

#### 4.3.1. 9k to 30MHz emissions:

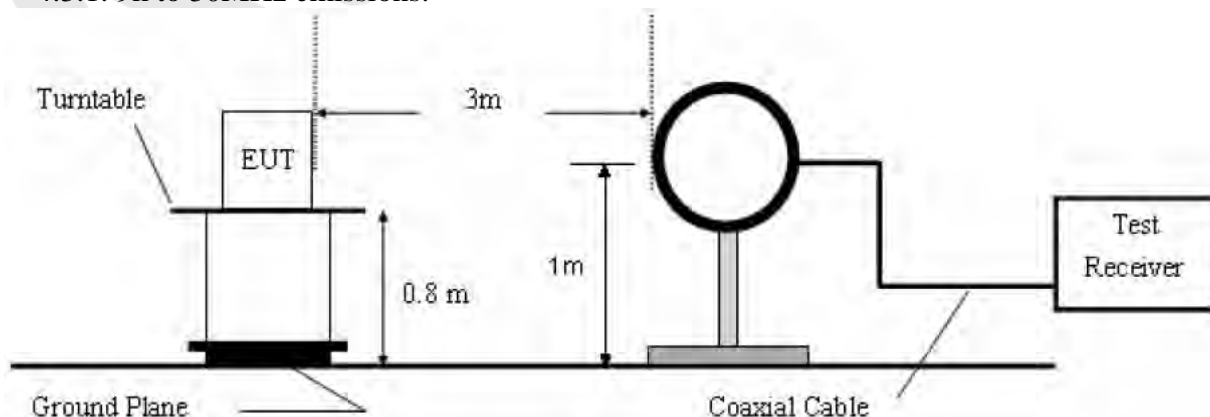




#### 4.3.2. 30M to 1G emissions:

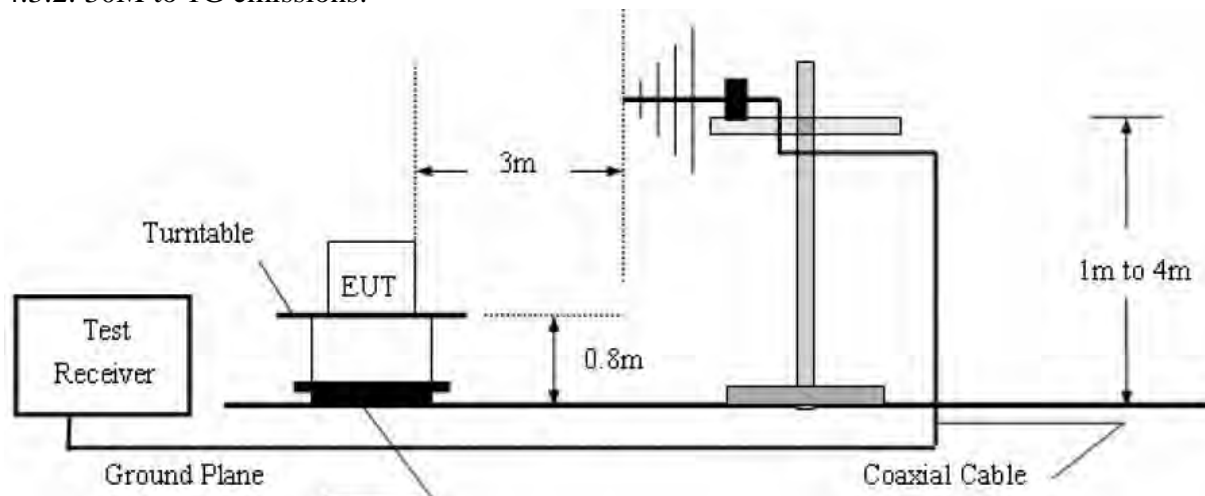

#### 4.3.3. 1G to 40G emissions:

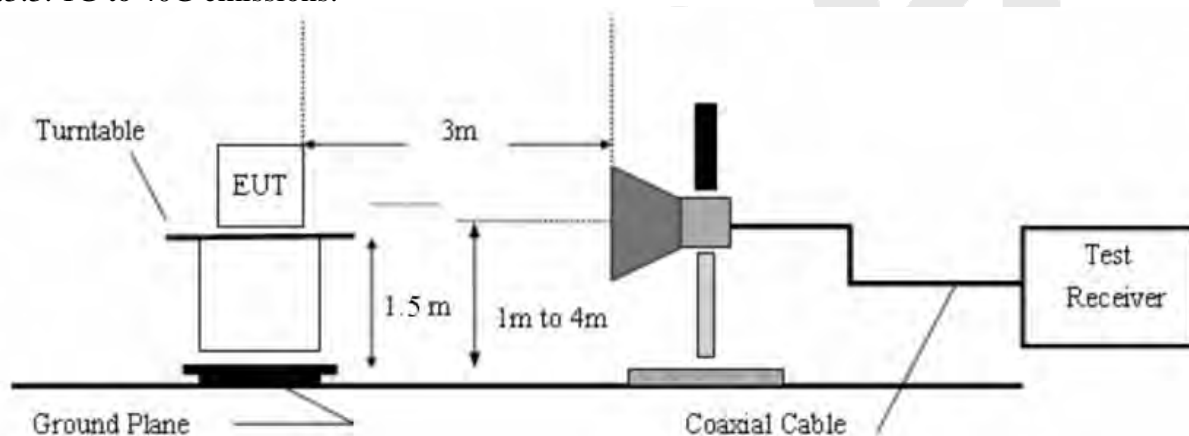

### 4.4 Test Results


PASS.

Please refer the following pages. Only the worst case (x orientation).

The test results of above 18000MHz are attenuated more than 20dB below the permissible limits, so the results don't record in the report.




Job No.:	0115090711	Plarization:	Horizontal
Standard:	(RE)FCC PART 15C _3m	Power Source:	AC 120V, 60Hz for adapter
Test item:	Radiation Test (30~1000MHz)	Temp.(C)/Hum.(%RH):	24.3( C)/55%RH
Test Mode:	On	Distance:	3m

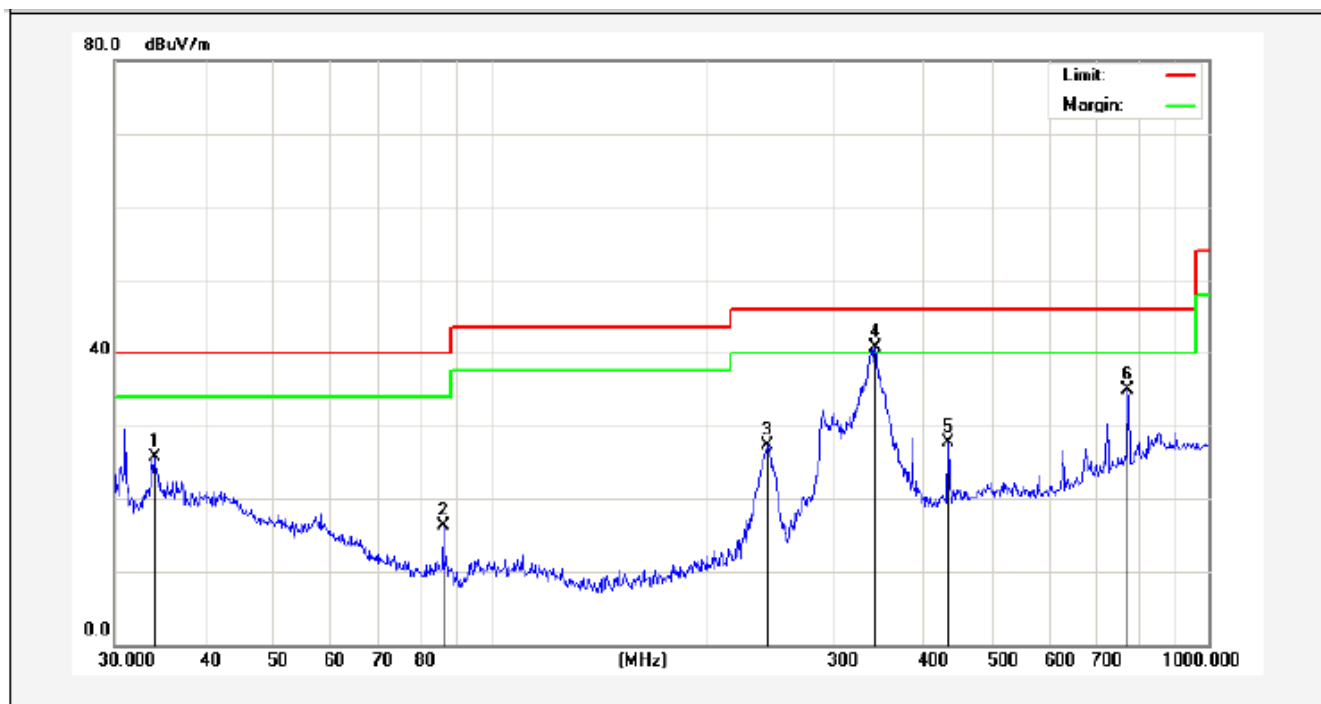


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	34.0365	40.43	-14.80	25.63	40.00	-14.37	peak			
2	85.8984	37.03	-20.79	16.24	40.00	-23.76	peak			
3	243.3772	45.59	-18.24	27.35	46.00	-18.65	peak			
4	343.1800	54.96	-14.20	40.76	46.00	-5.24	peak			
5	434.0651	39.90	-12.27	27.63	46.00	-18.37	peak			
6	771.4486	42.01	-7.11	34.90	46.00	-11.10	peak			

Job No.:	011509071I	Plarization:	Vertical
Standard:	(RE)FCC PART 15C _3m	Power Source:	AC 120V, 60Hz for adapter
Test item:	Radiation Test (30~1000MHz)	Temp.(C)/Hum.(%RH):	24.3( C)/55%RH
Test Mode:	On	Distance:	3m

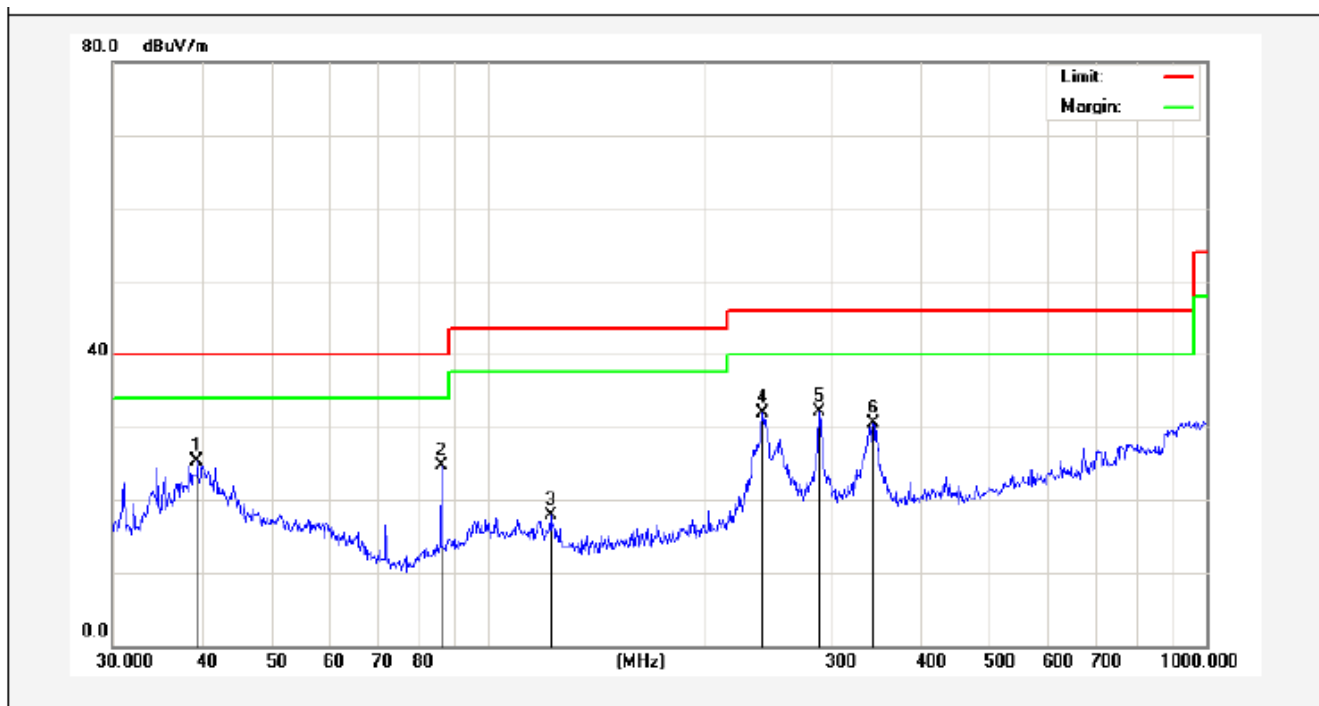


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	39.2991	36.27	-10.92	25.35	40.00	-14.65	peak			
2	85.8984	42.94	-18.25	24.69	40.00	-15.31	peak			
3	121.9755	34.60	-16.62	17.98	43.50	-25.52	peak			
4	240.8304	45.96	-14.09	31.87	46.00	-14.13	peak			
5	289.0021	47.13	-14.98	32.15	46.00	-13.85	peak			
6	343.1800	43.73	-13.20	30.53	46.00	-15.47	peak			

Job No.:	011509071I	Plarization:	Horizontal
Standard:	(RE)FCC PART 15C_Class B_3m	Power Source:	DC 4.8V
Test item:	Radiation Test (Above 1GHz)	Temp.(C)/Hum.(%RH):	24.3( C)/55%RH
Test Mode:	TX(2403 MHz)	Distance:	3m

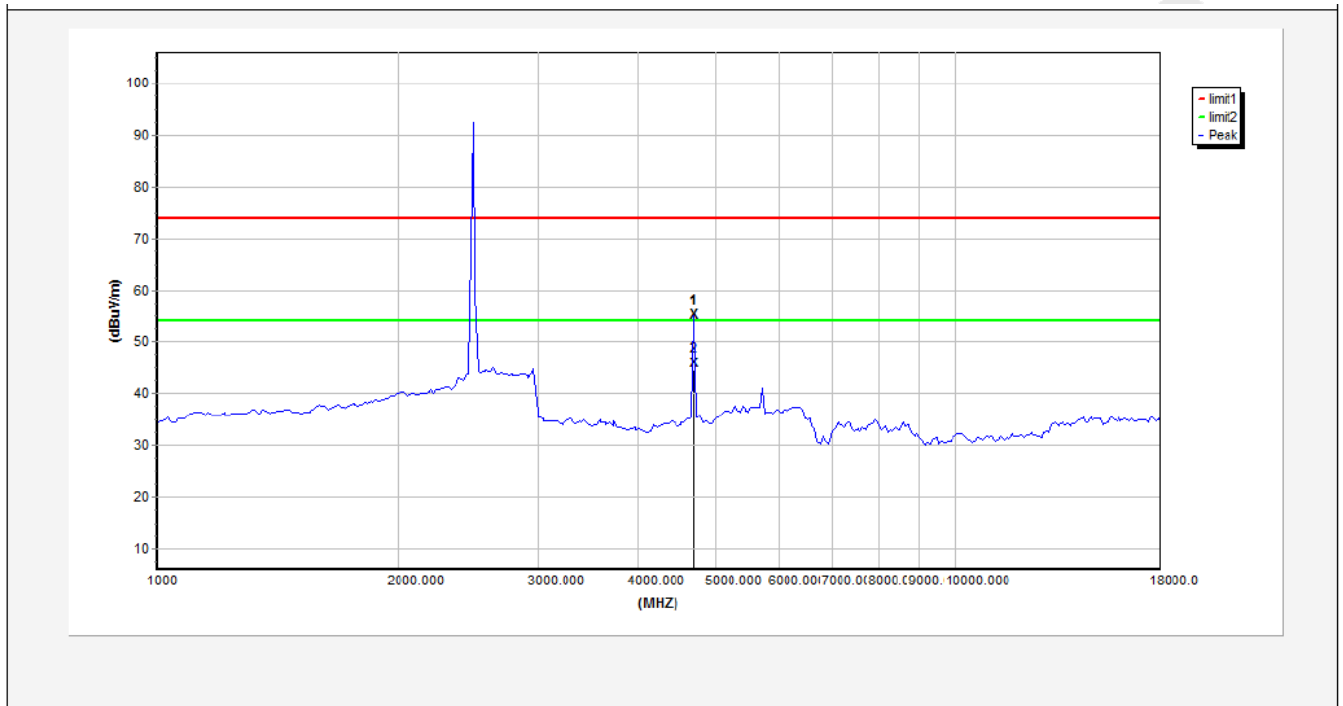


No.	Freq. (MHz)	Reading (dBuV/m)	Antenna (dB/m)	Amp. (dB/m)	Cable (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)
1	4806.5000	55.13	3.11	16.26	16.26	52.02	74.00	-18.87	peak	---	---
2	4806.5000	45.77	3.11	16.26	16.26	42.66	54.00	-8.23	AVG	---	---

Job No.:	011509071I	Plarization:	Vertical
Standard:	(RE)FCC PART 15C_Class B_3m	Power Source:	DC 4.8V
Test item:	Radiation Test (Above 1GHz)	Temp.(C)/Hum.(%RH):	24.3( C)/55%RH
Test Mode:	TX(2403 MHz)	Distance:	3m

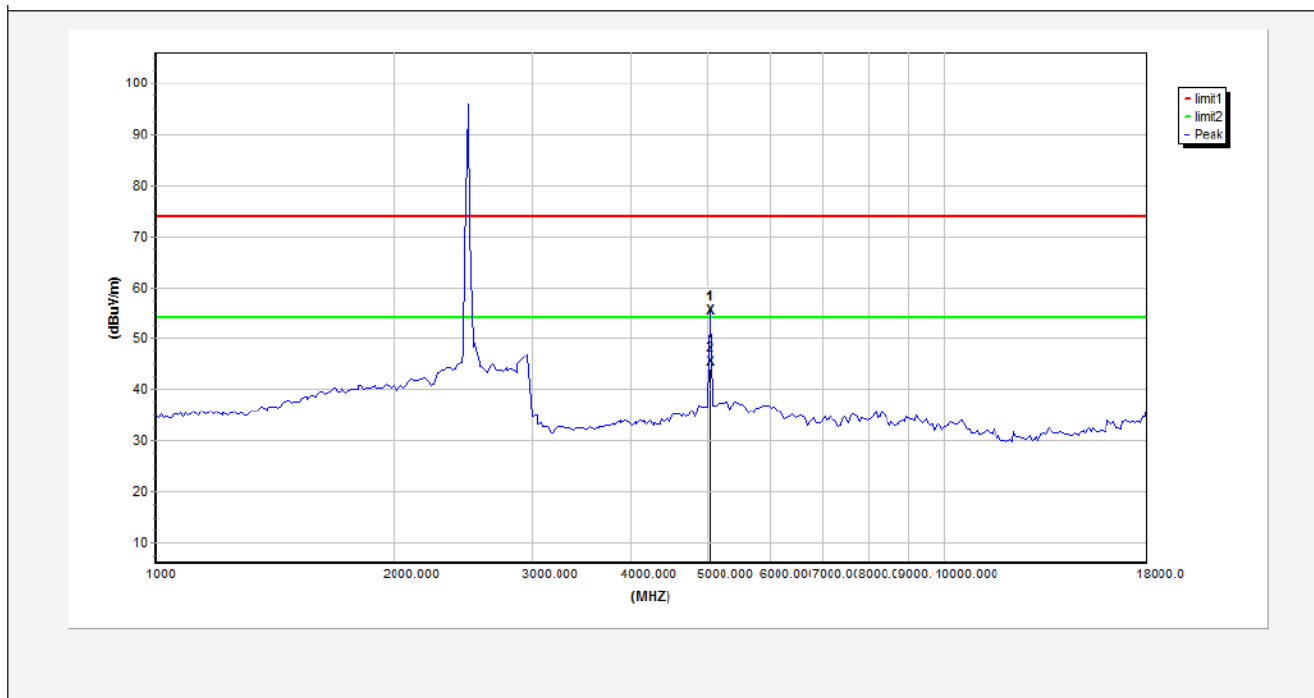


No.	Freq. (MHz)	Reading (dBuV/m)	Antenna (dB/m)	Amp. (dB/m)	Cable (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)
1	4806.5000	55.17	3.67	17.92	17.92	51.50	74.00	-18.83	peak	---	---
2	4806.5000	45.21	3.67	17.92	17.92	41.54	54.00	-8.79	AVG	---	---

Job No.:	011509071I	Plarization:	Horizontal
Standard:	(RE)FCC PART 15C_Class B_3m	Power Source:	DC 4.8V
Test item:	Radiation Test (Above 1GHz)	Temp.(C)/Hum.(%RH):	24.3( C)/55%RH
Test Mode:	TX(2446 MHz)	Distance:	3m

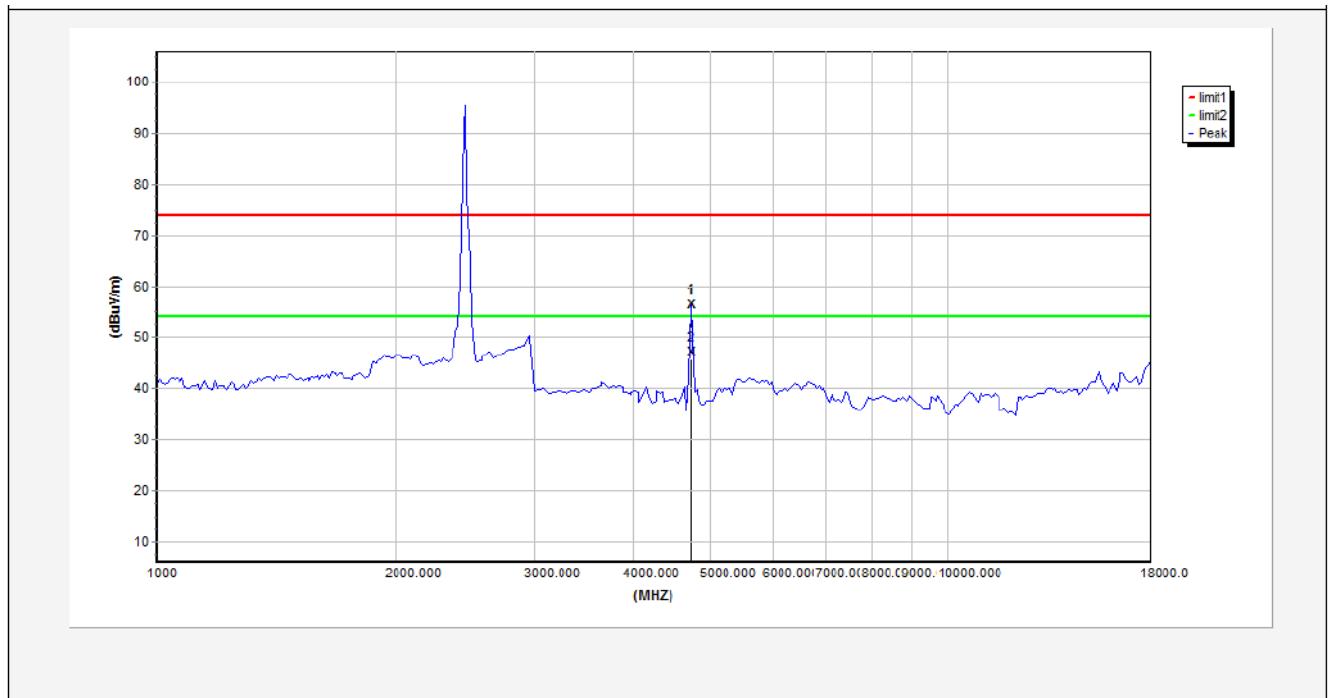


No.	Freq. (MHz)	Reading (dBuV/m)	Antenna (dB/m)	Amp. (dB/m)	Cable (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)
1	4892.0000	56.30	3.19	16.5	16.5	53.11	74.00	-17.70	peak	---	---
2	4892.0000	46.99	3.19	16.5	16.5	43.80	54.00	-7.01	AVG	---	---

Job No.:	0115090711	Plarization:	Vertical
Standard:	(RE)FCC PART 15C_Class B_3m	Power Source:	DC 4.8V
Test item:	Radiation Test (Above 1GHz)	Temp.(C)/Hum.(%RH):	24.3( C)/55%RH
Test Mode:	TX(2446 MHz)	Distance:	3m

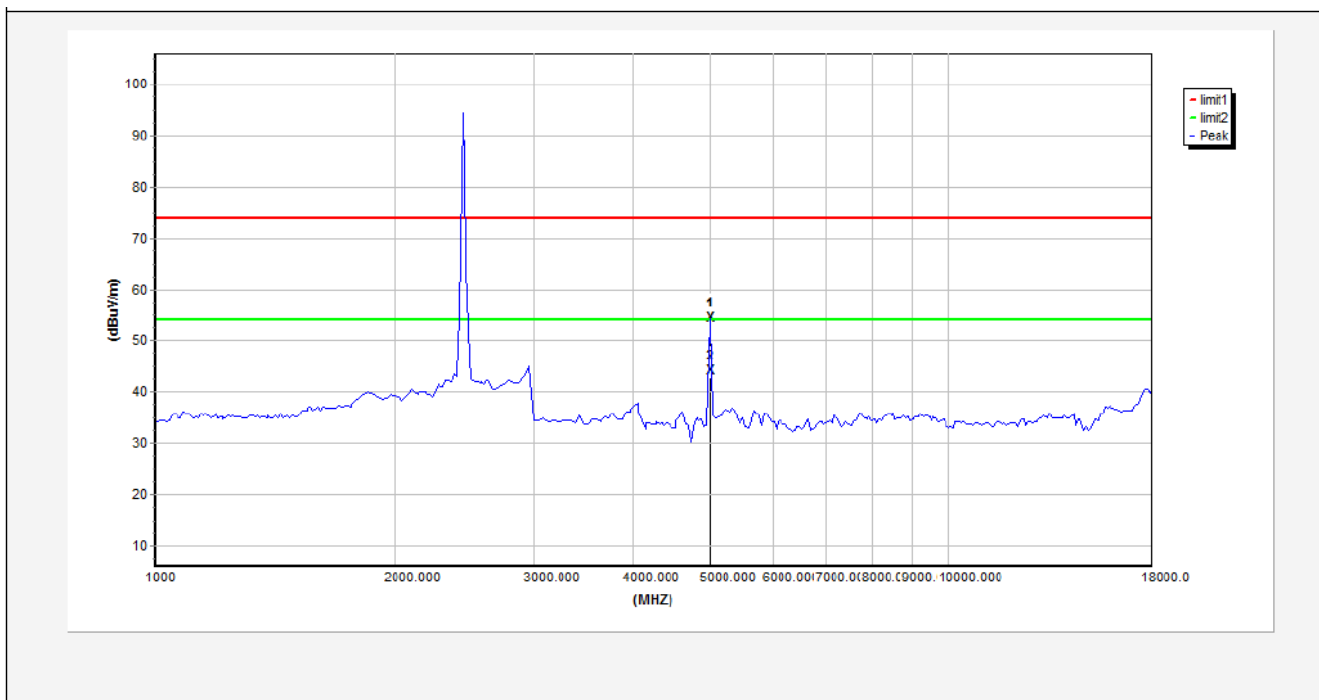


No.	Freq. (MHz)	Reading (dBuV/m)	Antenna (dB/m)	Amp. (dB/m)	Cable (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)
1	4892.0000	54.36	3.64	17.96	17.96	50.72	74.00	-19.64	peak	---	---
2	4892.0000	44.00	3.64	17.96	17.96	40.36	54.00	-10.00	AVG	---	---

Job No.:	011509071I	Plarization:	Horizontal
Standard:	(RE)FCC PART 15C_Class B_3m	Power Source:	DC 4.8V
Test item:	Radiation Test (Above 1GHz)	Temp.(C)/Hum.(%RH):	24.3( C)/55%RH
Test Mode:	TX(2479 MHz)	Distance:	3m

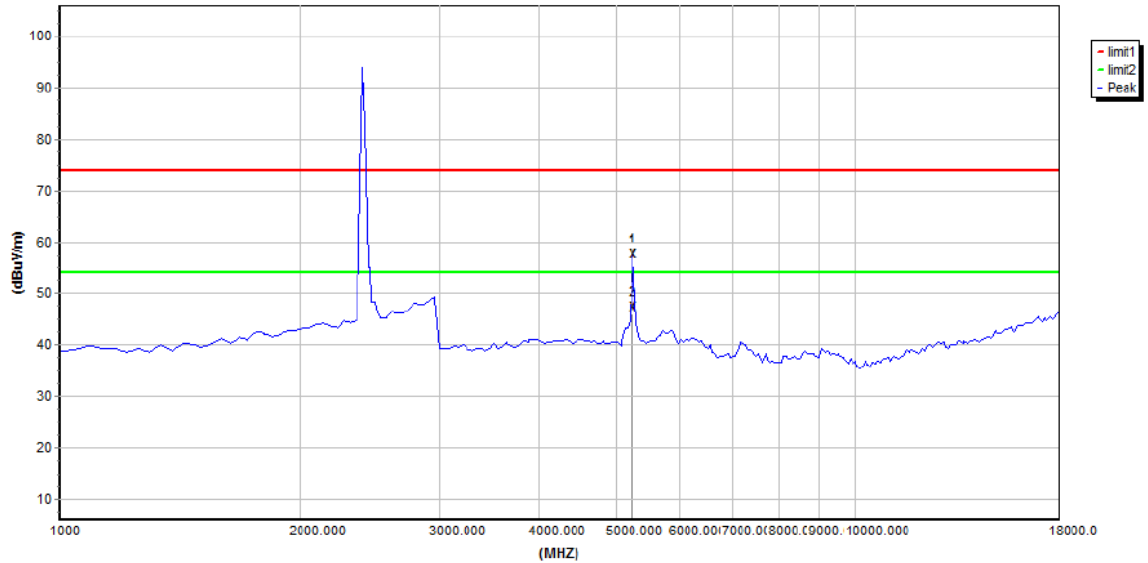

No.	Freq. (MHz)	Reading (dBuV/m)	Antenna (dB/m)	Amp. (dB/m)	Cable (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)
1	4956.0000	57.55	3.8	17.52	17.53	53.74	74.00	-16.45	peak	---	---
2	4956.0000	47.10	3.8	17.52	17.53	43.29	54.00	-6.90	AVG	---	---

Job No.:	0115090711	Plarization:	Vertical
Standard:	(RE)FCC PART 15C_Class B_3m	Power Source:	DC 4.8V
Test item:	Radiation Test (Above 1GHz)	Temp.(C)/Hum.(%RH):	24.3( C)/55%RH
Test Mode:	TX(2479 MHz)	Distance:	3m

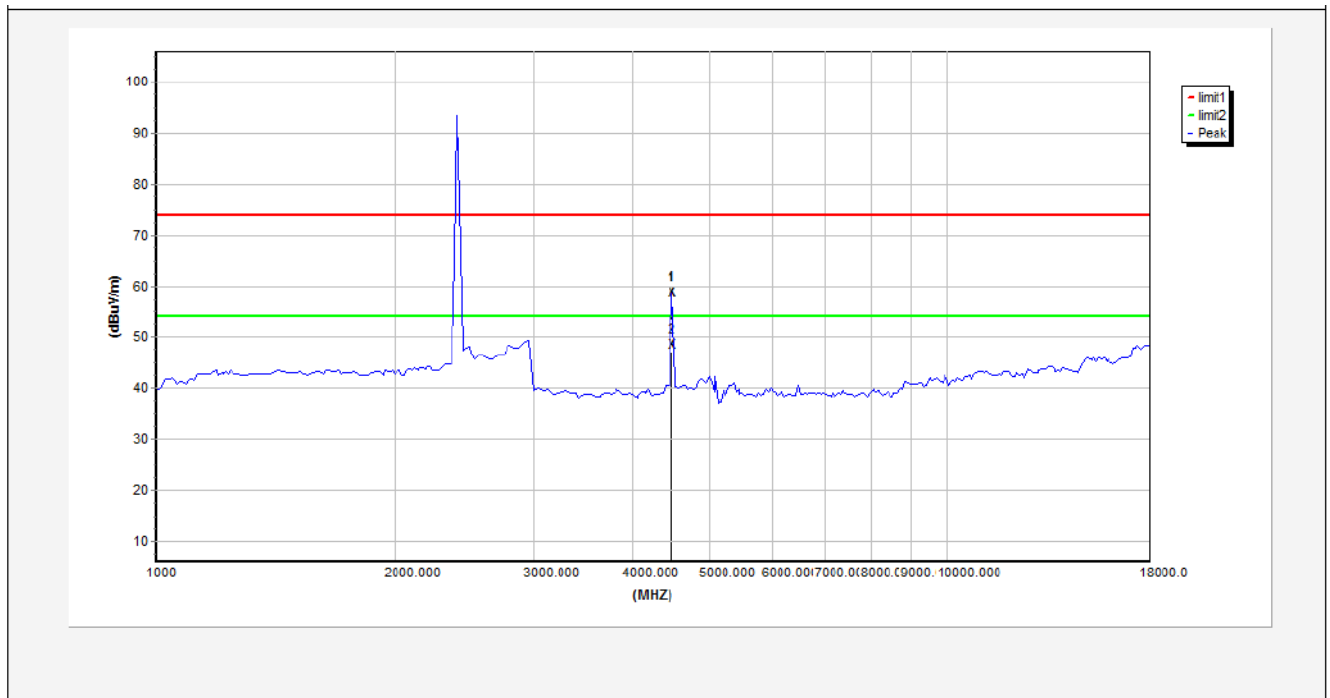

No.	Freq. (MHz)	Reading (dBuV/m)	Antenna (dB/m)	Amp. (dB/m)	Cable (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)
1	4956.0000	58.62	2.74	15.11	15.11	55.88	74.00	-15.38	peak	---	---
2	4956.0000	48.38	2.74	15.11	15.11	45.64	54.00	-5.62	AVG	---	---




## 5. CHANNEL SEPARATION TEST

### 5.1 Measurement Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

### 5.2 Test SET-UP



### 5.3 Test Equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Jun 30, 2016	1 Year


## 5.4 Test Results

Test Item	:	Frequency Separation	Test Mode	:	CH Low ~ CH High
Test Voltage	:	DC 4.8V	Temperatur e	:	24℃
Test Result	:	PASS	Humidity	:	55%RH


Channel	Frequency (MHz)	Separation Read Value (kHz)	Limit (kHz)	Result
Low	2403	1005	991.2	Pass
Mid	2446	1005	998.5	Pass
High	2479	1005	992.0	Pass

Channel---Low

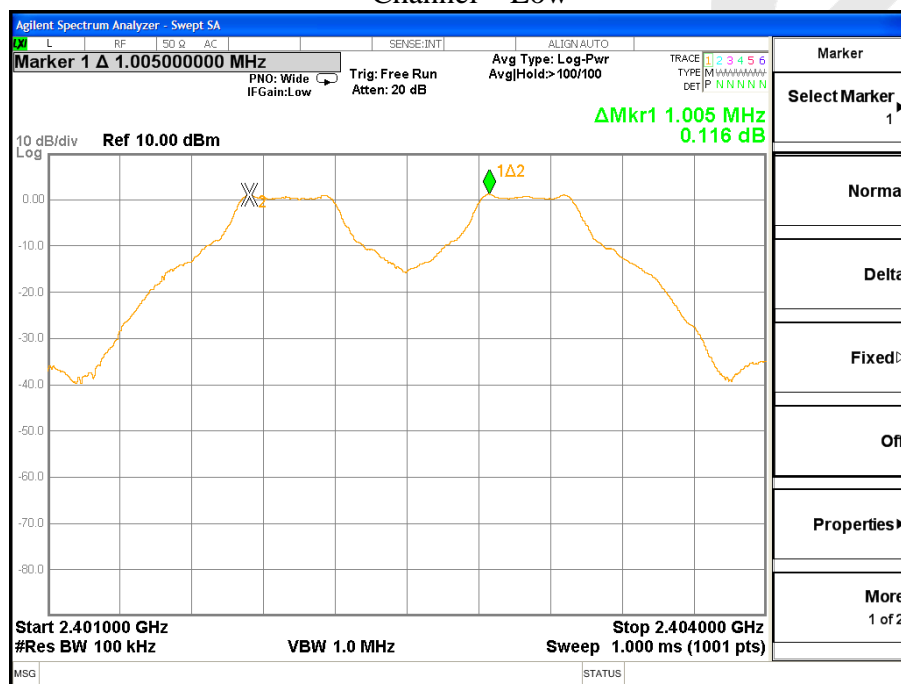

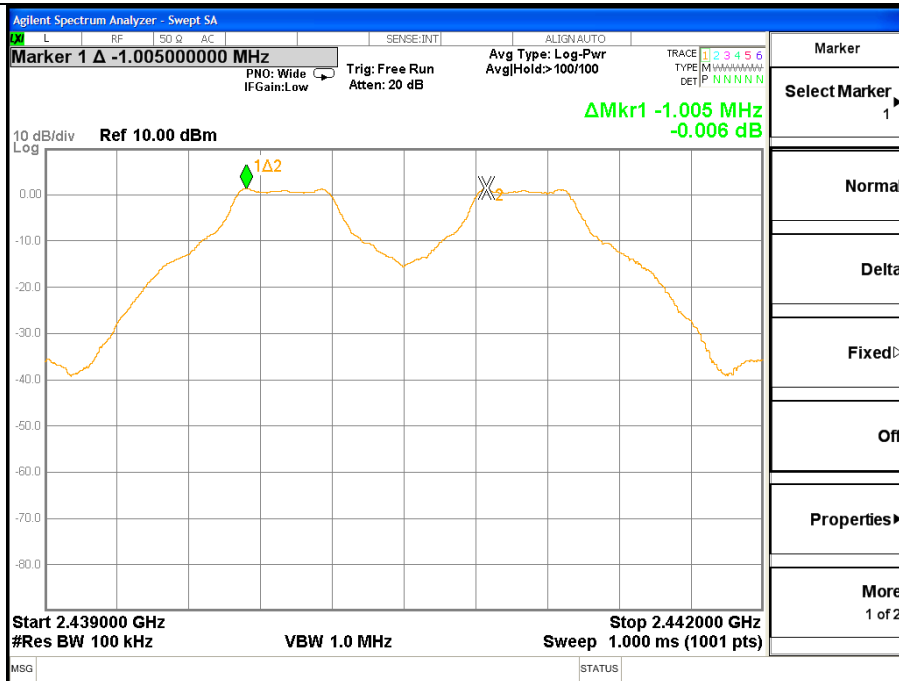

Channel--Mid

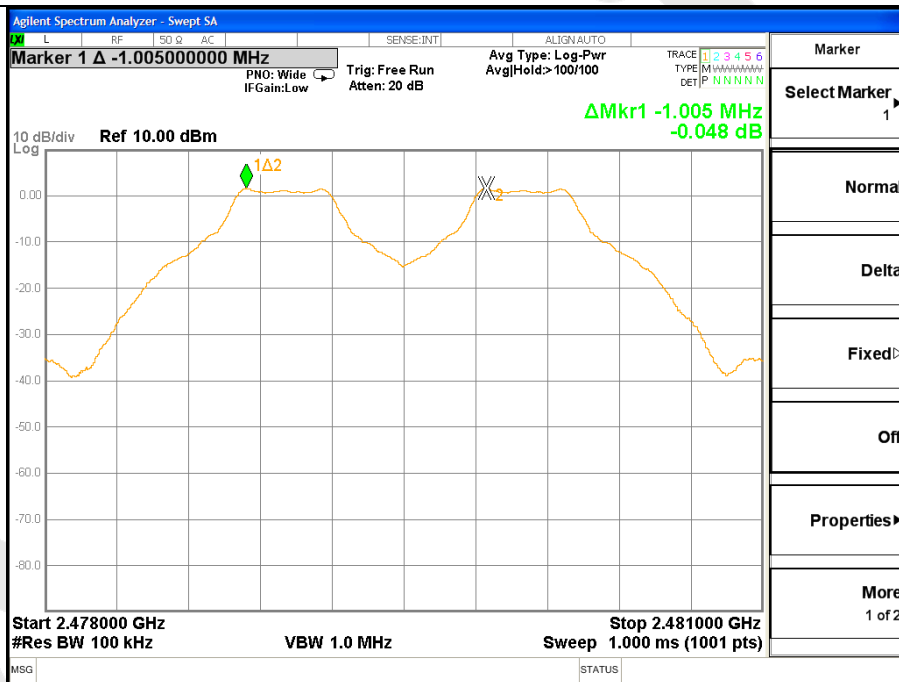

Channel---High


## 6. 20DB BANDWIDTH TEST

### 6.1 Measurement Procedure

Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

### 6.2 Test SET-UP




### 6.3 Test Equipment

Same as the equipment listed in 5.3.


### 6.4 Test Results

Test Item	: 20dB BW	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 4.8V	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH


Channel	Frequency (MHz)	20dB Down BW(kHz)	Result
Low	2403	991.2	Pass
Mid	2446	998.5	Pass
High	2479	992.0	Pass

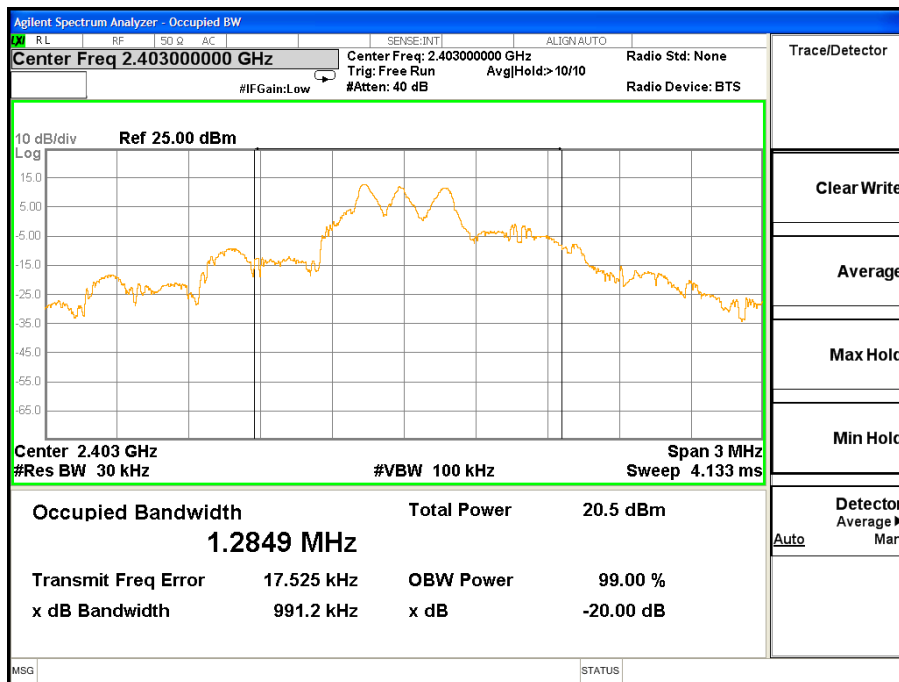

Channel---Low

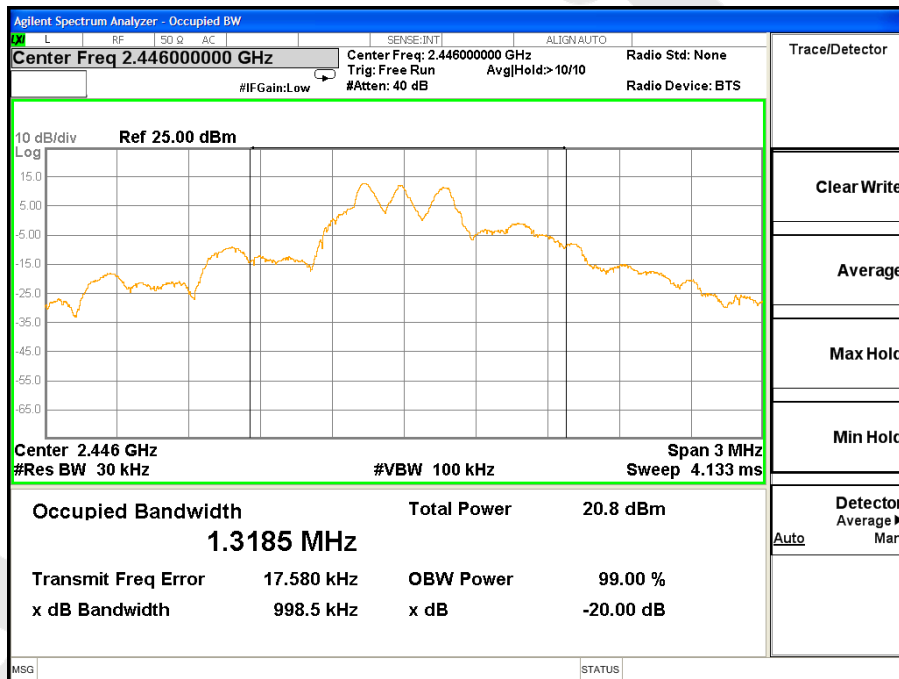

Channel--Mid

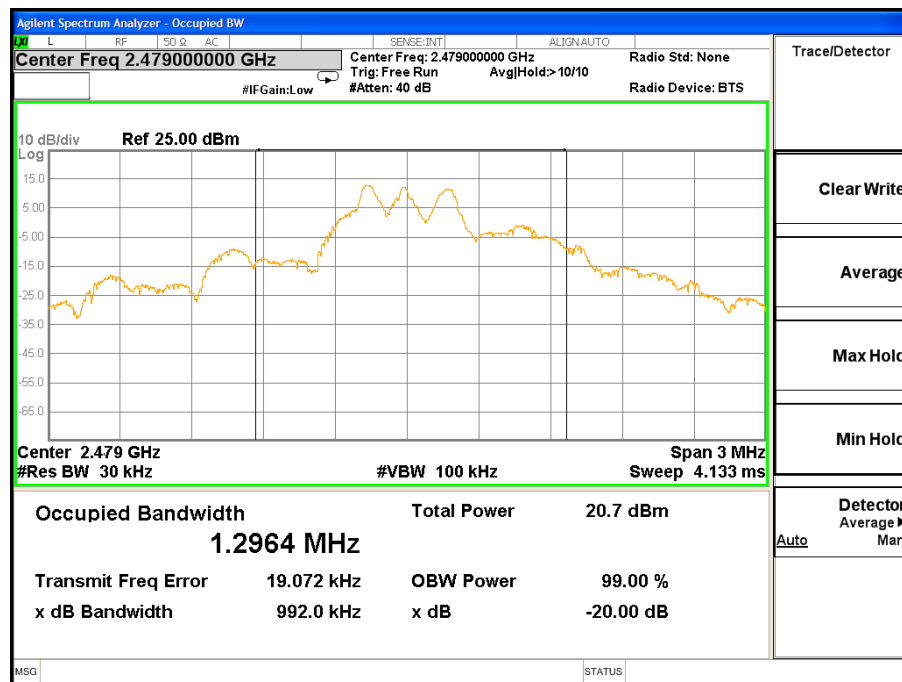

Channel---High


## 7. QUANTITY OF HOPPING CHANNEL TEST

### 7.1 Measurement Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:

1. Span= the frequency band of operation
2. Set the RBW = 1 MHz.
3. Set the VBW = 1 MHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

### 7.2 Test SET-UP




### 7.3 Test Equipment

Same as the equipment listed in 5.3.

### 7.4 Test Results

Test Item	: Number of Hopping Frequency	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 4.8V	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2403-2479	77	> 15

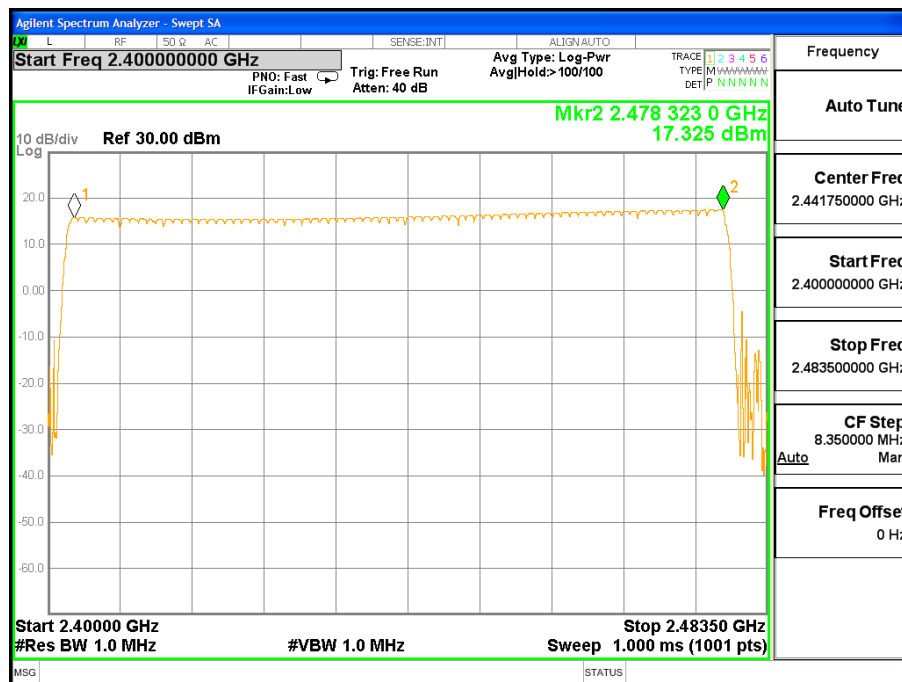




## 8. DWELL TIME TEST

### 8.1 Measurement Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 1 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

### 8.2 Test SET-UP




### 8.3 Test Equipment

Same as the equipment listed in 5.3.

### 8.4 Test Results

Test Item	:	Time of Occupancy	Test Mode	:	CH Low ~ CH High
Test Voltage	:	DC 4.8V	Temperature	:	24°C
Test Result	:	PASS	Humidity	:	55%RH

Test CH	Pulse width (ms)	Time slot length(ms)	Dwell time (ms)	Limit (ms)
Low	0.089	Pulse width*2/30*(0.4*77)	0.183	400

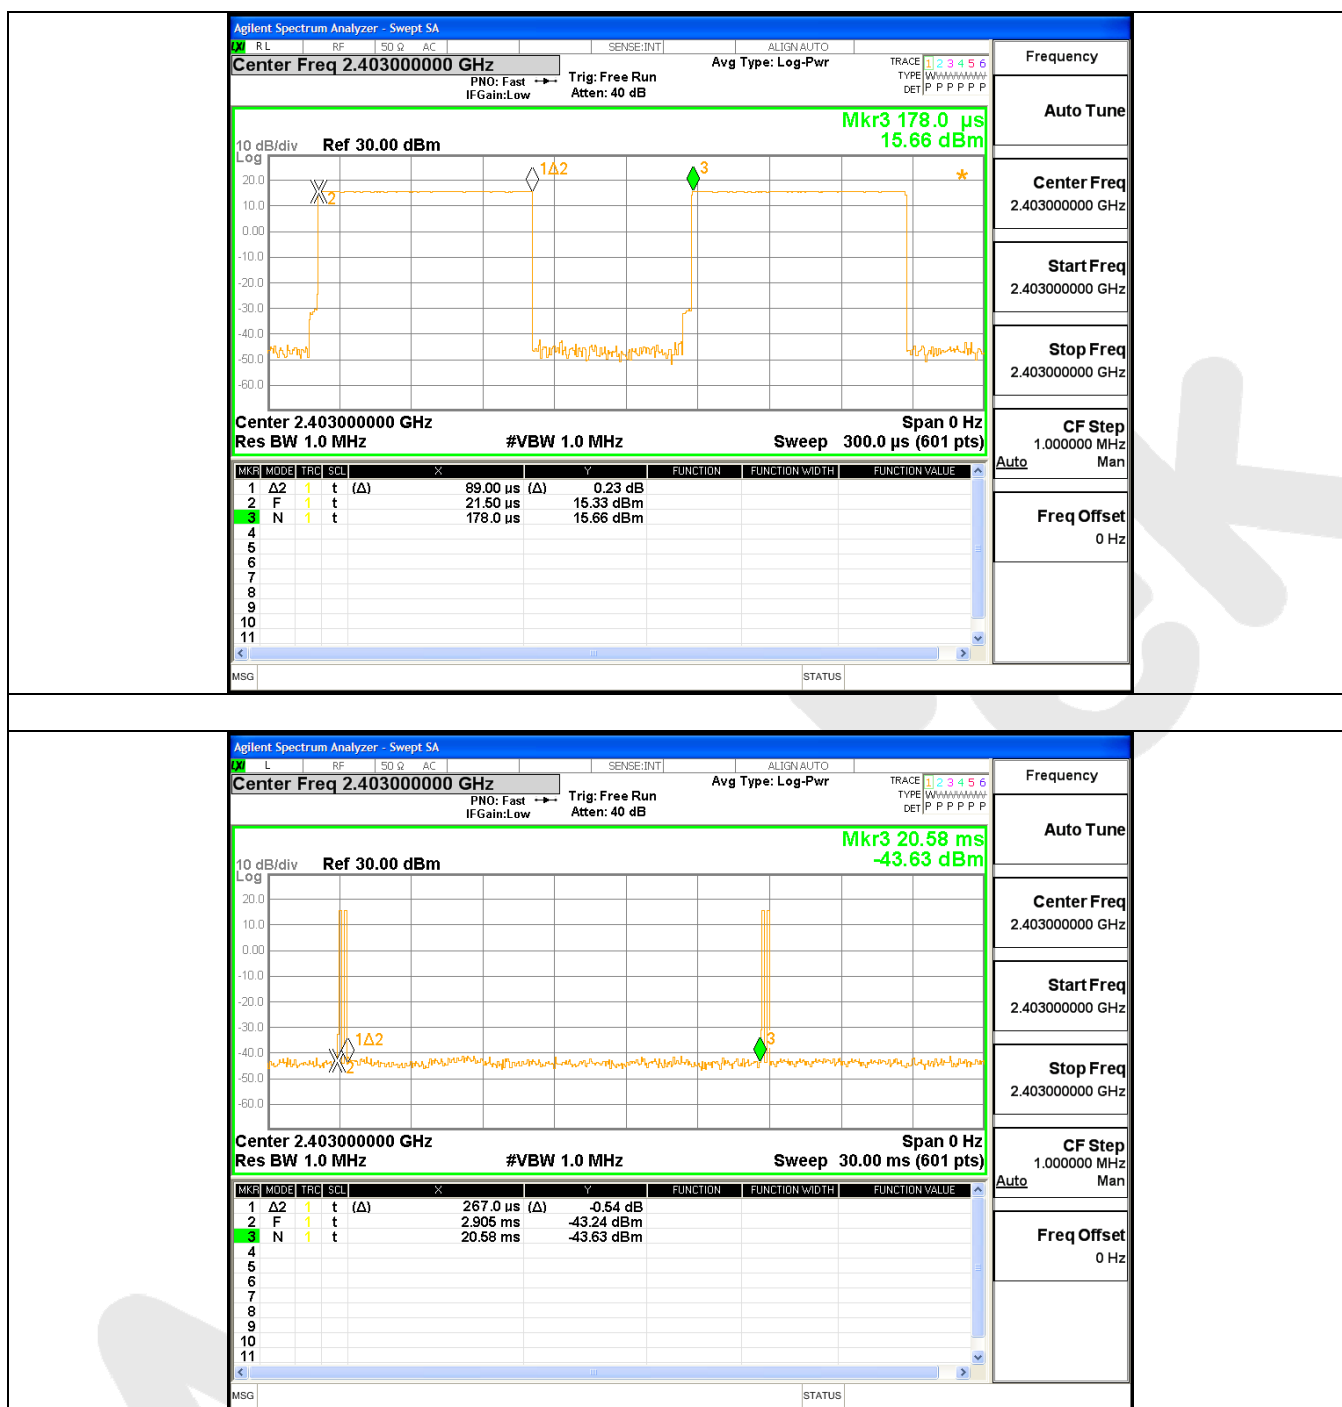

## 9. MAXIMUM PEAK OUTPUT POWER TEST


### 9.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

Using the following spectrum analyzer settings:

- Span= approximately 5 times the 20dB bandwidth, centered on a hopping channel
- Set the RBW = 1 MHz.
- Set the VBW = 3 MHz.
- Sweep time = auto couple.
- Detector function = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.

### 9.2 Test SET-UP



### 9.3 Test Equipment


Same as the equipment listed in 5.3.

## 9.4 Test Results


Test Item : Max. peak output power      Test Mode : CH Low ~ CH High  
Test Voltage : DC 4.8V      Temperatur e : 24°C  
Test Result : PASS      Humidity : 55%RH

Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power Limit(dBm)	Results
2403	9.264	30	PASS
2446	9.225	30	PASS
2479	9.098	30	PASS


### Low CH

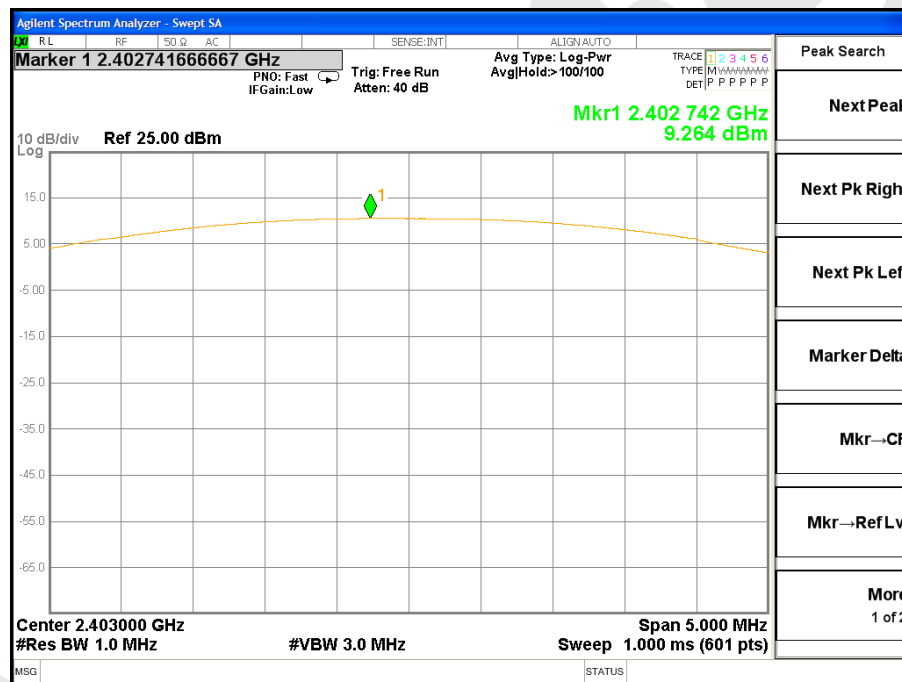

## Mid CH

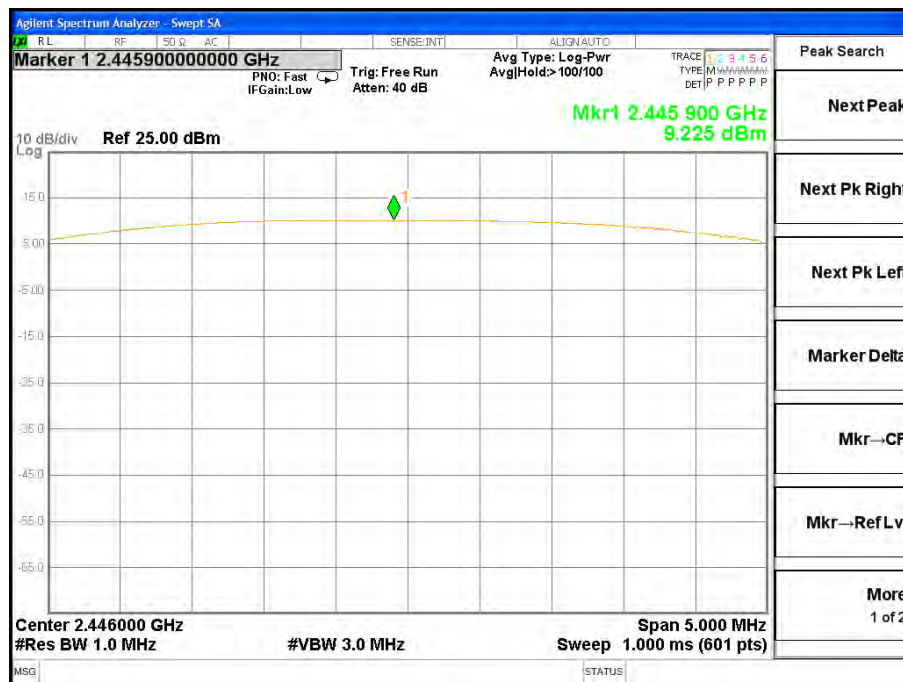

## High CH

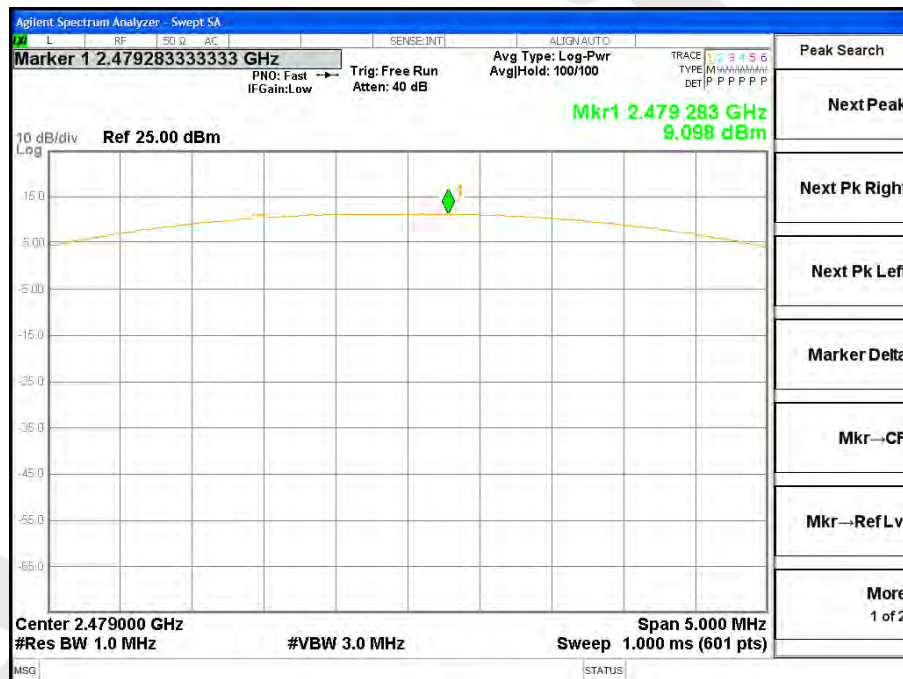

## 10. BAND EDGE TEST

### 10.1 Measurement Procedure


#### A) Conducted Emission method:

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100kHz with a convenient frequency span including 100kHz bandwidth from band edge,
4. Measurement the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Report above procedures until all measured frequencies were complete.

#### B) Radiated Emission method:

The EUT is placed on a turn table which is 1.5 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. for Radiated emissions restricted band RBW= 1 MHz, VBW= 3 MHz.

### 10.2 Test SET-UP

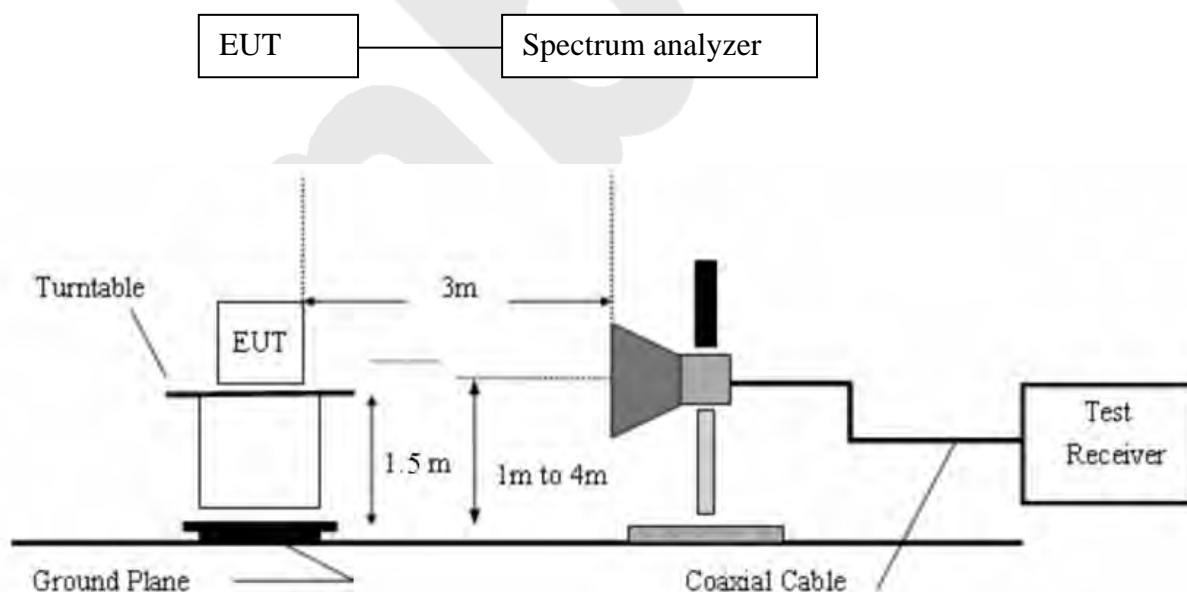

### 10.3 Test Equipment

Same as the equipment listed in 5.3.

### 10.4 Test Results


Pass.

Please refer the following data.

Test Item : Band edge  
Test Voltage : DC 4.8V  
Test Result : PASS

Test Mode : CH Low ~ CH High  
Temperatur : 24°C  
Humidity : 55%RH

#### For Hopping Mode:

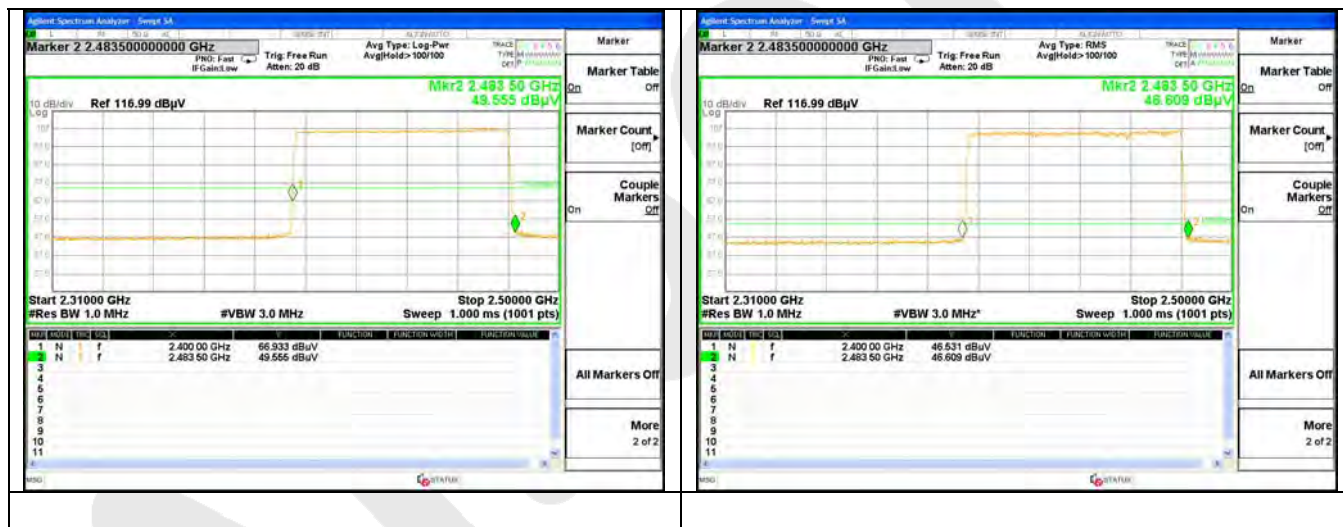



Test Item : Band edge  
Test Voltage : DC 4.8V

Test Mode : CH Low ~ CH High  
Temperatur : 24°C

Test Result : PASS

e  
Humidity : 55%RH


## For Non-Hopping Mode:

### 1. Conducted Test

Frequency (MHz)	Peak Power Output(dBm)	Emission read Value(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)	Results
<2400	16.323	-5.234	21.557	>20dBc	PASS
>2483.5	17.436	-10.034	27.470	>20dBc	PASS

### 2. Radiated emission Test

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)		Results
		PK	AV	PK	AV	
<2400	V	55.27	42.10	74.00	54.00	PASS
>2483.5	V	55.71	43.45	74.00	54.00	PASS

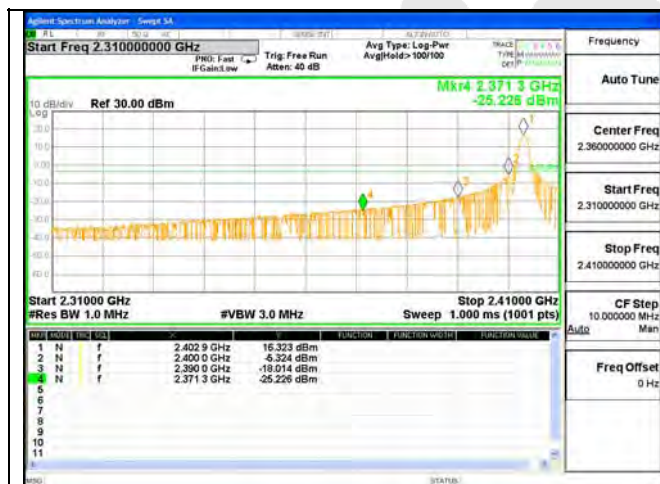

Channel---Low



Channel---High



## 11. ANTENNA APPLICATION

### 11.1 Antenna requirement


The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2479MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 11.2 Result

The EUT's antenna used a Integrated Antenna, The antenna's gain is 0.5dBi and meets the requirement.

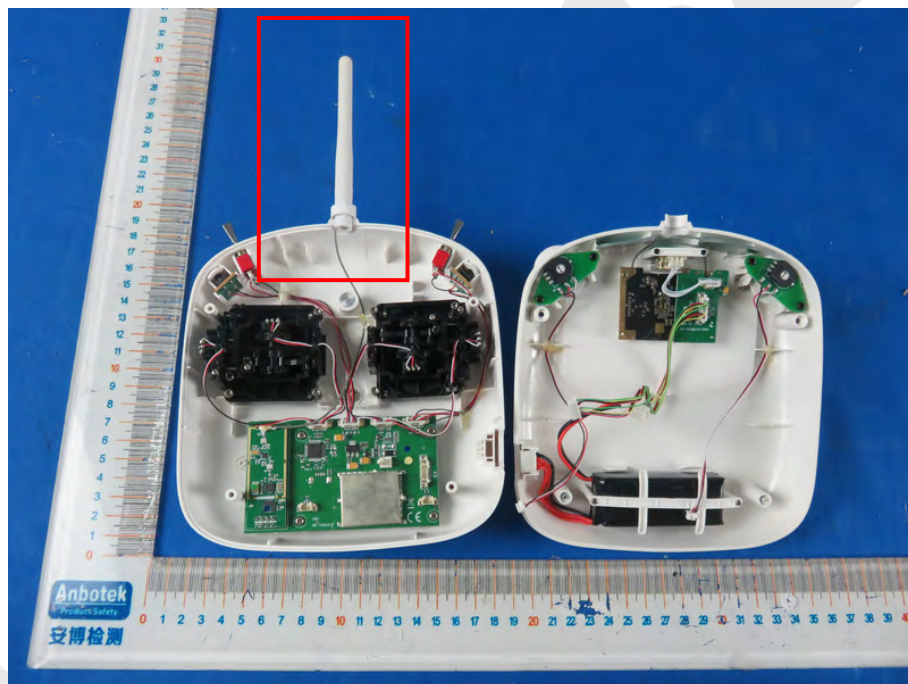



## 12. PHOTOGRAPH

### 12.1 Photo of Power Line Conducted Emission Measurement



### 12.2 Photo of Radiation Emission Test

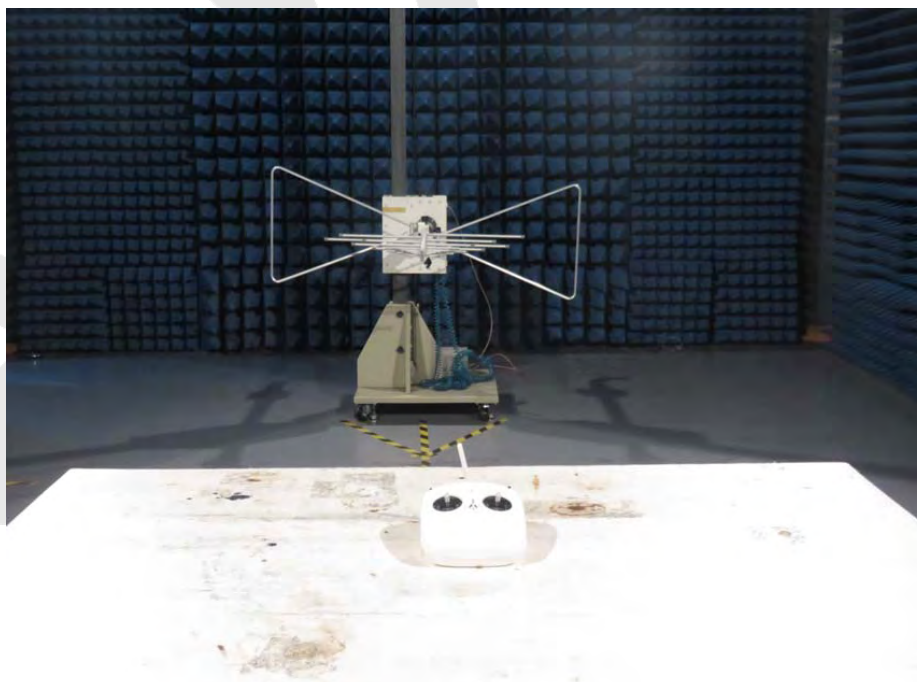

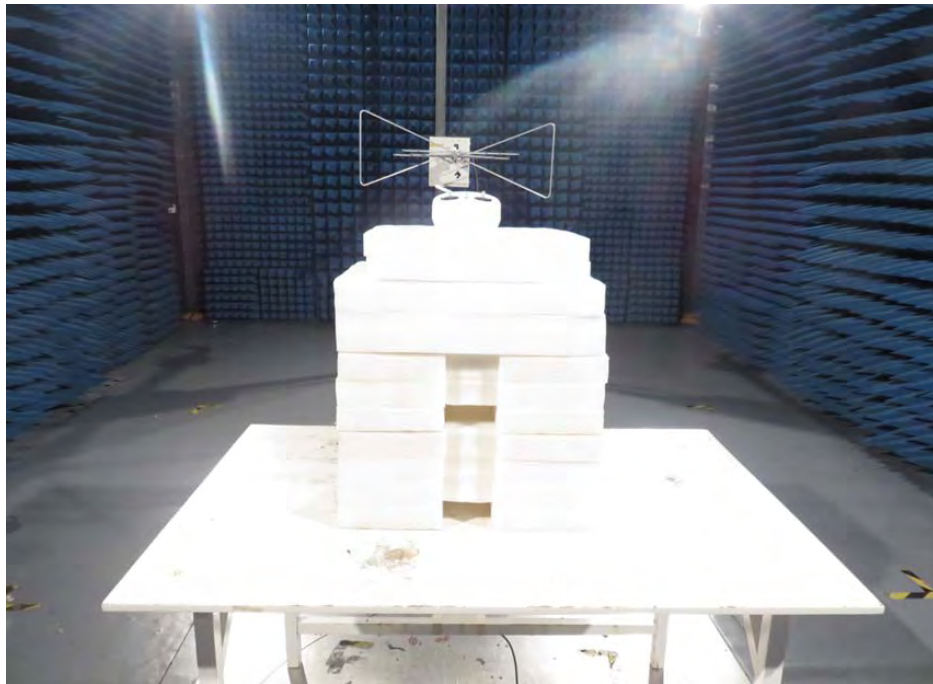

## APPENDIX I (EXTERNAL PHOTOS)

1. Figure  
The EUT-Top View



2. Figure  
The EUT-Bottom View






3. Figure  
The EUT-Front View



4. Figure  
The EUT-Back View

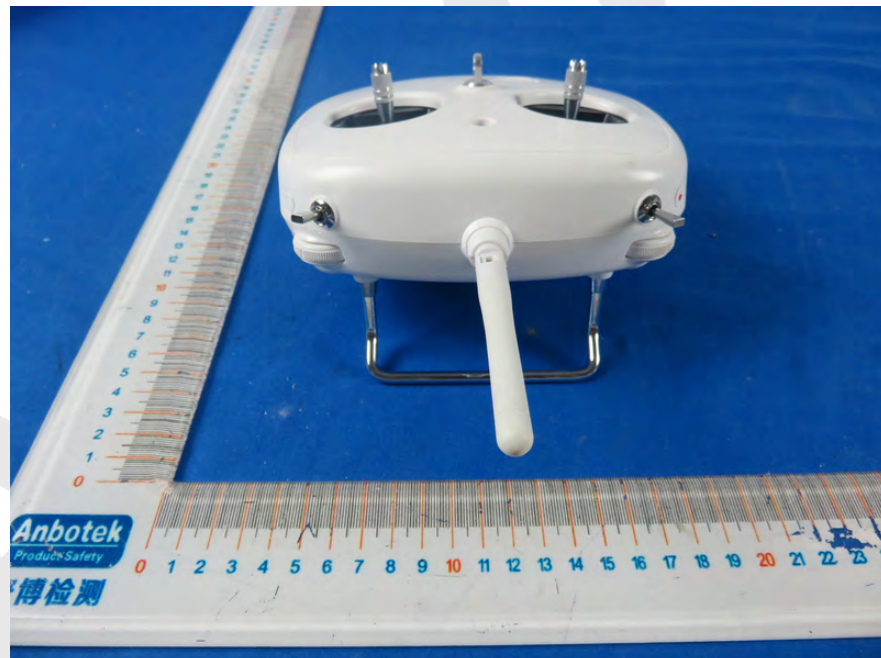

5. Figure  
The EUT- Right View




6. Figure  
The EUT- Left View




## APPENDIX II (INTERNAL PHOTOS)

1. Figure  
The EUT-Inside View

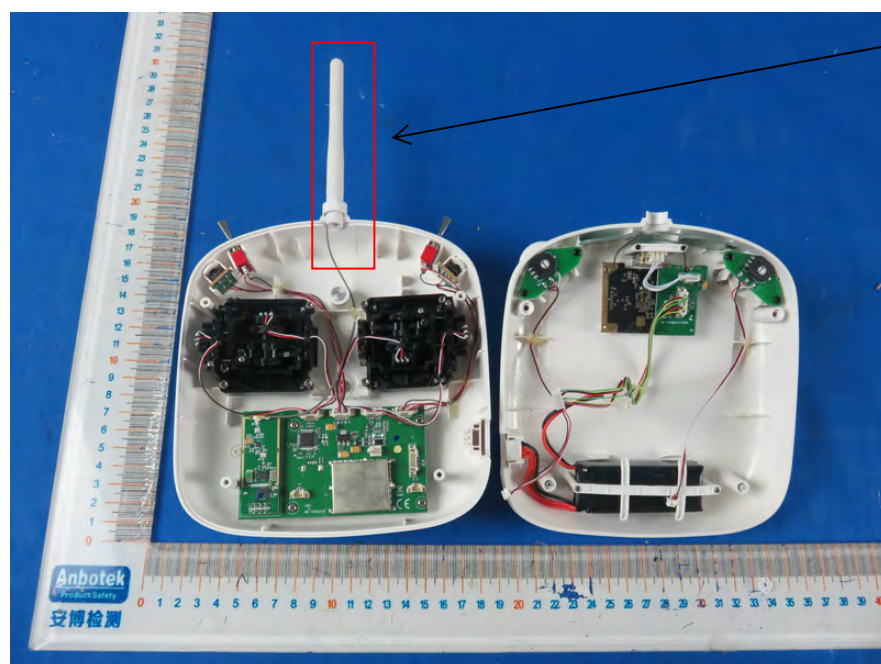


2. Figure  
PCB of the EUT-Front View

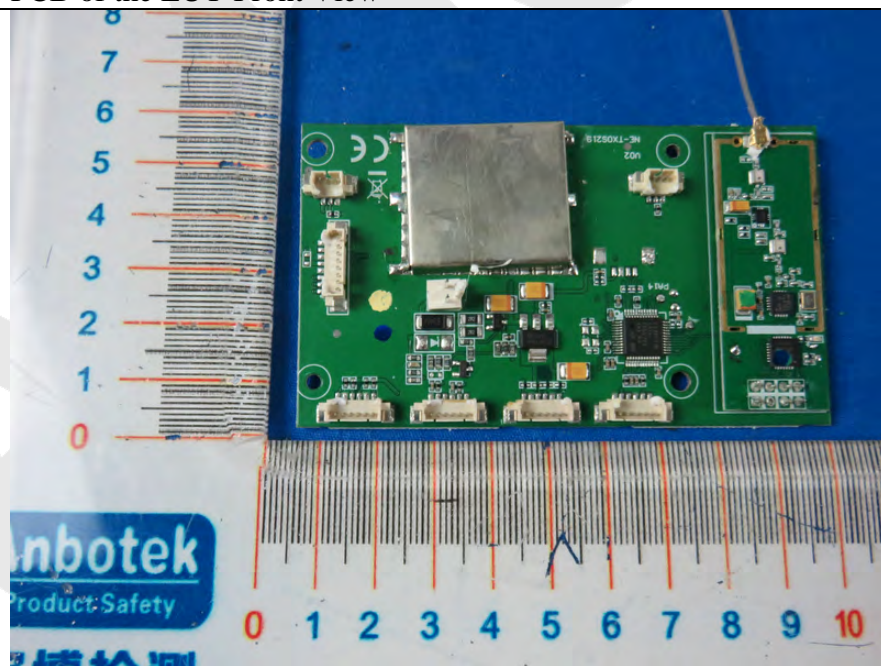




3. Figure  
PCB of the EUT-Back View

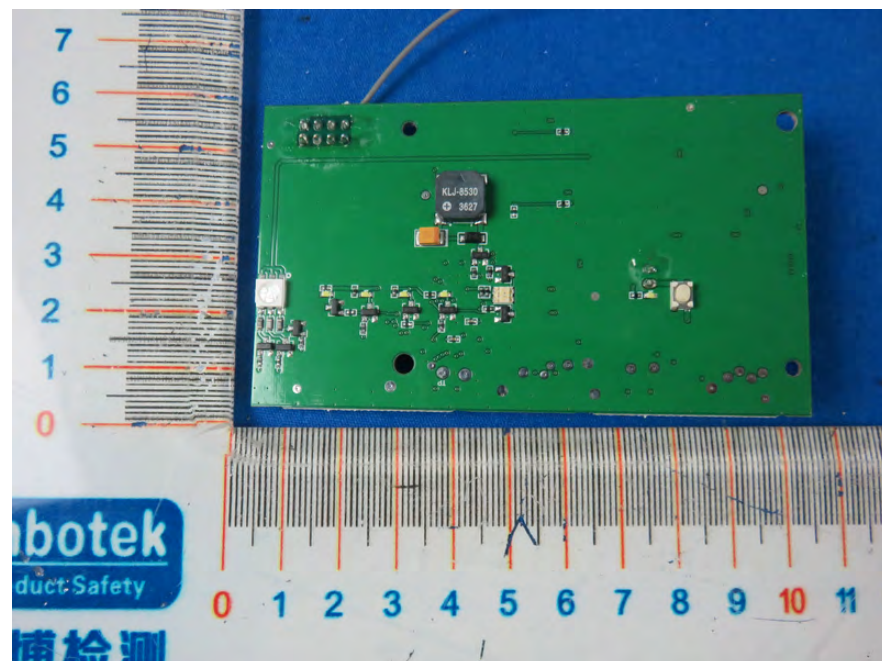


4. Figure  
PCB of the EUT-Front View

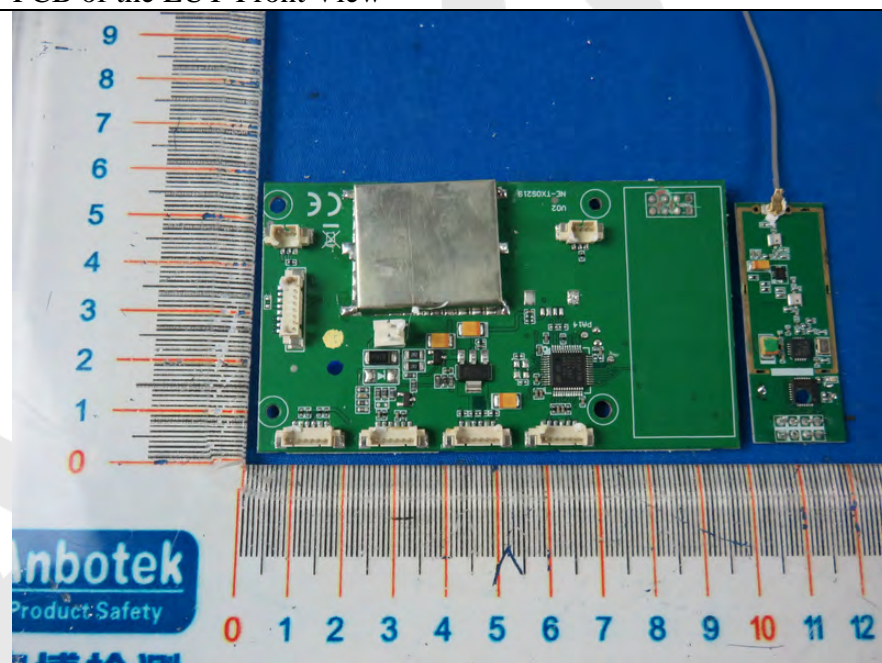





5. Figure  
PCB of the EUT-Back View

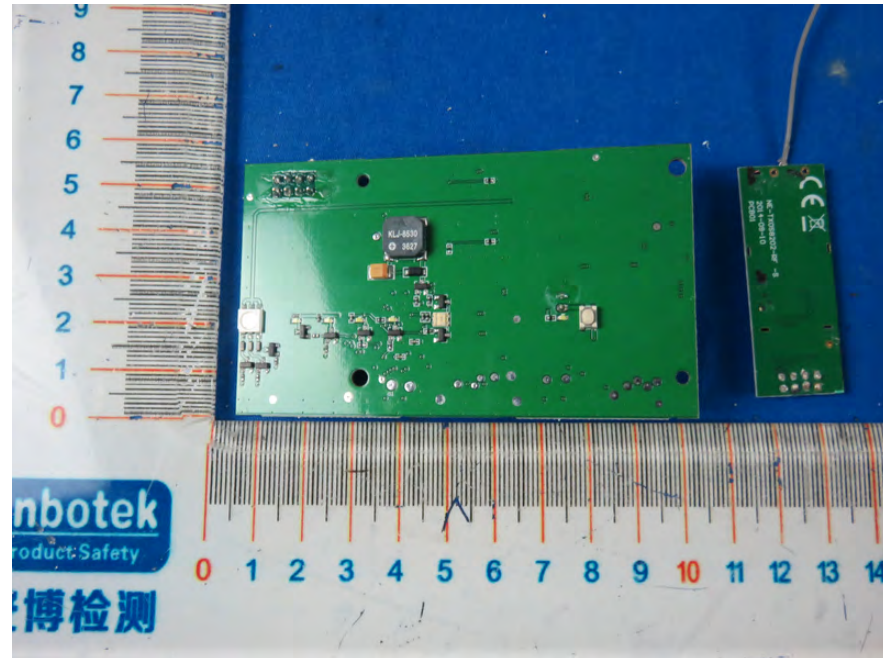


6. Figure  
PCB of the EUT-Front View

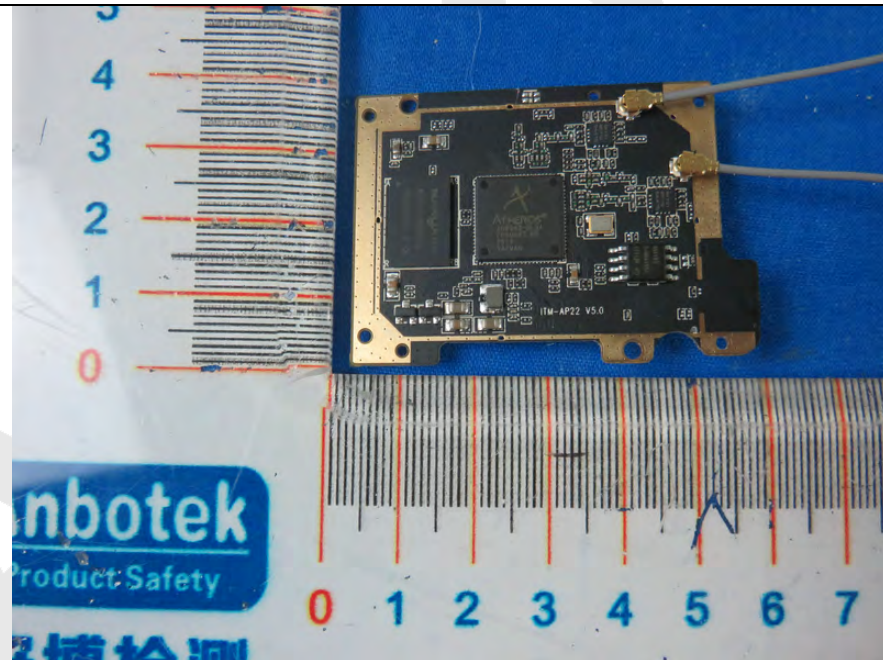

7. Figure  
PCB of the EUT-Back View

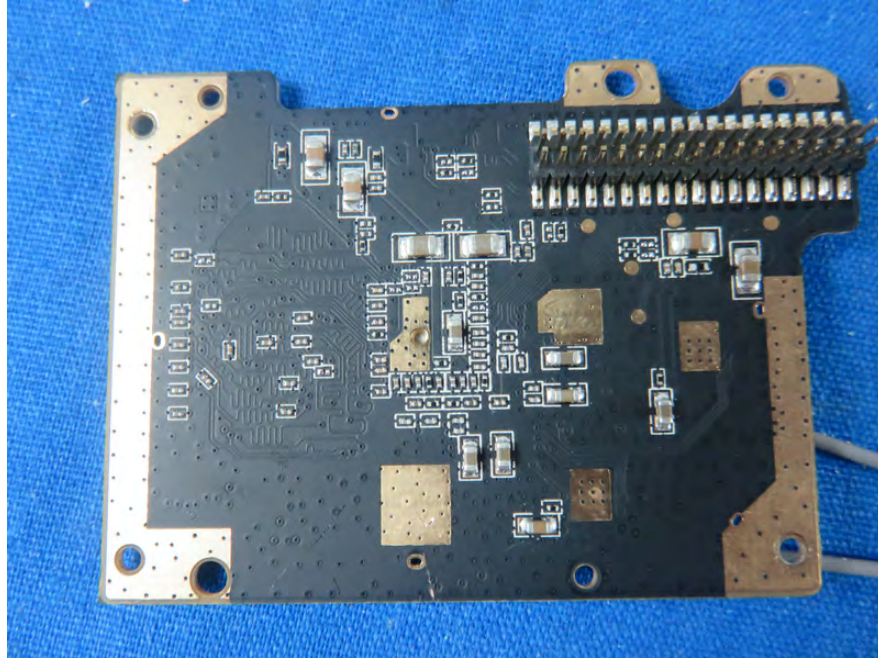

8. Figure  
PCB of the EUT-Front View

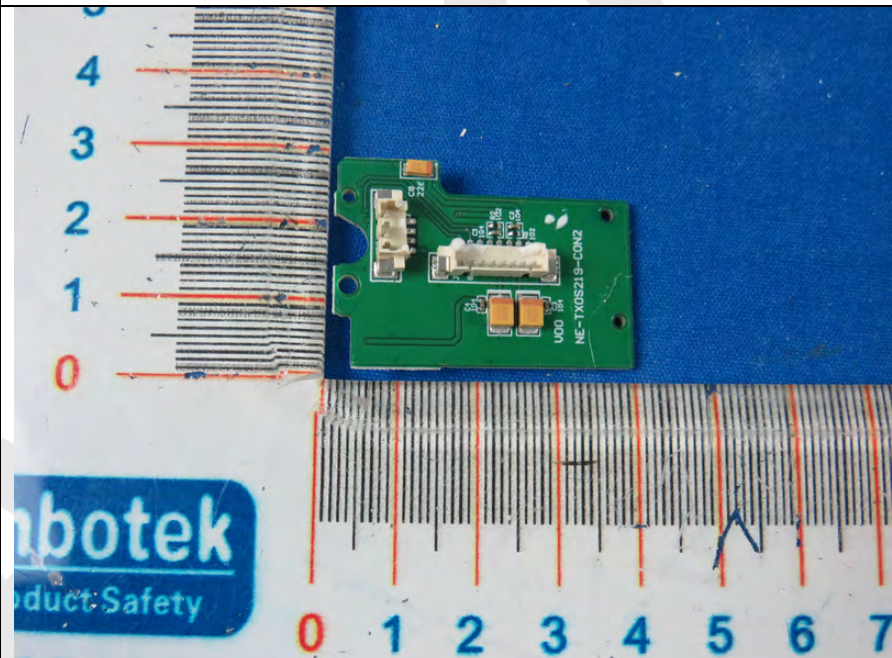



9. Figure  
PCB of the EUT-Back View

