



AirLink
COMMUNICATIONS



3066308

FCC ID N7N-MC5725

IC 2417C-MC5725


Conforms to ISA-12 12 01

Certified to CAN/CSA STD C22.2 No. 213

This apparatus is suitable for use in Class 1 Div 2 Groups A, B, C, and D T4 locations.
Ambient temperatures of -30C to +70C. Warning: Explosion Hazard. Do not disconnect while
circuit is live or unless the area is known to be free of ignitable concentrations. Rated input
10V to 28V DC, 0.02 to 0.45 Amps. This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions: (1) This device does not cause harmful
interference, and (2) This device must accept any interference received including
interference that may cause undesired operation.
Cet appareil est certifié pour l'usage dans la Classe 1, des endroits Division 2, Groupes
atmosphérique A, B, C et de D, T4. Avertissement: Risque d'Explosion. Ne débrancher pas
tandis que le circuit est électrifié sauf si il n'y a aucune concentration de vapeurs
combustibles. La température ambiante -30C à +70C.





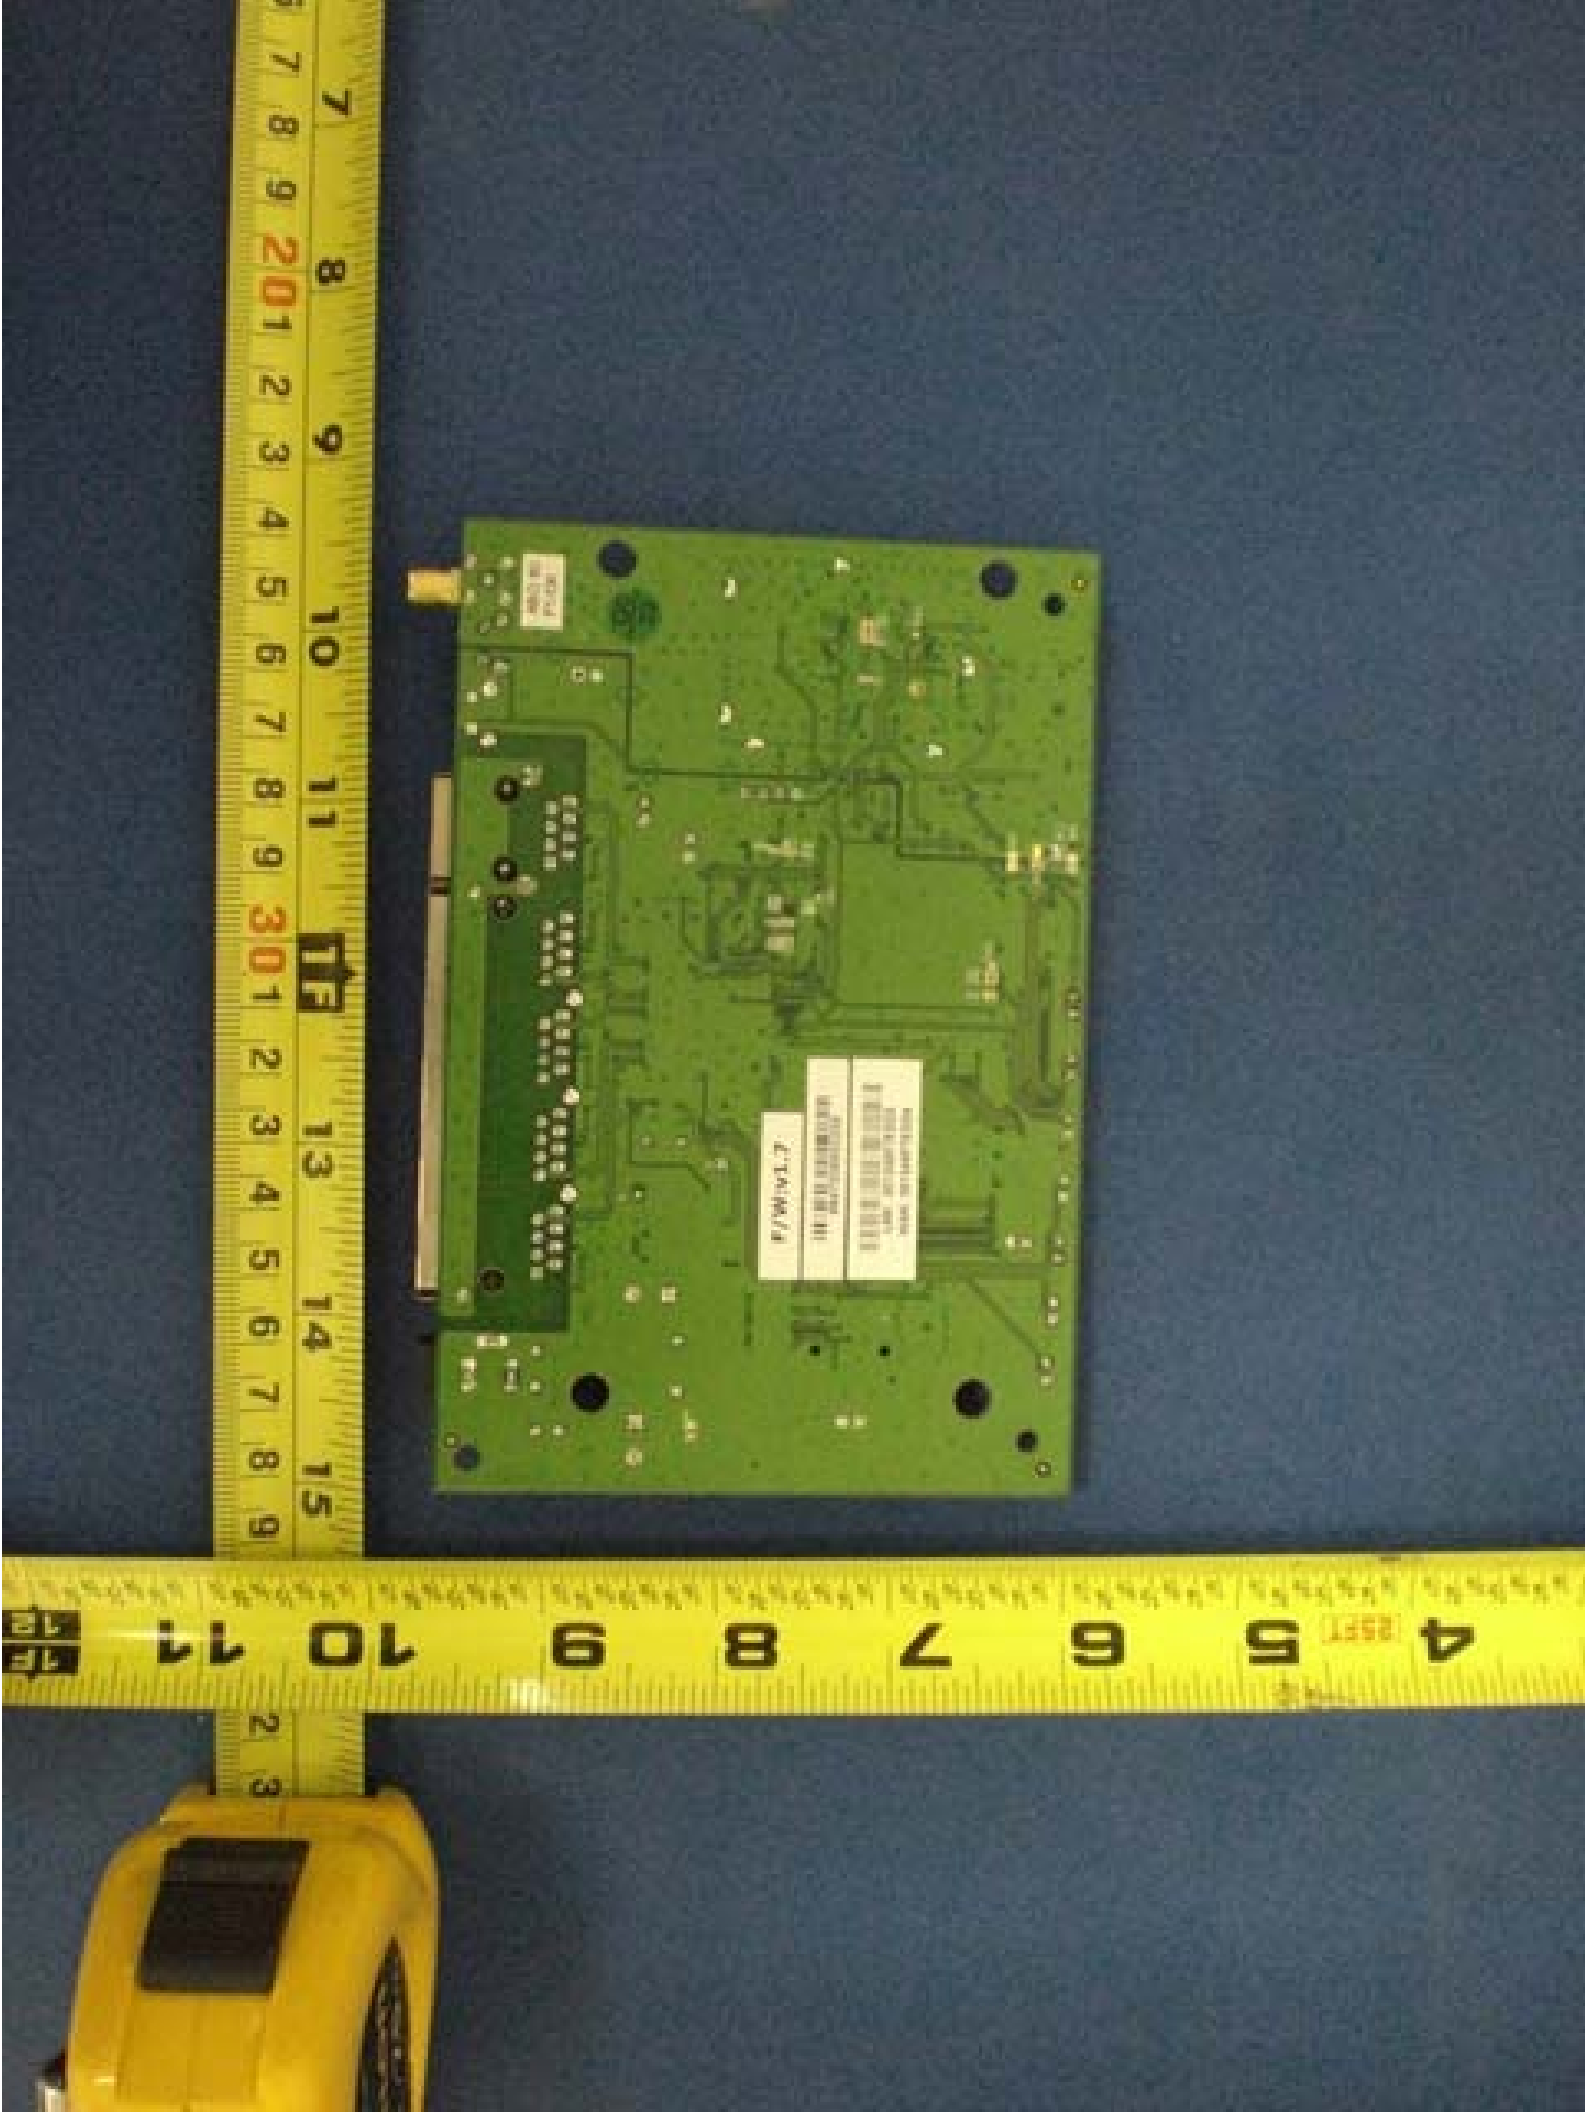





F/W:V1.7

6947208800239

LAN: 801308F7E-DD3
WAN: 801308F7E-DD4

ABO-80
F1/2K

QC
30





F/W:V1.7

8832206901455

LAN: 001349D1E8E3
WAN: 001349D1E8E4

S060F38002735

ABO 60
F1/OK

QC
27