

## HYUNDAI CALIBRATION & CERTIFICATION TECH. CO., LTD.

Product Compliance Division, EMC Team  
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNKI-DO, 467-701, KOREA  
TEL: +82 31 639 8518 FAX: +82 31 639 8525

# TEST REPORT

**Manufacture;**  
**Aomni International**

463-841) C-601 Inteli-G-2, Jeongja-Dong 24, Bundang-Gu  
Seongnam-Si, Gyeonggi-Do, Korea

FRN: 0016269607

**Date of Issue:** August 27, 2007

**Test Report No.:** HCT-F07-0809

**Test Site:** HYUNDAI CALIBRATION & CERTIFICATION  
TECHNOLOGIES CO., LTD.

**HCT FRN:** 0005-8664-21

**FCC ID :**

**U6DAL420VA**

**MODEL:**

**HL-4210V, AL420VA**

**Rule Part(s):** Part 15 & 2  
**Equipment Class:** FCC Class B Peripheral Device (JBP)  
**Standard(s):** FCC Class B: (CISPR 22)

**EUT Port:** DTV & Service Port, Audio In, HDMI, Serial, Component, Audio Out,  
S-Video, AV 3 In, AV 2 In, AV 1 In, Line Out, D-sub

**LCD Panel:** LC420WX5/ LG. PHILIPS LCD

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Report prepared by  
: Kyoung Houn, Seo  
Test engineer of EMC Tech. Part



Approved by  
: Sang Jun LEE  
Manager of EMC Tech. Part



# TABLE OF CONTENTS

	PAGE
REPORT COVER	1
TABLE OF CONTENTS	2
1. SCOPE	3
2. INTRODUCTION (SITE DESCRIPTION )	4
3. PRODUCTION INFORMATION	5 - 6
3.1 Equipment Description	
3.2 EMI Suppression Devices	
4. DESCRIPTION OF TESTS (CONDUCTED)	7
4.1 Powerline Conducted RFI	
5. DESCRIPTION OF TESTS (RADIATED)	8
6. LIST OF SUPPORT EQUIPMENT	9 - 11
6.1 Cable Description	
6.2 Noise Suppression Parts on Cable. (I/O CABLE)	
7. TEST DATA (CONDUCTED)	12 - 16
8. TEST DATA (RADIATED)	17
9. SAMPLE CALCULATIONS	18
9.1 Example 1	
9.2 Example 2	
10. TEST EQUIPMENT	19
11. TEST SOFTWARE USED	20
12. CONCLUSION	21

ATTACHMENT A:	FCC ID LABEL & LOCATION
ATTACHMENT B:	EXTERNAL PHOTOGRAPHS
ATTACHMENT C:	BLOCK DIAGRAM
ATTACHMENT D:	TEST SETUP PHOTOGRAPHS
ATTACHMENT E:	USER'S MANUAL
ATTACHMENT F:	INTERNAL PHOTOGRAPHS

# MEASUREMENT REPORT

## 1. Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

<b>Applicant Name:</b>	<b>Aomni International</b>
<b>Address:</b>	<b>463-841) C-601 Inteli-G-2 Jeongja-Dong 24, Bundang-Gu Seongnam-Si, Gyeonggi-Do, Korea</b>

- **FCC ID :** U6DAL420VA
- **Equipment Class:** FCC Class B Peripheral Device (JBP)
- **EUT Type:** 42" Monitor
- **Model(s):** HL-4210V, AL420VA
- **Max input resolution:** 1280 X 1024 / 60 Hz
- **Input power:** AC 100 ~ 240V 50/60 Hz
- **Power consumption:** 180 W
- **Rule Part(s):** FCC Part 15 Subpart B
- **Test Procedure(s):** ANSI C63.4 (2003)
- **Dates of Tests:** August 21, 2007 ~ August 22, 2007
- **Place of Tests:** 254-1,MAEKOK-RI,HOBUP-MYUN,ICHON-SI,KYOUNGKI-DO,467-701,KOREA

## 2. INTRODUCTION

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003) was used in determining radiated and conducted emissions emanating from **Aomni International 42" Monitor FCC ID: U6DAL420VA**

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, MAEKOK-RI, HOBUP-MYUN, ICHON-SI, KYOUNGKI-DO, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 23, 2003 (Confirmation Number: EA90661)



## 3. PRODUCT INFORMATION

### 3.1 Equipment Description

Equipment Under Test (EUT) is **Aomni International 42" Monitor**  
**(FCC ID: U6DAL420VA)**

#### Function and Display Specification

Display Size	42-Inch 16 : 9 Diagonal Screen
Display Mode	Variable 5 Modes (4:3 Mode / 16:9 X 4 Modes)
Pixel Format	1366 X 768 Physical Pixel
Contrast Ratio	5000 : 1
Brightness	500 cd/m <sup>2</sup>
Max Input Resolution	1280 X 1024 / 60Hz
PIP	Advanced multi-windows viewing PIP (picture in picture) with four selectable window positions on Video mode
Input Compatible Video	Multiple input compatible Advanced motion digital/Motion-Adaptive De-interlace process, Digital progressive line scaling.
Tuner Module	TV/CATV (PAL/SECAM)
Programming	Favorite channel programming, Time Set, Set the Sleep timer, TTX
HDTV Input	480i/p (60Hz), 576i/p (50Hz), 720p (50/60Hz), 1080i (50/60Hz)
Color Temperature	Selectable 5 Mode (Warm1, 2, Normal, Cool1, 2)

#### Dimension/Weight

Main Only	1013mm (W) X 692mm (H) X 121mm (D)
With Stand	1013mm (W) X 625mm (H) X 270mm (D)
With Stand and Speaker	1108mm (W) X 692mm (H) X 121mm (D)

#### Miscellaneous

Audio	Built-in amplifier and two speaker (7Watt/Typ.) systems (optional), Selectable fixed/variable audio output (optional)
External Control	Front OSD Key Control, Remote Control, RS232C Control

#### Power Consumption

Input Power	AC 100 ~ 240V 50/60Hz
Power Consumption	180 Watt (Max)

#### Connectivity


TV Input	RF/CATV (PAL/SECAM)
COMPOSITE Input	RCA X 3Port (AV Input 1, 2, 3)
COMPONENT Input	RCA X 1Port
S-VIDEO Input	Mini Din 4Pin X 1Port
PC Input	Mini D-Sub 15Pin X 1Port / HDTV Input (480p, 576p, 720p (50/60Hz), 1080i (50/60Hz))
AUDIO Input/Output	RCA X 3Port
Speaker Output	Cinch Type X 4Port (Stereo L/R), Head Phone Jack X 1Port
External Control Port	Mini D-Sub 9Pin X 1Port
HDMI1, 2 Input	HDMI X 2Port

## 3.2 EMI Suppression Devices:

### 1. Attached the Core



### 2. Attached the Core

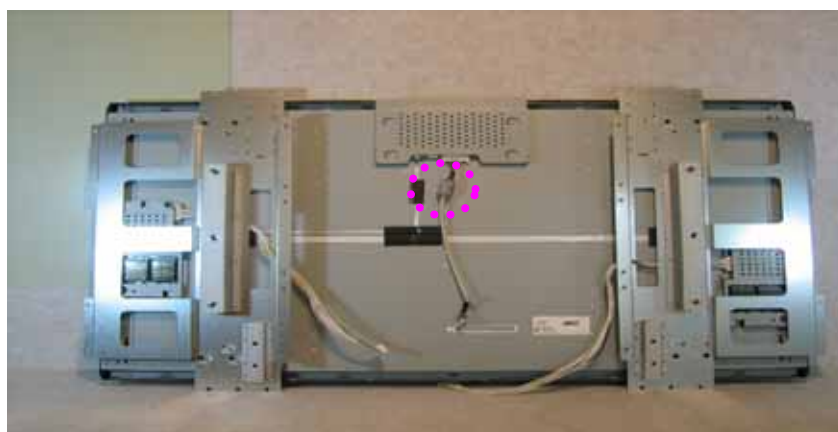

### 3. Attached the Gasket



## 4. Description of Tests(Conducted)

### 4.1 Powerline Conducted RFI (150 kHz- 30 MHz)

The power line conducted RFI measurements were performed according to **ANSI C63.4 (2003)**.

The EUT was placed on a non-conducting 1.0 by 1.5 meter table which is 0.8 meters in height and 0.40 meters away from the vertical wall of the shielded enclosure. Power to the EUT is provided through a Rohde & Schwarz 50  $\Omega$  / 50 uH Line Impedance Stabilization Network (LISN) and the support equipment through a separate Solar 50  $\Omega$  / 50 uH Line- Conducted Test Facility LISN. Sufficient time for the EUT, support equipment, and test equipment were allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME. The spectrum was scanned from 150 kHz to 30 MHz. Each maximum EME was remeasured using an EMI receiver. The detector function of the receiver was set to CISPR quasi- peak and average mode with the bandwidth set to 9 kHz. Each emission was maximized consistent with the typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum Diagram emission. Excess cable lengths were bundled at the center with 30- 40cm. in length. The worst-case configuration is noted in the test report and the photographs are attached. Each EME reported was calibrated using the Rohde & Schwarz SMT signal generator and are listed on Table 1. RFI Conducted FCC Class B.

RFI CONDUCTED	FCC CLASS B Limits dB(uV)	
	Quasi-Peak	Average
<b>Freq. Range</b>		
<b>150 kHz - 0.5 MHz</b>	<b>66-56**</b>	<b>56-46**</b>
<b>0.5 MHz – 5 MHz</b>	<b>56</b>	<b>46</b>
<b>5 MHz – 30 MHz</b>	<b>60</b>	<b>50</b>
<b>**Limits decreases linearly with the logarithm of frequency</b>		

**Table 1. RFI Conducted Limits**

## 5. Description of Tests (Radiated)

### Radiated Emissions

Preliminary measurements were made indoors at 3 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The spectrum was scanned from 30 to 1000 MHz using Tri-log antenna, and above 1 GHz using linearly polarized horn antennas. For frequencies above 1 GHz, horn antennas were used. Sufficient time for the EUT, support equipment, and test equipment were allowed in order for them to warm up to their normal operating condition. The EMI receiver detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120 kHz. The EUT, support equipment, and interconnecting cables were arranged to the configuration that produces the maximum EME emission found during preliminary scan. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Horizontal and vertical antenna polarizations were checked. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/ or support equipment, and powering the monitor the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission.

ITE Radiated Limits			
Frequency (MHz)	FCC Limit @ 3m. Quasi- Peak dB[ $\mu$ V / m]	FCC Limit @ 10m.* Quasi – Peak dB [ $\mu$ V / m]	CISPR Limit @ 10m. Quasi-Peak dB [ $\mu$ V / m]
30-88	40.0	29.5	30.0
88-216	43.5	33.0	30.0
216-230	46.0	35.6	30.0
230-960	46.0	35.6	37.0
960-1000	54.0	43.5	37.0
> 1000	54.0	43.5	No Specified Limit
* Limit extrapolated 20 dB/decade			

Table 2. Radiated Class B limits @ 10-meters



## 6. Support Equipment Used

DEVICE TYPE	MANUFACTURER	MODEL NUMBER	FCC ID / DoC	CONNECTED TO
42" Monitor	Aomni International	HL-4210V, AL420VA	DoC	EUT
PC	DELL	OPTIPLEXGX620	DoC	EUT END
Mouse	DELL	MO56U0	DoC	PC END
Keyboard	DELL	SK-8115	DoC	PC END
Printer	H.P	C4569A	DoC	PC END

## 6.1 Cable Description

		Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (M)
<b>42" Monitor (EUT)</b>	<b>DTV &amp; Service Port</b>	N/A	N	(D)1.5
	<b>Audio In</b>	N/A	Y	(D)1.5
	<b>HDMI</b>	N/A	Y	(D)1.5
	<b>Serial</b>	N/A	Y	(D)1.8
	<b>D-Sub</b>	N/A	Y	(D)1.8
	<b>Audio Out</b>	N/A	Y	(D)1.5
	<b>Component</b>	N/A	Y	(D)1.5
	<b>S-Video</b>	N/A	Y	(D)1.5
	<b>AV Input 3</b>	N/A	Y	(D)1.5
	<b>AV Input 2</b>	N/A	Y	(D)1.5
	<b>AV Input 1</b>	N/A	Y	(D)1.5
	<b>Line Out</b>	N/A	N	(D)1.5
	<b>AC IN</b>	N	N/A	(P)1.8
<b>PC</b>	<b>USB</b>	N/A	Y	(D)1.8
	<b>USB</b>	N/A	Y	(D)1.8
	<b>Parallel</b>	N/A	Y	(D)1.8
	<b>AC In</b>	N	N/A	(P)1.8
<b>Monitor</b>	<b>AC In</b>	N	N/A	(P)1.8
<b>Printer</b>	<b>AC In</b>	N	N/A	(P)1.8

The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

## 6.2 Noise Suppression Parts on Cable. (I/O CABLE)

		Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
42" Monitor (EUT)	DTV & Service Port	Y	Both End	N	N/A
	Audio In	N	N/A	Y	Both END
	HDMI	N	N/A	N	N/A
	D-Sub	Y	Both End	Y	Both END
	Component Out	Y	Both End	Y	Both END
	Audio Out	N	N/A	Y	Both END
	S-Video	N	N/A	Y	Both END
	AV Input 1	N	N/A	Y	Both END
	AV Input 2	N	N/A	Y	Both END
	AV Input 3	N	N/A	Y	Both END
	Line Out	Y	Both End	N	N/A
PC	USB	N	N/A	Y	PC END
	USB	N	N/A	Y	PC END
	Parallel	Y	Both End	Y	Both End

## 7. CONDUCTED TEST DATA

[D-Sub mode]


HCT

EMC TEST LAB.

EUT: HL-4210V, AL420VA  
 Manufacturer: AOMNI  
 Operating Condition: 1280 X 1024 60Hz  
 Test Site: SHIELD ROOM  
 Operator: KH-SEO  
 Test Specification: CISPR 22 CLASS B  
 Comment: H

### SCAN TABLE: "CISPR 22 Voltage"

Short Description:			CISPR 22 Voltage			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.1 kHz	500.0 kHz	2.5 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

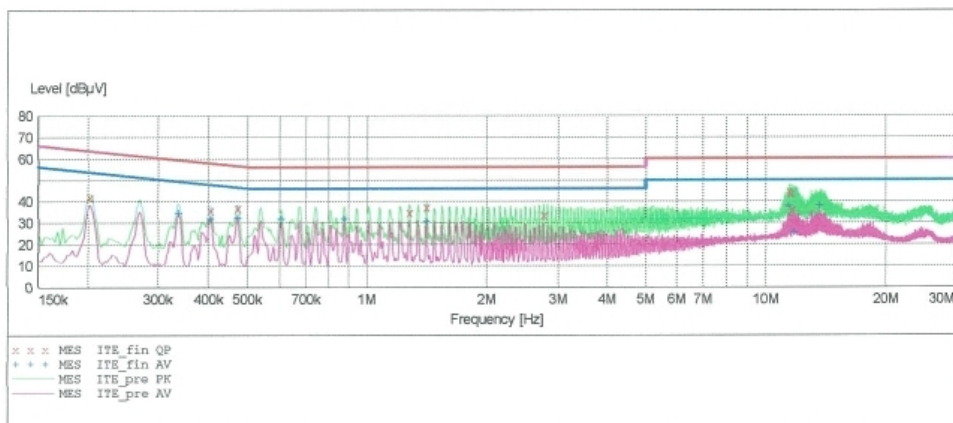

### MEASUREMENT RESULT: "ITE\_fin QP"

8/21/2007 2:30PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.202600	42.00	10.0	64	21.6	---	---
0.405100	35.90	10.0	58	21.9	---	---
0.472600	37.00	10.1	57	19.5	---	---
1.280000	34.90	10.2	56	21.1	---	---
1.415000	37.40	10.2	56	18.6	---	---
2.765000	33.50	10.4	56	22.5	---	---
11.475000	44.60	11.3	60	15.4	---	---
11.530000	43.70	11.3	60	16.3	---	---
11.675000	35.90	11.4	60	24.1	---	---

**MEASUREMENT RESULT: "ITE\_fin AV"**

8/21/2007 2:30PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.337600	34.70	10.0	49	14.6	---	---
0.405100	32.30	10.0	48	15.5	---	---
0.472600	32.70	10.1	47	13.8	---	---
0.605000	32.00	10.1	46	14.0	---	---
0.875000	32.00	10.1	46	14.0	---	---
1.415000	30.80	10.2	46	15.2	---	---
11.420000	37.80	11.3	50	12.2	---	---
11.785000	25.60	11.4	50	24.4	---	---
13.650000	38.00	11.7	50	12.0	---	---




HCT

**EMC TEST LAB.**

EUT: HL-4210V, AL420VA  
 Manufacturer: AOMNI  
 Operating Condition: 1280 X 1024 60Hz  
 Test Site: SHIELD ROOM  
 Operator: KH-SEO  
 Test Specification: CISPR 22 CLASS B  
 Comment: N

**SCAN TABLE: "CISPR 22 Voltage"**

Short Description:			CISPR 22 Voltage			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.1 kHz	500.0 kHz	2.5 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

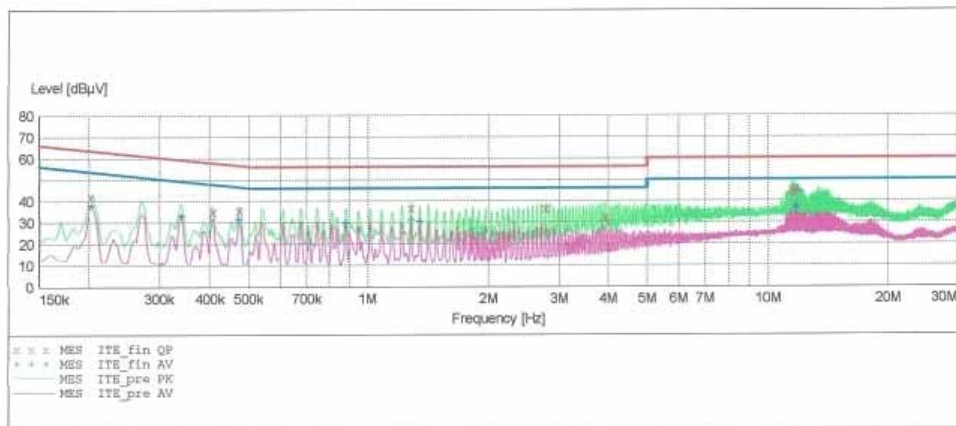

**MEASUREMENT RESULT: "ITE\_fin QP"**

8/21/2007 2:26PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.202600	42.00	10.0	64	21.5	---	---
0.407600	35.00	10.0	58	22.7	---	---
0.472600	35.80	10.1	57	20.6	---	---
1.285000	36.60	10.2	56	19.4	---	---
2.770000	36.40	10.4	56	19.6	---	---
3.920000	32.10	10.5	56	23.9	---	---
11.480000	45.50	11.3	60	14.5	---	---
11.535000	43.70	11.3	60	16.3	---	---
11.750000	45.80	11.4	60	14.2	---	---

## MEASUREMENT RESULT: "ITE\_fin AV"

8/21/2007 2:26PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.202600	38.20	10.0	54	15.3	---	---
0.340100	33.20	10.0	49	16.0	---	---
0.472600	31.70	10.1	47	14.8	---	---
0.880000	29.70	10.1	46	16.3	---	---
1.285000	31.40	10.2	46	14.6	---	---
1.350000	30.60	10.2	46	15.4	---	---
11.695000	36.50	11.4	50	13.5	---	---
11.750000	37.60	11.4	50	12.4	---	---
11.805000	36.60	11.4	50	13.4	---	---

**NOTES:**

1. All modes of operation were investigated, and the worst-case emissions are reported.
2. The conducted limits are listed on Table 1 (Page 7).
3. Line H = Hot    Line N = Neutral

---

\*\* Measurements using CISPR quasi-peak mode.

## 8. RADIATED TEST DATA

[D-Sub]

Frequency MHz	Reading dBuV	Ant. Factor dB / m	Cable Loss dB	ANT POL (H / V)	Total dBuV / m	Limit dBuV / m	Margin dB
40.0	8.9	13.0	1.5	V	23.4	30.0	6.6
96.0	12.9	8.8	2.3	V	24.0	30.0	6.0
122.4	11.2	11.3	2.6	H	25.1	30.0	4.9
157.5	7.9	13.0	3.0	V	23.9	30.0	6.1
236.2	10.2	10.8	3.7	H	24.7	37.0	12.3
314.9	13.9	13.0	4.3	V	31.2	37.0	5.8
583.1	8.3	18.5	5.6	V	32.4	37.0	4.6
658.6	7.1	19.8	6.0	V	32.9	37.0	4.1

Radiated Measurements at 10-meters.

### NOTES:

1. All modes of operation were investigated, and the worst-case emissions are reported.
2. The radiated limits are listed on Table 2 (Page 8).

\*\*\* Measurements using CISPR quasi-peak mode.

## 9. Sample Calculations

$$\text{dB } \mu\text{V} = 20 \log_{10} (\mu\text{V})$$

$$\text{dB } \mu\text{V} = \text{dBm} + 107$$

### 9.1 Example 1:

@ 13.65 MHz

Class B limit	= 50.0 dB $\mu\text{V}$
Reading	= 38.0 dB $\mu\text{V}$ (calibrated level)

Margin	= 38.0 – 50.0 = - 12.0 dB $\mu\text{V}$
	= <b>12.0 dB below limit</b>

### 9.2 Example 2:

@ 658.6 MHz

Class B limit	= 37.0 dB $\mu\text{V}/\text{m}$
Reading	= 7.1 dB $\mu\text{V}/\text{m}$ (calibrated level)
Antenna Factor + Cable Loss	= 25.8 dB
Total	= 32.9 dB $\mu\text{V}/\text{m}$

Margin	= 32.9 – 37.0 = - 4.1 dB $\mu\text{V}/\text{m}$
	= <b>4.1 dB below limit</b>



## 10. Test Equipment

<u>Type</u>	<u>Manufacture</u>	<u>Model Number</u>	<u>CAL Due Date</u>
Conducted Emission			
EMI Test Receiver	Rohde & Schwarz	ESCI	2008.08.24
LISN	Rohde & Schwarz	ESH2-Z5	2008.04.20
LISN	EMCO	3816/2SH	2008.02.03
PULSE LIMITER	Rohde & Schwarz	ESH3-Z2	2007.10.30
Radiated Emission			
EMI Test Receiver	Rohde & Schwarz	ESCI40	2007.11.06
TRILOG Antenna	Schwarzbeck	9168	2008.03.19
Antenna Position Tower	HD	MA240	N/A
Turn Table	EMCO	1050	N/A
Controller	HD GmbH	HD 100	N/A
Slide Bar	HD GmbH	KMS 560	N/A

## 11. Test Software Used

**The EUT was acted standby mode during radiated and conducted testing.**

NOTE: This is a sample of the basic program used during the test. However, during testing, a different software program may be used; whichever determines the worst-case condition. In addition, the program used also depends on the number and type of devices being tested.

## 12. Conclusion

The data collected shows that **Aomni International 42" Monitor (FCC ID: U6DAL420VA)** complies with §15.107 and §15.109 of the FCC Rules.