

## FCC 15.247 2.4 GHz Report

for

**INVENTEC BESTA CO.,LTD**

**10FL.,No.36,Lane513,Rui Guang Road,Nei Hu Dist., Taipei  
114,Taiwan,R.O.C**

**Brand : N/A**  
**Product Name : The Smallest Digital Wireless  
Parking Camera**  
**Model Name : EB934**  
**FCC ID : U6OEB934**

**Prepared by: : AUDIX Technology Corporation,  
EMC Department**



## TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION .....	4
<b>1. REPORT HISTORY .....</b>	<b>5</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>3. GENERAL INFORMATION .....</b>	<b>7</b>
3.1. Description of EUT .....	7
3.2. EUT Specifications Assessed in Current Report .....	8
3.3. Antenna Information .....	9
3.4. Data Rate Relative to Output Power .....	9
3.5. Test Configuration .....	10
3.6. Tested Supporting System List .....	11
3.7. Setup Configuration .....	11
3.8. Operating Condition of EUT .....	11
3.9. Description of Test Facility .....	12
3.10. Measurement Uncertainty .....	12
<b>4. MEASUREMENT EQUIPMENT LIST .....</b>	<b>13</b>
4.1. Radiated Emission Measurement .....	13
4.2. RF Conducted Measurement .....	13
<b>5. CONDUCTED EMISSION MEASUREMENT .....</b>	<b>14</b>
<b>6. RADIATED EMISSION MEASUREMENT .....</b>	<b>15</b>
6.1. Block Diagram of Test Setup .....	15
6.2. Radiated Emission Limits .....	17
6.3. Test Procedure .....	18
6.4. Measurement Result Explanation .....	19
6.5. Test Results .....	19
<b>7. 6dB BANDWIDTH MEASUREMENT .....</b>	<b>34</b>
7.1. Block Diagram of Test Setup .....	34
7.2. Specification Limits .....	34
7.3. Test Procedure .....	34
7.4. Test Results .....	34
<b>8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>35</b>
8.1. Block Diagram of Test Setup .....	35
8.2. Specification Limits .....	35
8.3. Test Procedure .....	35
8.4. Test Results .....	35
<b>9. EMISSION LIMITATIONS MEASUREMENT .....</b>	<b>36</b>
9.1. Block Diagram of Test Setup .....	36
9.2. Specification Limits .....	36
9.3. Test Procedure .....	36
9.4. Test Results .....	37
<b>10. POWER SPECTRAL DENSITY .....</b>	<b>38</b>
10.1. Block Diagram of Test Setup .....	38
10.2. Specification Limits .....	38

AUDIX Technology Corp.  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City 244, Taiwan

Tel: +886 2 26099301  
Fax: +886 2 26099303

---

10.3. Test Procedure .....	38
10.4. Test Results .....	38
11. DEVIATION TO TEST SPECIFICATIONS.....	39

APPENDIX A TEST PHOTOGRAPHS  
APPENDIX B TEST PLOTS

## TEST REPORT CERTIFICATION

Applicant : INVENTEC BESTA CO.,LTD  
Product Name : The Smallest Digital Wireless Parking Camera  
Model No. : EB934  
Serial No. : N/A  
Brand : N/A  
Power Supply : DC 12V (Via Battery)

### Applicable Standards:

47 CFR FCC Part 15 Subpart C: 2015  
ANSI C63.10:2013  
KDB 558074 D01 DTS Meas Guidance v03r05

**AUDIX Technology Corp.** tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report. **AUDIX Technology Corp.** does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Test: 2016. 09. 21 ~ 10. 13

Date of Report: 2016. 10. 17

Producer: Eva Chen  
(Eva Chen/Assistant Administrator)

Signatory: Ben Cheng  
(Ben Cheng/Manager)

## 1. REPORT HISTORY

Edition No.	Date of Rev.	Revision Summary	Report No.
0	2016. 10. 17	Original Report.	EM-F160622

## 2. SUMMARY OF TEST RESULTS

Rule	Description	Results
15.207	Conducted Emission	N/A, Note
15.247(d)/15.205	Radiated Band Edge and Radiated Spurious Emission	PASS
15.247(a)(2)	6dB Bandwidth	PASS
15.247(b)(3)	Maximum Peak Output	PASS
15.247(d)	Conducted Band Edges and Conducted Spurious Emission	PASS
15.247 (e)	Peak Power Spectral Density	PASS
15.203	Antenna Requirement	PASS
Note: The EUT only employs battery power for operation, so it is unnecessary to test.		

### 3. GENERAL INFORMATION

#### 3.1. Description of EUT

Product	The Smallest Digital Wireless Parking Camera
Model Number	EB934
Serial Number	N/A
Brand Name	N/A
Applicant	INVENTEC BESTA CO.,LTD 10FL.,No.36,Lane513,Rui Guang Road,Nei Hu Dist., Taipei 114,Taiwan,R.O.C
RF Features	802.11b/g
Transmit Type	1T1R
Power Wire	Unshielded, Undetachable, 2.0m
Date of Receipt of Sample	2016. 08. 28

### 3.2. EUT Specifications Assessed in Current Report

Mode	Fundamental Range (MHz)	Channel Number	Modulation	Data Rate (Mbps)
802.11b	2412-2462	11	DSSS (DBPSK/DQPSK/CCK)	Up to 11
802.11g		11	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 54

Channel List	
802.11 b/g	
Channel Number	Frequency (MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462



### 3.3. Antenna Information

Antenna Part Number	Manufacture	Antenna Type	Frequency	Max Gain (dBi)
RA15LMSA00R A041	RIFO	Metal Stamping Antenna	2400-2500MHz	1.22

### 3.4. Data Rate Relative to Output Power

802.11b			
Channel	Modulation	Date Rate (Mbps)	Power (dBm)
1	DBPSK	1	<b>15.78</b>
1	DQPSK	2	<b>15.73</b>
1	CCK	5.5	<b>15.66</b>
1	CCK	11	<b>15.59</b>
802.11g			
Channel	Modulation	Date Rate (Mbps)	Power (dBm)
1	BPSK	6	<b>13.97</b>
1	BPSK	9	<b>13.92</b>
1	QPSK	12	<b>13.86</b>
1	QPSK	18	<b>13.81</b>
1	16-QAM	24	<b>13.74</b>
1	16-QAM	36	<b>13.67</b>
1	64-QAM	48	<b>13.60</b>
1	64-QAM	54	<b>13.55</b>

Note: Above results are assessed in average power.

### 3.5. Test Configuration

Mode	Duty Cycle (x)	T (ms)	Duty Cycle Factor (dB)
802.11b	1	N/A	N/A
802.11g	1	N/A	N/A

Note: When duty cycle is less than 98% (0.98) that duty cycle factor  $10\log(1/x)$  is needed to add in conducted test items measured in average detector.

Item		Mode	Data Rate	Test Channel
Radiated Test Case Note3	Radiated Band Edge Note1	802.11b	1Mbps	1/11
		802.11g	6Mbps	1/6/11
	Radiated Spurious Emission Note1 & 2	802.11b	1Mbps	1/6/11
		802.11g	6Mbps	1/6/11
Conducted Test Case Note3	6dB Bandwidth	802.11b	1Mbps	1/6/11
		802.11g	6Mbps	1/6/11
	Peak Power Spectral Density	802.11b	1Mbps	1/6/11
		802.11g	6Mbps	1/6/11
	Peak Output Power	802.11b	1Mbps	1/6/11
		802.11g	6Mbps	1/2/6/10/11
	Band Edge	802.11b	1Mbps	1/11
		802.11g	6Mbps	1/11
	Spurious Emission	802.11b	1Mbps	1/6/11
		802.11g	6Mbps	1/6/11

Note 1:

Mobile Device

Portable Device, and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow:

Lie

Side

Stand

Note 2: Low, mid, and high channels were measured, only the worst channel of each modulation was presented in this report.

### 3.6. Tested Supporting System List

#### 3.6.1. Support Peripheral Unit

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Battery #1 (DC 12V)	N/A	N/A	N/A	N/A

#### 3.6.2. Cable Lists

No.	Cable Description Of The Above Support Units
1.	Power Wire: Unshielded, Detachable, 0.2m

### 3.7. Setup Configuration

#### 3.7.1. EUT Configuration for Radiated Emission



#### 3.7.2. EUT Configuration for Conducted Test Items



### 3.8. Operating Condition of EUT

Test program “MTT601” is used for enabling EUT WLAN function under continues transmitting and choosing data rate/ channel.

### 3.9. Description of Test Facility

Test Firm Name	:	<b>AUDIX Technology Corporation</b> <b>EMC Department</b> No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan
Test Location & Facility	:	<b>Semi-Anechoic Chamber &amp;</b> <b>Fully Anechoic Chamber</b> No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan
NVLAP Lab. Code	:	200077-0
TAF Accreditation No	:	1724
FCC OET Designation	:	TW1004 & TW1090

### 3.10. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Radiation Test (Distance: 3m)	30MHz~1000MHz	± 3.68dB
	Above 1GHz	± 5.82dB

Remark : Uncertainty =  $k_{uc}(y)$

Test Item	Uncertainty
6dB Bandwidth	± 0.05kHz
Maximum peak output power	± 0.33dB
Power spectral density	± 0.13dB
Conducted Emission Limitations	± 0.13dB

## 4. MEASUREMENT EQUIPMENT LIST

### 4.1. Radiated Emission Measurement

#### 4.1.1. Frequency Range 9kHz~1000MHz (Semi Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2016. 09. 19	1 Year
2.	Test Receiver	R & S	ESCS30	100338	2016. 06. 22	1 Year
3.	Amplifier	HP	8447D	2944A06305	2016. 02. 23	1 Year
4.	Bilog Antenna	CHASE	CBL6112D	33821	2016. 01. 30	1 Year
5.	Loop Antenna	R&S	HFH2-Z2	891847/27	2015. 12. 24	1 Year
6.	Test Software	Audix	e3	V.6.110601	N.C.R.	N.C.R.

#### 4.1.2. Frequency Range Above 1GHz (Fully Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	2016. 08. 19	1 Year
2.	Amplifier	Sonoma	310N	187161	2016. 06. 14	1 Year
3.	Horn Antenna	ETS-Lindgren	3117	00135902	2016. 03. 05	1 Year
4.	Horn Antenna	EMCO	3116	2653	2015. 10. 20	1 Year
5.	2.4GHz Notch Filter	K&L	7NSL10-2441. 5E130.5-00	1	2016. 07. 28	1 Year
6.	Test Software	Audix	e3	V.6.110601	N.C.R.	N.C.R.

### 4.2. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9030A-526	MY53310269	2015. 11. 28	1 Year
2.	Power Meter	Anritsu	ML2495A	1145008	2015. 10. 23	1 Year
3.	Power Sensor	Anritsu	MA2411B	1126096	2015. 10. 23	1 Year

## **5. CONDUCTED EMISSION MEASUREMENT**

【The EUT only employs Batteries power for operation, no conductive emission limits are required according to FCC Part 15 Section §15.207】


## 6. RADIATED EMISSION MEASUREMENT

### 6.1. Block Diagram of Test Setup


#### 6.1.1. Block Diagram of connection between EUT and simulators

Indicated as section 3.7


#### 6.1.2. Semi Anechoic Chamber (3m) Setup Diagram for 9kHz-30MHz

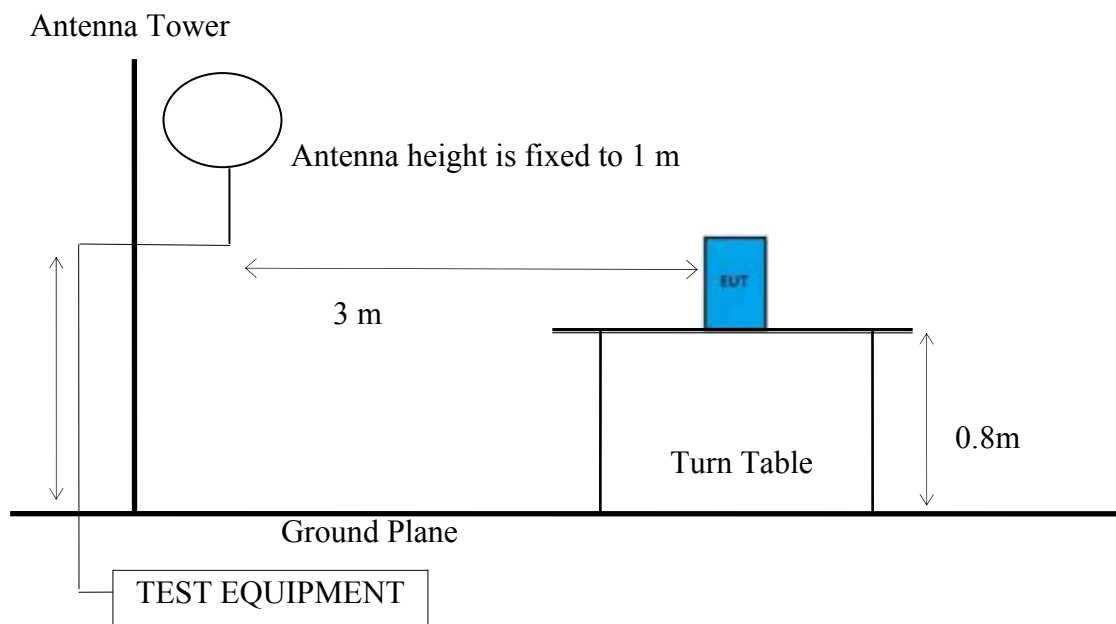

#### 6.1.3. Semi Anechoic Chamber (3m) Setup Diagram for 30-1000 MHz

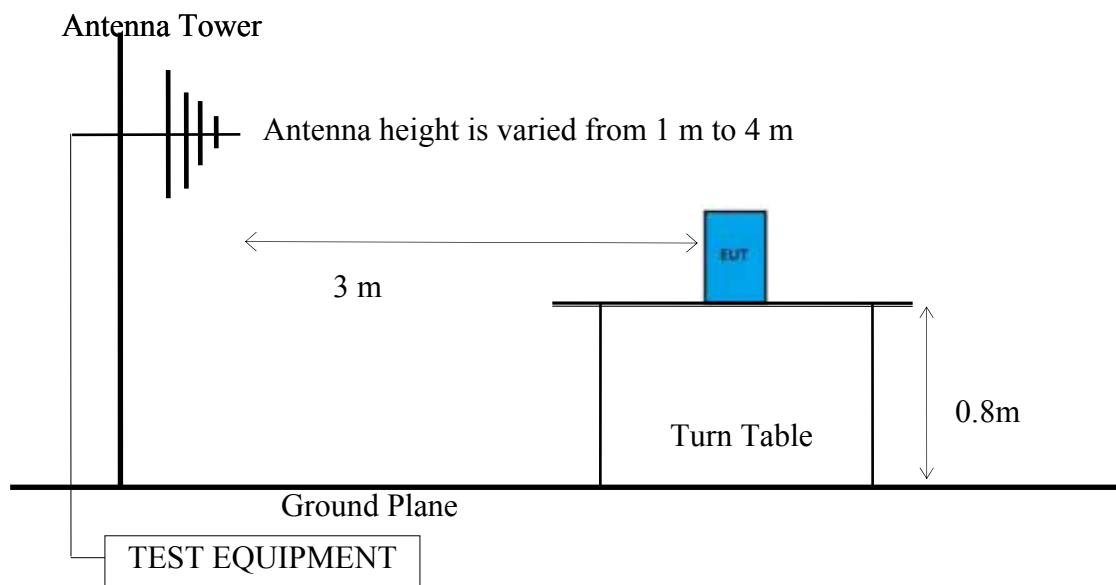

#### 6.1.4. Fully Anechoic Chamber (3m) Setup Diagram for above 1GHz

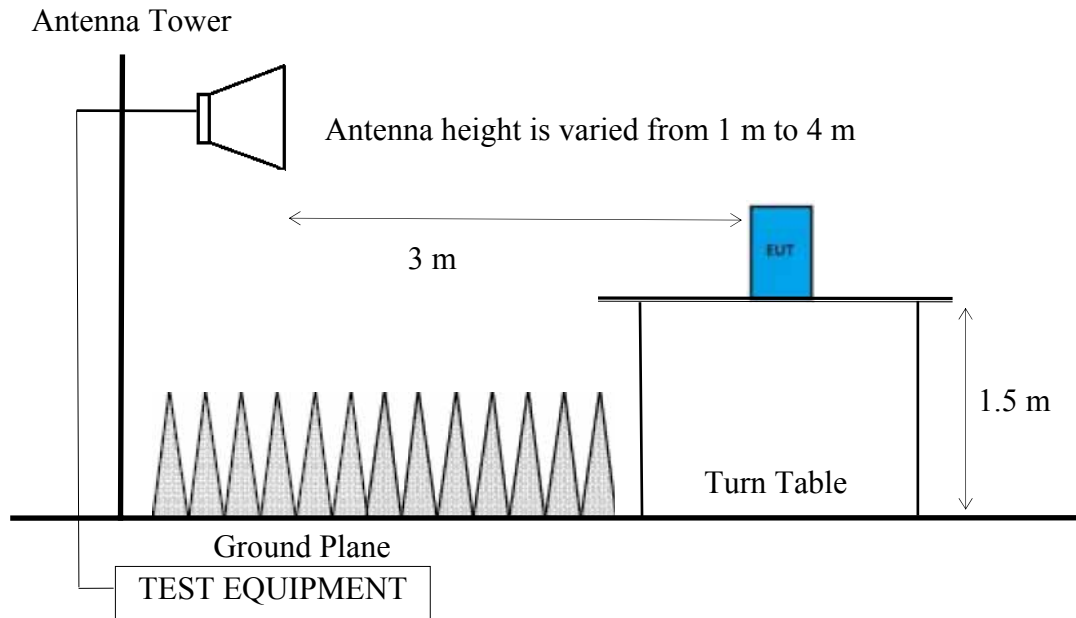



## 6.2. Radiated Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance (m)	Limits	
		dB $\mu$ V/m	$\mu$ V/m
0.009 - 0.490	300	67.6	2400/kHz
0.490 - 1.705	30	87.6	24000/kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dB $\mu$ V/m (Peak) 54.0 dB $\mu$ V/m (Average)	

Remark : (1) dB $\mu$ V/m = 20 log ( $\mu$ V/m)

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

### 6.3. Test Procedure

#### Frequency Range 9kHz~30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)  
Q.P. (490kHz-30MHz)

#### Frequency Range 30MHz ~ 40GHz:

The EUT setup on the turn find table which has 80 cm (for 30-1000 MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

#### Frequency below 1 GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120kHz
- (2) VBW  $\geq 3 \times$  RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required. Otherwise using Q.P. for finally measurement.

#### Frequency above 1GHz to 10th harmonic:

##### Peak Detector:

- (1) RBW = 1MHz
- (2) VBW  $\geq 3 \times$  RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the average detector is not required. Otherwise using average for finally measurement.

**Average Detector:****Option 1:**

- (1) RBW = 1MHz
- (2) VBW  $\geq 1/T$ .

Modulation Type	T (ms)	1/ T (kHz)	VBW Setting
802.11b	N/A	N/A	10 Hz
802.11g	N/A	N/A	10 Hz

N/A: 1/ T is not implemented when duty cycle presented in section 3.5 is  $\geq 98\%$ .

- (1) Detector = Peak.
- (2) Sweep time = auto.
- (3) Trace mode = max hold.
- (4) Allow sweeps to continue until the trace stabilizes.

**Option 2:**

Average Emission Level = Peak Emission Level + D.C.C.F.

**6.4. Measurement Result Explanation**

Peak Emission Level = Antenna Factor + Cable Loss + Meter Reading

Average Emission Level = Antenna Factor + Cable Loss + Meter Reading

Average Emission Level = Peak Emission Level + DCCF

Duty Cycle Correction Factor (DCCF) =  $20\log(TX_{on}/TX_{on+off})$  presented in section 3.5

ERP = Peak Emission Level - 95.2dB - 2.14dB

**6.5. Test Results**

**PASSED.**

Test Date	2016/10/12	Temp./Hum.	23 / 53 %
Test Voltage	DC 12V (Via Battery)		

#### 6.5.1. Emissions within Restricted Frequency Bands

##### 6.5.1.1. Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

##### 6.5.1.2. Frequency 30MHz~1000MHz

Mode	802.11b	Frequency	TX 2437MHz
------	---------	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
101.78	12.04	2.29	7.17	21.50	43.50	22.00	Peak
288.02	13.54	4.19	14.29	32.02	46.00	13.98	Peak
399.57	15.92	5.54	9.22	30.68	46.00	15.32	Peak
499.48	17.13	6.42	6.51	30.06	46.00	15.94	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
55.22	8.44	1.66	13.20	23.30	40.00	16.70	Peak
208.48	10.09	3.43	13.09	26.61	43.50	16.89	Peak
399.57	15.92	5.54	8.41	29.87	46.00	16.13	Peak
484.93	16.98	6.31	8.98	32.27	46.00	13.73	Peak

Mode	802.11g	Frequency	TX 2437MHz
------	---------	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
101.78	12.04	2.29	7.62	21.95	43.50	21.55	Peak
288.02	13.54	4.19	14.07	31.80	46.00	14.20	Peak
398.60	15.92	5.54	9.15	30.61	46.00	15.39	Peak
497.54	17.11	6.41	6.71	30.23	46.00	15.77	Peak

**Antenna at Vertical Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
53.28	8.90	1.63	13.36	23.89	40.00	16.11	Peak
224.97	11.21	3.59	12.33	27.13	46.00	18.87	Peak
398.60	15.92	5.54	8.93	30.39	46.00	15.61	Peak
499.48	17.13	6.42	8.57	32.12	46.00	13.88	Peak

## 6.5.2. Frequency Above 1 GHz to 10<sup>th</sup> harmonics

### Band Edge:


[Note: We performed testing of the worst switching adapter]

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

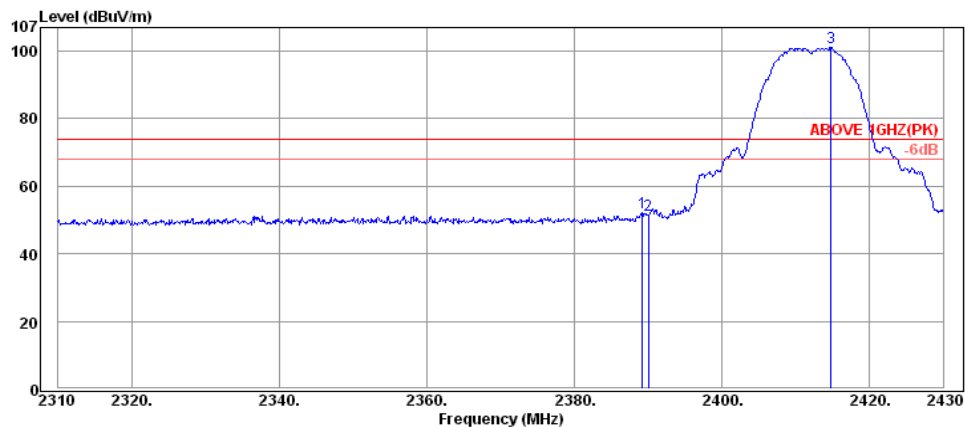

### Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.20	32.16	6.08	13.80	52.04	74.00	21.96	Peak
2390.04	32.16	6.08	13.29	51.53	74.00	22.47	Peak
2414.76	32.18	6.11	62.81	101.10	---	---	Peak

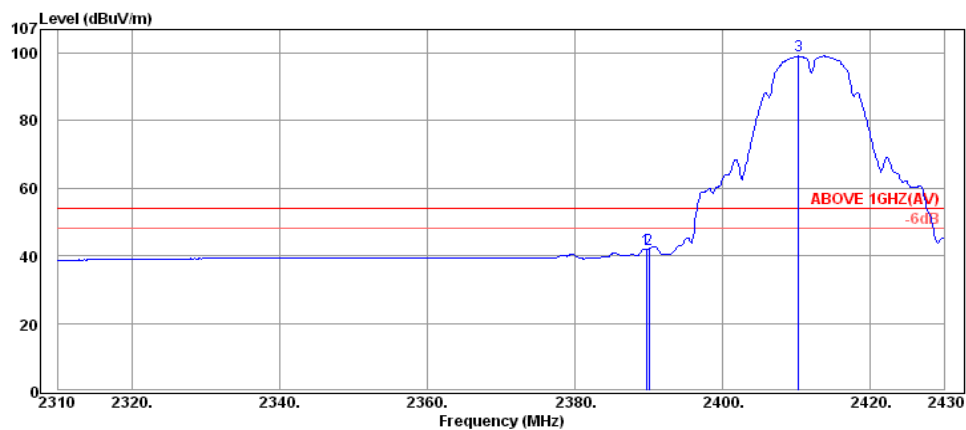

### Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	32.16	6.08	3.78	42.02	54.00	11.98	Average
2390.04	32.16	6.08	3.79	42.03	54.00	11.97	Average
2410.32	32.18	6.10	60.86	99.14	---	---	Average

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

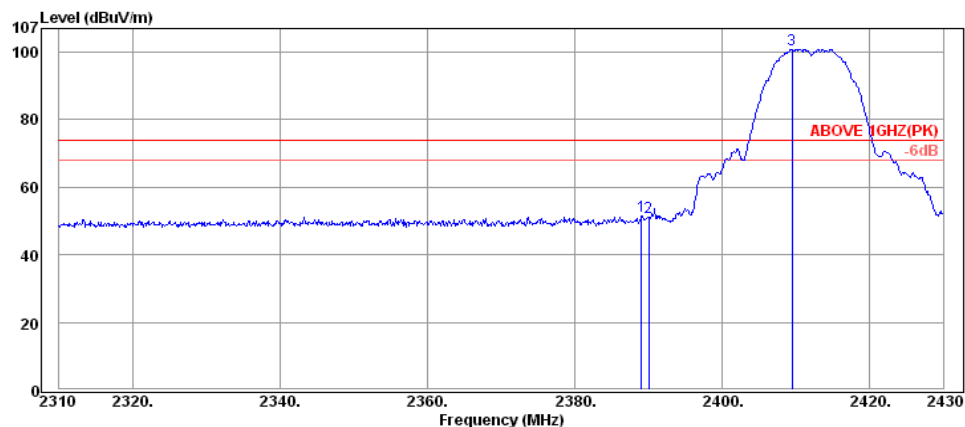

### Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.08	32.16	6.08	13.16	51.40	74.00	22.60	Peak
2390.04	32.16	6.08	12.90	51.14	74.00	22.86	Peak
2409.48	32.18	6.10	62.62	100.90	---	---	Peak

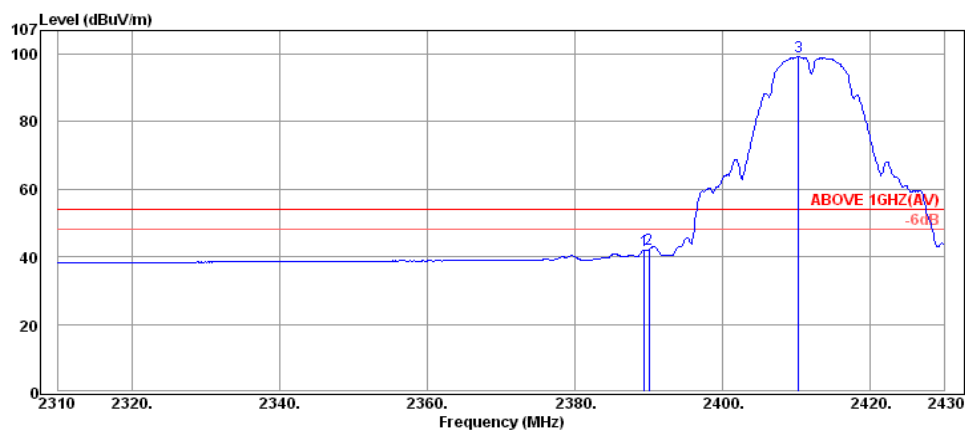

### Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.44	32.16	6.08	3.81	42.05	54.00	11.95	Average
2390.04	32.16	6.08	3.94	42.18	54.00	11.82	Average
2410.32	32.18	6.10	60.95	99.23	---	---	Average

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

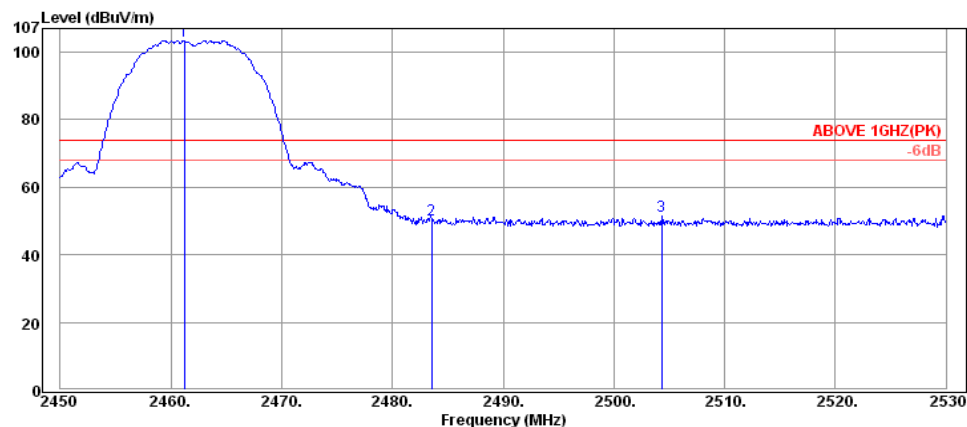

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2461.20	32.25	6.16	65.01	103.42	---	---	Peak
2483.52	32.28	6.19	11.98	50.45	74.00	23.55	Peak
2504.32	32.30	6.21	13.07	51.58	74.00	22.42	Peak

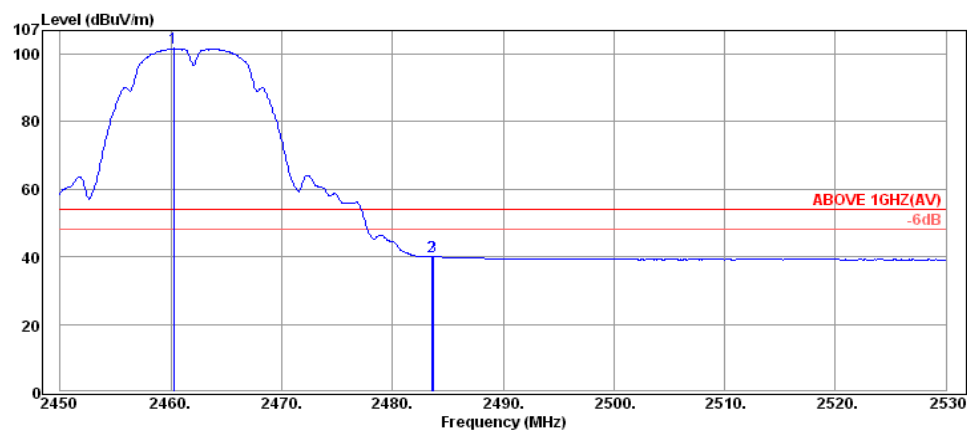


#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2460.24	32.25	6.16	63.28	101.69	---	---	Average
2483.52	32.28	6.19	1.68	40.15	54.00	13.85	Average
2483.68	32.28	6.19	1.64	40.11	54.00	13.89	Average




Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

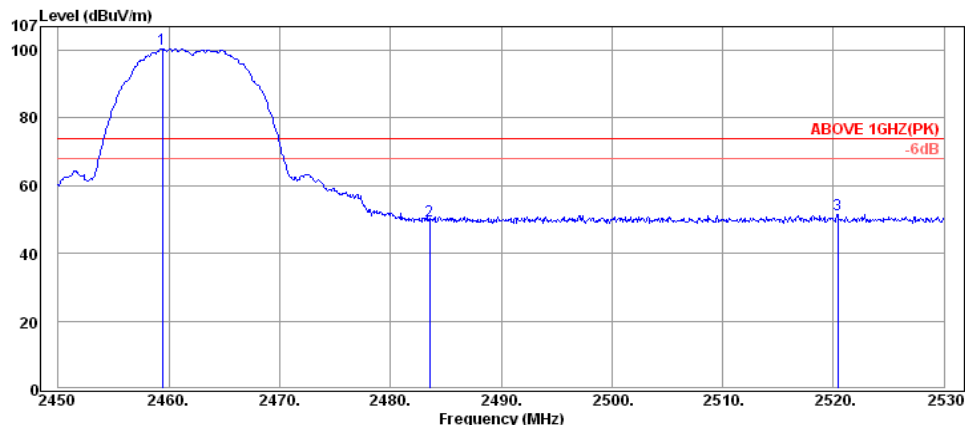

#### Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2459.44	32.25	6.16	62.07	100.48	---	---	Peak
2483.52	32.28	6.19	11.26	49.73	74.00	24.27	Peak
2520.40	32.32	6.23	13.00	51.55	74.00	22.45	Peak

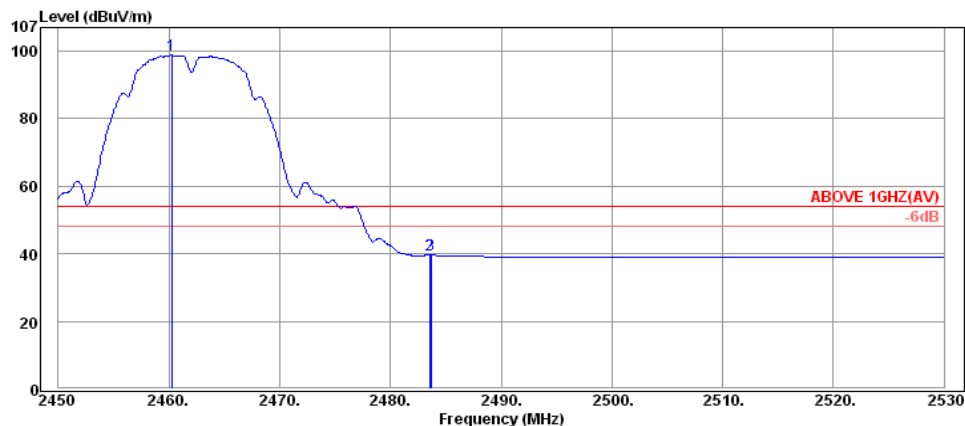

#### Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2460.24	32.25	6.16	60.37	98.78	---	---	Average
2483.52	32.28	6.19	1.32	39.79	54.00	14.21	Average
2483.68	32.28	6.19	1.31	39.78	54.00	14.22	Average

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

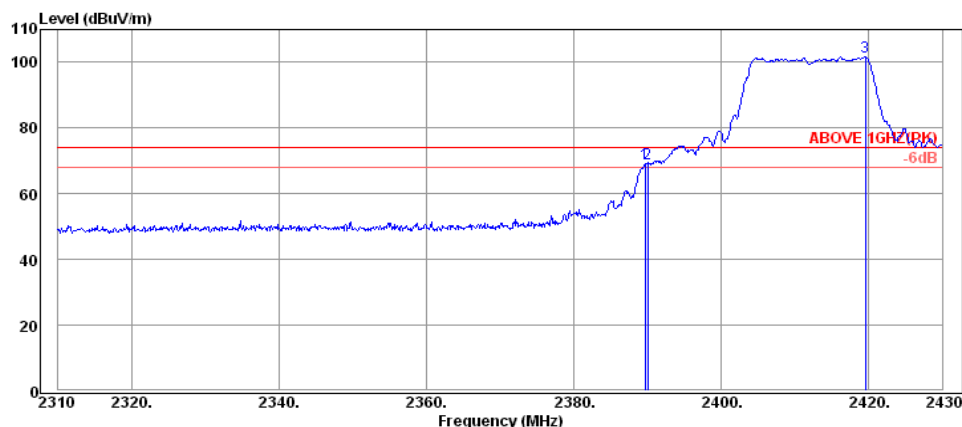

### Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.68	32.16	6.08	30.87	69.11	74.00	4.89	Peak
2390.04	32.16	6.08	30.82	69.06	74.00	4.94	Peak
2419.56	32.20	6.12	63.26	101.58	---	---	Peak

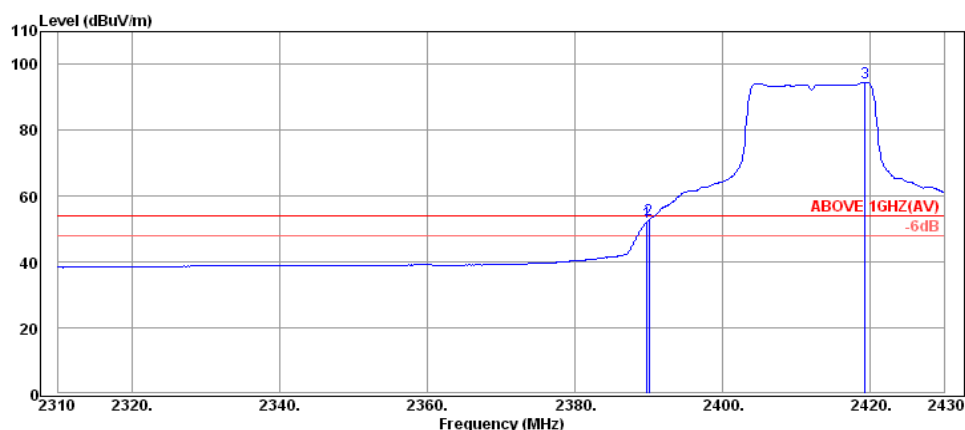

### Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.80	32.16	6.08	13.93	52.17	54.00	1.83	Average
2390.04	32.16	6.08	14.57	52.81	54.00	1.19	Average
2419.32	32.18	6.12	56.25	94.55	---	---	Average

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

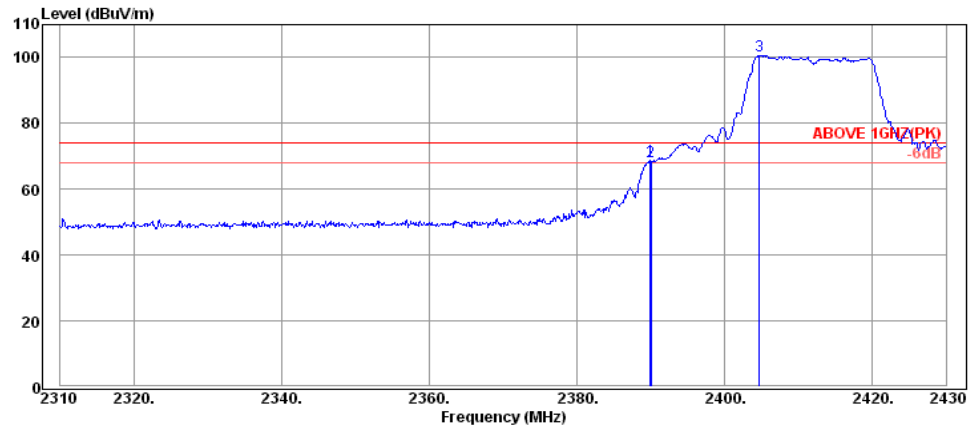

### Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.92	32.16	6.08	30.40	68.64	74.00	5.36	Peak
2390.04	32.16	6.08	30.31	68.55	74.00	5.45	Peak
2404.68	32.18	6.10	62.42	100.70	---	---	Peak

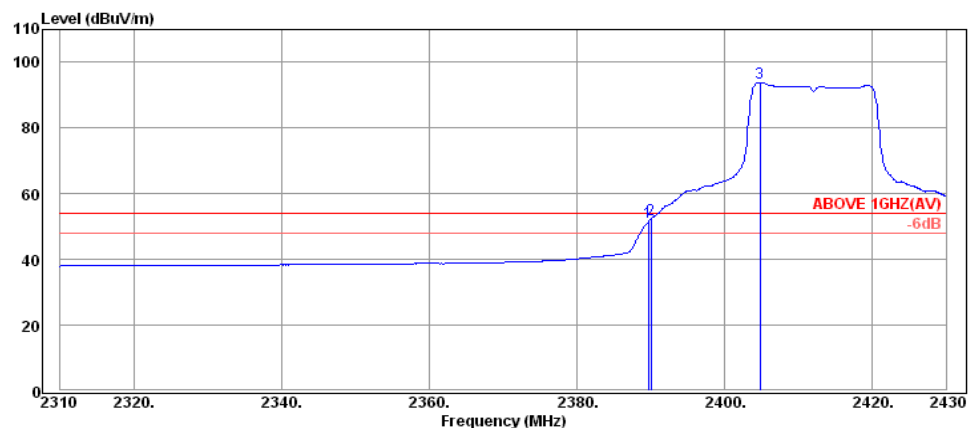

### Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.68	32.16	6.08	13.22	51.46	54.00	2.54	Average
2390.04	32.16	6.08	14.09	52.33	54.00	1.67	Average
2404.80	32.18	6.10	55.53	93.81	---	---	Average

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

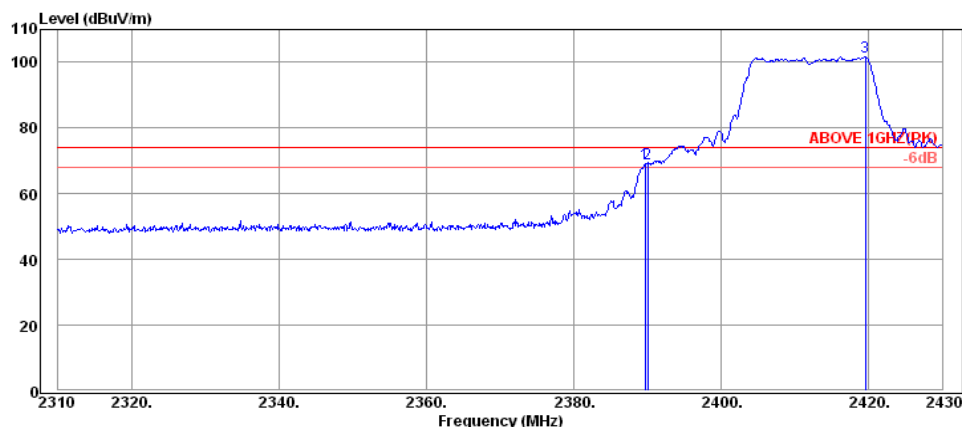

### Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.68	32.16	6.08	30.87	69.11	74.00	4.89	Peak
2390.04	32.16	6.08	30.82	69.06	74.00	4.94	Peak
2419.56	32.20	6.12	63.26	101.58	---	---	Peak

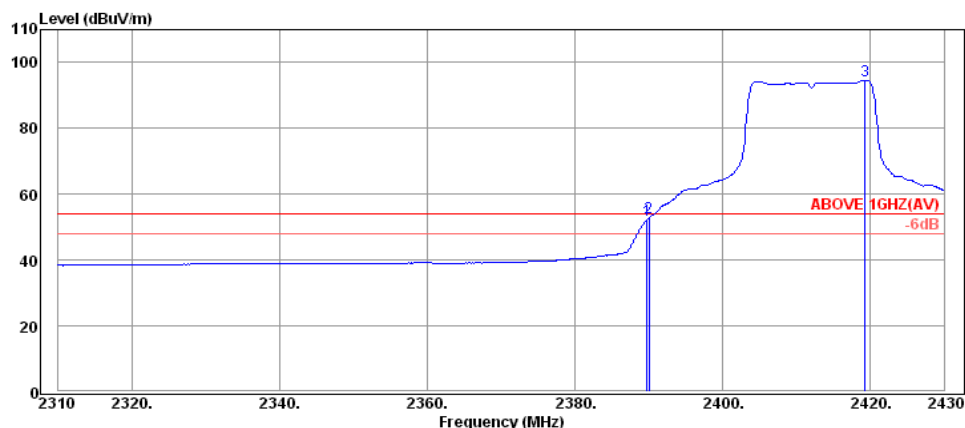

### Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.80	32.16	6.08	13.93	52.17	54.00	1.83	Average
2390.04	32.16	6.08	14.57	52.81	54.00	1.19	Average
2419.32	32.18	6.12	56.25	94.55	---	---	Average

Mode	802.11g	Frequency	TX 2437MHz
------	---------	-----------	------------

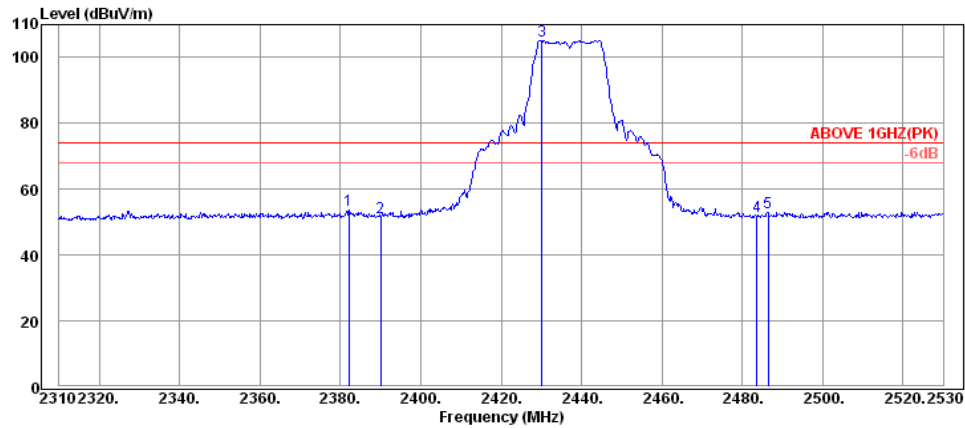

### Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2382.16	32.13	6.07	15.62	53.82	74.00	20.18	Peak
2390.08	32.16	6.08	13.34	51.58	74.00	22.42	Peak
2430.12	32.20	6.13	66.83	105.16	---	---	Peak
2483.58	32.28	6.19	13.38	51.85	74.00	22.15	Peak
2486.44	32.28	6.19	14.61	53.08	74.00	20.92	Peak

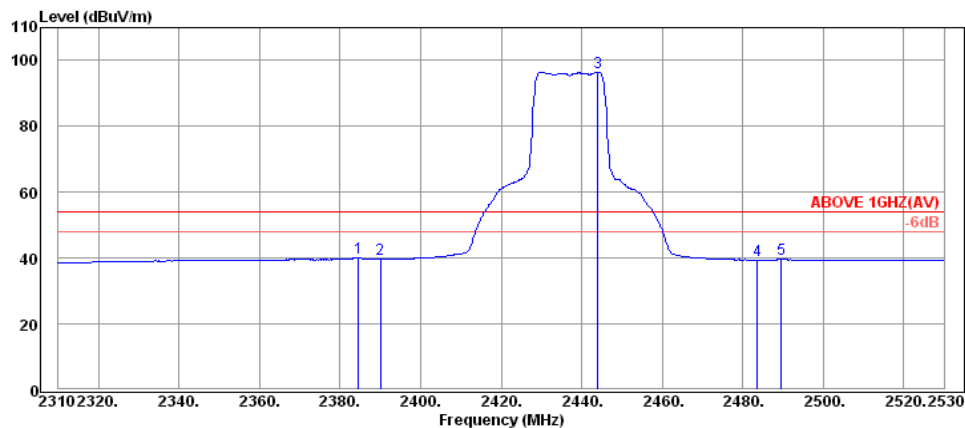

### Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.58	32.13	6.07	1.91	40.11	54.00	13.89	Average
2390.08	32.16	6.08	1.43	39.67	54.00	14.33	Average
2443.98	32.23	6.14	58.10	96.47	---	---	Average
2483.58	32.28	6.19	0.94	39.41	54.00	14.59	Average
2489.52	32.30	6.19	1.18	39.67	54.00	14.33	Average

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

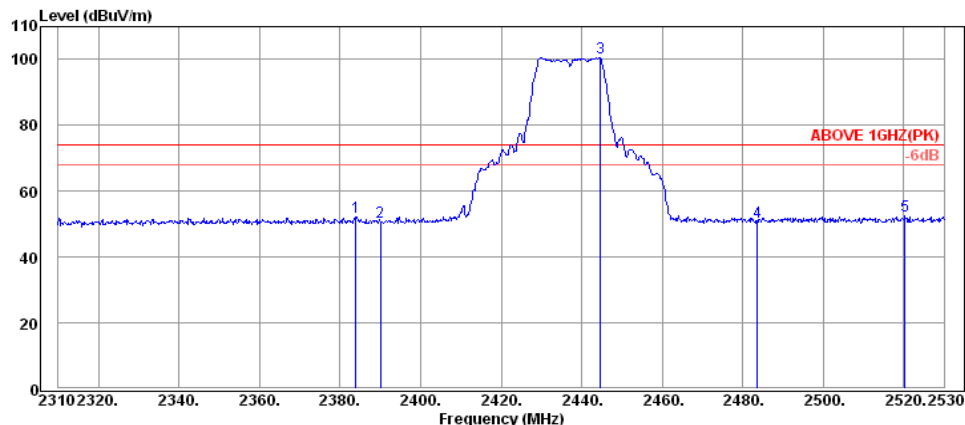

#### Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.92	32.13	6.07	13.90	52.10	74.00	21.90	Peak
2390.08	32.16	6.08	12.37	50.61	74.00	23.39	Peak
2444.64	32.23	6.14	62.21	100.58	---	---	Peak
2483.58	32.28	6.19	12.36	50.83	74.00	23.17	Peak
2520.32	32.32	6.23	13.86	52.41	74.00	21.59	Peak

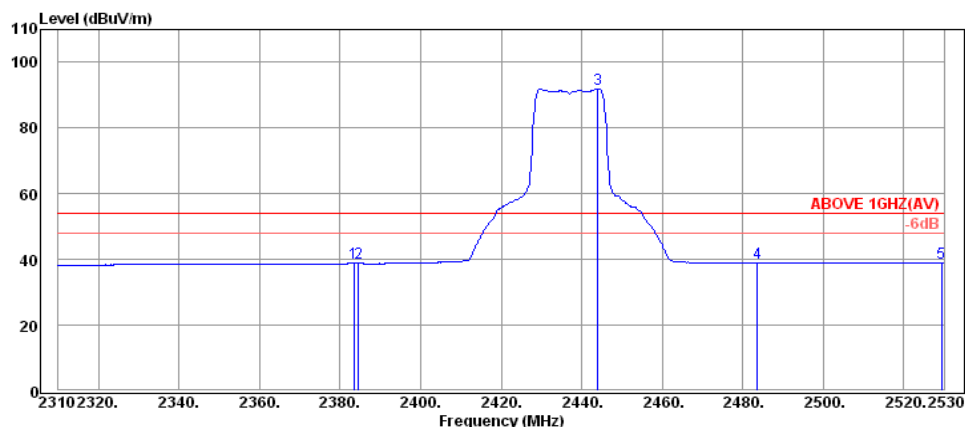

#### Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.48	32.13	6.07	0.62	38.82	54.00	15.18	Average
2384.58	32.13	6.07	0.69	38.89	54.00	15.11	Average
2443.98	32.23	6.14	53.59	91.96	---	---	Average
2483.58	32.28	6.19	0.50	38.97	54.00	15.03	Average
2529.34	32.34	6.25	0.44	39.03	54.00	14.97	Average

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

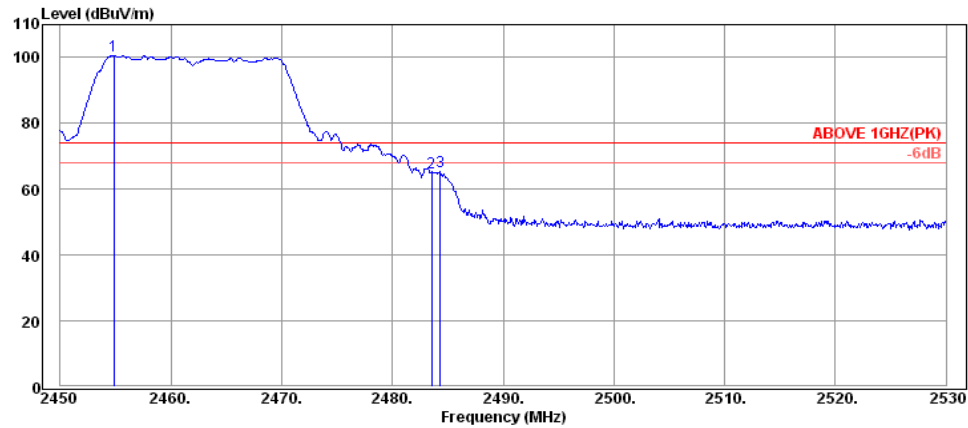

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2454.88	32.25	6.15	62.21	100.61	---	---	Peak
2483.52	32.28	6.19	26.60	65.07	74.00	8.93	Peak
2484.32	32.28	6.19	26.91	65.38	74.00	8.62	Peak

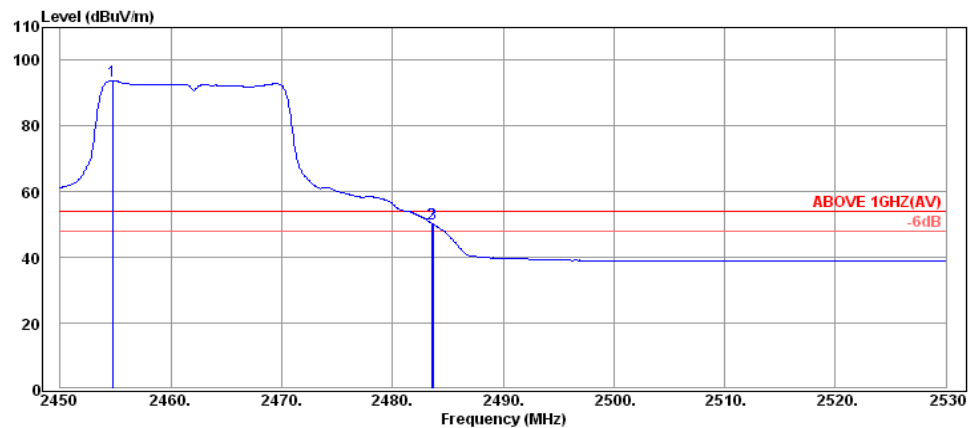

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2454.72	32.25	6.15	55.31	93.71	---	---	Average
2483.52	32.28	6.19	11.96	50.43	54.00	3.57	Average
2483.68	32.28	6.19	11.66	50.13	54.00	3.87	Average

### 6.5.3. Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	802.11b	Frequency	TX 2437MHz
------	---------	-----------	------------

#### **Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4875.00	34.25	8.35	7.57	50.17	54.00	3.83	Peak
7310.00	35.80	9.82	-1.36	44.26	54.00	9.74	Peak

#### **Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4875.00	34.25	8.35	2.92	45.52	54.00	8.48	Peak
7310.00	35.80	9.82	-0.15	45.47	54.00	8.53	Peak



Mode	802.11g	Frequency	TX 2437MHz
------	---------	-----------	------------

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4875.00	34.25	9.09	-0.86	42.48	54.00	11.52	Peak
7310.00	35.80	11.80	-3.30	44.30	54.00	9.70	Peak

**Antenna at Vertical Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
4880.00	34.25	9.14	2.47	45.86	54.00	8.14	Peak
7310.00	35.80	11.80	-3.10	44.50	54.00	9.50	Peak

**6.5.4. Emissions in Non-restricted Frequency Bands**

Pursuant to KDB 558074 D01 v03r05 that emission levels below the 15.209 general radiated emissions limits is not required.

## 7. 6dB BANDWIDTH MEASUREMENT

### 7.1. Block Diagram of Test Setup

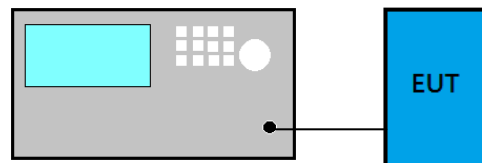

### 7.2. Specification Limits

The minimum 6dB bandwidth shall be at least 500kHz.

### 7.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r05:

Option 2

- (1) Set RBW = 100 kHz.
- (2) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x dB to -6 dB to record the final bandwidth.

### 7.4. Test Results

Please refer to Appendix A

## 8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT

### 8.1. Block Diagram of Test Setup



### 8.2. Specification Limits

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5MHz is : 1Watt. (30dBm), and E.I.R.P.: 4Watt (36dBm)

### 8.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r05:

#### **PKPM1 Peak power meter method:**

EUT is connected to power sensor and record the maximum output power.

#### **Method AVGPM (Measurement using an RF average power meter):**

EUT is connected to power sensor and record the maximum average output power and duty cycle factor is added when duty cycle presented in section 3.5 is < 98%.

#### **Method AVGSA-2 (Spectrum channel power)**


- (1) Set span to at least 1.5 times the OBW
- (2) Set RBW = 1 -5% of OBW
- (3) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- (4) Detector = RMS.
- (5) Trace mode = trace average at least 100 traces
- (6) Sweep = auto couple.
- (7) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
- (8) Duty cycle factor is added when duty cycle presented in section 3.5 is < 98%.

### 8.4. Test Results

Please refer to Appendix A

## 9. EMISSION LIMITATIONS MEASUREMENT

### 9.1. Block Diagram of Test Setup

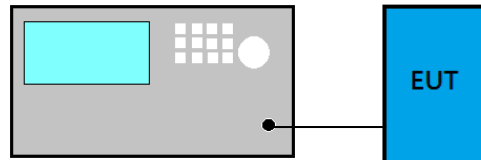

### 9.2. Specification Limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)).

### 9.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r05:

#### Reference Level

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW  $\geq 3 \times$  RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max PSD as reference level.

### **Emission Level Measurement**


- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW  $\geq 3 \times$  RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max level.

## **9.4. Test Results**

Please refer to Appendix A

## 10. POWER SPECTRAL DENSITY

### 10.1. Block Diagram of Test Setup

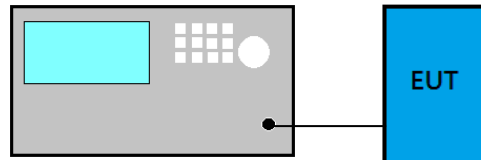

### 10.2. Specification Limits

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band.

### 10.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r05:

#### Method PKPSD (peak PSD)

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to:  $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
- (4) Set the VBW  $\geq 3 \times \text{RBW}$ .
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize.
- (9) Use the peak marker function to determine the maximum amplitude level.
- (10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### Method AVGPSD-2

- (1) Using peak PSD procedure step 1 to step 4.
- (2) Detector = RMS detector
- (3) Sweep time = auto couple
- (4) Trace mode = trace averaging over a minimum of 100 traces
- (5) Use the peak marker function to determine the maximum amplitude level.
- (6) Duty cycle factor is added when duty cycle presented in section 3.5 < 98%.
- (7) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 10.4. Test Results

Please refer to Appendix A

## **11.DEVIATION TO TEST SPECIFICATIONS**

**【NONE】**



**AUDIX Technology Corp.**  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City 244, Taiwan

---

**APPENDIX A**

**Tel: +886 2 26099301**  
**Fax: +886 2 26099303**

# APPENDIX A

## TEST PLOTS

(Model: EB934)



## TABLE OF CONTENTS

<b>A.1 6dB BANDWIDTH MEASUREMENT .....</b>	<b>2</b>
A.1.1 6dB Bandwidth Result.....	2
A.1.2 Measurement Plots .....	3
<b>A.2 MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>4</b>
A.2.1 Peak Output Power .....	4
A.2.2 Average Output Power (Reporting only).....	4
<b>A.3 EMISSION LIMITATIONS MEASUREMENT .....</b>	<b>5</b>
<b>A.4 POWER SPECTRAL DENSITY .....</b>	<b>11</b>
A.4.1 Power Spectral Density Result .....	11
A.4.2 Measurement Plots .....	12

## A.1 6dB BANDWIDTH MEASUREMENT

Test Date	2016/09/21	Temp./Hum.	25 /58%
Cable Loss	2.1dB	Test Voltage	DC 12V (Via Battery)

### A.1.1 6dB Bandwidth Result

Modulation Type	Centre Frequency (MHz)	6 dB Bandwidth (MHz)	Limit
802.11b	2412	10.11	>500kHz
	2437	10.10	
	2462	10.10	
802.11g	2412	16.64	
	2437	16.63	
	2462	16.63	

AUDIX Technology Corp.  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City 244, Taiwan



Tel: +886 2 26099301  
Fax: +886 2 26099303

## A.1.2 Measurement Plots

802.11b



802.11g

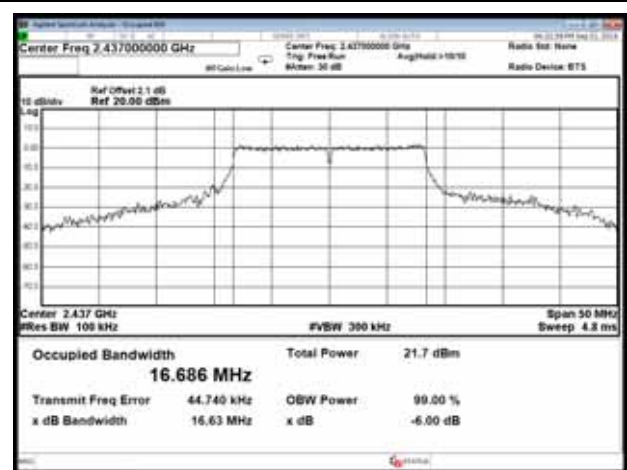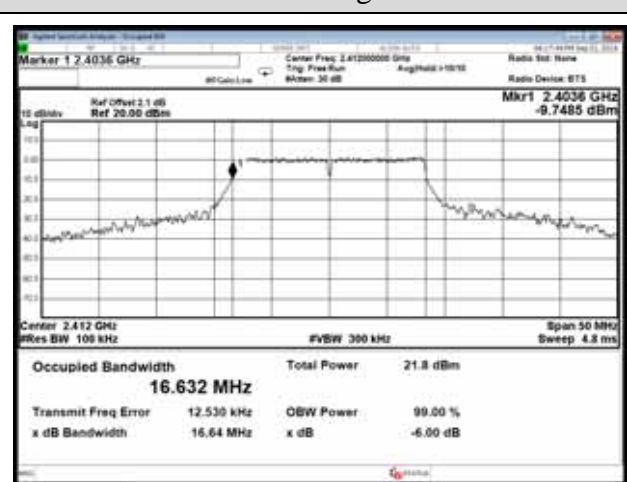

## A.2 MAXIMUM PEAK OUTPUT POWER MEASUREMENT

Test Date	2016/10/13	Temp./Hum.	26 /52%
Cable Loss	2.1dB	Test Voltage	DC 12V (Via Battery)

### A.2.1 Peak Output Power

Modulation Type	Centre Frequency (MHz)	Peak Output Power		Limit
		(dBm)	(W)	
802.11b	2412	18.92	0.077983	< 30 dBm (1 W)
	2437	19.30	0.085114	
	2462	19.07	0.080724	
802.11g	2412	20.15	0.103514	
	2417	20.11	0.102565	
	2437	21.26	0.133660	
	2457	20.67	0.116681	
	2462	20.74	0.118577	

Note: The results have been included cable loss.


### A.2.2 Average Output Power (Reporting only)

Modulation Type	Centre Frequency (MHz)	Output Power (dBm)	10log(1/X)	Max Outpower (dBm)
802.11b	2412	15.78	0	15.78
	2437	16.19		16.19
	2462	16.04		16.04
802.11g	2412	13.97	0	13.97
	2417	13.92		13.92
	2437	15.23		15.23
	2457	14.89		14.89
	2462	14.97		14.97

Note: The results have been included cable loss.

## A.3 EMISSION LIMITATIONS MEASUREMENT


Test Date	2016/09/21	Temp./Hum.	25 /58%
Cable Loss	2.1dB	Test Voltage	DC 12V (Via Battery)
Mode	802.11b	Frequency	TX 2412MHz
Simultaneous Factor10 log(n) (Note: "n" is antenna number)			N/A

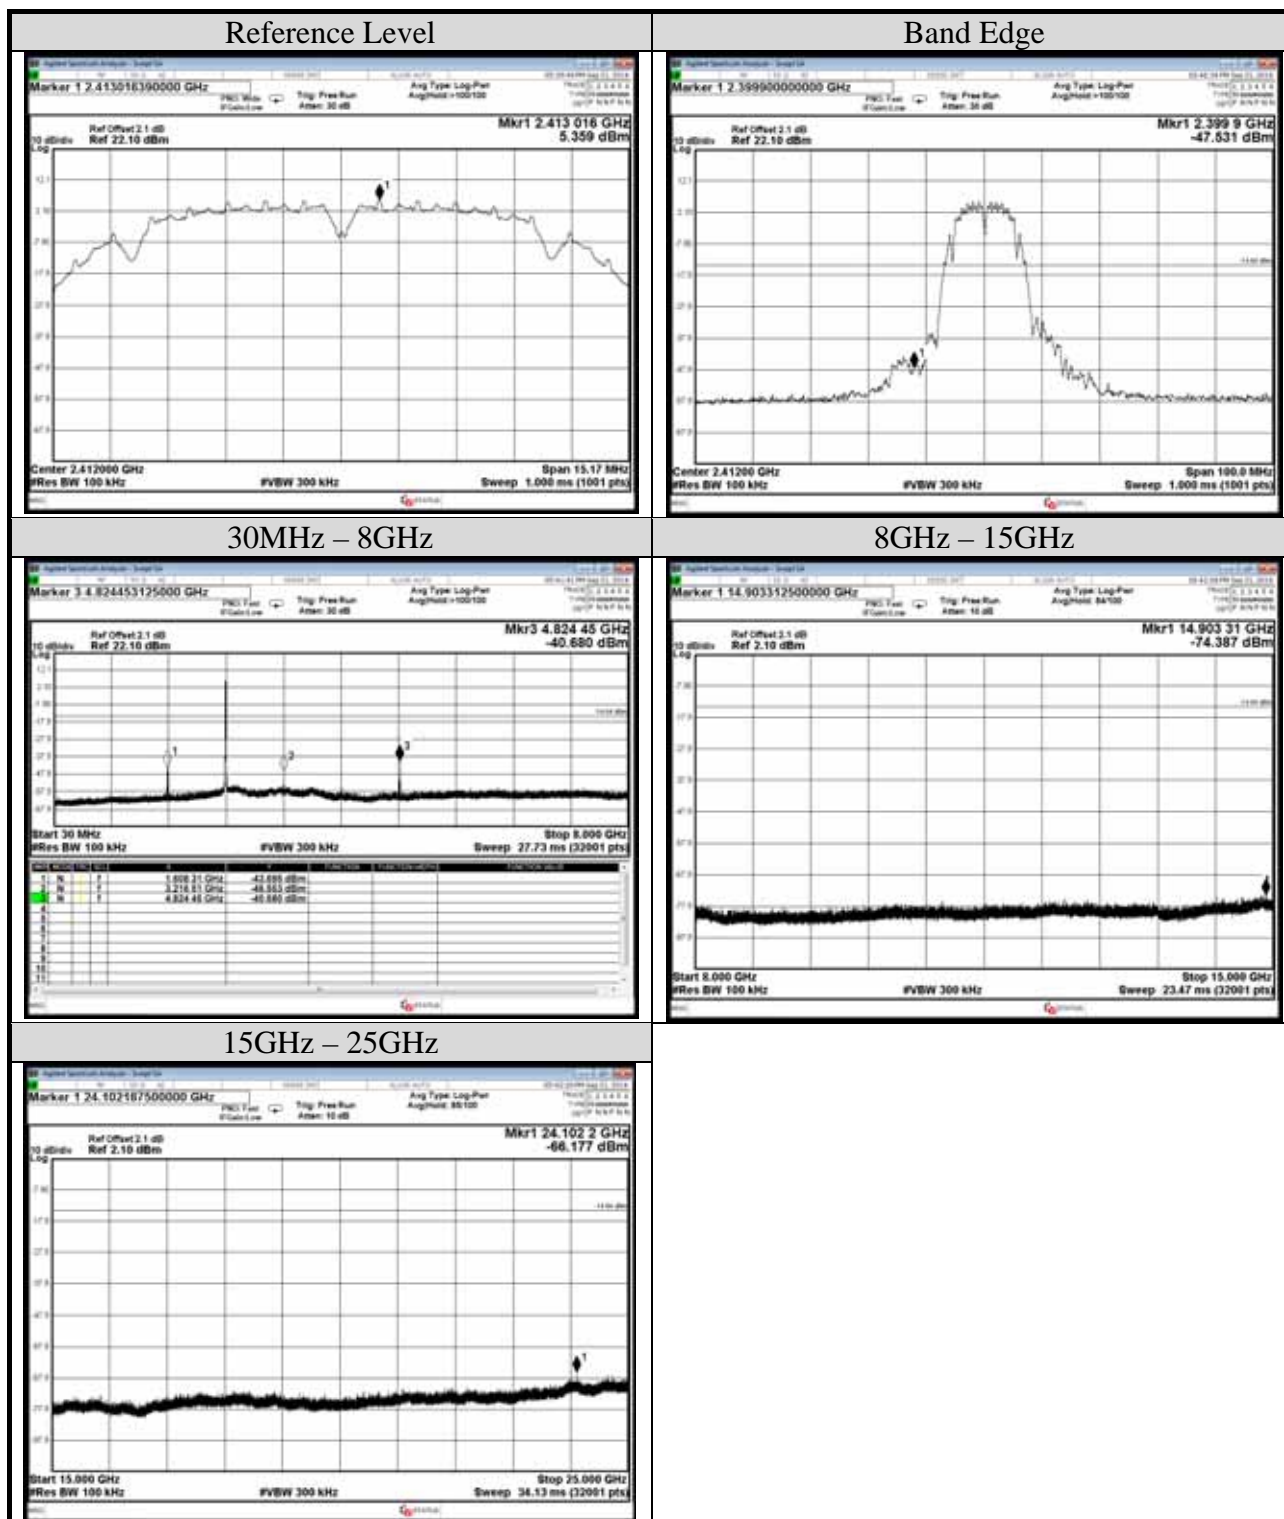

AUDIX Technology Corp.  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan

Tel: +886 2 26099301  
Fax: +886 2 26099303

Test Date	2016/09/21	Temp./Hum.	25 /58%
Cable Loss	2.1dB	Test Voltage	DC 12V (Via Battery)
Mode	802.11b	Frequency	TX 2437MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		N/A

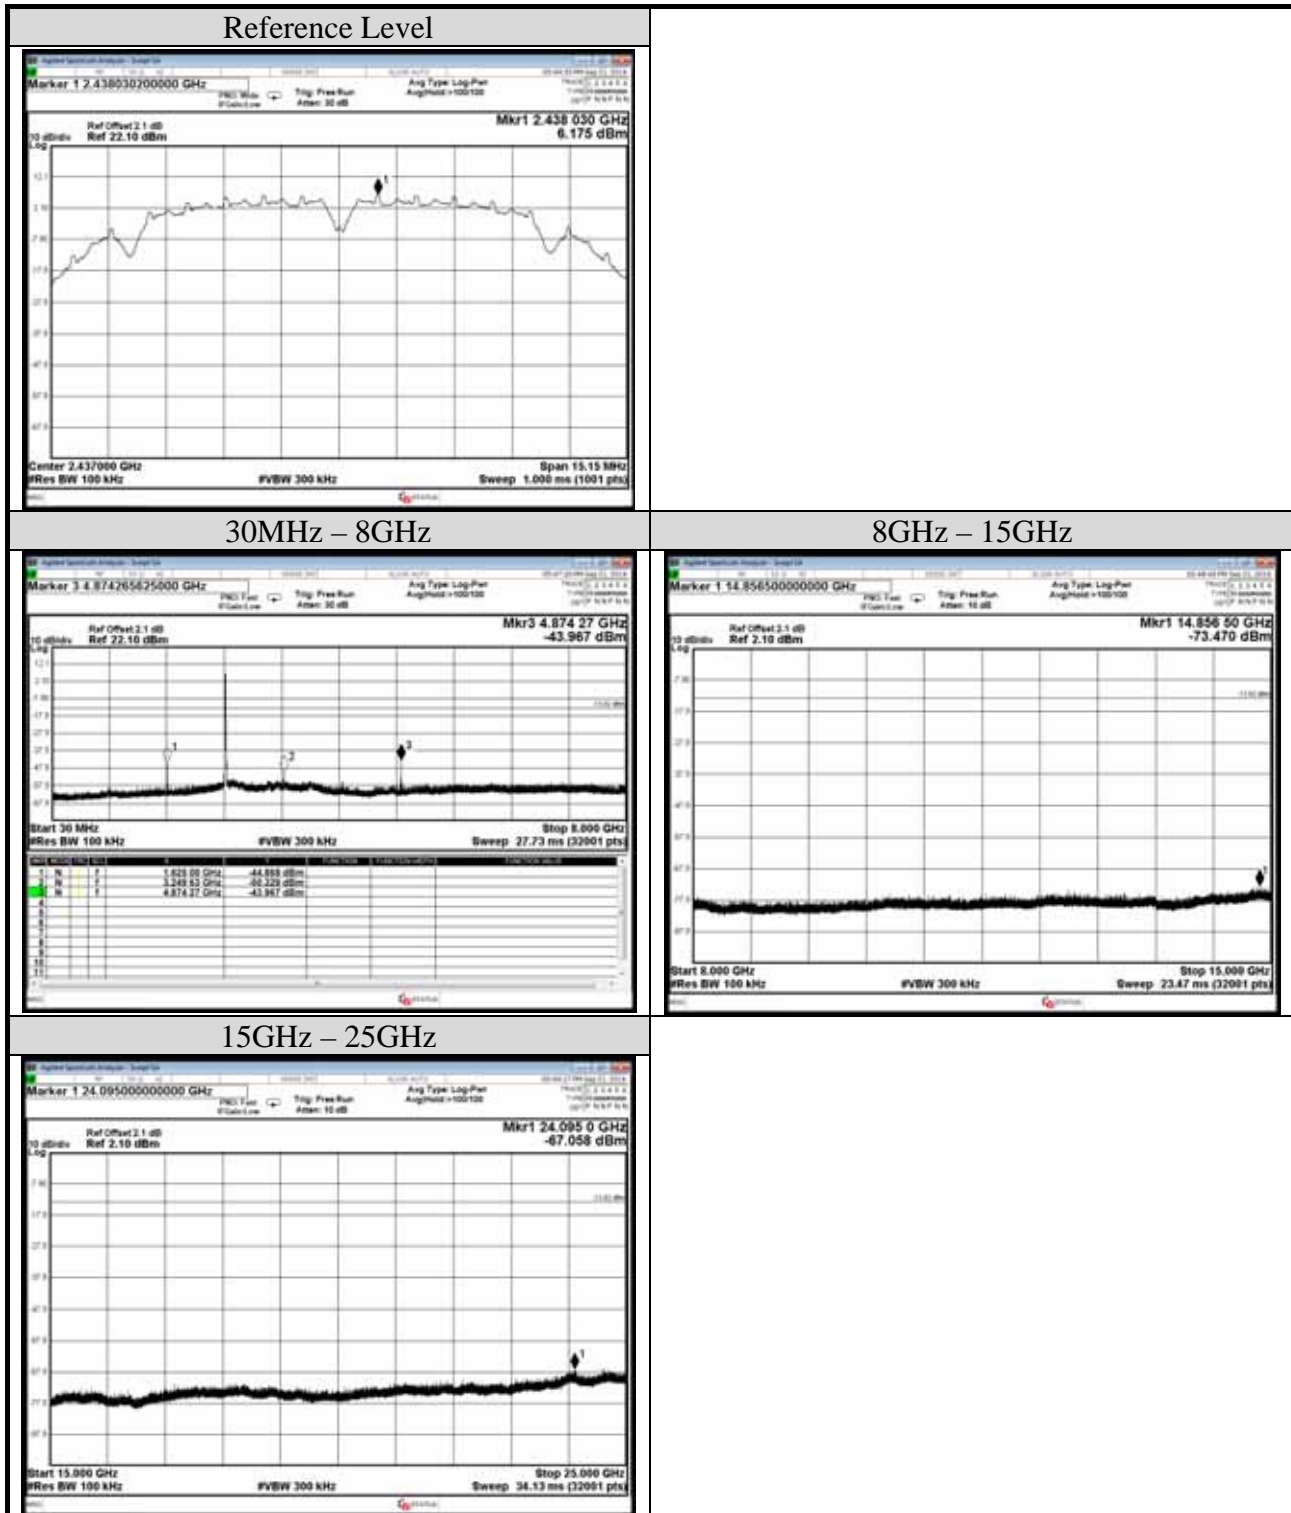




AUDIX Technology Corp.  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City 244, Taiwan

Tel: +886 2 26099301  
Fax: +886 2 26099303


Test Date	2016/09/21	Temp./Hum.	25 /58%
Cable Loss	2.1dB	Test Voltage	DC 12V (Via Battery)
Mode	802.11b	Frequency	TX 2462MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		N/A

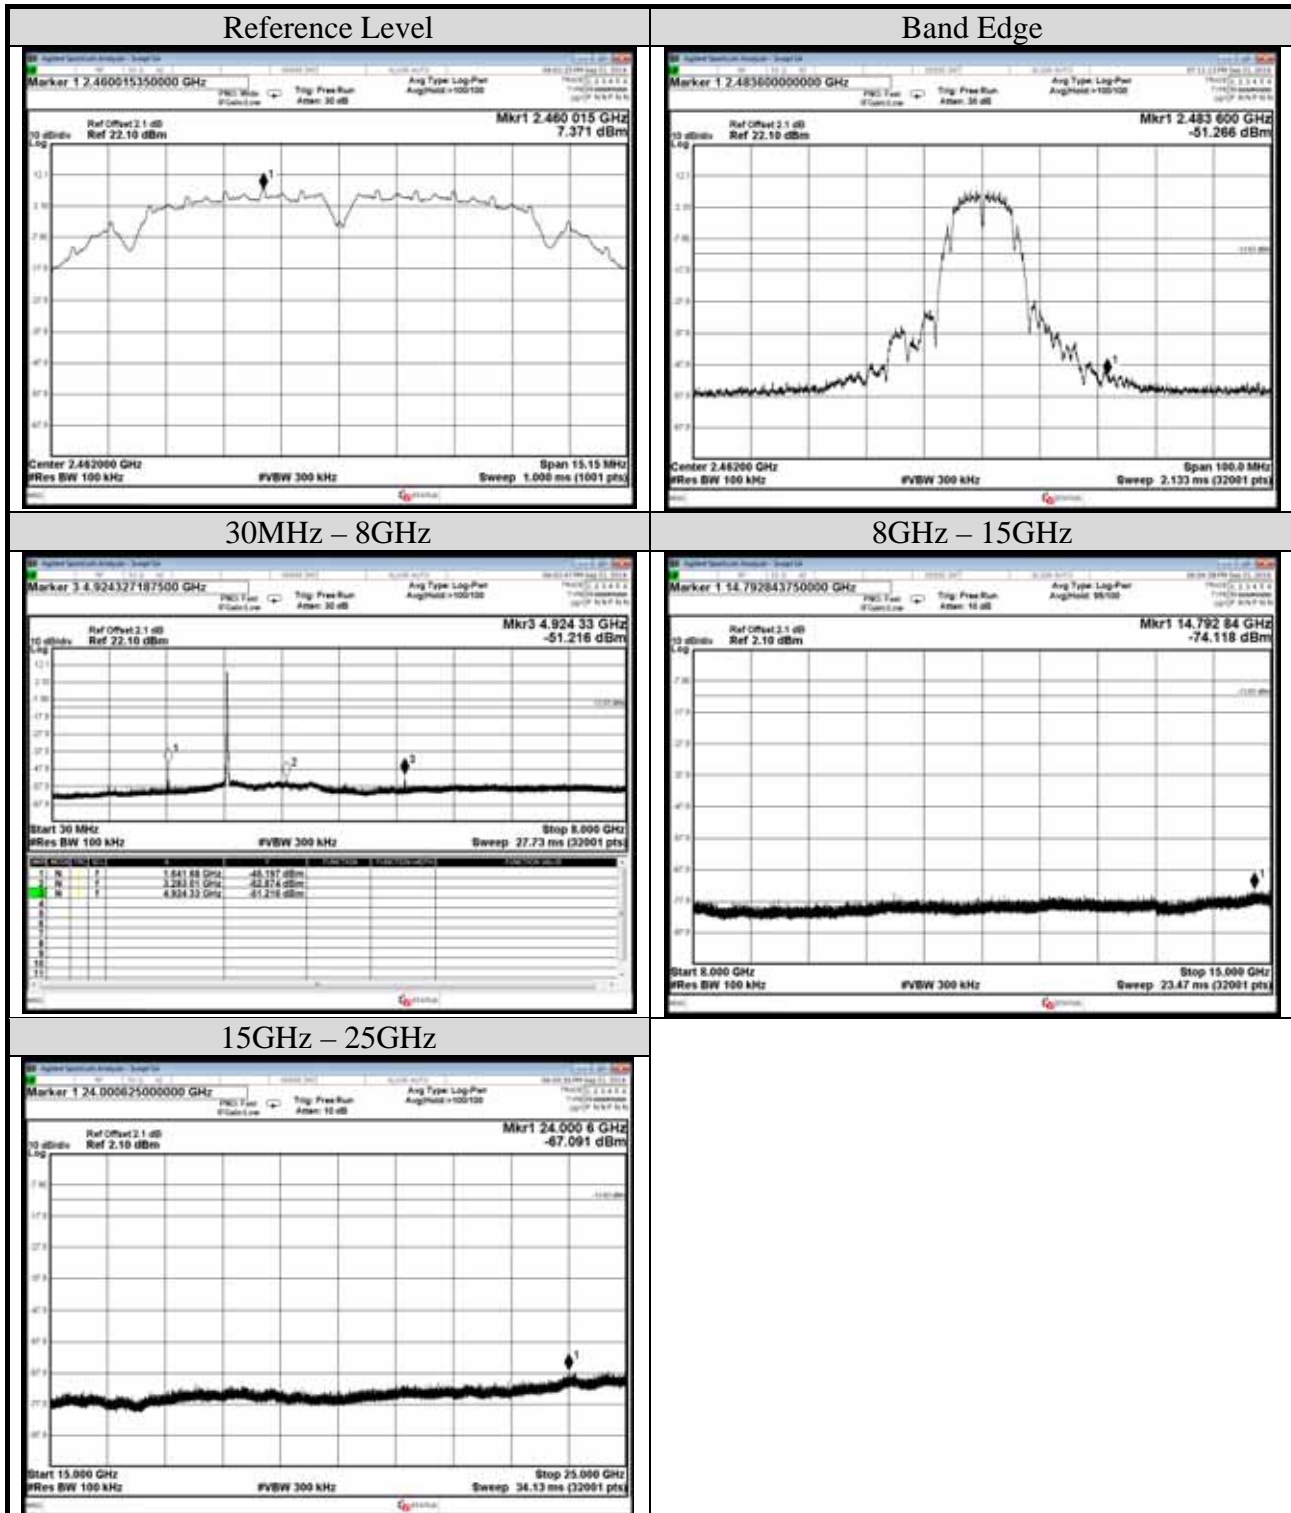

AUDIX Technology Corp.  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City244, Taiwan

Tel: +886 2 26099301  
Fax: +886 2 26099303

Test Date	2016/09/21	Temp./Hum.	25 /58%
Cable Loss	2.1dB	Test Voltage	DC 12V (Via Battery)
Mode	802.11g	Frequency	TX 2412MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		N/A

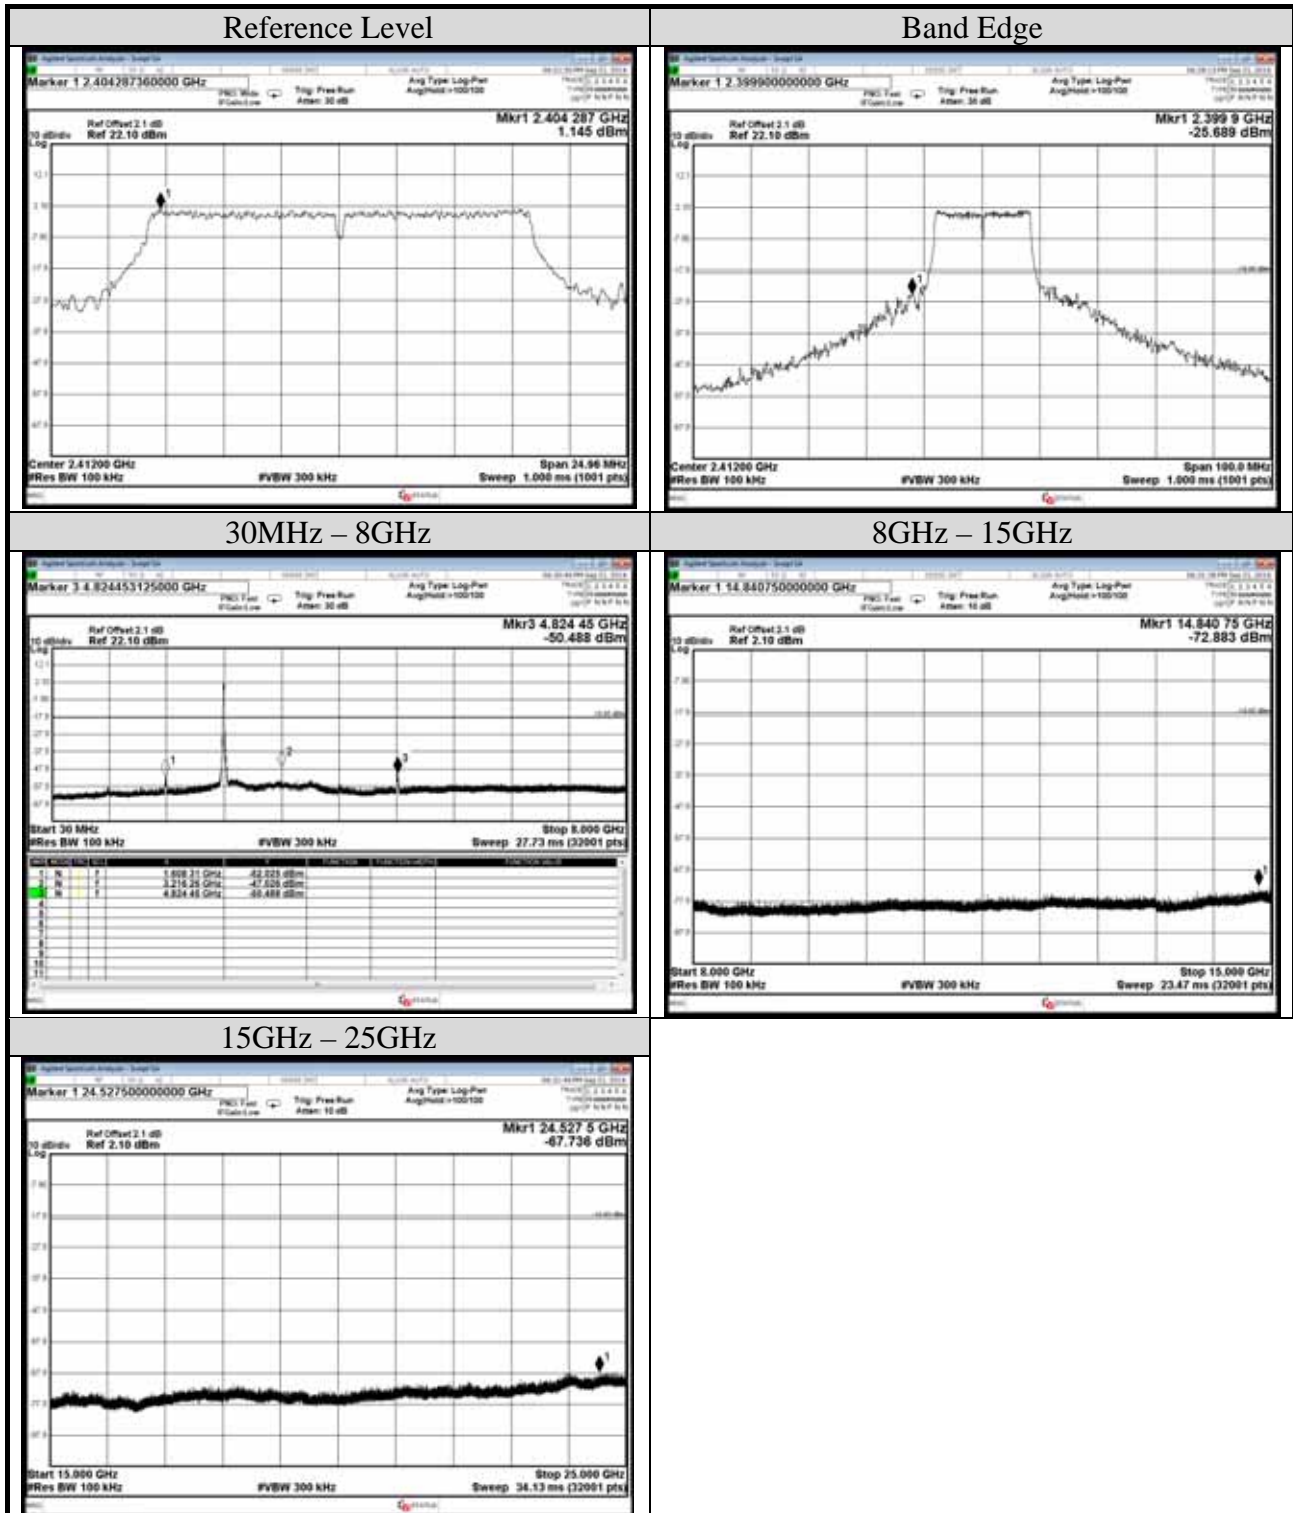




AUDIX Technology Corp.  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City 244, Taiwan

Tel: +886 2 26099301  
Fax: +886 2 26099303


Test Date	2016/09/21	Temp./Hum.	25 /58%
Cable Loss	2.1dB	Test Voltage	DC 12V (Via Battery)
Mode	802.11g	Frequency	TX 2437MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		N/A

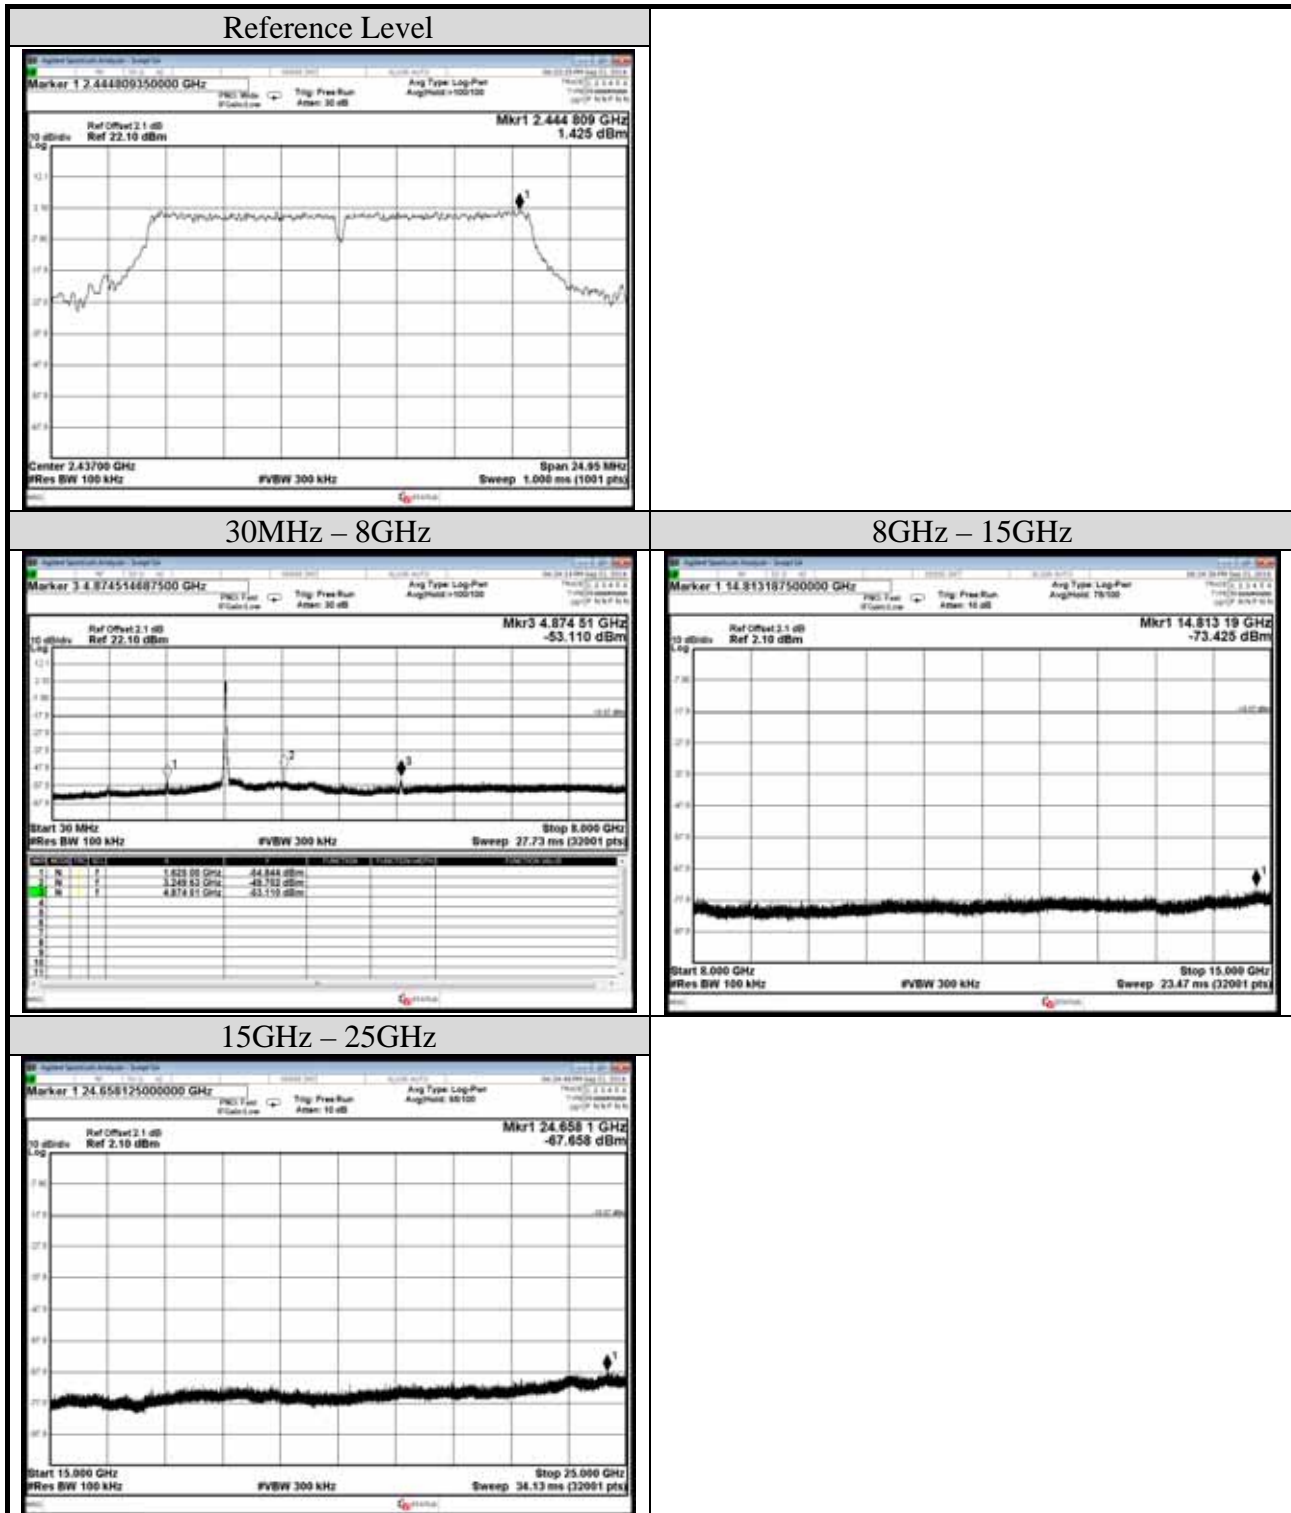

AUDIX Technology Corp.  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City 244, Taiwan

Tel: +886 2 26099301  
Fax: +886 2 26099303

Test Date	2016/09/21	Temp./Hum.	25 /58%
Cable Loss	2.1dB	Test Voltage	DC 12V (Via Battery)
Mode	802.11g	Frequency	TX 2462MHz
Simultaneous Factor	10 log(n) (Note: "n" is antenna number)		N/A

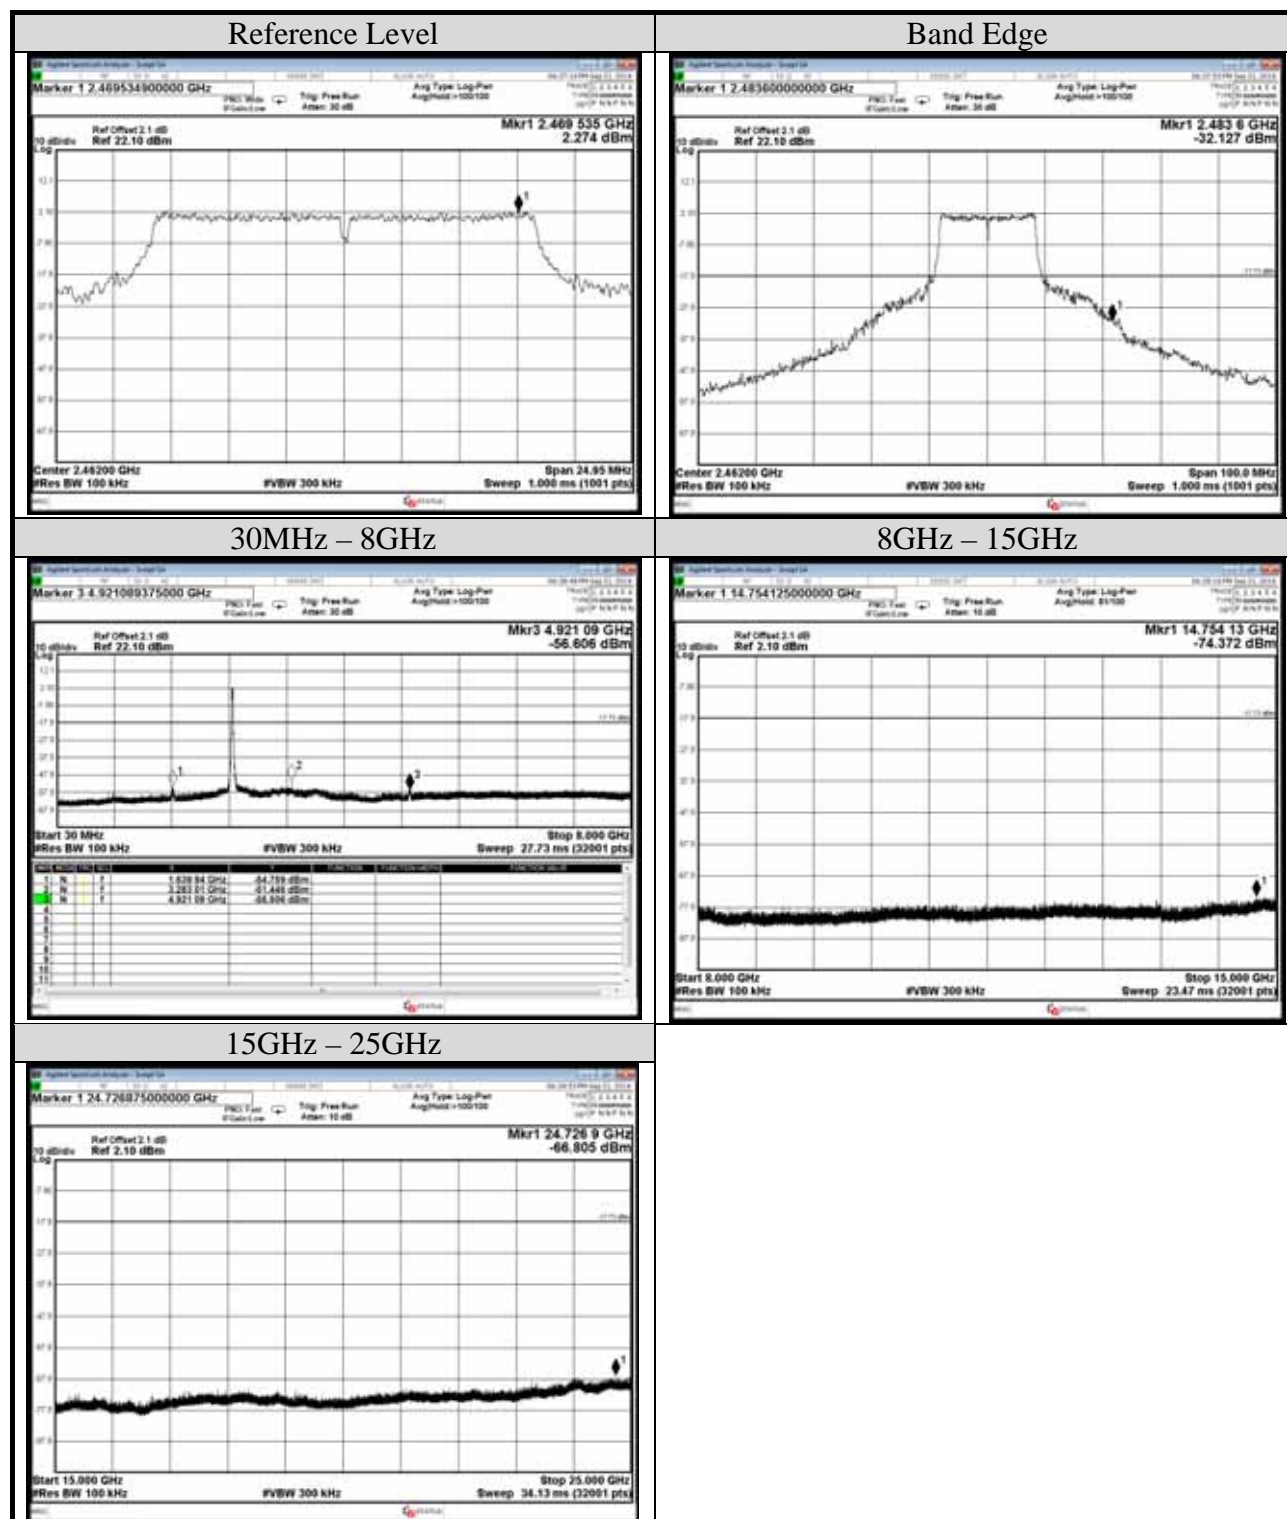

## A.4 POWER SPECTRAL DENSITY

Test Date	2016/09/21	Temp./Hum.	25 /58%
Cable Loss	2.1dB	Test Voltage	DC 12V (Via Battery)
Simultaneous Factor 10 log(n) (Note: "n" is antenna number)			N/A

### A.4.1 Power Spectral Density Result


Modulation Type	Centre Frequency (MHz)	Power Spectral Density (dBm)	Limit
802.11b	2412	5.359	< 8 dBm/3kHz
	2437	6.175	
	2462	7.371	
802.11g	2412	1.145	
	2437	1.425	
	2462	2.274	

Note: All results have been included cable loss and Simultaneous Factor.

AUDIX Technology Corp.  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City 244, Taiwan

Tel: +886 2 26099301  
Fax: +886 2 26099303

## A.4.2 Measurement Plots

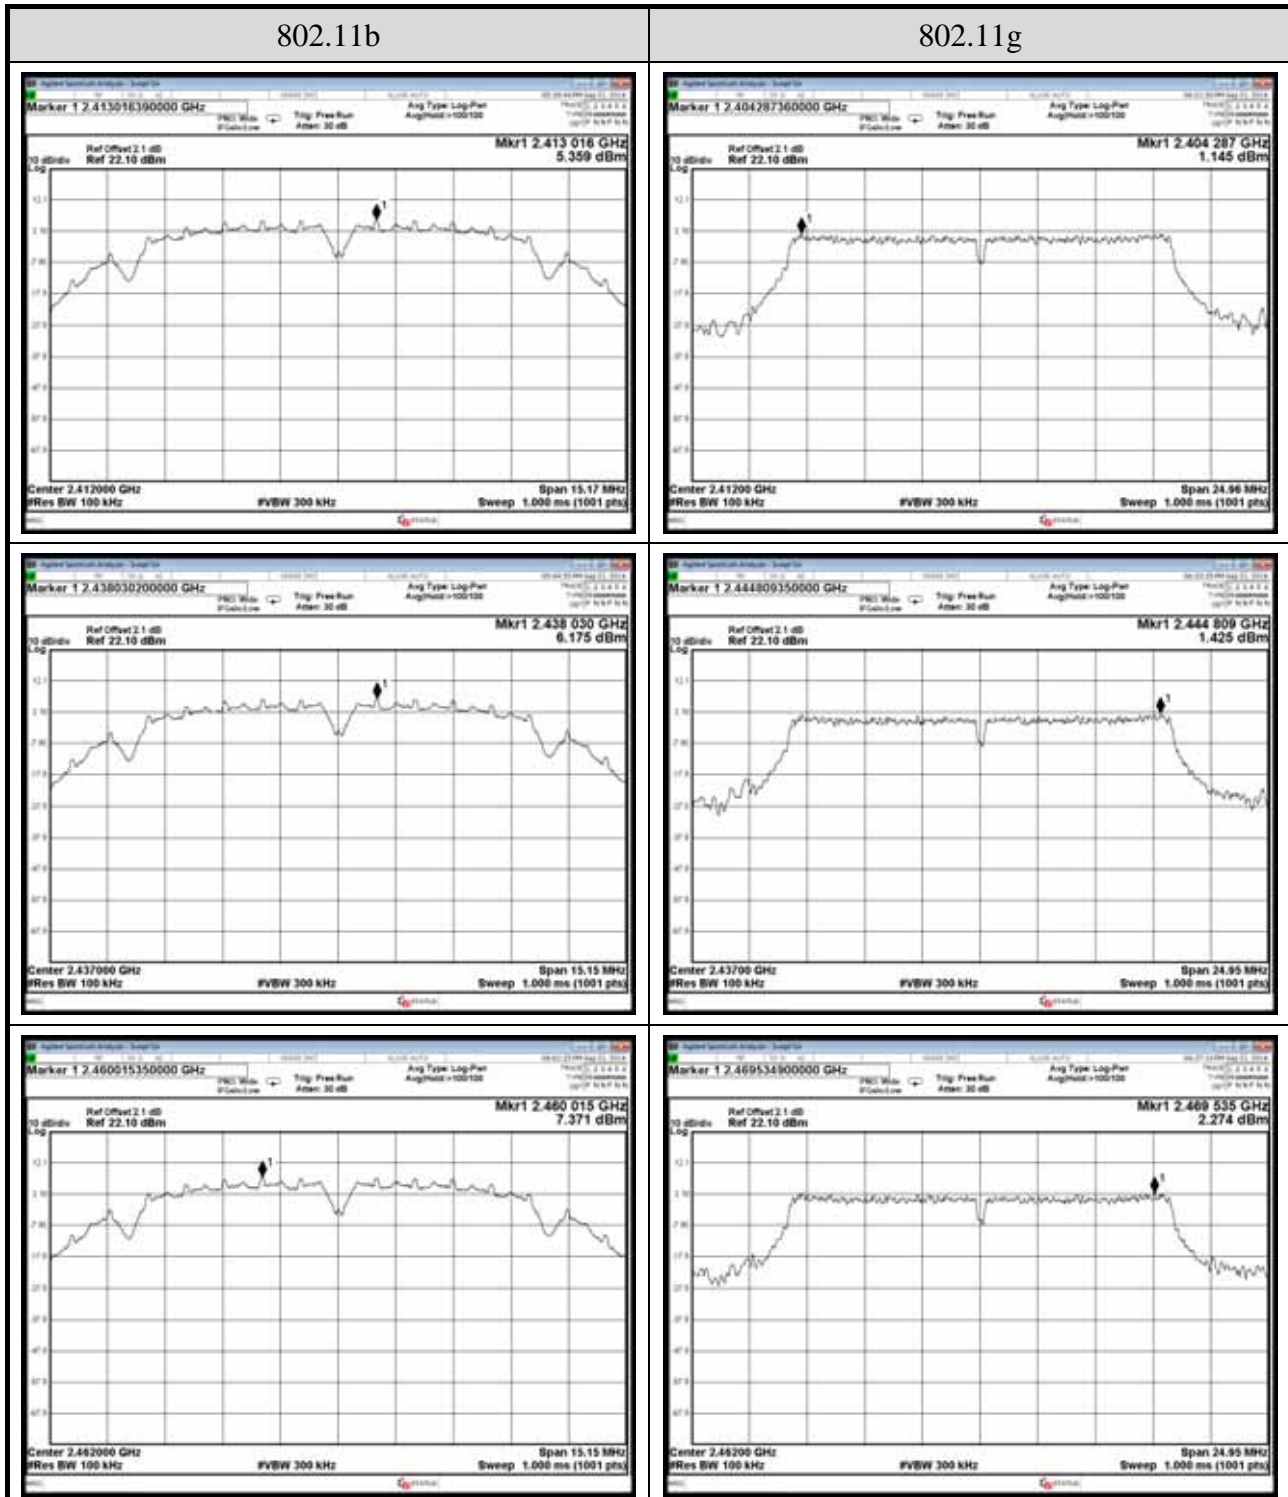

Note: All results have been included cable loss and Simultaneous Factor.