



**A TEST REPORT**  
**FOR**  
**TEAM SIMOCO Ltd**  
**ON**  
**SB2025NT100W**  
**Private Land Mobile Radio**  
**DOCUMENT NO. TRA-008201-W-US-1**

TEST REPORT NO: TRA-008201-W-US-01  
COPY NO: 1  
ISSUE NO: 1  
FCC ID: U89SB2K5354D3D3V

**REPORT ON THE CERTIFICATION TESTING OF A  
TEAM SIMOCO  
SB2025NT100W  
WITH RESPECT TO  
THE FCC RULES CFR 47,  
PART 90**

**PRIVATE LAND MOBILE RADIO.**

TEST DATE: 6<sup>th</sup> -12<sup>th</sup> January 2012



APPROVED BY: \_\_\_\_\_ J CHARTERS  
RADIO  
PRODUCT  
MANAGER

DATE: 6<sup>th</sup> March 2012 \_\_\_\_\_

Distribution:

- Copy Nos: 1. Team Simoco  
2. TRaC Global

THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE

## CONTENTS

	PAGE
CERTIFICATE OF CONFORMITY & COMPLIANCE	4
APPLICANT'S SUMMARY	5
EQUIPMENT TEST CONDITIONS	6
TESTS REQUIRED	6
TEST RESULTS	7 – 47

## ANNEX

PHOTOGRAPHS	A
PHOTOGRAPH No. 1&2: Test setup	
PHOTOGRAPH No. 3&4: Equipment overview	
PHOTOGRAPH No. 5&6: Top/Underside View Main Audio PC	
PHOTOGRAPH No. 7&8: Top/Underside View SBC Support PCB	
PHOTOGRAPH No. 9&10: Top/Underside View Aux PCB	
PHOTOGRAPH No. 11&12: Top/Underside View SBC	
PHOTOGRAPH No. 13&14: Top /Underside View T36 Option PCB	
PHOTOGRAPH No. 15&16: Top /Underside View Tx'er exciter PCB	
PHOTOGRAPH No. 17&18: Top /Underside View Rx'er PCB	
PHOTOGRAPH No. 19&20: Top /Underside View Controller PCB	
PHOTOGRAPH No. 21&22: Top /Underside View Digital I/O PCB	
PHOTOGRAPH No. 23: Top View 100W P. A. PCB	
APPLICANTS DECLARATION	B
EQUIPMENT CALIBRATION	C
MEASUREMENT UNCERTAINTY	D

### Notes:

1. Component failure during test
 

YES	[ ]
NO	[X]
2. If Yes, details of failure:
3. The facilities used for the testing of the product contain in this report are FCC Listed.

**CERTIFICATE OF CONFORMITY & COMPLIANCE**

FCC IDENTITY: U89SB2K5354D3D3V

PURPOSE OF TEST: Certification

TEST SPECIFICATION: FCC RULES CFR 47, Part 90

TEST RESULT: Compliant to Specification

EQUIPMENT UNDER TEST: SB2025NT100W

EQUIPMENT TYPE: Private Land Mobile Radio

FREQUENCY OF OPERATION: 148MHz – 174MHz

MAXIMUM OUTPUT CONDUCTED: 49.94dBm 98.62W

MODULATION TYPE: F3E, F1E

POWER SOURCE(s): +13.8Vdc

TEST DATE(s): 6<sup>th</sup> -12<sup>th</sup> January 2012

APPLICANT: Team Simoco

ADDRESS: Team Simoco Ltd  
Field House  
Utttoxeter Old Road  
Derby  
DE1 1NH

APPROVED BY:



RADIO  
PRODUCT  
MANAGER

## APPLICANT'S SUMMARY

EQUIPMENT UNDER TEST (EUT):	SB2025NT100W
EQUIPMENT TYPE:	Private Land Mobile Radio
PURPOSE OF TEST:	Certification
TEST SPECIFICATION(s):	FCC RULES CFR 47, Part 90
TEST RESULT:	COMPLIANT      Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
APPLICANT'S CATEGORY:	MANUFACTURER <input checked="" type="checkbox"/> IMPORTER <input type="checkbox"/> DISTRIBUTOR <input type="checkbox"/> TEST HOUSE <input type="checkbox"/> AGENT <input type="checkbox"/>
APPLICANT'S CONTACT PERSON(s):	Mr Richard Stimson
EMAIL ADDRESS	Richard.stimson@teamsimoco.com
APPLICANT:	Team Simoco Ltd
ADDRESS:	Team Simoco Ltd Field House Uttoxeter Old Road Derby DE1 1NH
TEL:	01332 375414
MANUFACTURER:	Team Simoco Ltd
EUT(s) COUNTRY OF ORIGIN:	United Kingdom
TEST LABORATORY:	TRaC Global
TEST DATE(s):	6 <sup>th</sup> -12 <sup>th</sup> January 2012
TEST REPORT No:	TRA-008201-W-US-01

## EQUIPMENT TEST / EXAMINATIONS REQUIRED

1.	TEST/EXAMINATION	RULE PART	APPLICABILITY	RESULT
	RF Power Output	90.205	Yes	Complies
	Audio Frequency Response (a)	2.1047	Yes	Complies
	Modulation Limiting	2.1047	No	N/A
	Occupied Bandwidth	90.210	Yes	Complies
	Spurious Emissions at Antenna Terminals	90.210	Yes	Complies
	Field Strength of Spurious Emissions	90.210	Yes	Complies
	Field Strength of Un- Intentional Spurious Emissions	15.109	Yes	Complies
	Frequency Stability	90.213	Yes	Complies
	Transient behaviour	90.214	Yes	Complies
	Emission Mask	90.210(d)	Yes	Complies

2. Product class: Class A ☒ Class B ☐

3. Product Use: Private Land Mobile Radio

4. Emission Designator: F3E, F1E

5. Temperatures: Ambient (Tnom) 22°C

6. Supply Voltages: Vnom +13.8Vdc

Note: Vnom voltages are as stated above unless otherwise shown on the test report page

7. Equipment Category: Single channel ☐  
Two channel ☐  
Multi-channel ☒

8. Channel spacing: Narrowband ☐  
Wideband ☒

9. Test Location TRaC Global  
Skelmersdale ☒

10. Modifications made during test program No modifications were performed.

### System description:


The SB2025NT100W is a radio base station capable of operating in analogue FM and digital P25 modes as a stand-alone repeater or as part of a simulcast/voted system. Inputs are provided for connection to external frequency and 1PPS timing signals to ensure the accurate frequency and modulation synchronisation necessary for simulcast operation. Dispatcher connection is via Ethernet using the TIA DFSI protocol."

## COMPLIANCE TESTS

### RF OUTPUT POWER – CONDUCTED – PART 2.1046

Ambient temperature = 20°C  
 Relative humidity = 47%  
 Supply voltage = +13.8Vdc  
 Channel number = See test results

Radio Laboratory

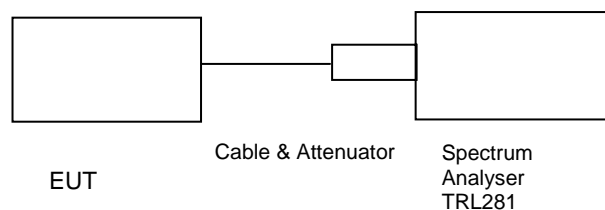

Frequency MHz	Level on Analyser (dBm)	Output Cable & Attenuator loss (dB)	Conducted Output Power (dBm)	Conducted Output Power (W)	Rated output Power (dBm)	Rated output Power (W)
148.0500MHz	-0.4	50.30	49.90	97.72	50.0	100
161.0250MHz	-0.41	50.35	49.94	98.62	50.0	100
173.9875MHz	-0.4	50.34	49.94	98.62	50.0	100

Notes: Power and antenna height clause 90.205(d) specifies that in the band 150MHz – 174MHz the maximum allowable station effective radiated power (ERP) is dependent upon the station's antenna HAAT and the required service area.


TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	R&S	FSU46	200034	TRL281	<b>X</b>
CABLE	TRAC	N/A	N/A	UH271	<b>X</b>
CABLE	TRAC	N/A	N/A	UH272	<b>X</b>
ATTENUATOR	SPINNER	745357	N/A	TRLUH225	<b>X</b>
ATTENUATOR	-	-	-	20dB	<b>X</b>
ATTENUATOR	BIRD	8304-100-N	N/A	222	<b>X</b>

## TRANSMITTER TESTS

### 99% Bandwidth – CONDUCTED – Part 90.209

Ambient temperature = 20°C  
 Relative humidity = 47%  
 Supply voltage = +13.8Vdc  
 Channel number = See test results

Radio Laboratory

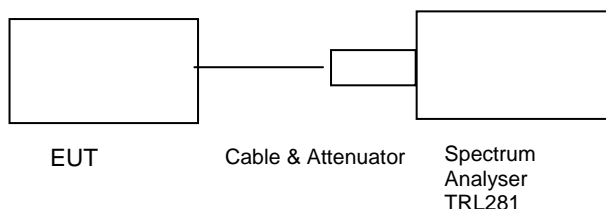

Note:


1. Cable and attenuator between EUT and spectrum analyser 50dB
2. See Table below for 99% Power Occupied Bandwidth
3. Internally generated test tone analogue speech
4. P25 Internally generated test tone C4FM

Frequency Of Operation Channel	Modulation Type
FM 2.5kHz Deviation	
148.0500MHz	99% Bandwidth =4.51kHz
161.0250MHz	99% Bandwidth =4.51kHz
173.9875MHz	99% Bandwidth =4.51kHz
P25 Modulation	
148.0500MHz	99% Bandwidth =8.25kHz
161.0250MHz	99% Bandwidth =8.33kHz
173.9875MHz	99% Bandwidth =8.25kHz

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRAC No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	RHODE & SCHWARZ	FSU46	200034	UH281	<b>X</b>
CABLE	TRAC	N/A	N/A	UH271	<b>X</b>
CABLE	TRAC	N/A	N/A	UH272	<b>X</b>
ATTENUATOR	SPINNER	745357	N/A	TRLUH225	<b>X</b>
ATTENUATOR	-	-	-	20dB	<b>X</b>
ATTENUATOR	BIRD	8304-100-N	N/A	222	<b>X</b>


148.0500MHz analogue speech



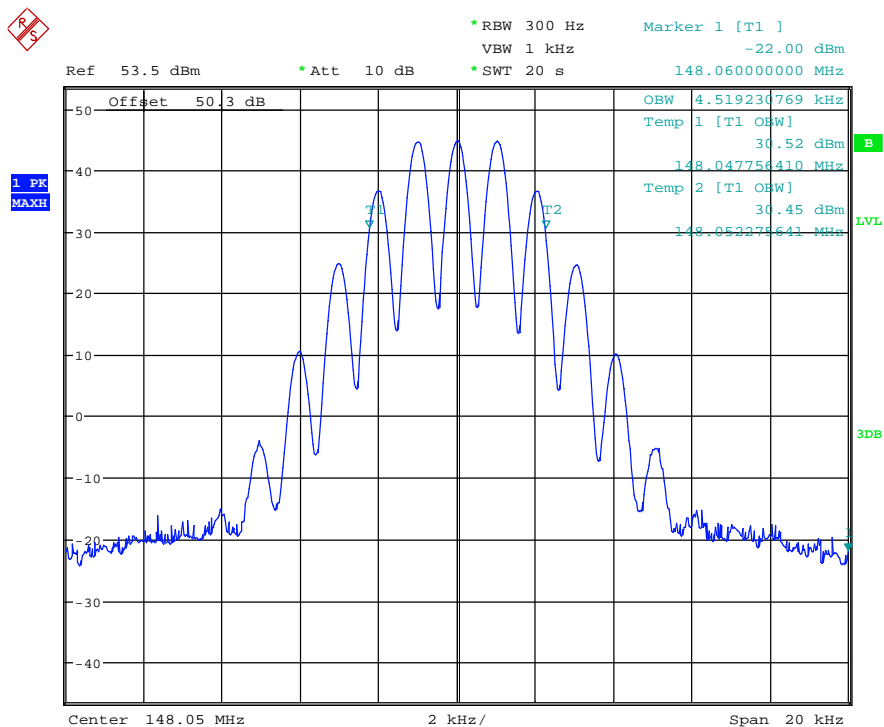


Date: 3.JAN.2012 15:35:01

### 161.0250MHz analogue speech

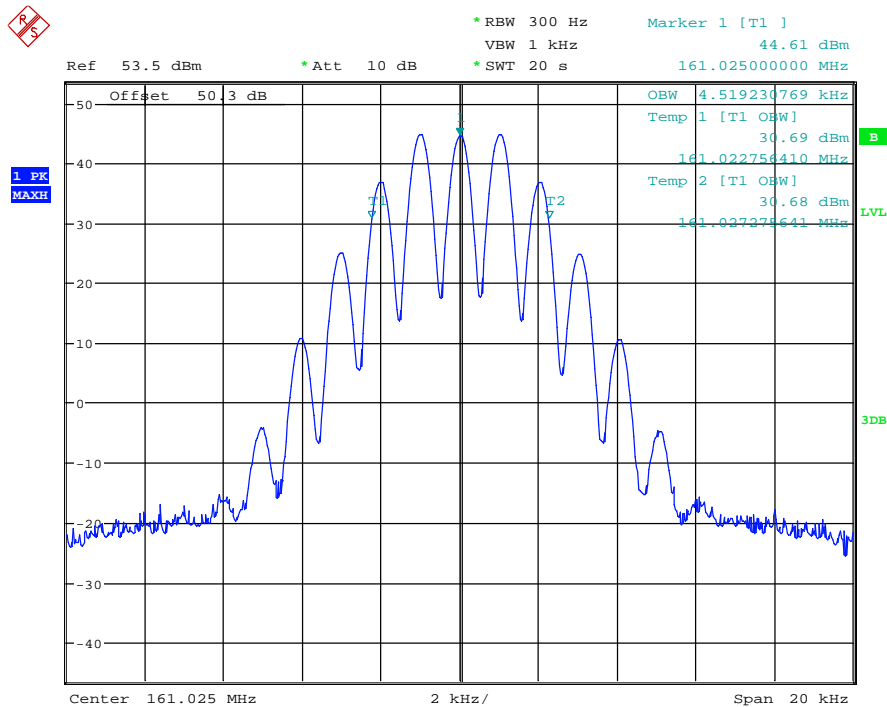


Date: 3.JAN.2012 15:53:28

# 173.9875MHz analogue speech

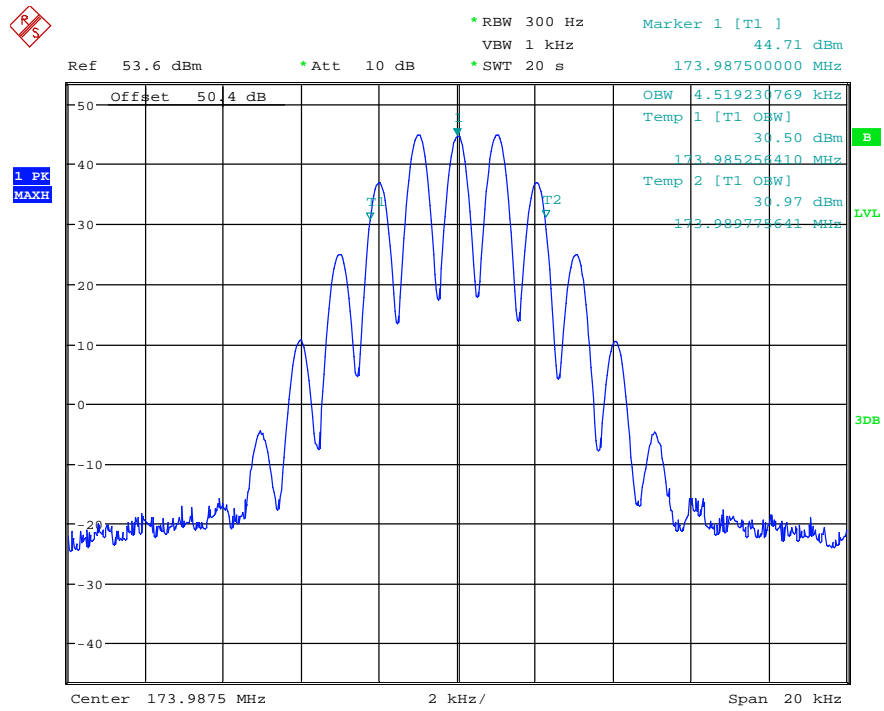


Date: 3.JAN.2012 16:08:42

# 148.0500MHz P25 Modulation

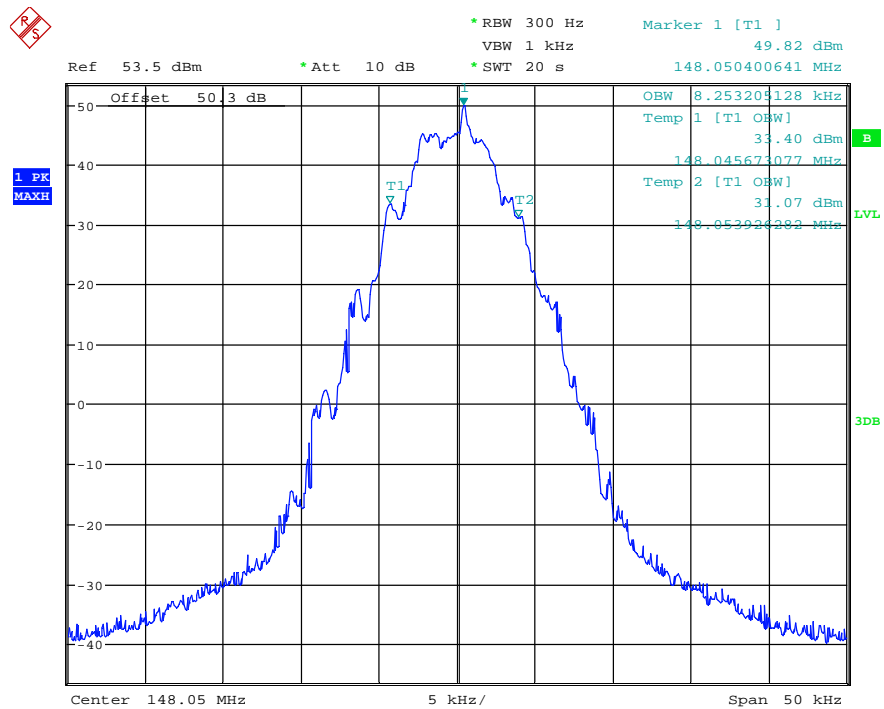


Date: 3.JAN.2012 15:45:56

# 161.0250MHz P25 Modulation

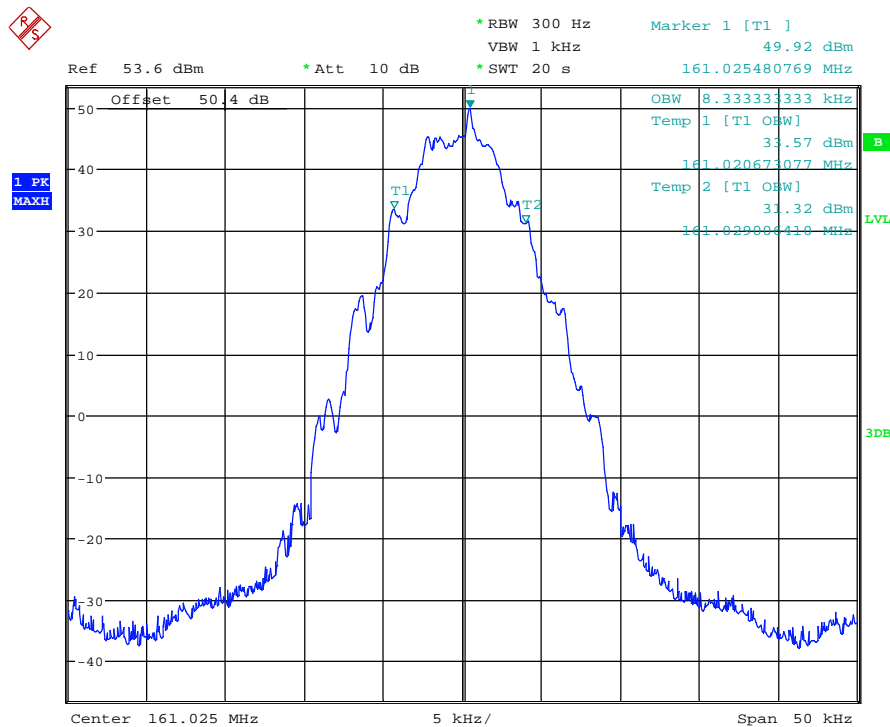

Date: 3.JAN.2012 16:00:30

# 173.9875MHz P25 Modulation

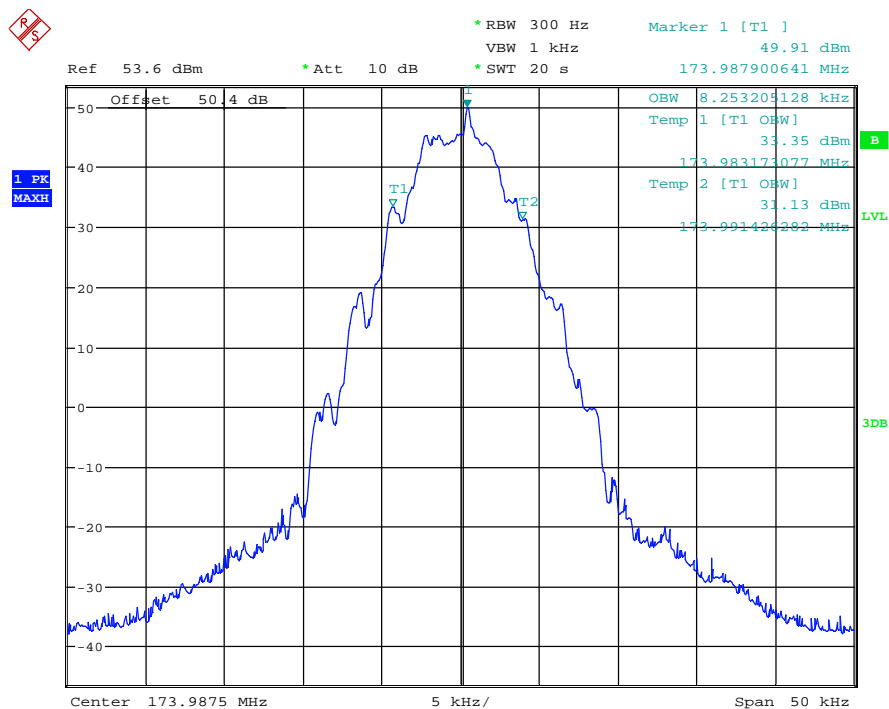


Date: 3.JAN.2012 16:20:58

## TRANSMITTER TESTS


### Occupied Bandwidth Emission Masks. Part 90.210(d)

Ambient temperature = 20°C  
Relative humidity = 47%  
Supply voltage = +13.8Vdc

Radio Laboratory  
Test Signal = F3E

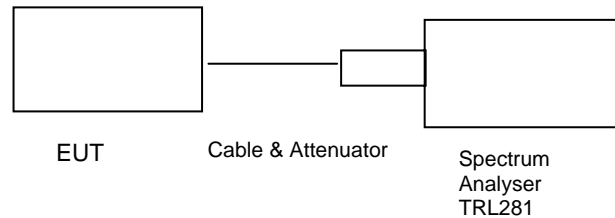


Part 90 Bottom channel: F3E 12.5kHz channel spacing

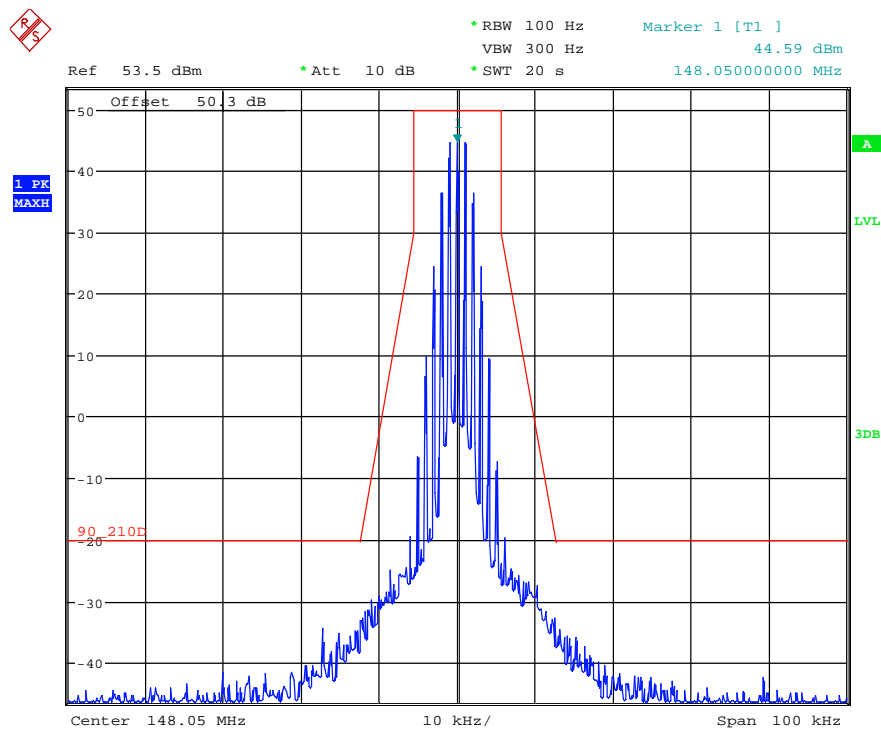


Date: 4.JAN.2012 10:41:03

## Part 90 Bottom channel: F1E 12.5kHz channel spacing

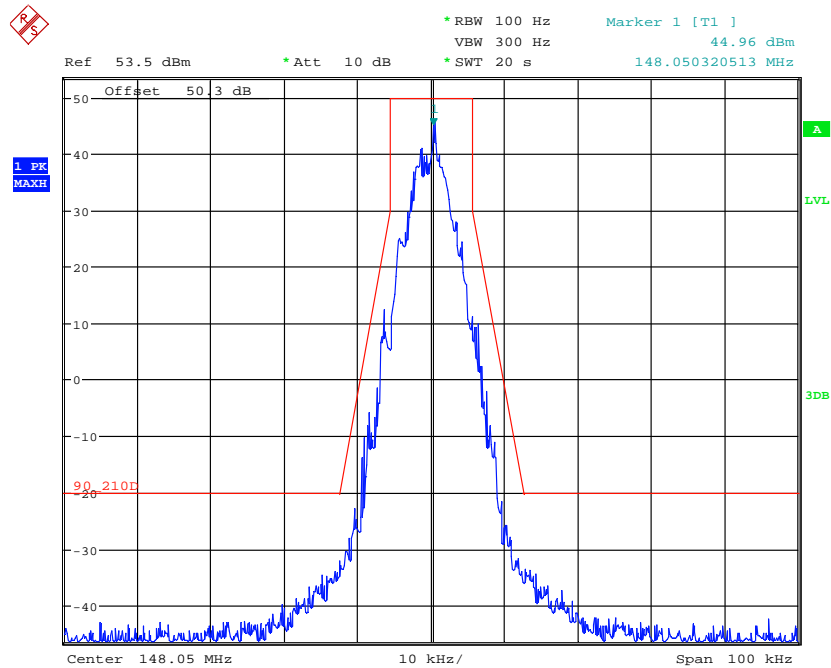


Date: 4.JAN.2012 10:43:30

## Part 90 Middle channel: F3E 12.5kHz channel spacing

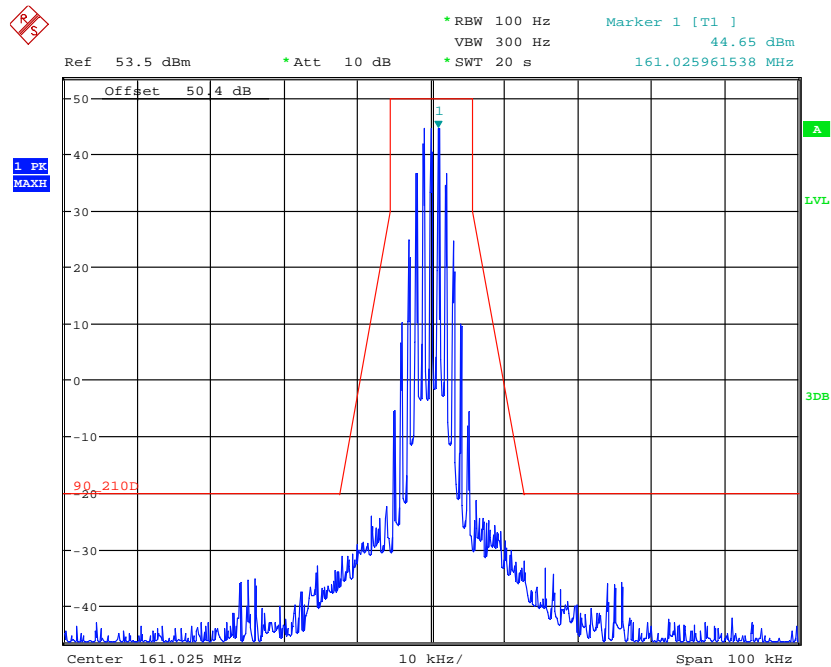


Date: 4.JAN.2012 10:34:48

## Part 90 Middle channel: F1E 12.5kHz channel spacing

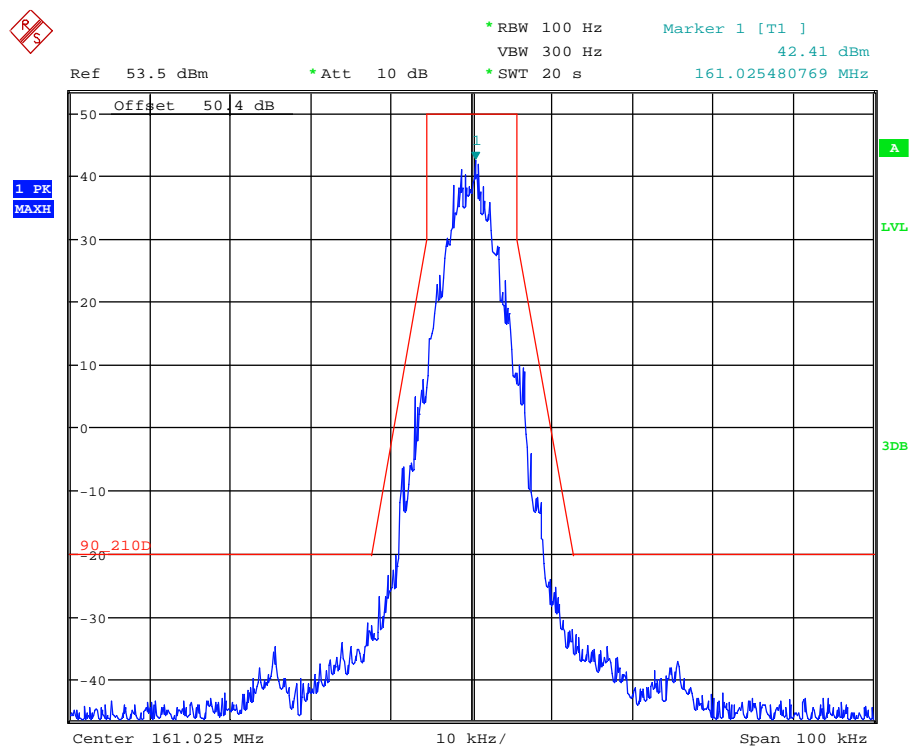


Date: 4.JAN.2012 10:38:01

## Part 90 Top channel: F3E 12.5kHz channel spacing

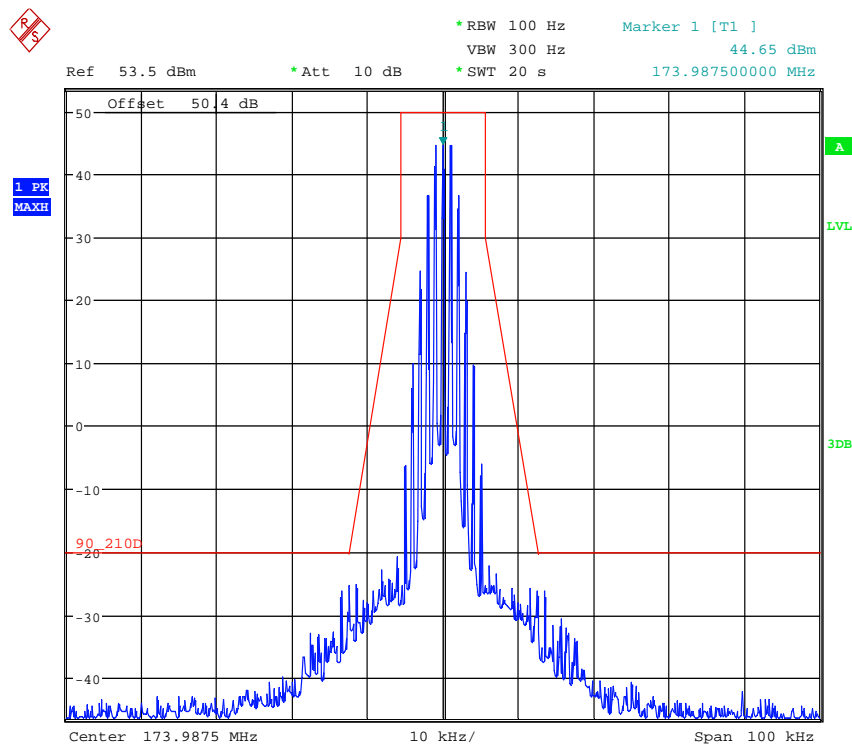

Date: 4.JAN.2012 10:31:28

## Part 90 Top channel: F1E 12.5kHz channel spacing

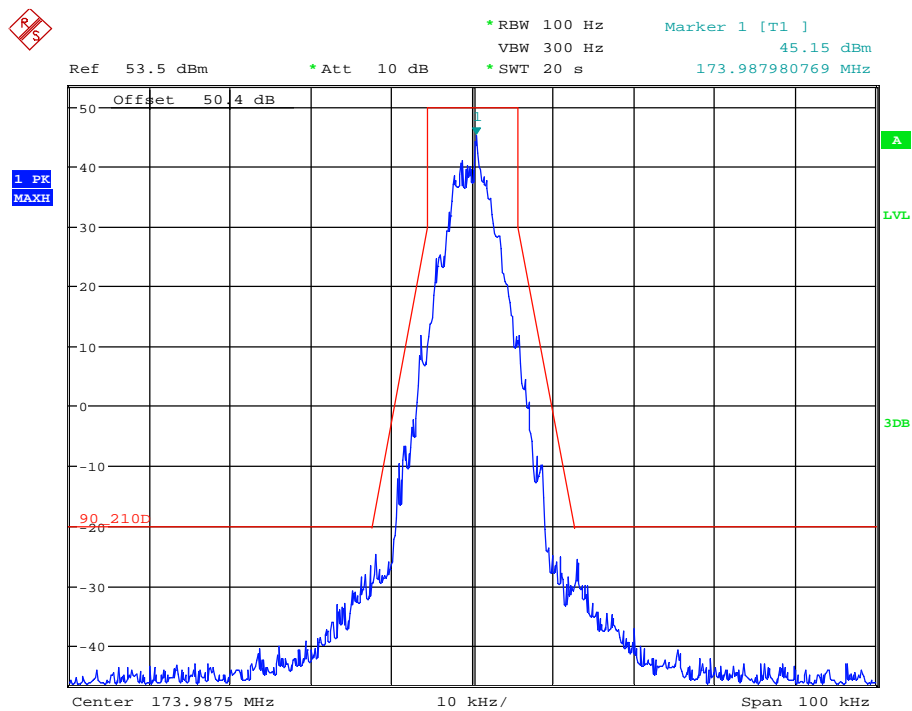

Date: 4.JAN.2012 10:29:01

Note: the spectrum masks are defined in: Part 90.210(d) as the transmitter operates in the band 146MHz- 174MHz using an authorized bandwidth of 11.25kHz as per section 90.209(6).




## TRANSMITTER TESTS

### SPURIOUS EMISSIONS – CONDUCTED – Part 2.1053 Bottom Channel

Ambient temperature = 22°C  
Relative humidity = 42%  
Supply voltage = +13.8Vdc

Radio Laboratory  
Test Signal = F3E

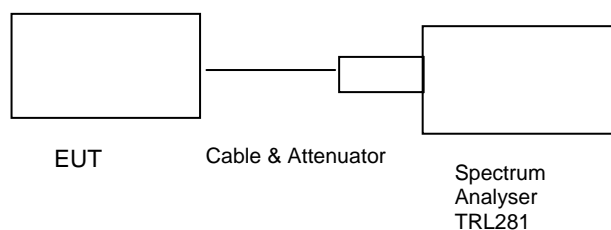

The test was set up as per the diagram. The unit was tested operating at maximum power.

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more than 250% of the authorised bandwidth

At least 43 + 10 log PdB

$(10\log P_{\text{watts}}) - (43 + 10\log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$

## RESULTS

### Bottom Channel


FREQUENCY RANGE	FREQ. (MHz)	MEASURED LEVEL (dBm)	LIMIT (dBm)
9kHz – 10GHz	296.10	-17.86	-13

The test equipment used for the Transmitter Conducted Emissions:

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRAC No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	RHODE & SCHWARZ	FSU46	200034	UH281	X
CABLE	TRAC	N/A	N/A	UH271	X
CABLE	TRAC	N/A	N/A	UH272	X
ATTENUATOR	SPINNER	745357	N/A	TRLUH225	X
ATTENUATOR	-	-	-	20dB	X
ATTENUATOR	BIRD	8304-100-N	N/A	222	X


# Conducted emissions Bottom Channel

148.0500MHz 9kHz – 150kHz

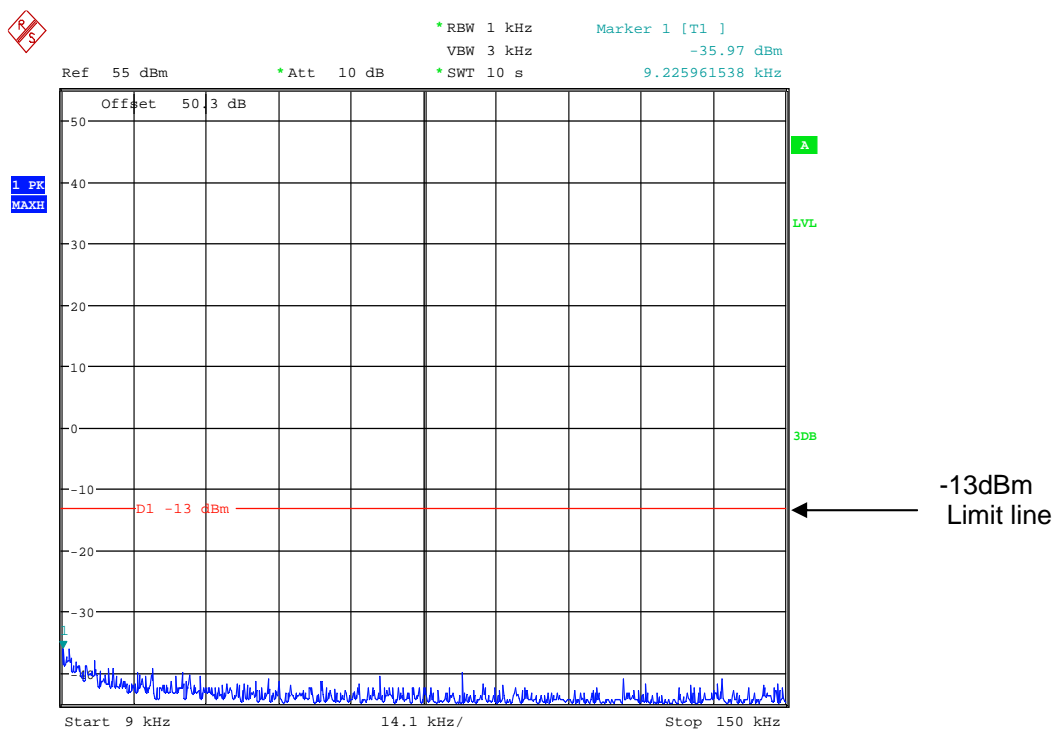


Date: 3.JAN.2012 17:43:25

148.0500MHz 150kHz-30MHz

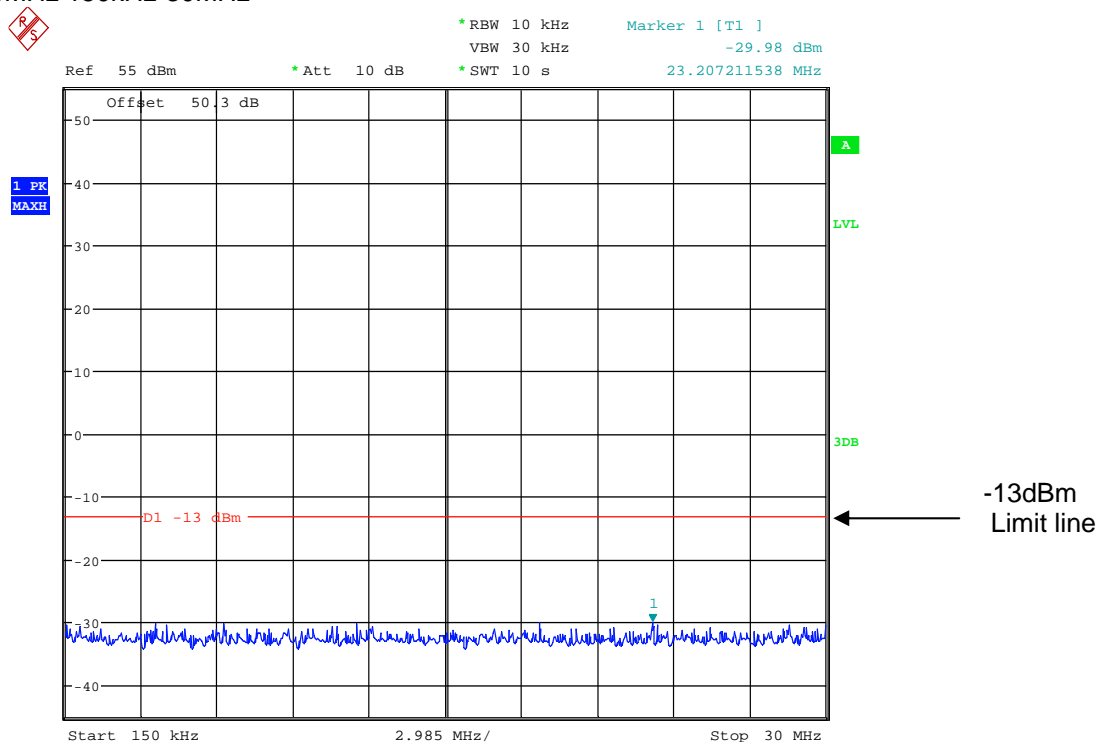


Date: 3.JAN.2012 17:44:16

# 148.0500MHz 30MHz-1GHz

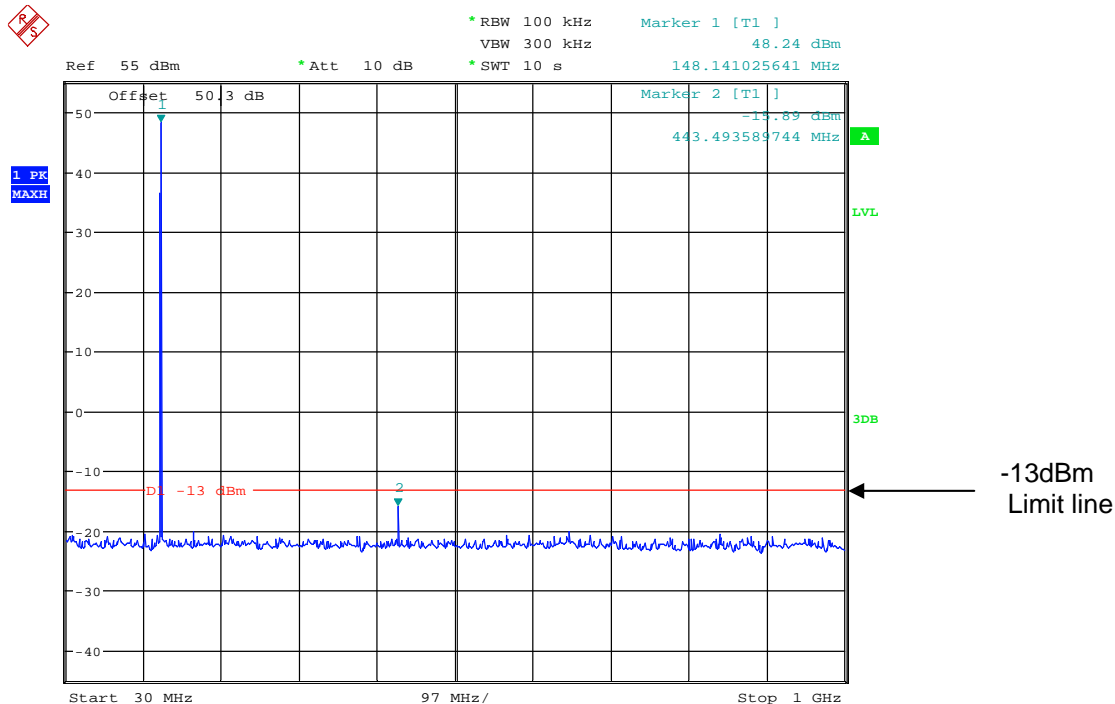


Date: 3.JAN.2012 17:45:00

# 148.0500MHz 1GHz – 5GHz

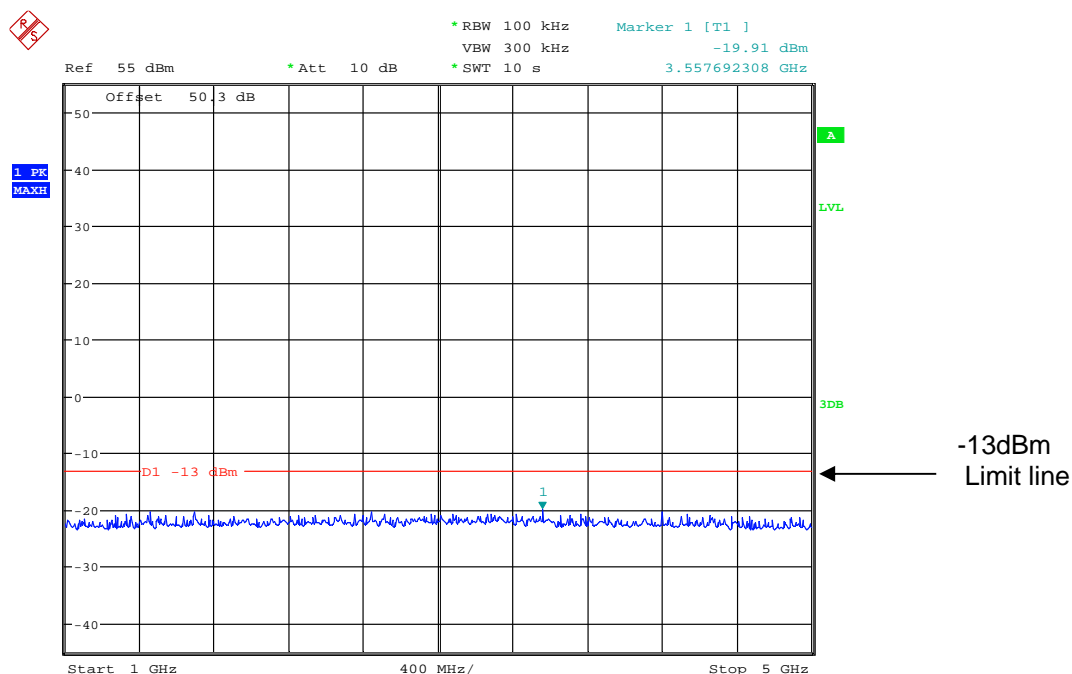

Date: 3.JAN.2012 17:45:30

# 148.0500MHz 5GHz-10GHz

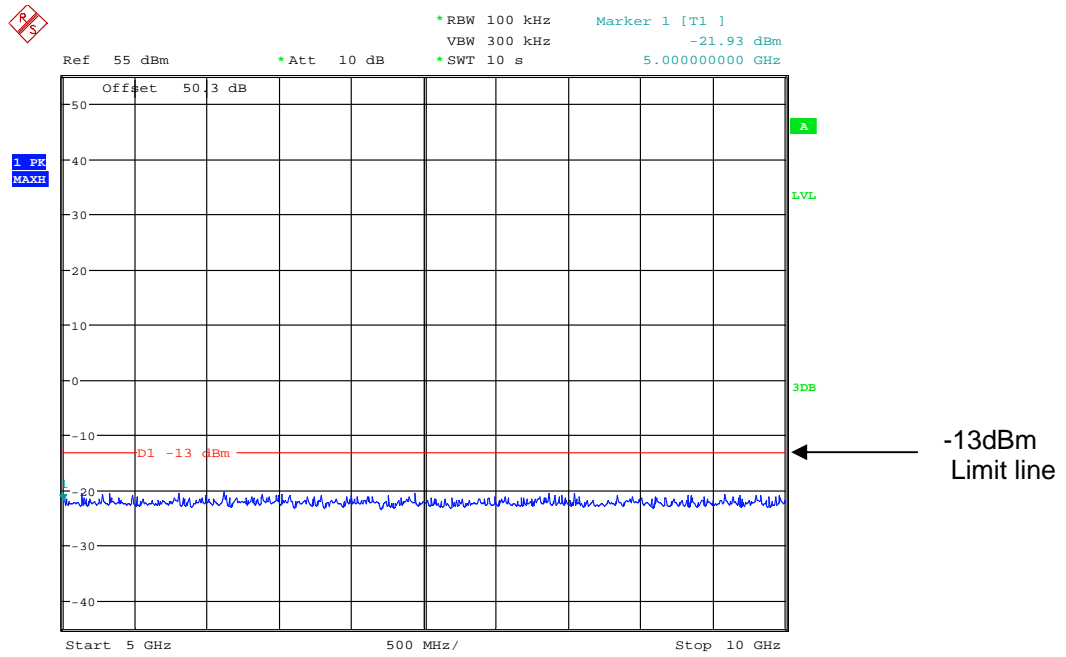


Date: 3.JAN.2012 17:46:01

## SPURIOUS EMISSIONS – CONDUCTED – Part 2.1053

### Middle Channel

Ambient temperature = 20°C  
 Relative humidity = 47%  
 Supply voltage = +13.8Vdc

Radio Laboratory  
 Test Signal = F3E

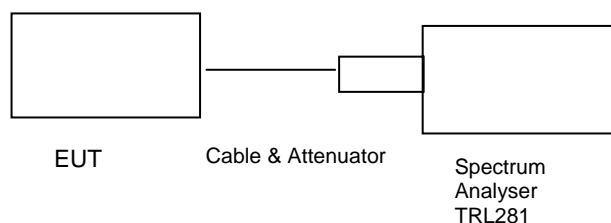

The test was set up as per the diagram. The unit was tested operating at maximum power.

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more that 250% of the authorised bandwidth

At least  $43 + 10 \log P_{dB}$

$(10 \log P_{watts}) - (43 + 10 \log (P_{watts} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$

## RESULTS


### Middle Channel

FREQUENCY RANGE	FREQ. (MHz)	MEASURED LEVEL (dBm)	LIMIT (dBm)
9kHz – 10GHz	322.05	-15.17	-13

The test equipment used for the Transmitter Conducted Emissions:


TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRAC No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	RHODE & SCHWARZ	FSU46	200034	UH281	<b>X</b>
CABLE	TRAC	N/A	N/A	UH271	<b>X</b>
CABLE	TRAC	N/A	N/A	UH272	<b>X</b>
ATTENUATOR	SPINNER	745357	N/A	TRLUH225	<b>X</b>
ATTENUATOR	-	-	-	20dB	<b>X</b>
ATTENUATOR	BIRD	8304-100-N	N/A	222	<b>X</b>

# 161.0250MHz 9kHz – 150kHz

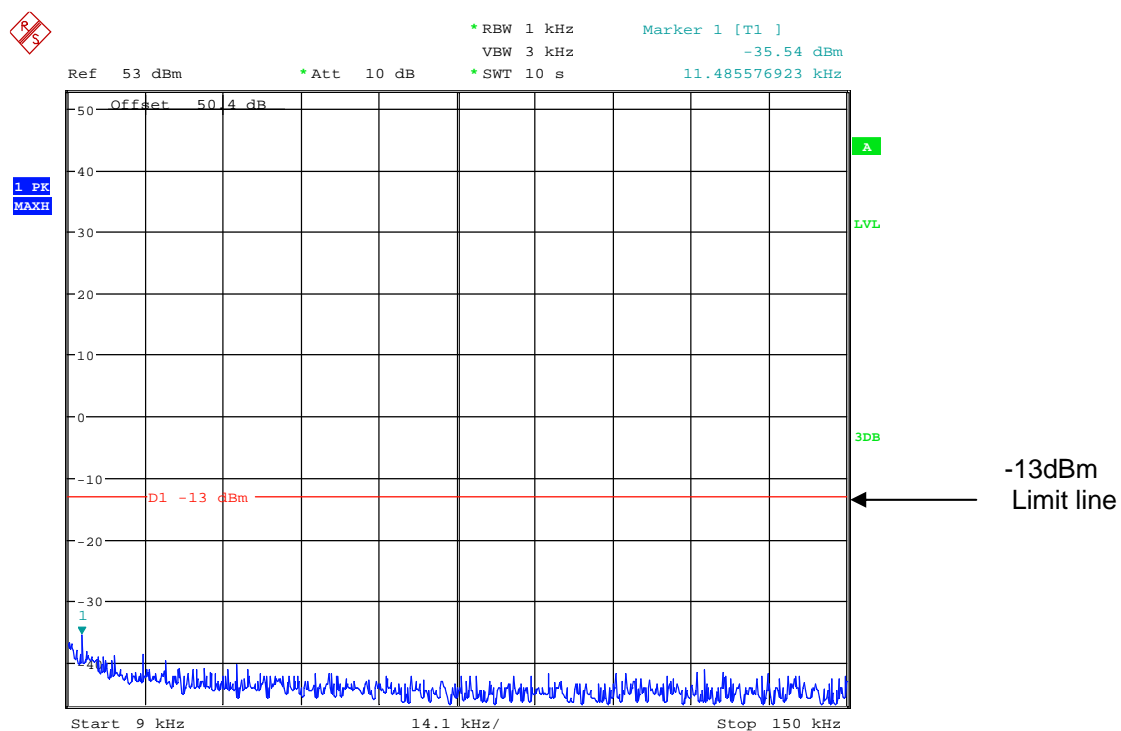


Date: 3.JAN.2012 17:55:04

# 161.0250MHz 150kHz – 30MHz

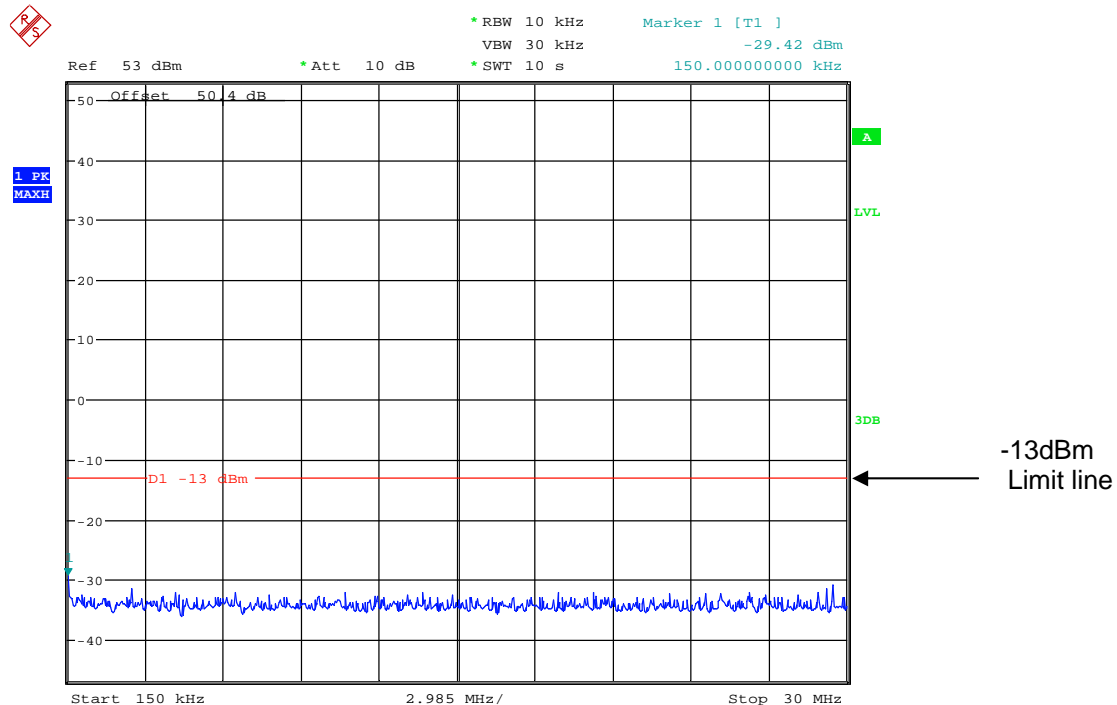


Date: 3.JAN.2012 17:55:37

# 161.0250MHz 30MHz- 1GHz

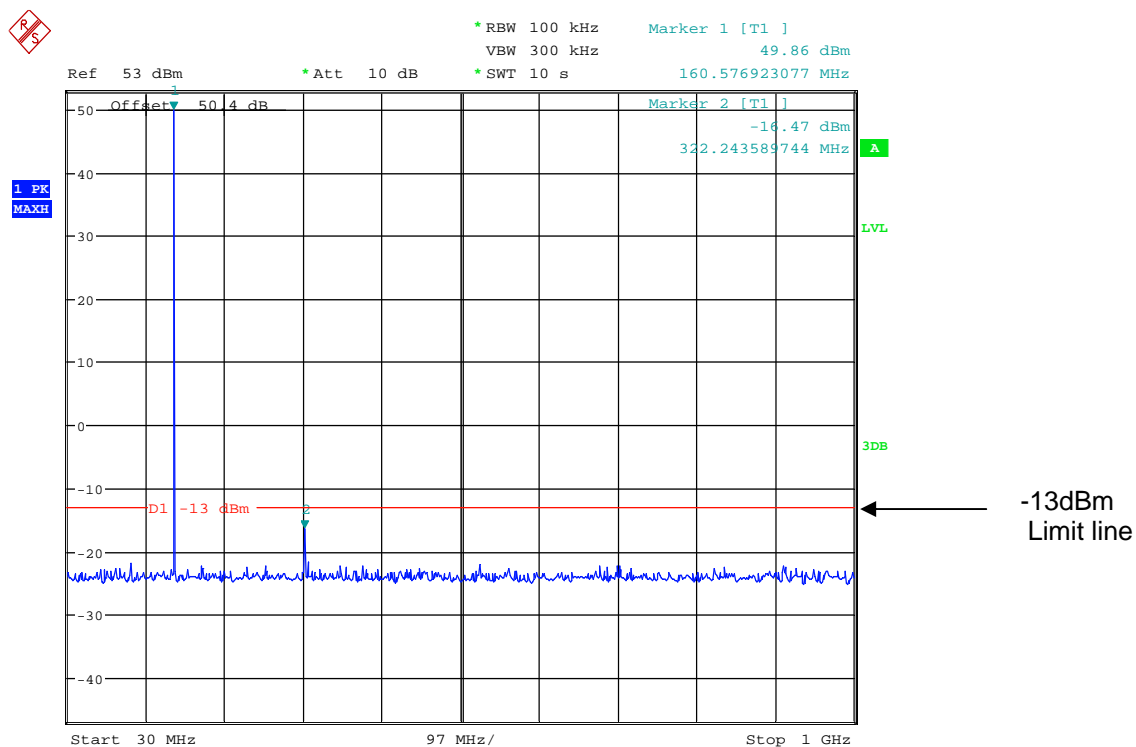


Date: 3.JAN.2012 17:56:20

# 161.0250MHz 1GHz - 5GHz

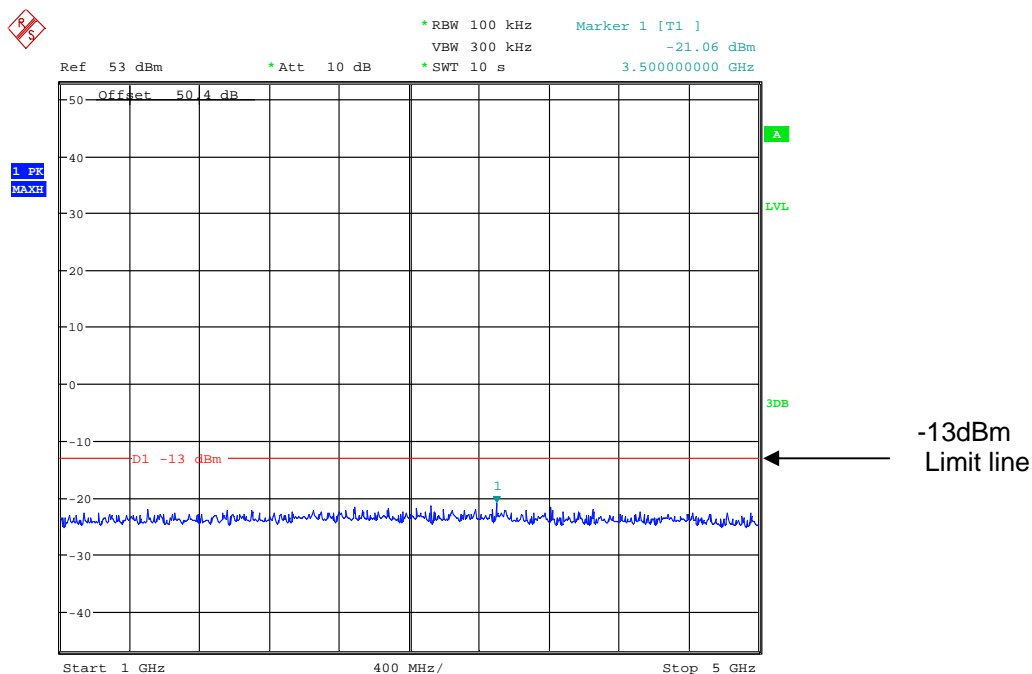

Date: 3.JAN.2012 17:56:50

161.0250MHz 5GHz - 10GHz

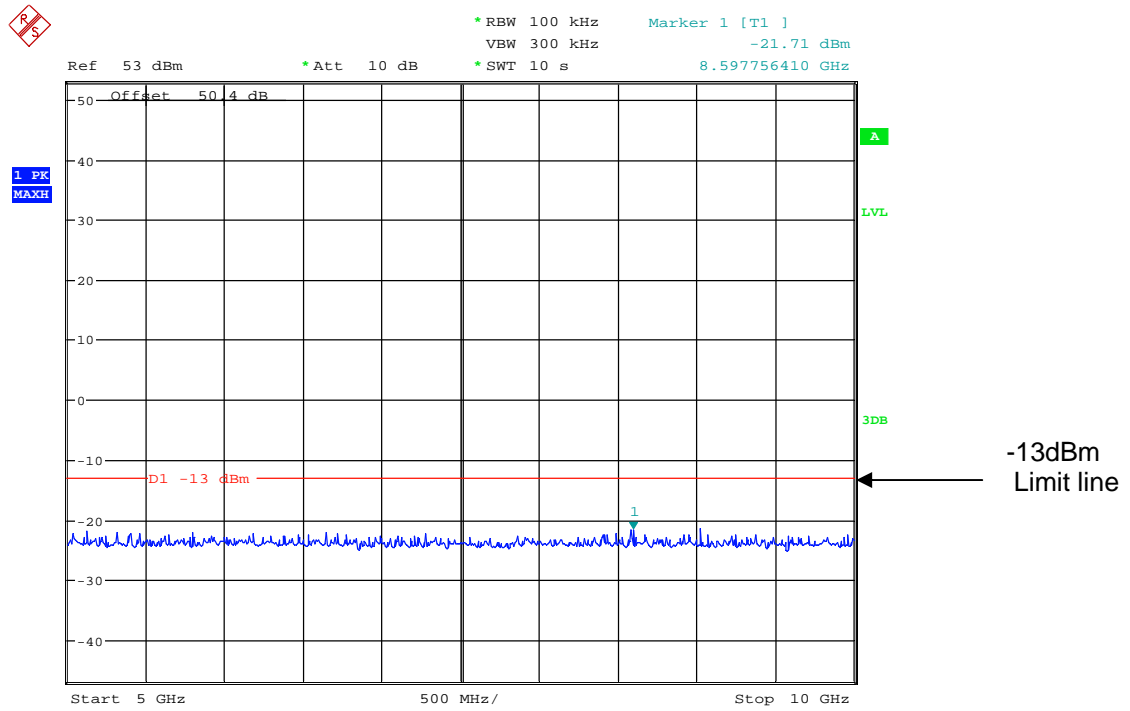

Date: 3.JAN.2012 17:57:21




## SPURIOUS EMISSIONS – CONDUCTED – Part 2.1053

### Top Channel

Ambient temperature = 20°C  
Relative humidity = 47%  
Supply voltage = +13.8Vdc

Radio Laboratory  
Test Signal = F3E

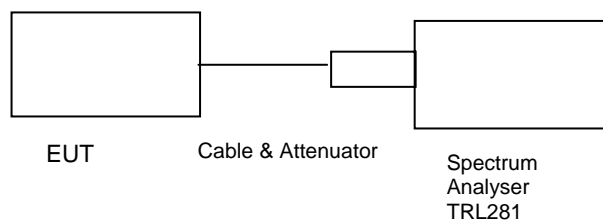

The test was set up as per the diagram. The unit was tested operating at maximum power .

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more that 250% of the authorised bandwidth

At least  $43 + 10 \log P_{dB}$

$(10 \log P_{watts}) - (43 + 10 \log (P_{watts} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$

## RESULTS

### Top Channel


FREQUENCY RANGE	FREQ. (MHz)	MEASURED LEVEL (dBm)	LIMIT (dBm)
9kHz – 10GHz	357.97	-13.76	-13

The test equipment used for the Transmitter Conducted Emissions:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRAC No	ACTUAL EQUIPMENT USED
SPECTRUM ANALYSER	RHODE & SCHWARZ	FSU46	200034	UH281	X
CABLE	TRAC	N/A	N/A	UH271	X
CABLE	TRAC	N/A	N/A	UH272	X
ATTENUATOR	SPINNER	745357	N/A	TRLUH225	X
ATTENUATOR	-	-	-	20dB	X
ATTENUATOR	BIRD	8304-100-N	N/A	222	X


## Conducted emissions Top Channel

173.9875MHz 9kHz – 150kHz

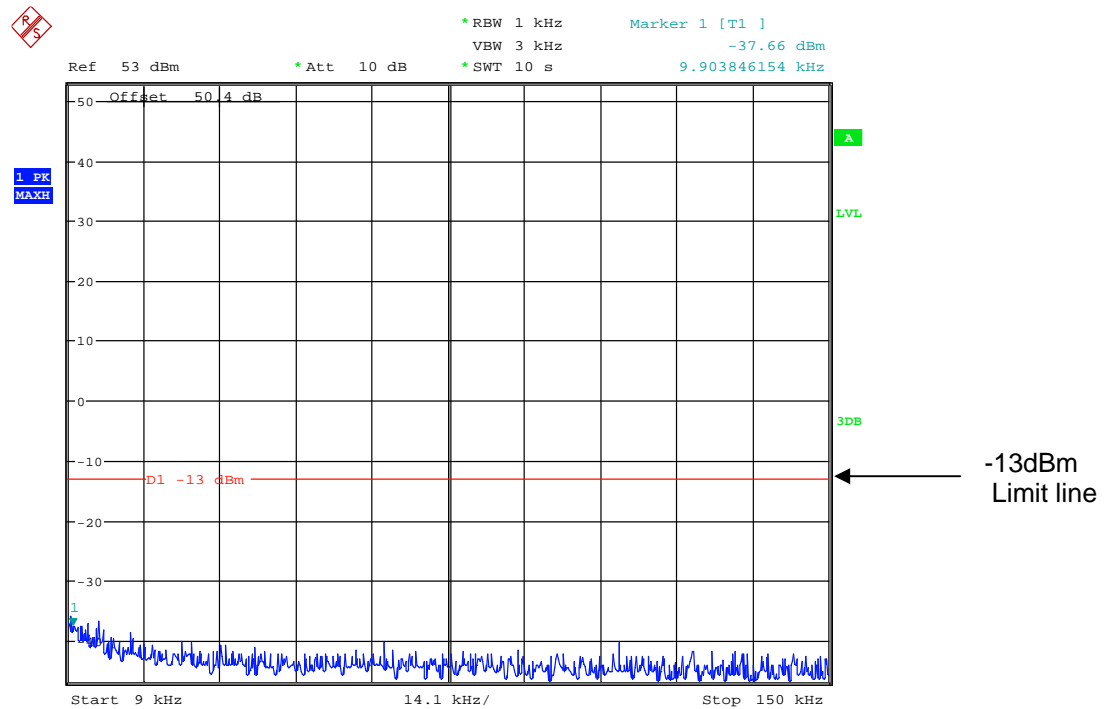


Date: 3.JAN.2012 18:00:42

173.9875MHz 150kHz -30MHz

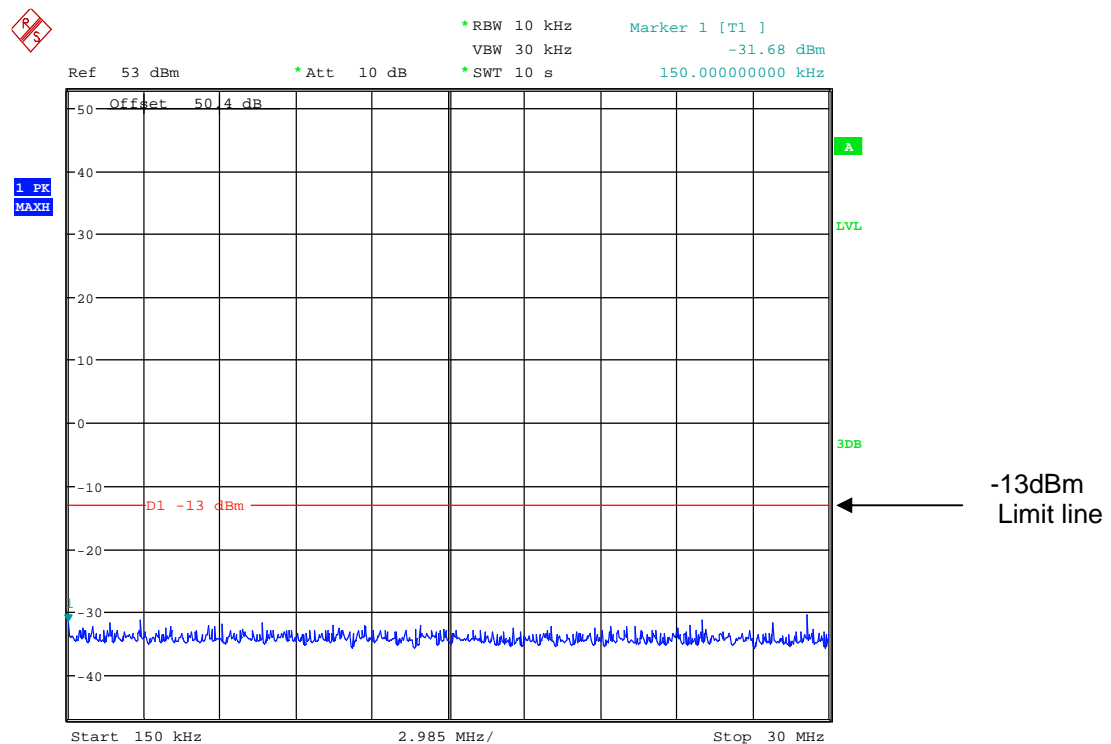


Date: 3.JAN.2012 18:01:16

# 173.9875MHz 30MHz-1GHz

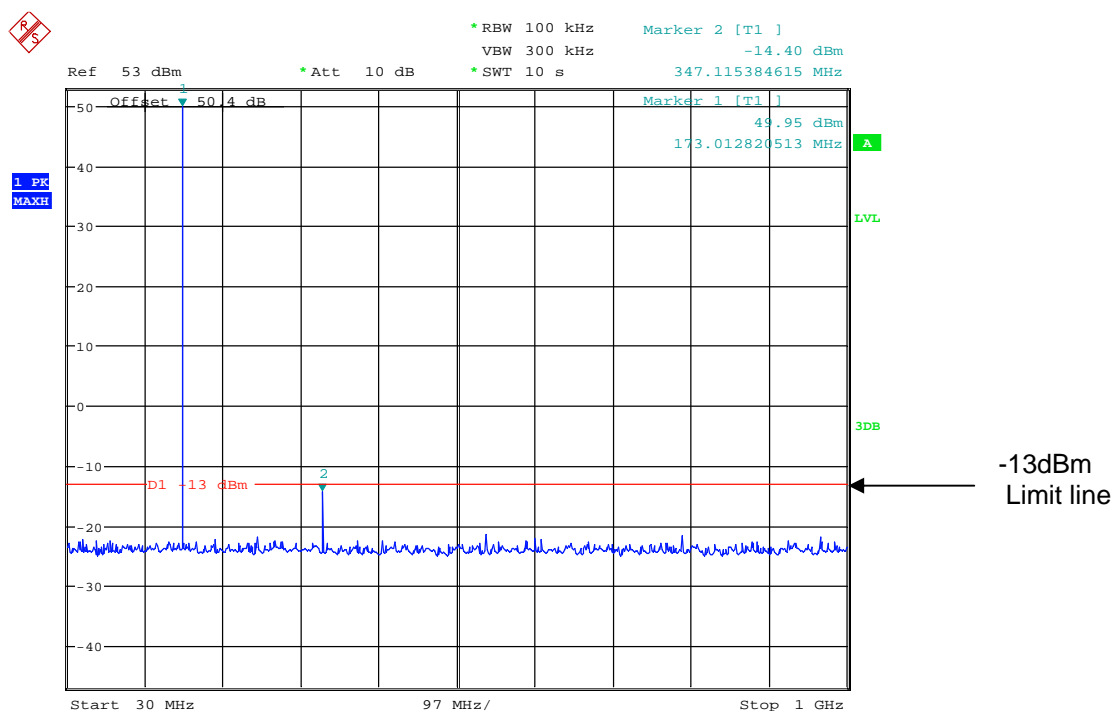


Date: 3.JAN.2012 18:01:54

# 173.9875MHz 1GHz – 5GHz

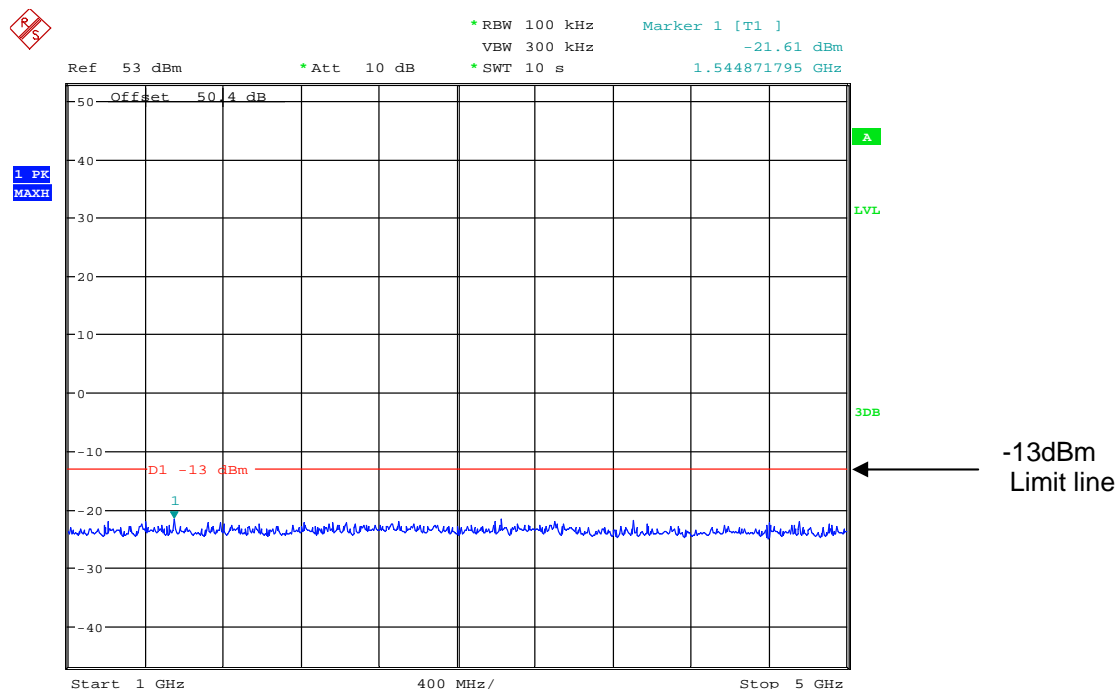

Date: 3.JAN.2012 18:02:30

# 174.0MHz 5GHz – 10GHz

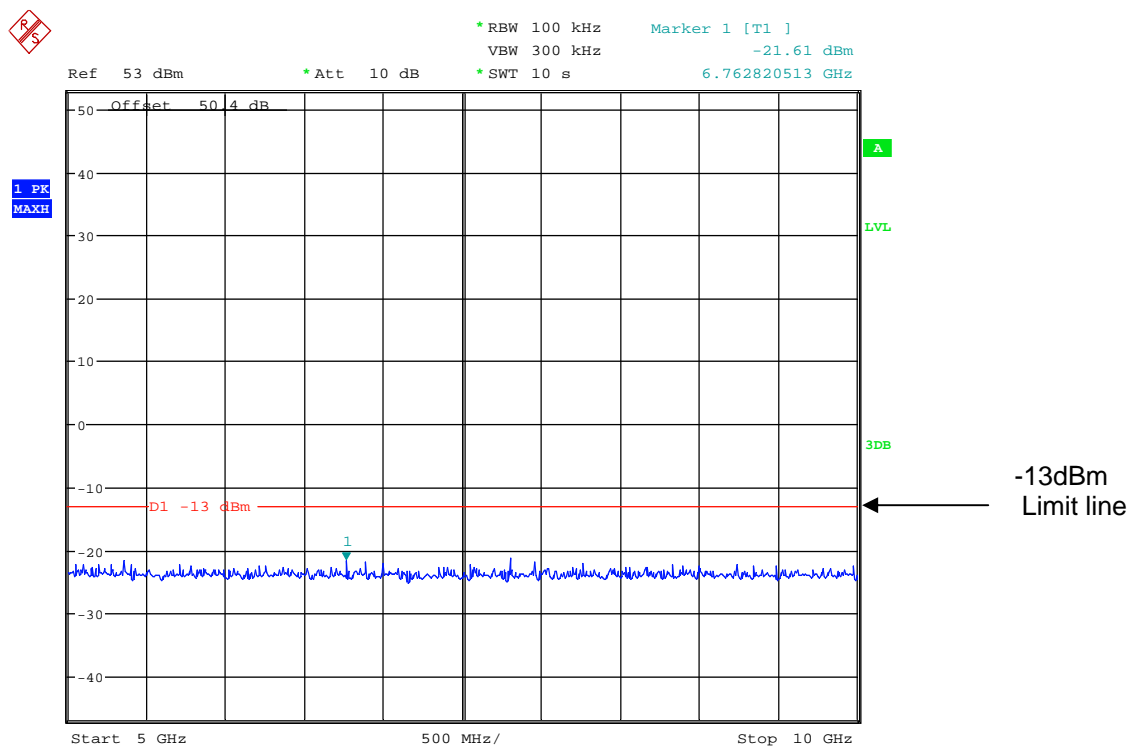


Date: 3.JAN.2012 18:03:23

## FREQUENCY STABILITY – CONDUCTED – Part 90.213

Ambient temperature = 24°C  
 Relative humidity = 42%  
 Supply voltage = +13.8Vdc

Radio Laboratory  
 Test Signal = F3E

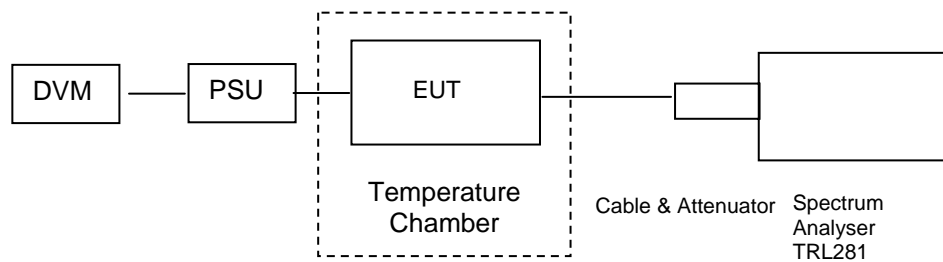

Bottom Channel


Temperature °C	Vnom (Vdc)	Measured Frequency (MHz)	Frequency Difference (Hz)	ppm	Limit ± 2.5 ppm Pass/Fail
+50	13.8	148.05001	0	0	Pass
+40	13.8	148.05001	0	0	Pass
+30	13.8	148.05001	0	0	Pass
+20	13.8	148.05001	0	0	Pass
+10	13.8	148.05001	0	0	Pass
0	13.8	148.05001	0	0	Pass
-10	13.8	148.05001	0	0	Pass
-20	13.8	148.05001	0	0	Pass
-30	13.8	148.05001	0	0	Pass

Tnom 24 °C	85%= 11.7Vdc	115%= 15.9Vdc
Frequency (MHz)	148.05001	148.05000
Frequency Difference (Hz)	0	-10
ppm	0	0.07
Limit ± 2.5 ppm Pass/Fail	Pass	Pass

# **FREQUENCY STABILITY – CONDUCTED – Part 90.213 cont**

Ambient temperature = 24°C  
 Relative humidity = 47%  
 Supply voltage = +13.8Vdc

Radio Laboratory  
 Test Signal = F3E

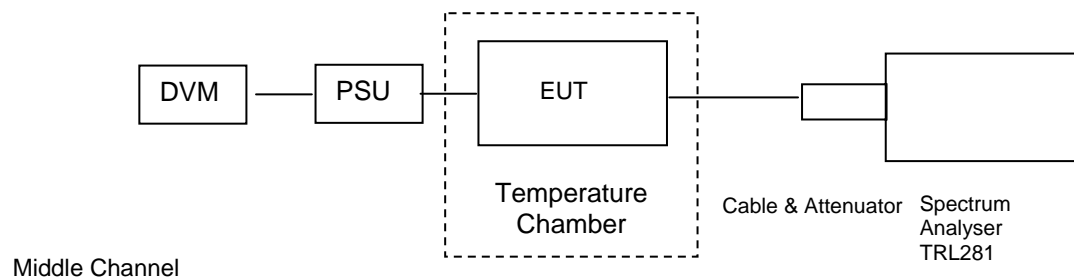


Temperature °C	Vnom (Vdc)	Measured Frequency (MHz)	Frequency Difference (Hz)	ppm	Limit ± 2.5 ppm Pass/Fail
+50	13.8	161.02500	0	0	Pass
+40	13.8	161.02500	0	0	Pass
+30	13.8	161.02500	0	0	Pass
+20	13.8	161.02500	0	0	Pass
+10	13.8	161.02500	0	0	Pass
0	13.8	161.02498	20	0.12	Pass
-10	13.8	161.02500	0	0	Pass
-20	13.8	161.02500	0	0	Pass
-30	13.8	161.02500	0	0	Pass

Tnom 21.5°C	85%= 11.7Vdc	115%= 15.9Vdc
Frequency (MHz)	161.02500	161.02500
Frequency Difference (Hz)	0	0
ppm	0	0
Limit ± 2.5 ppm Pass/Fail	Pass	Pass

Ambient temperature = 24°C  
 Relative humidity = 47%  
 Supply voltage = +13.8Vdc

Radio Laboratory  
 Test Signal = F3E

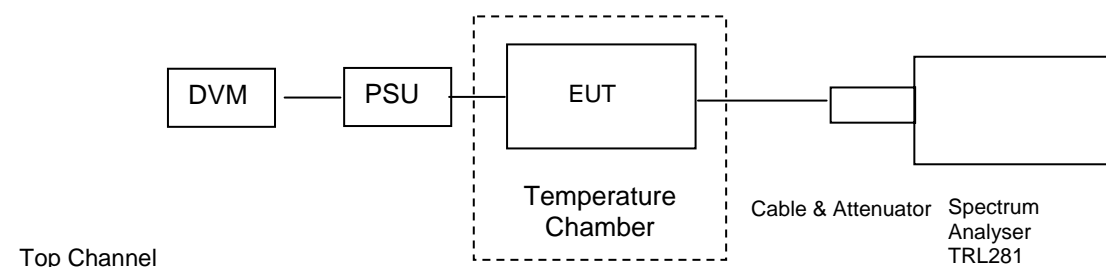

Temperature °C	Vnom (Vdc)	Measured Frequency (MHz)	Frequency Difference (Hz)	ppm	Limit ± 2.5 ppm Pass/Fail
+50	13.8	173.98750	0	0	Pass
+40	13.8	173.98750	0	0	Pass
+30	13.8	173.98750	0	0	Pass
+20	13.8	173.98750	0	0	Pass
+10	13.8	173.98750	0	0	Pass
0	13.8	173.98750	0	0	Pass
-10	13.8	173.98750	0	0	Pass
-20	13.8	173.98750	0	0	Pass
-30	13.8	173.98750	0	0	Pass

Tnom 21.5°C	85%= 11.7Vdc	115%= 15.9Vdc
Frequency (MHz)	173.9875	173.9875
Frequency Difference (Hz)	0	0
ppm	0	0
Limit ± 2.5 ppm Pass/Fail	Pass	Pass

Frequency stability measurements were between -30°C and +50°C in 10°C increments.


At each temperature the transmitter was given a period of 60 minutes to stabilise. The transmitter was then turned on and the frequency error measured after a period of 1 minute.

Measurements were also made with the supply voltage varied between 115% and 85% of the nominal supply voltage(13.8Vdc).

## INTENTIONAL RADIATOR SPURIOUS EMISSIONS – RADIATED – Part 2.1053

Ambient temperature = 22°C  
 Relative humidity = 46%  
 Conditions = OATS  
 Supply voltage = +13.8Vdc  
 Supply Frequency = N/A

Test Signal = F3E

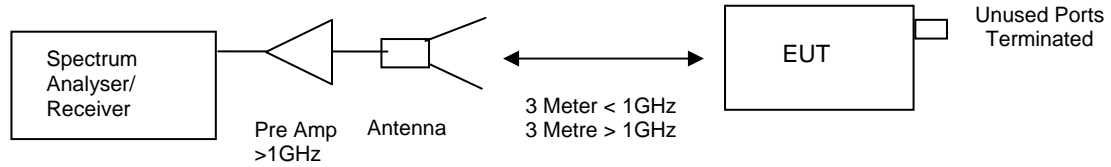

The test was set up as per the diagram. The unit was tested operating maximum power on three test frequencies with a 50 ohm load on the output.

The Spurious limit was calculated as follows:

On any frequency removed from the assigned frequency by more that 250% of the authorised bandwidth

At least  $43 + 10 \log P_{dB}$

$(10 \log P_{watts}) - (43 + 10 \log (P_{watts} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$

## RESULTS


FREQUENCY RANGE	FREQ. (MHz)	MEAS. Rx. (dBμV)	CABLE LOSS (dB)	ANT FACTOR	FIELD STRENGTH (dBμV/m)	CALCULATED EIRP (dBm)	LIMIT (dBm)
30MHz – 10GHz	No Significant Emissions Within 20dB of Limit.						-13

The test equipment used for the Transmitter Spurious Emissions:

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRAC No	ACTUAL EQUIPMENT USED
HORN	EMCO	3115	9010-3580	138	<b>X</b>
SPECTRUM ANALYSER	R&S	FSU46	200034	TRL281	<b>X</b>
PRE AMPLIFIER	HP	8449B	3008A016	572	<b>X</b>
ANTENNA	YORK	CBL611/A	1618	UH191	<b>X</b>
RECEIVER	R&S	ESVS10	825892/006	UH04	<b>X</b>




148.05MHz 30MHz – 1GHz Radiated emissions Bottom Channel

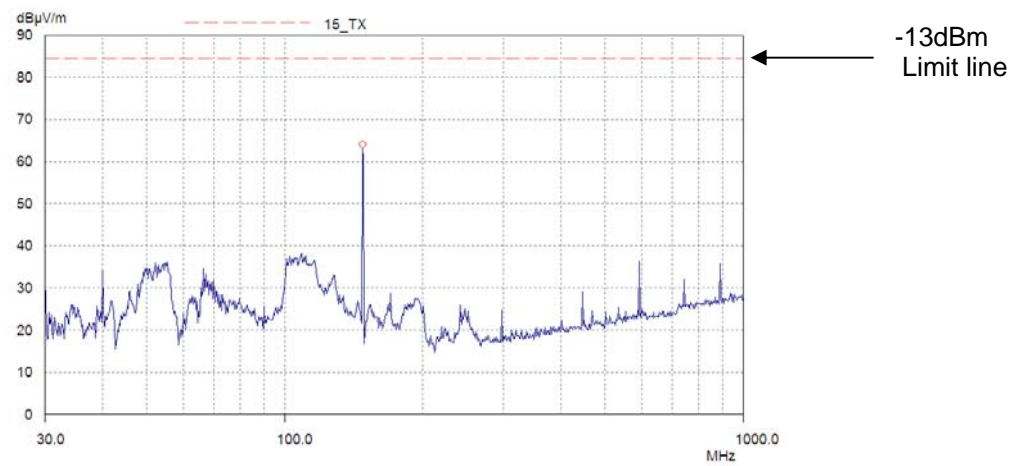


The above test results show that there were no emissions within 20dBs of the –13dBm limit.

## 148.05MHz 1GHz – 5GHz

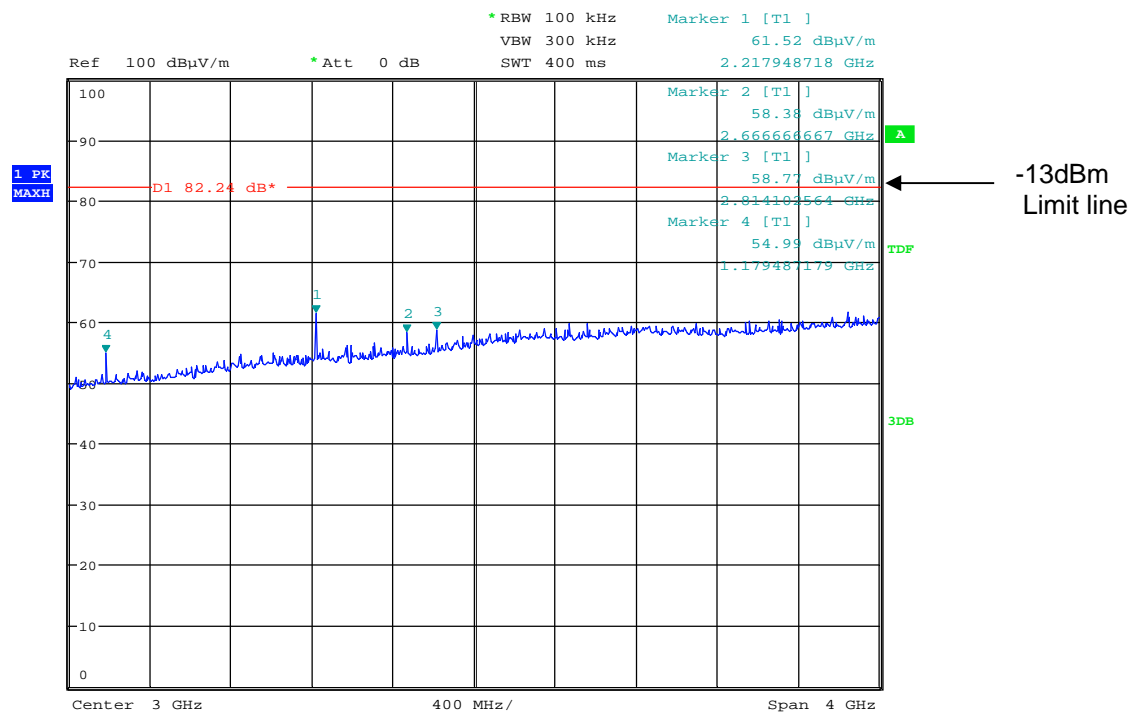

Date: 10.JAN.2012 12:29:30

## 148.05MHz 5GHz – 10GHz

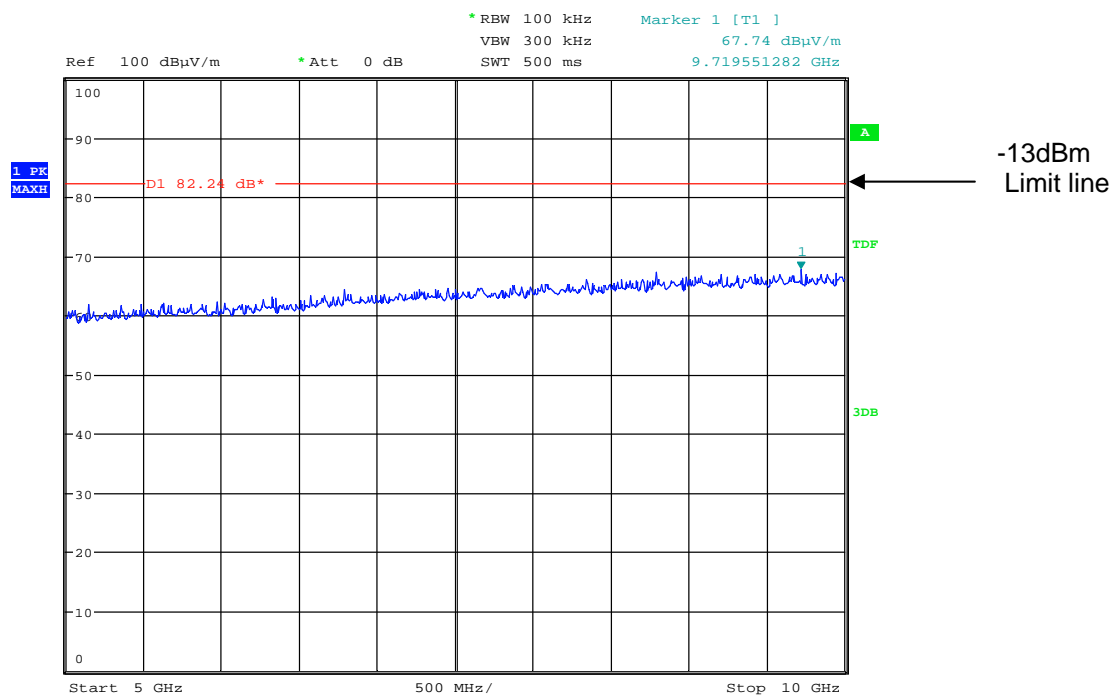


Date: 10.JAN.2012 12:32:49

The above test results show that there were no emissions within 20dBs of the –13dBm limit.


## Radiated emissions Middle Channel

161.025MHz 30MHz – 1GHz

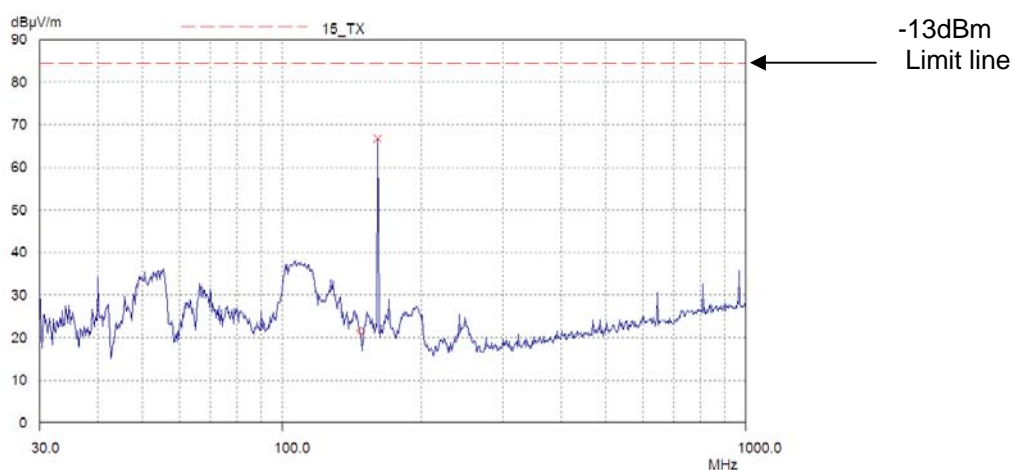


The above test results show that there were no emissions within 20dBs of the -13dBm limit.

161.025MHz 1GHz – 5GHz

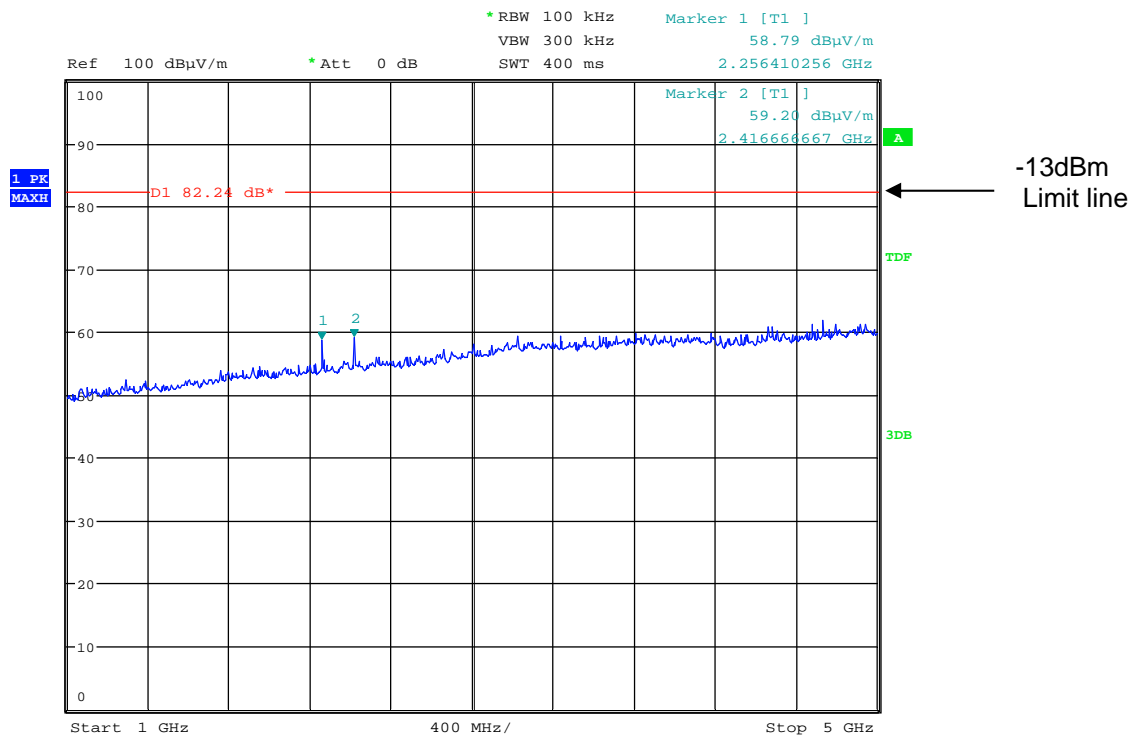

Date: 10.JAN.2012 12:37:27

158.5MHz 5GHz – 10GHz

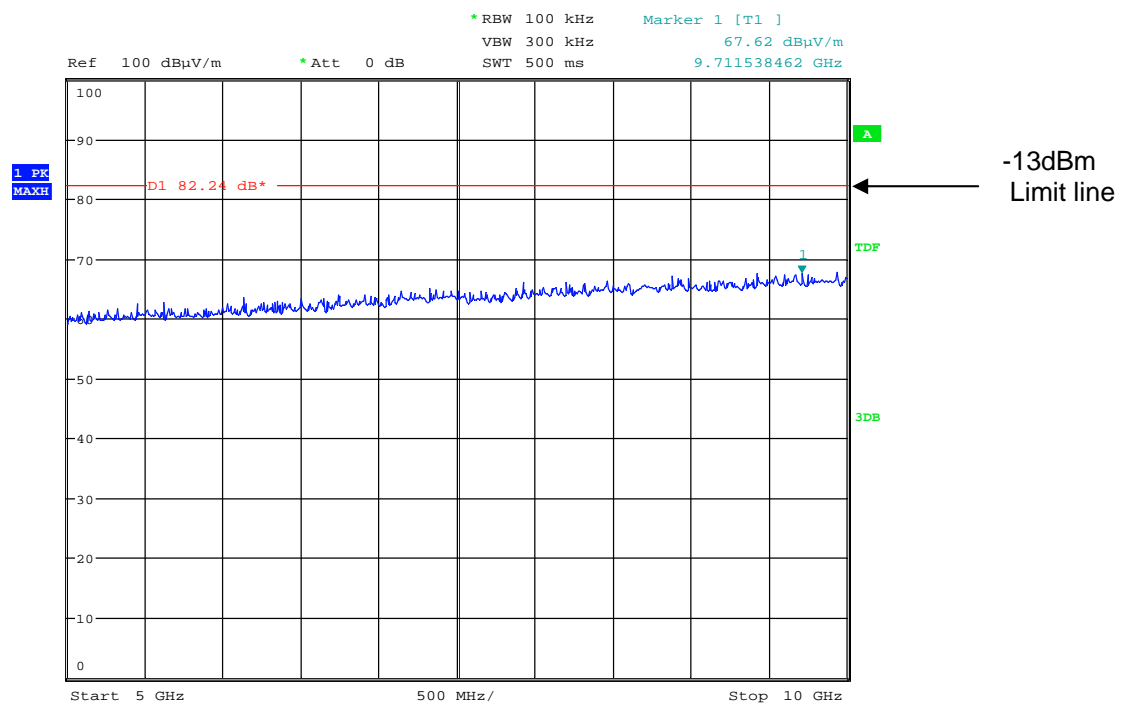


Date: 10.JAN.2012 12:41:38

The above test results show that there were no emissions within 20dBs of the  $-13\text{dBm}$  limit.


## Radiated emissions Top Channel

173.9875MHz - 30MHz – 1GHz

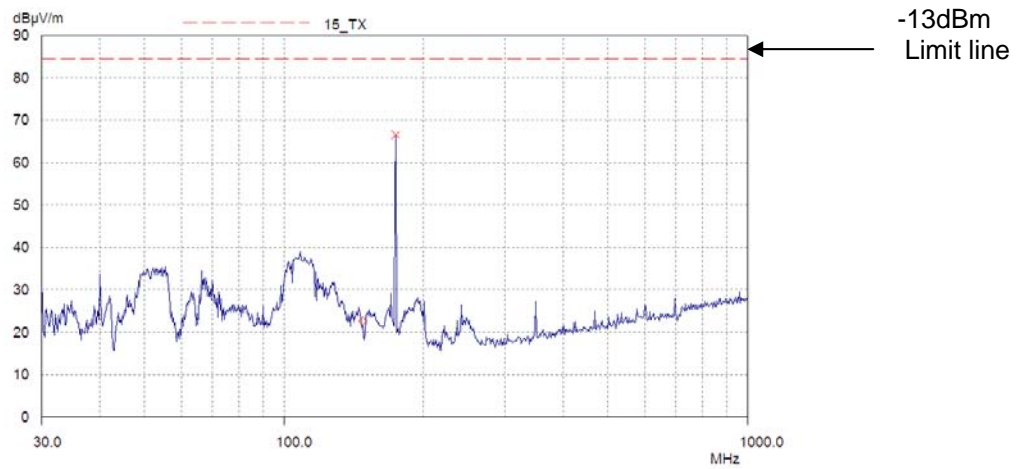


The above test results show that there were no emissions within 20dBs of the –13dBm limit.

## 173.9875MHz 1GHz – 5GHz

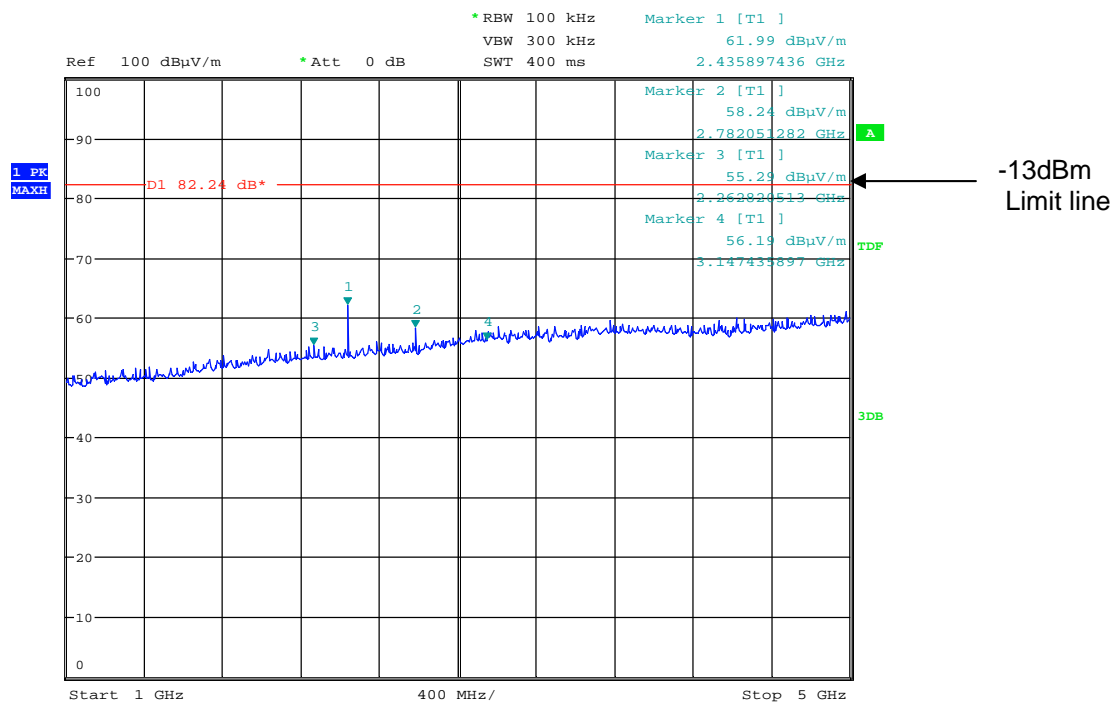

Date: 10.JAN.2012 12:49:07

## 173.9875MHz 5GHz – 10GHz

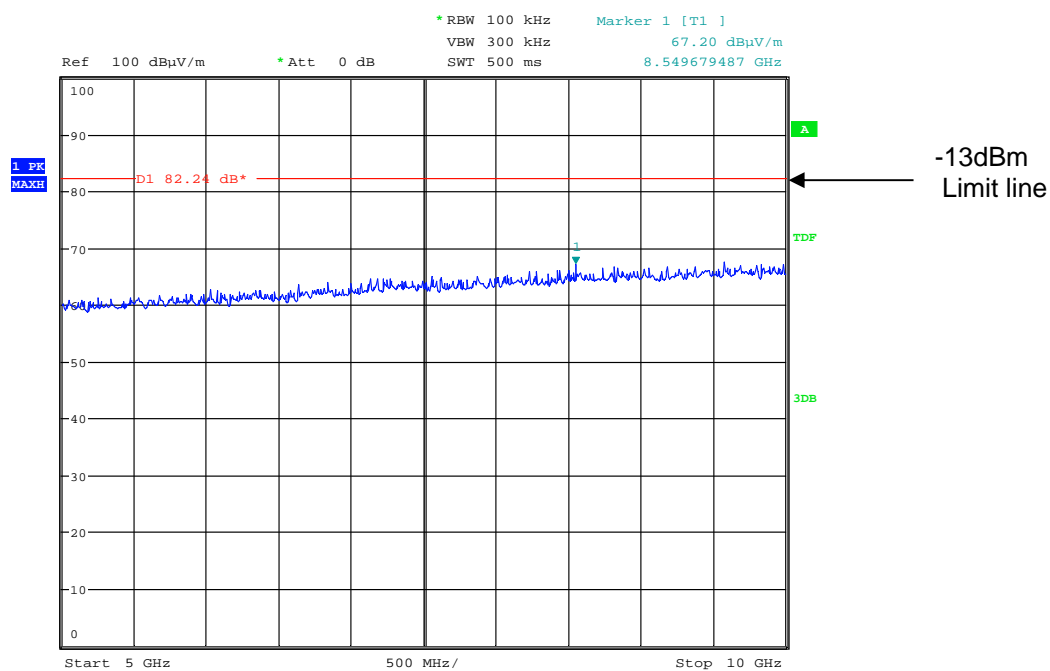


Date: 10.JAN.2012 12:52:22

The above test results show that there were no emissions within 20dBs of the -13dBm limit.

## UN-INTENTIONAL RADIATOR SPURIOUS EMISSIONS – RADIATED – Part 15:109

Ambient temperature = 22°C  
 Relative humidity = 46%  
 Conditions = OATS  
 Supply voltage = +13.8Vdc  
 Supply Frequency = N/A

Test Signal = F3E

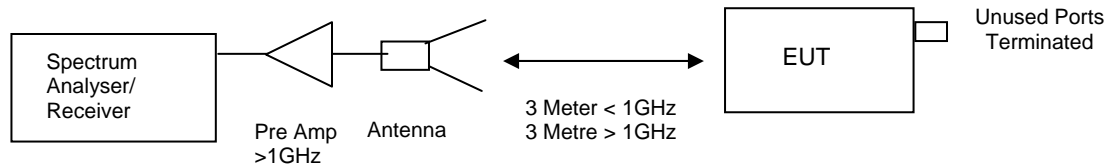

The test was set up as per the diagram, The receiver was tested while in receive mode while attached to a dummy load.

30MHz -1GHz worse case Rx mode


FREQ. (MHz)	MEAS. Rx. (dBμV)	Cable Loss (dB)	Ant Factor	Pre Amp (dB)	FIELD STRENGTH (dBμV/m)	FIELD STRENGTH (μV/m)	Limit (dBμV/m)	Limit (μV/m)
30.00	13.90	0.4	18.6	-	32.90	44.15	40.00	100
30.60	13.40	0.4	18.3	-	32.10	40.27	40.00	100
30.65	11.80	0.4	18.3	-	30.50	33.49	40.00	100
31.45	15.70	0.4	17.8	-	33.90	49.54	40.00	100
32.05	9.30	0.4	17.4	-	27.10	22.64	40.00	100
32.30	3.20	0.4	17.3	-	20.90	11.09	40.00	100
32.40	4.10	0.4	17.2	-	21.70	12.16	40.00	100
32.55	6.10	0.4	17.1	-	23.60	15.13	40.00	100
32.70	3.10	0.4	17.1	-	20.60	10.71	40.00	100
33.70	4.70	0.4	16.5	-	21.60	12.02	40.00	100
40.00	20.70	0.4	13.0	-	34.10	50.69	40.00	100
44.05	11.70	0.4	10.8	-	22.90	13.96	40.00	100
45.75	14.20	0.4	9.9	-	24.50	16.78	40.00	100
47.05	11.50	0.4	9.2	-	21.10	11.35	40.00	100
52.40	23.20	0.4	6.7	-	30.30	32.73	40.00	100
54.15	24.70	0.4	6.2	-	31.30	36.72	40.00	100
60.00	31.80	0.4	5.0	-	37.20	72.44	40.00	100
69.00	25.00	0.6	5.3	-	30.90	35.07	40.00	100
70.00	25.10	0.6	5.4	-	33.30	46.23	40.00	100
120.00	17.60	0.7	11.6	-	29.90	31.26	43.50	150
129.60	19.50	0.7	11.5	-	31.70	38.45	43.50	150
130.05	20.40	0.7	11.5	-	32.60	42.65	43.50	150
130.40	21.80	0.7	11.5	-	34.00	50.11	43.50	150
130.75	19.40	0.7	11.5	-	31.60	38.01	43.50	150

FREQ. (MHz)	MEAS. Rx. (dBμV)	Cable Loss (dB)	Ant Factor	Pre Amp (dB)	FIELD STRENGTH (dBμV/m)	FIELD STRENGTH (μV/m)	Limit (dBμV/m)	Limit (μV/m)
131.15	19.70	0.7	11.5	-	31.90	39.35	43.50	150
170.00	23.00	0.9	9.1	-	33.00	44.00	43.50	150
170.50	21.40	0.9	9.1	-	31.40	37.15	43.50	150
1866.02	57.14	2.1	27.4	35.90	50.74	344.35	74.0pk	5011pk
1866.02	41.52	2.1	27.4	35.90	35.12	57.01	54.0Av	500Av
2000.00	53.01	2.1	27.5	35.60	47.01	224.13	74.0pk	5011pk
2000.00	47.88	2.1	27.5	35.60	41.88	124.16	54.0Av	500Av
2133.18	61.11	2.1	27.8	35.60	55.41	589.52	74.0pk	5011pk
2133.18	42.86	2.1	27.8	35.60	37.16	72.11	54.0Av	500Av




## Rx 30MHz – 1GHz

FCC pt15.109 RE Class B 30MHz-1GHz ESVS10 + UH93 - 10thFeb2011

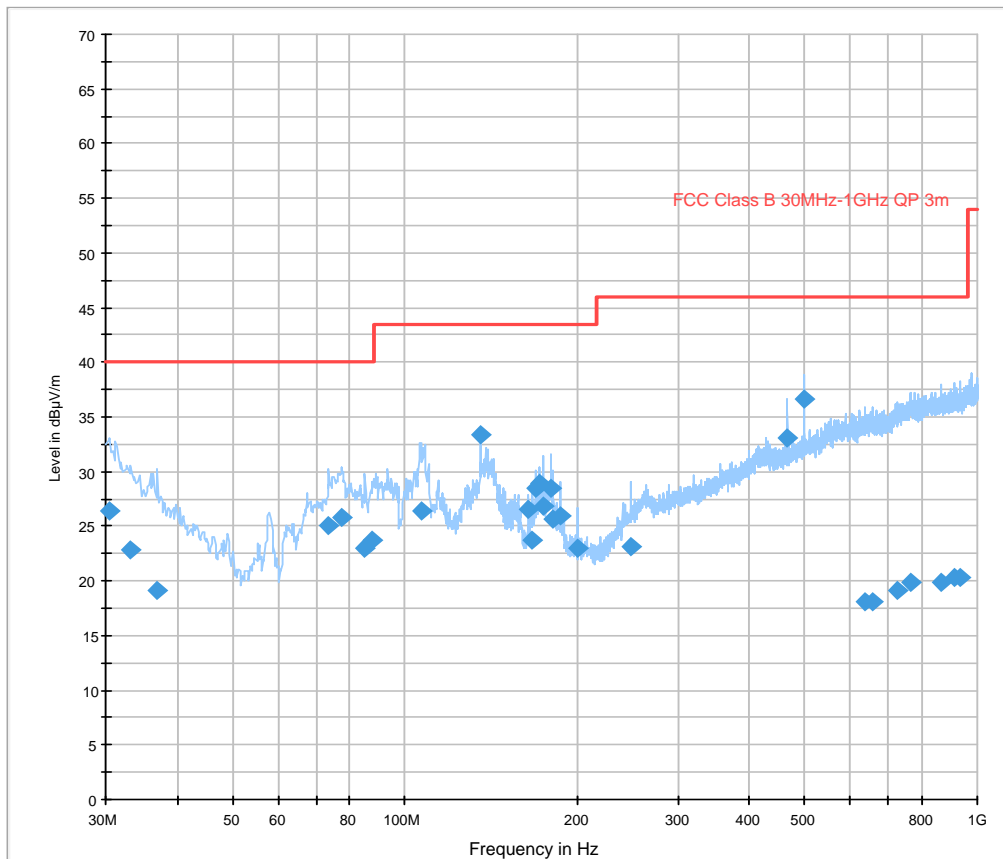


## 1GHz – 3GHz

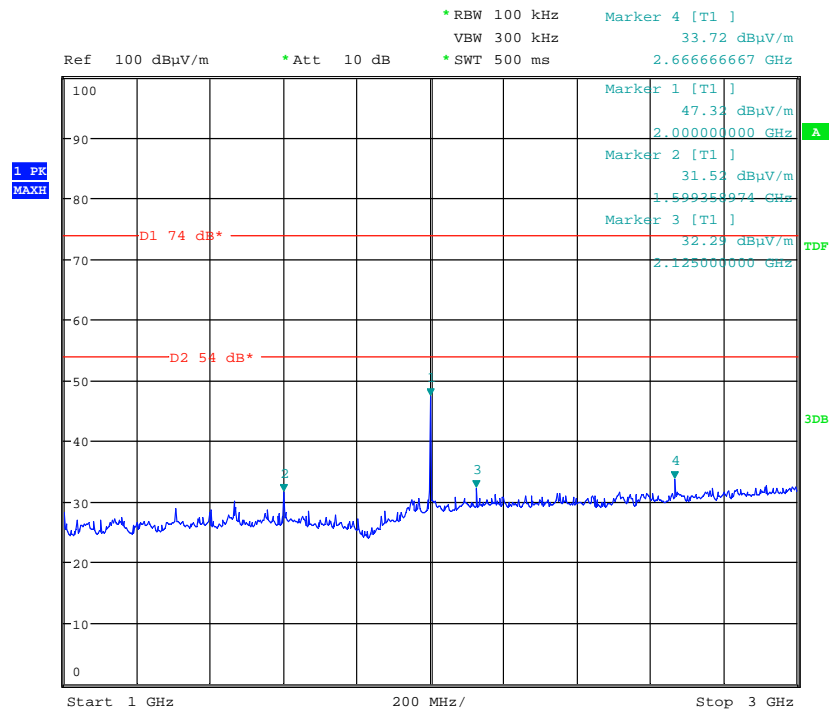

Date: 10.OCT.2011 10:32:08

## Rx 3GHz – 5GHz

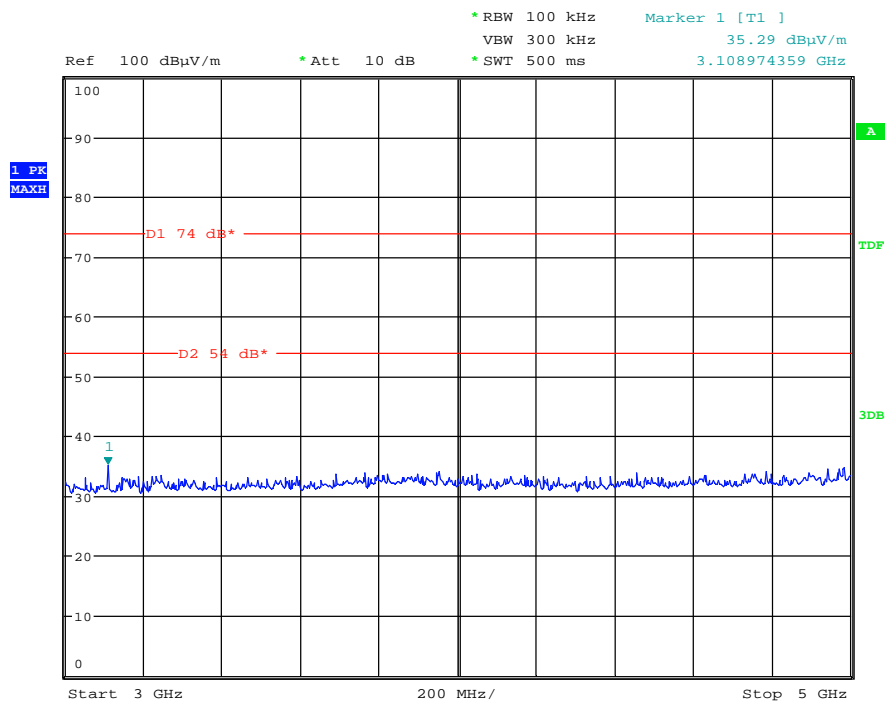


Date: 10.OCT.2011 10:32:48

## Modulation Characteristics: 2.1047 (a)

Ambient temperature = 21°C  
Relative humidity = 42%  
Supply voltage = +13.8Vdc

Radio Laboratory  
Test Signal = F3E

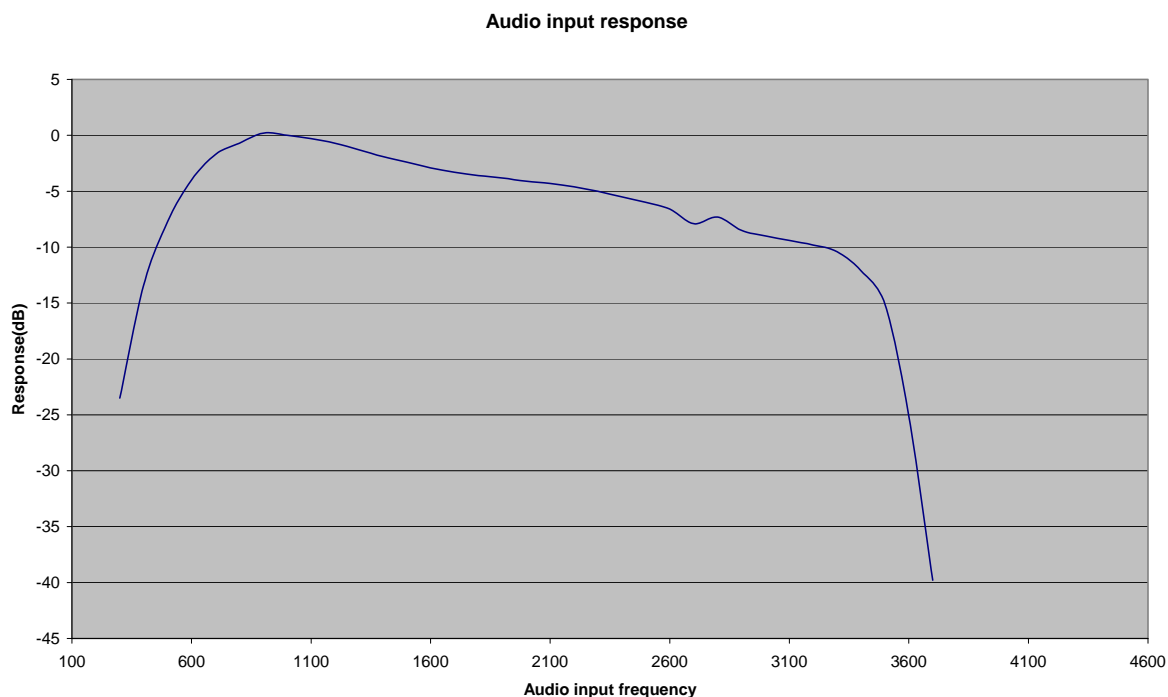

Note: The SB2025NT100W is capable of transmitting analogue speech and P25 digital audio modulation.

There are no transmitter audio frequency inputs available via a microphone socket or any other audio frequency input.

The transmitter was tested whilst operating under the following conditions:

- 1) A signal generator was connected into the receiver RF input, tuned to the receiver frequency, and the deviation level set to 2.5kHz, the audio frequency was then varied between 100Hz and 5kHz.
- 2) testing was carried out with the talk through feature enabled.  
(therefore the audio response will take into account the pre emphasis and de emphasis of the receiver and transmitter).
- 3) A 1kHz audio signal was applied which was used as a 0dB response reference.

The above plot shows the audio response of the transmitter.

## Modulation Characteristics: 2.1047 (b)

Note: The SB2025NT100W is capable of transmitting analogue speech and P25 digital audio modulation.

There are no transmitter external audio inputs available via a microphone socket etc, and therefore the test was not performed. The external audio is via the receiver RF input or the digital audio input.

# Transient frequency Behaviour: Part 90.214


Tnom = 22°C

Method

RHnom = 45%

Channel Spacing = 12.5kHz


Tx Pnom = 50W

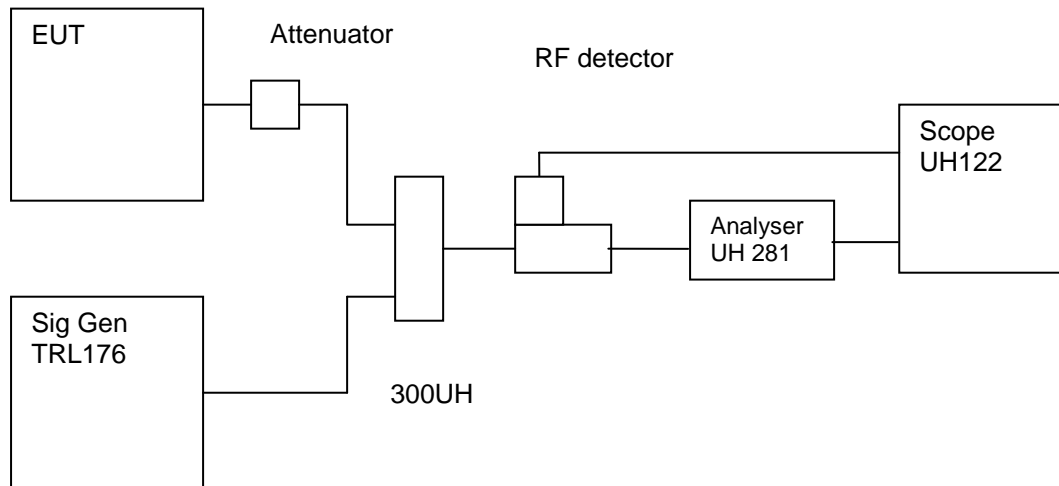

Channel		148.05MHz	161.025MHz	173.98750MHz
Time, t1 Transient Frequency		Compliant	Compliant	Compliant
Time, t2 Transient Frequency		Compliant	Compliant	Compliant
Time, t3 Transient Frequency		Compliant	Compliant	Compliant
Limits Clause	t1	5ms @ 12.5kHz		
	t2	20ms @ 6.25kHz		
	t3	5ms @ 12.5kHz		


148.05MHz 12.5kHz Transmitter turn on

Tek **Stop** Single Seq 50.0kS/s

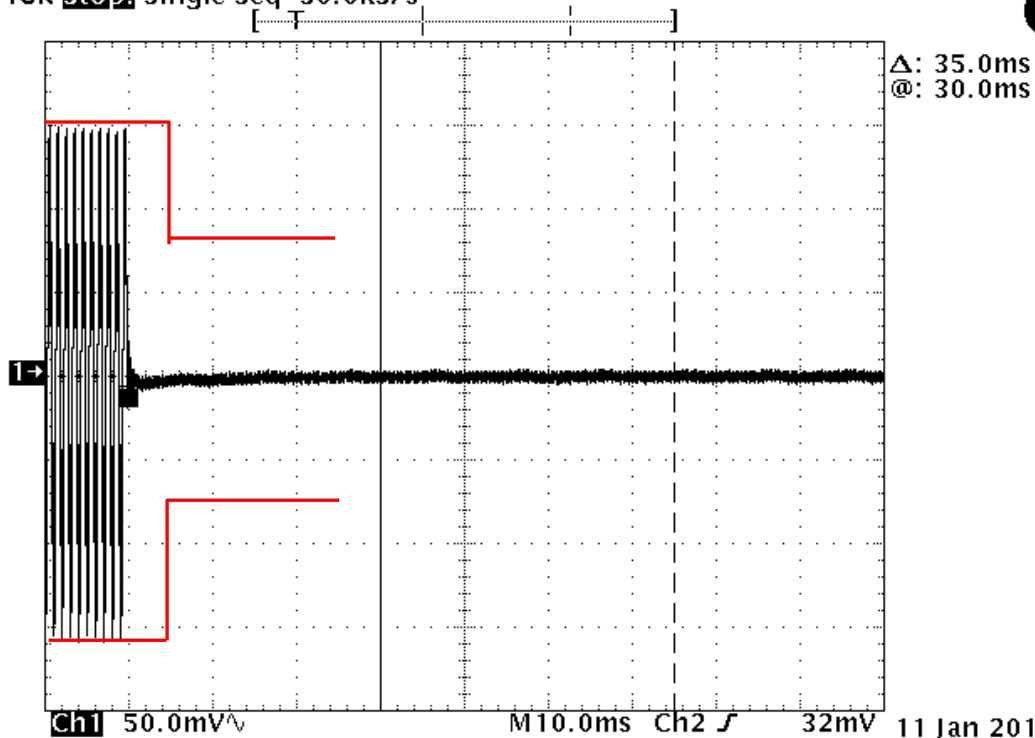


148.05MHz 12.5kHz Transmitter turn off

Tek **Stop** Single Seq 25.0kS/s

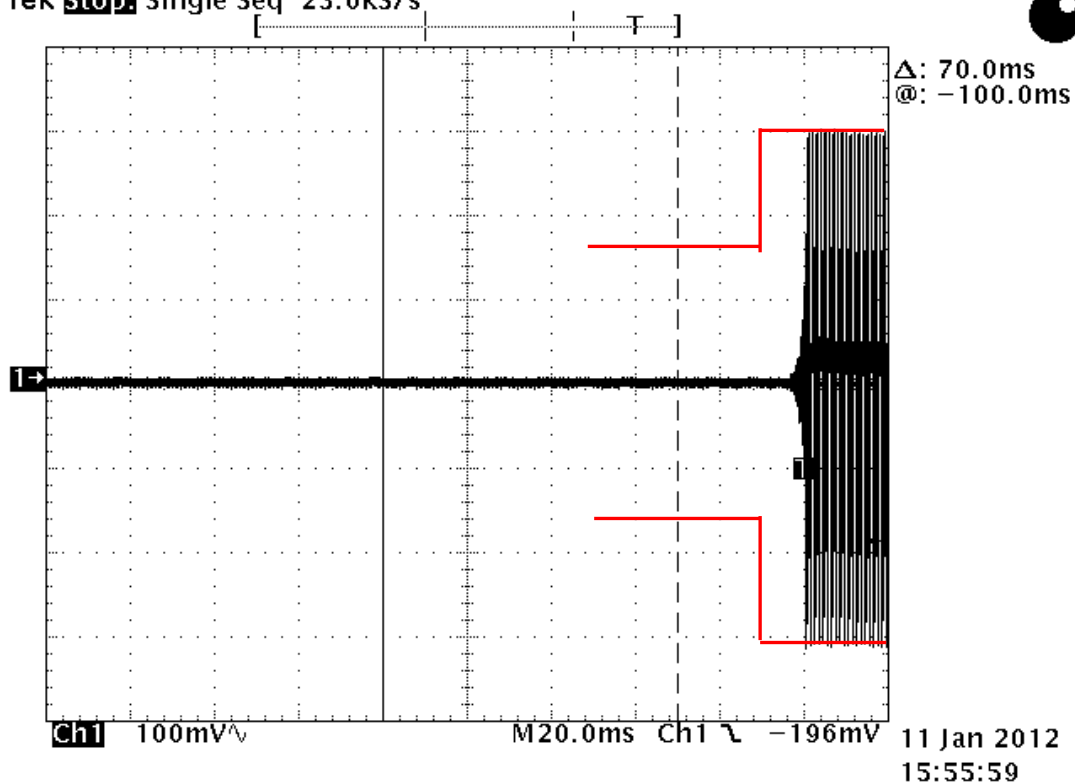


161.025MHz 12.5kHz Transmitter turn on

Tek **Stop** Single Seq 50.0kS/s

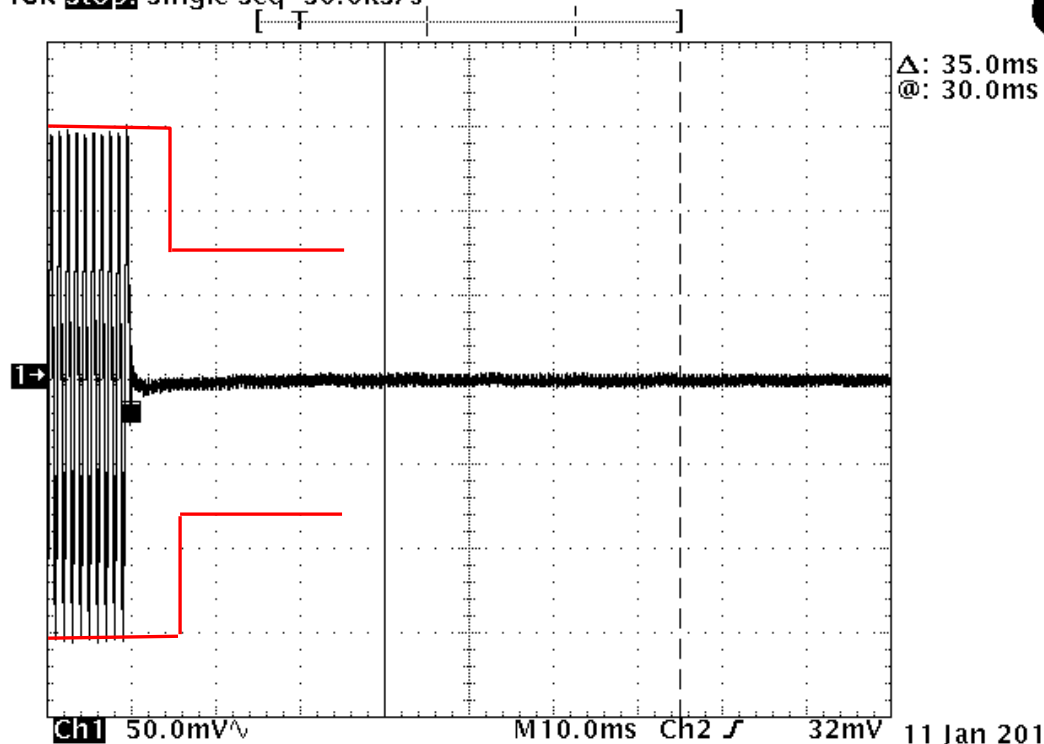


161.025MHz 12.5kHz Transmitter turn off

Tek **Stop** Single Seq 25.0kS/s

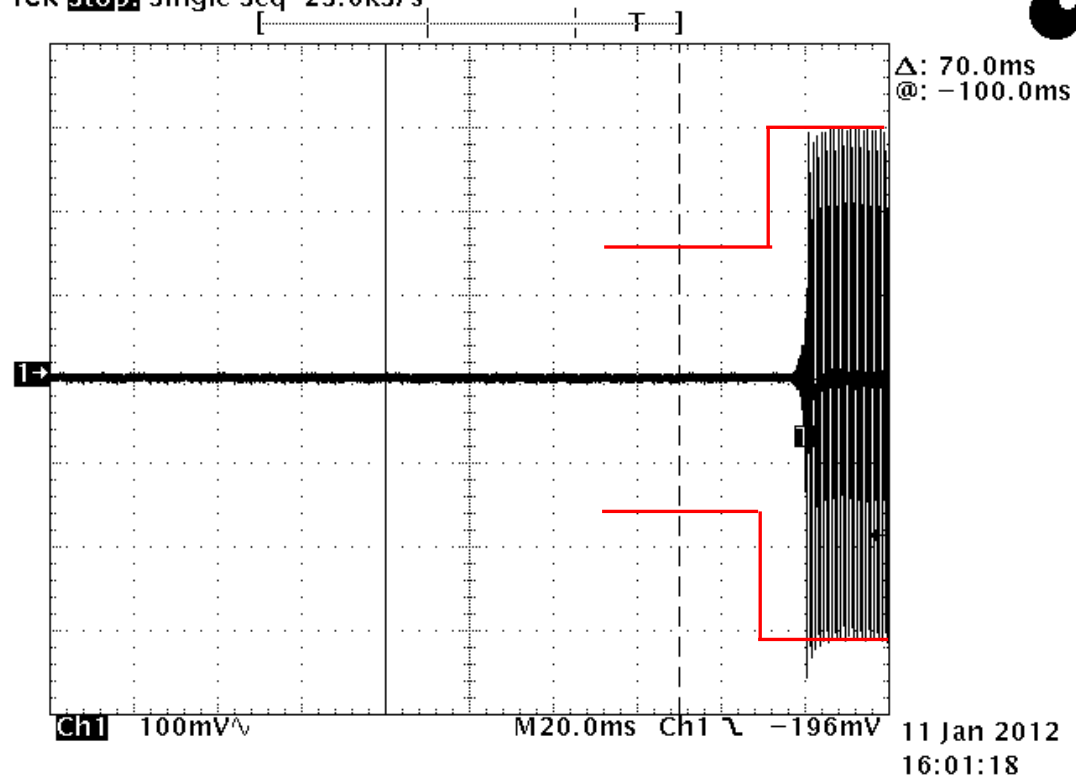


173.98750MHz 12.5kHz Transmitter turn on

Tek **Stop:** Single Seq 50.0kS/s

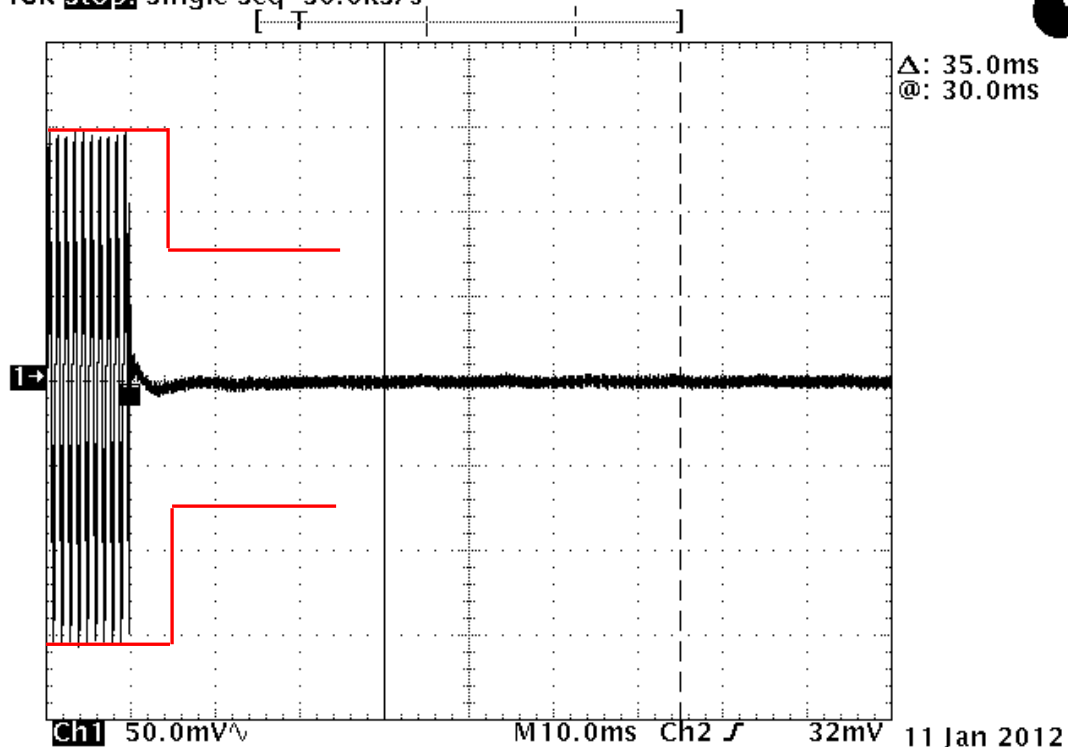

174.0MHz 12.5kHz Transmitter turn off



Tek **Stop:** Single Seq 25.0kS/s

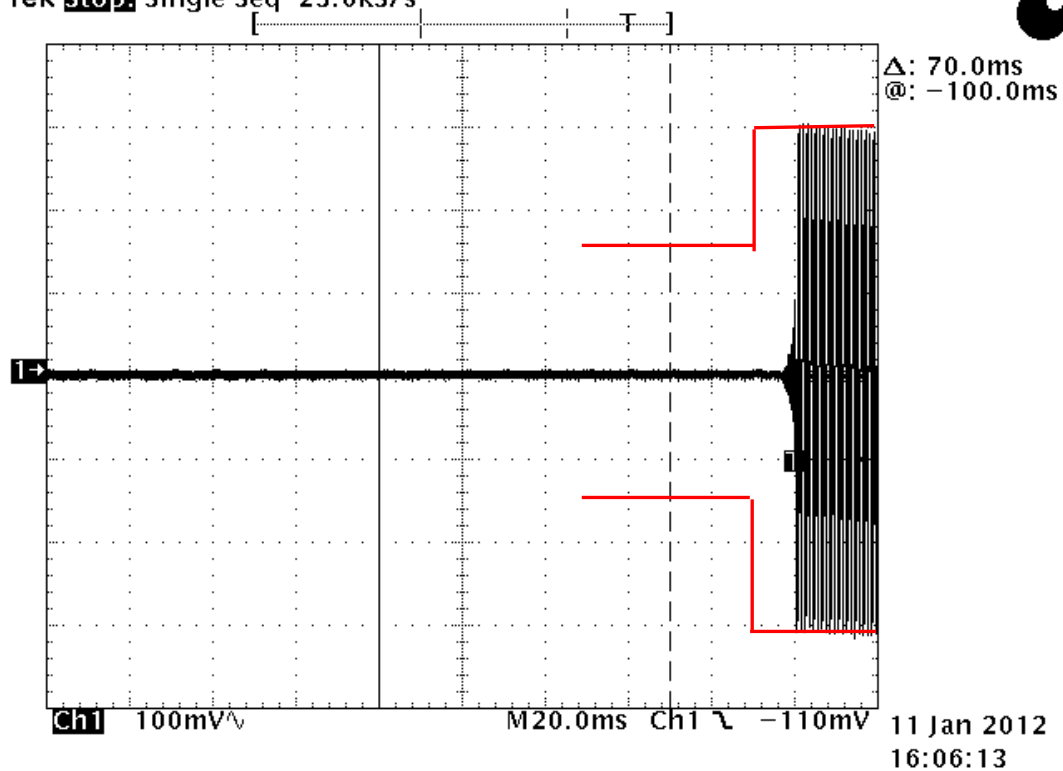

**ANNEX A**  
**PHOTOGRAPHS**




Photograph 1&2: Test Setup

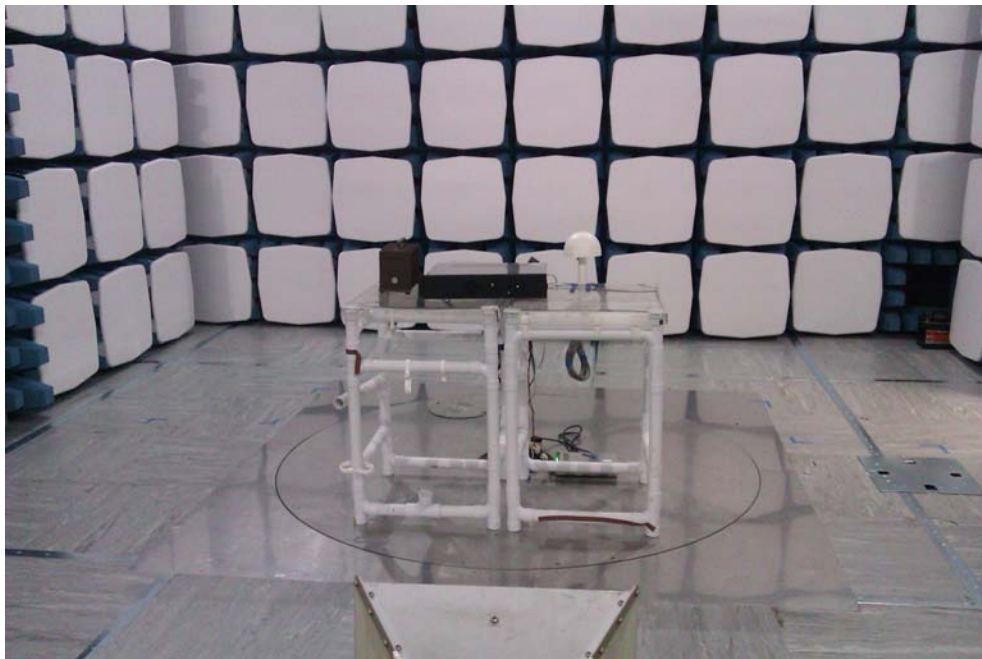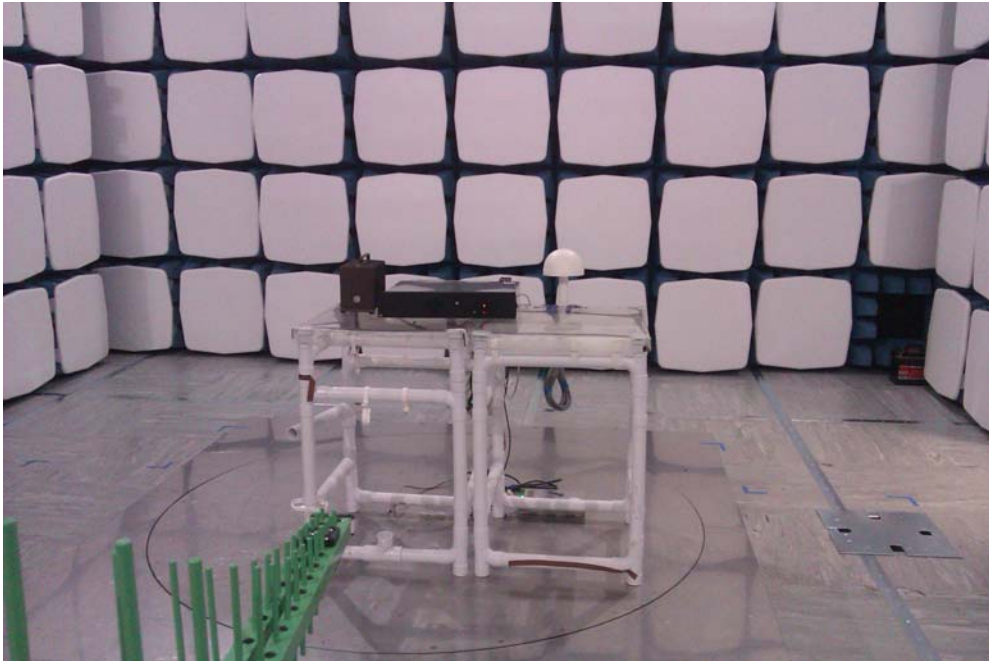


Photograph 3&4: Equipment overview



Photograph 5&6: Top View Main Audio PC

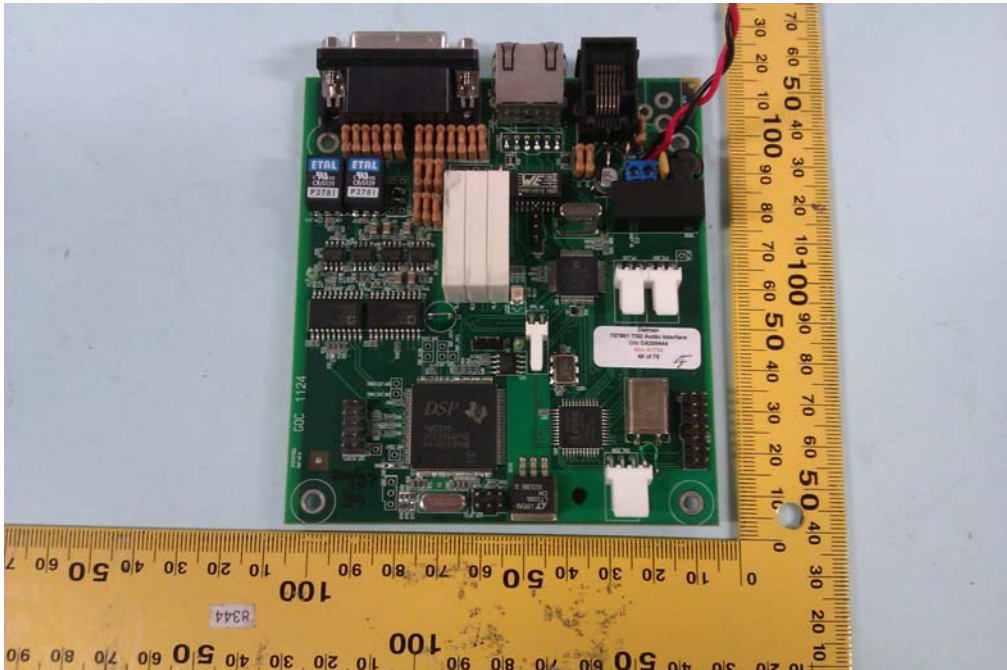

Underside view Main Audio PC

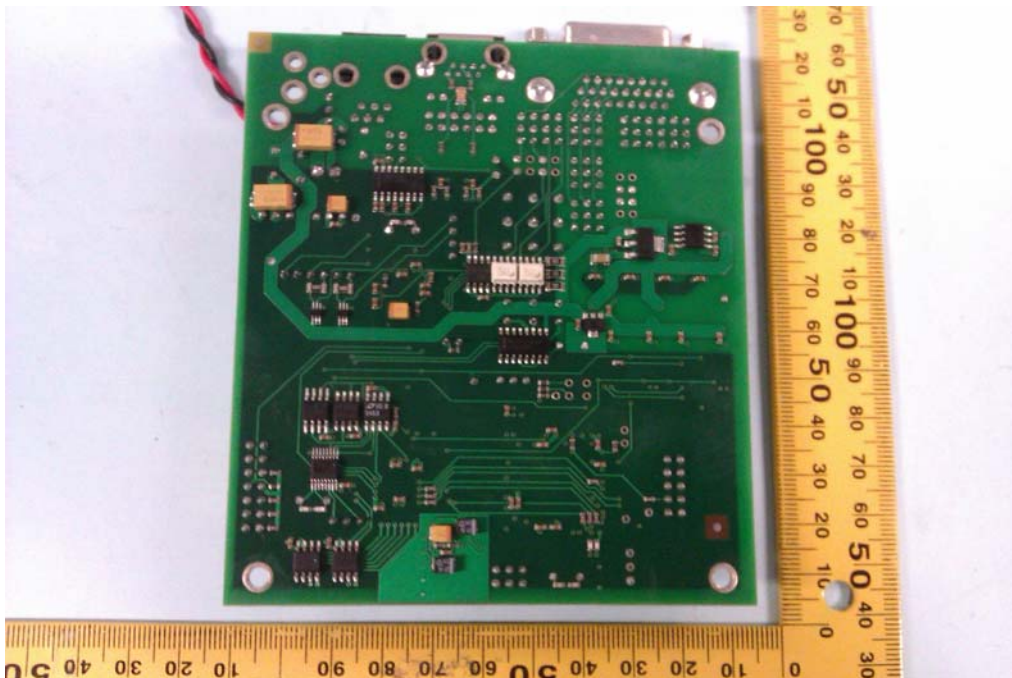





Photograph 7&8: Top View SBC Support PCB




Underside view SBC Support PCB

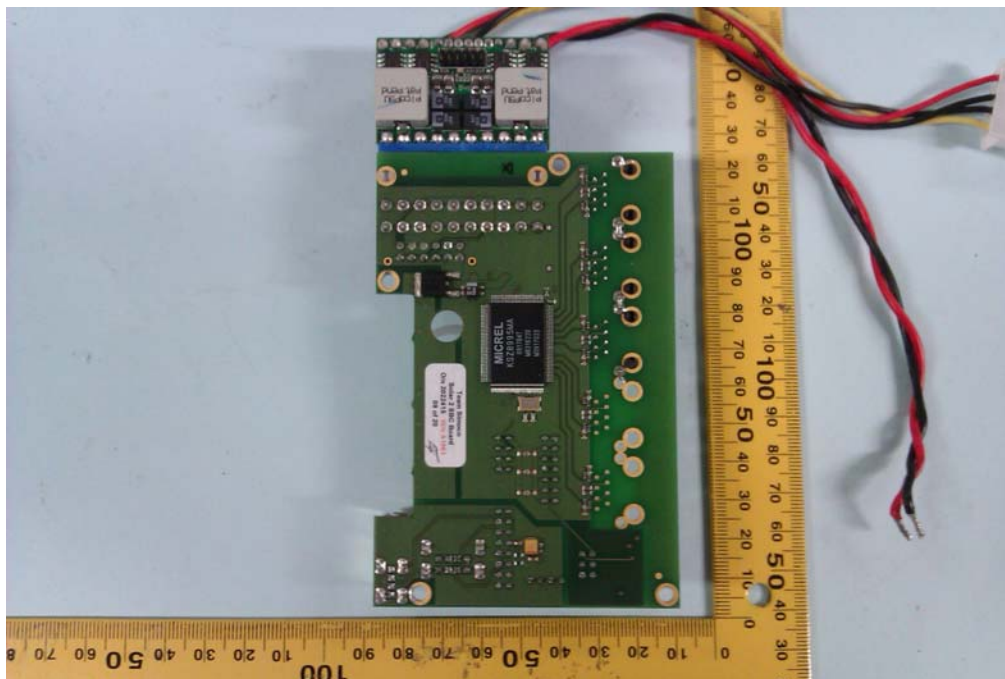


Photograph 9&10: Top View Aux PCB

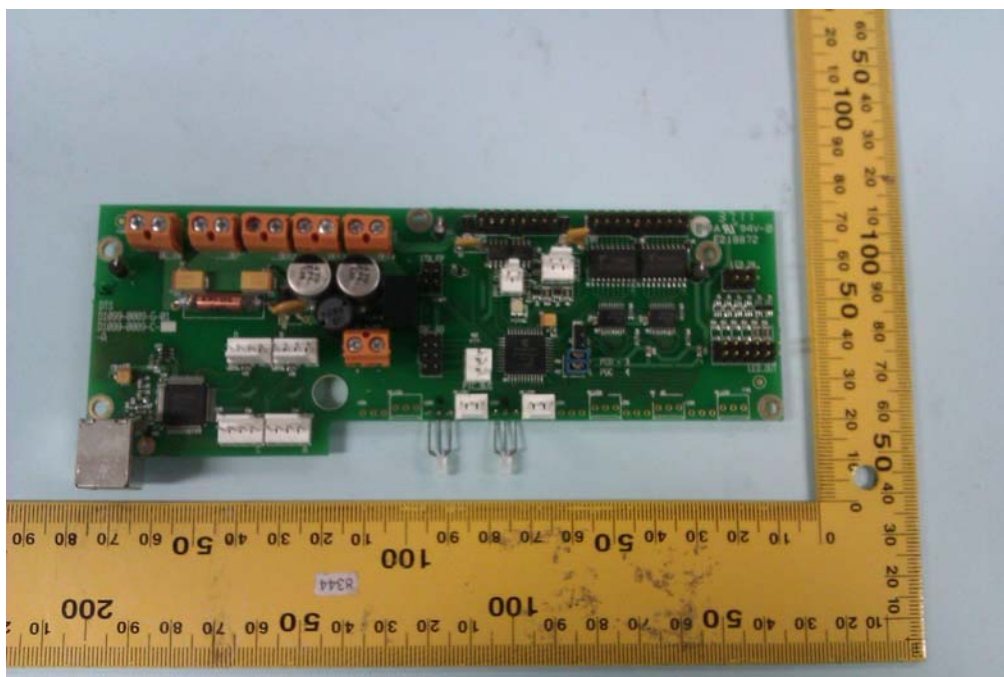


Underside view Aux PCB

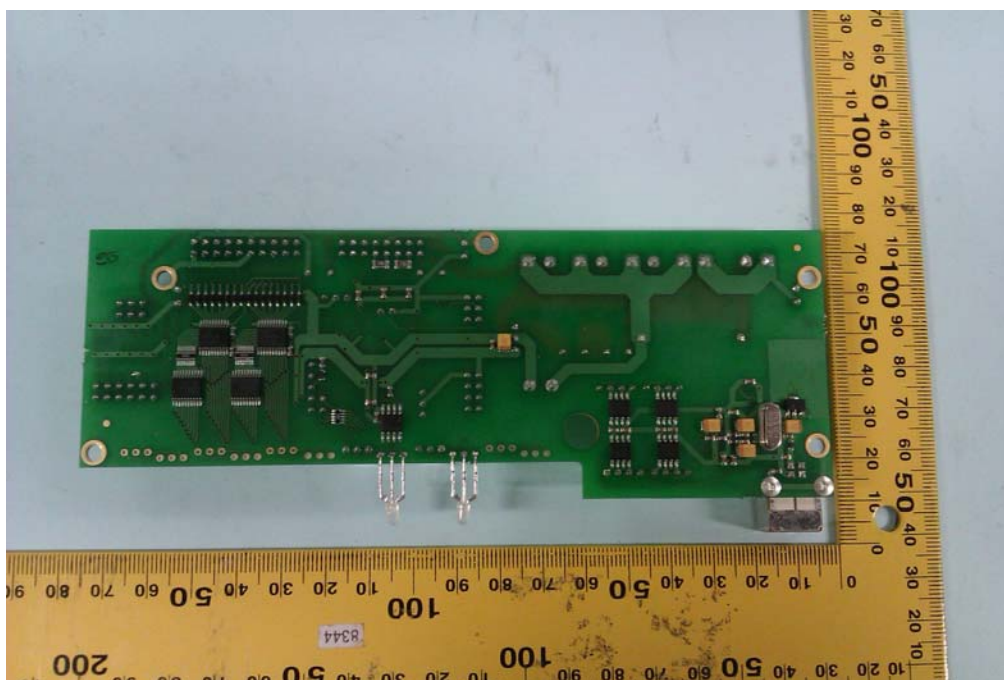

Photograph 11&12: Top View SBC

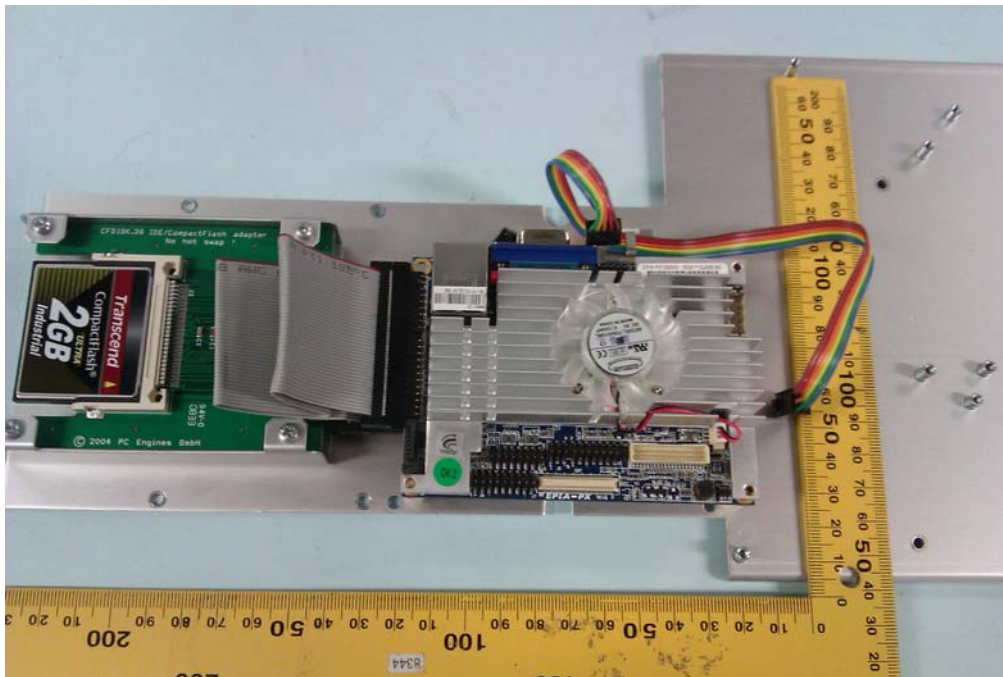


Underside view SBC

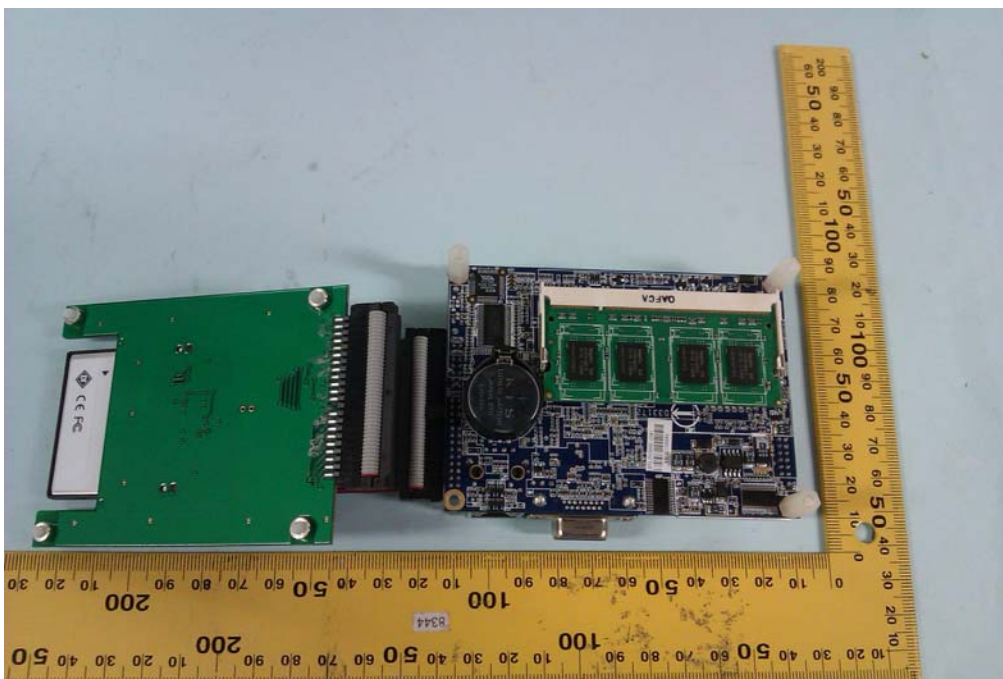





Photograph 13&14: Top View T36 Option PCB

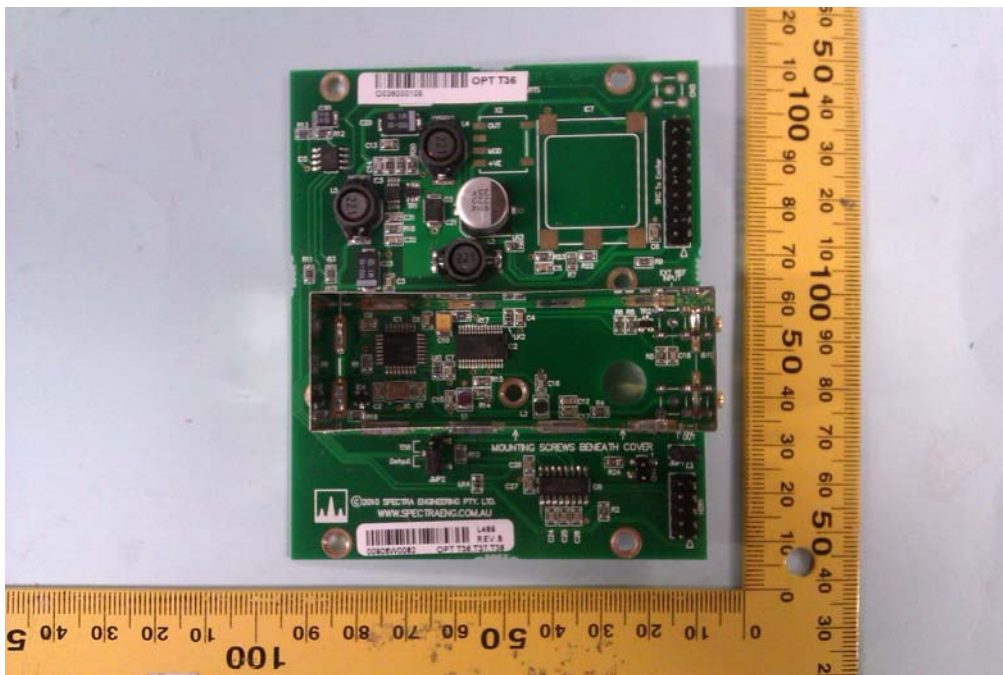


Underside view T36 Option PCB

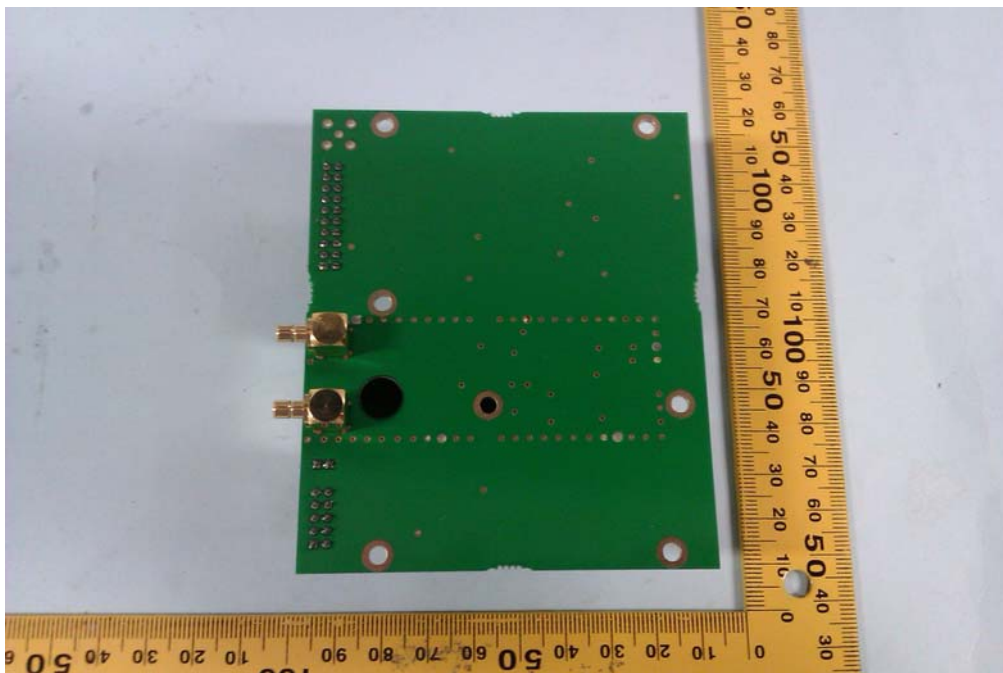

Photograph 15&16: Top View Tx'er exciter PCB

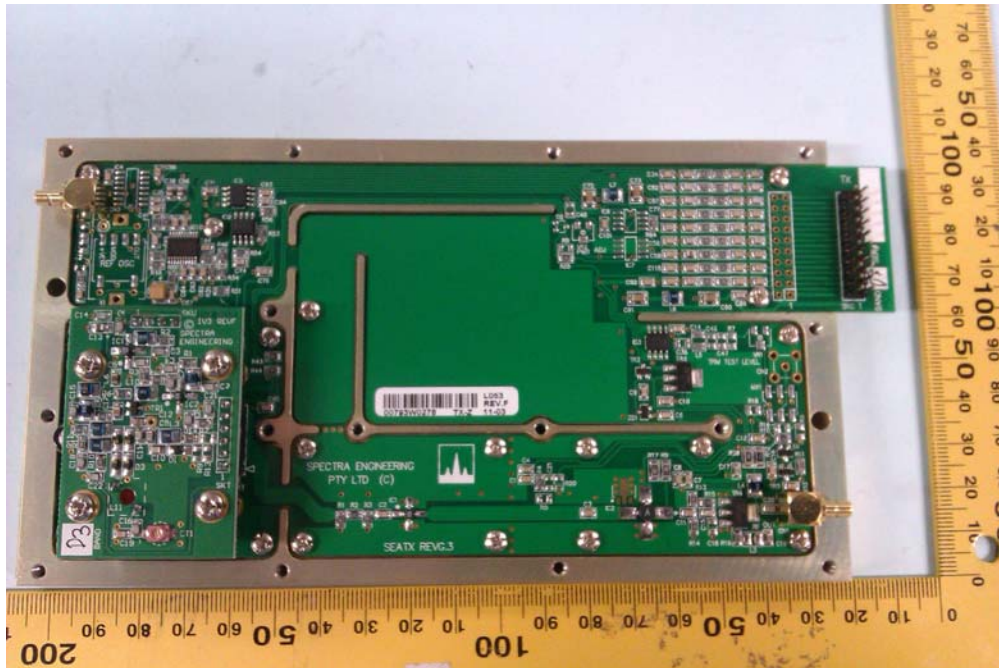


Underside view Tx'er exciter PCB

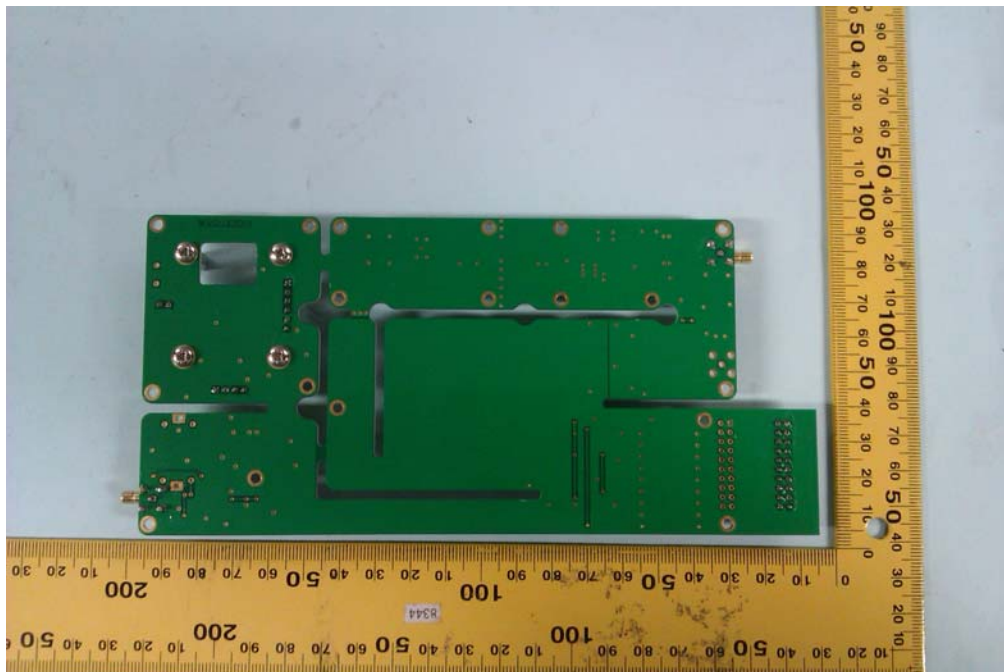




Photograph 17&18: Top View Rx'er PCB

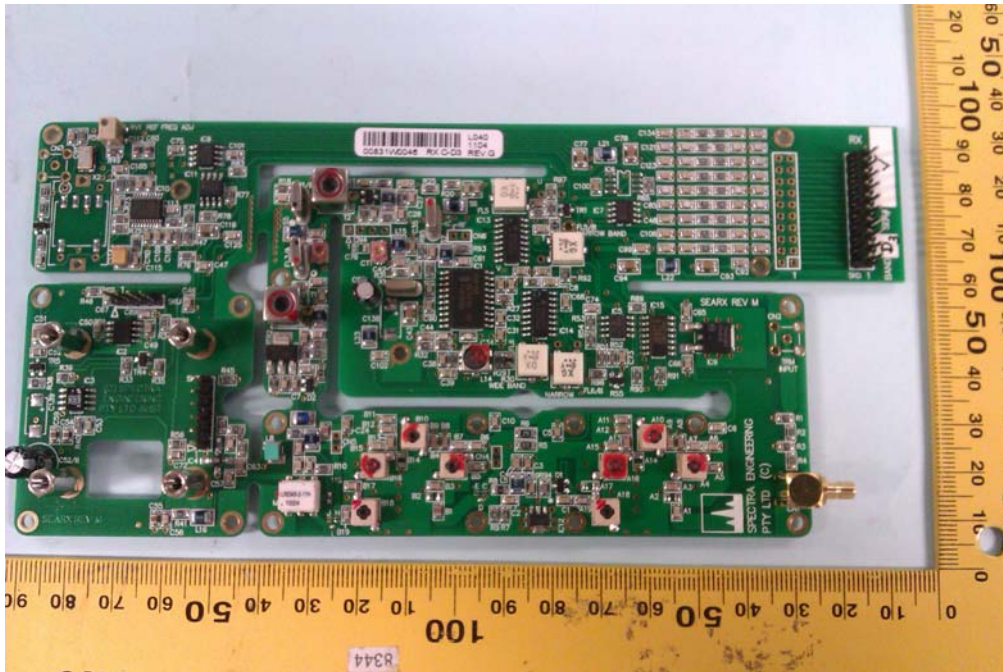


Underside view Rx'er PCB

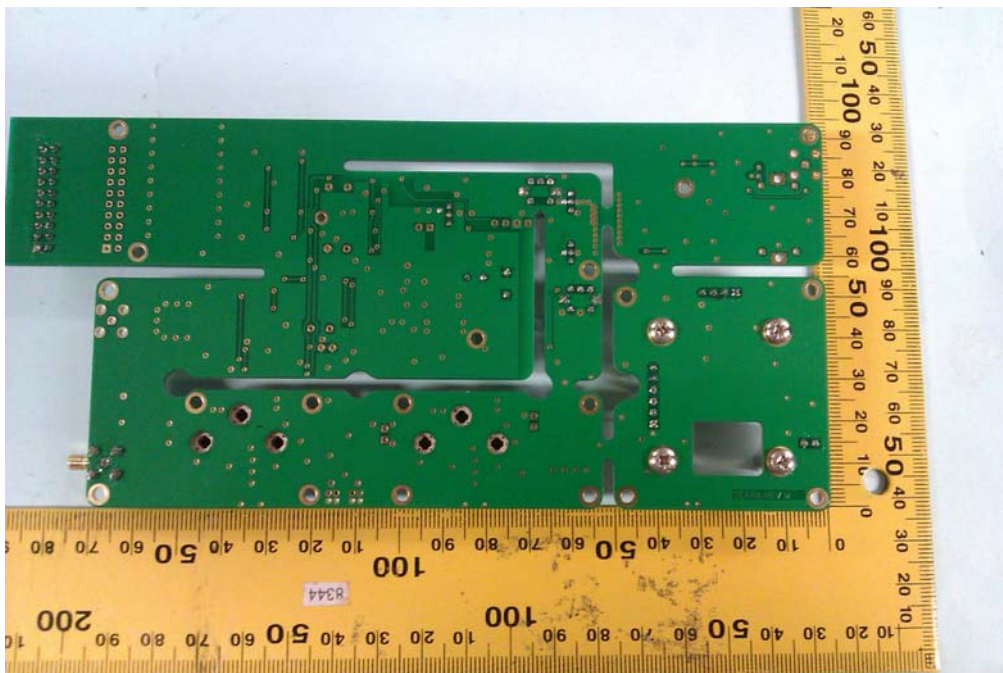

Photograph 19&20: Top View Controller PCB




Underside view Controller PCB

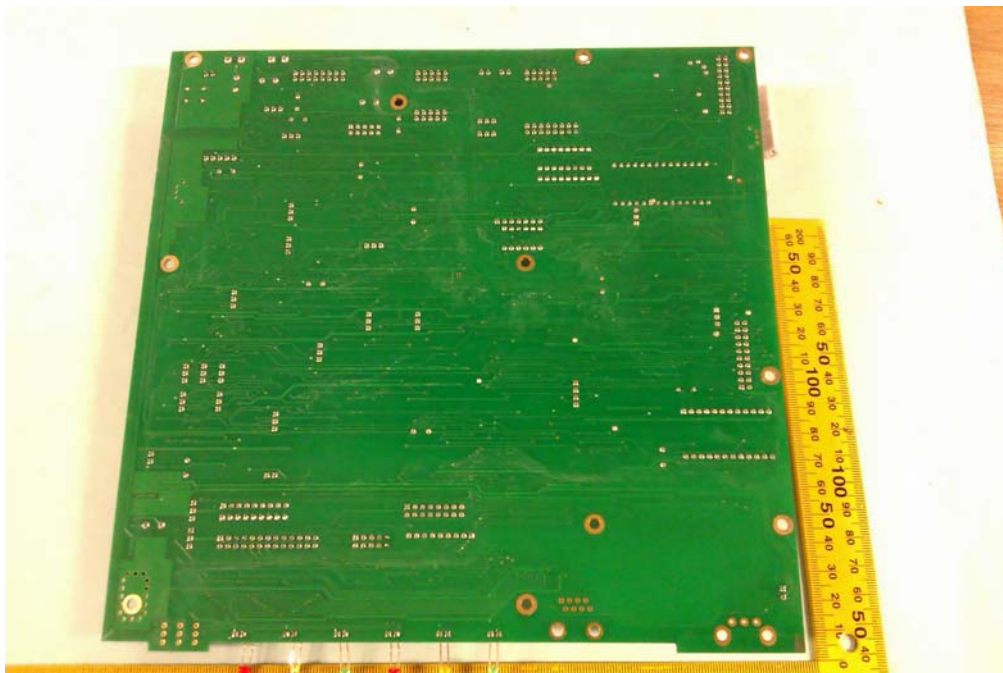





Photograph 21&22 Top View Digital I/O PCB

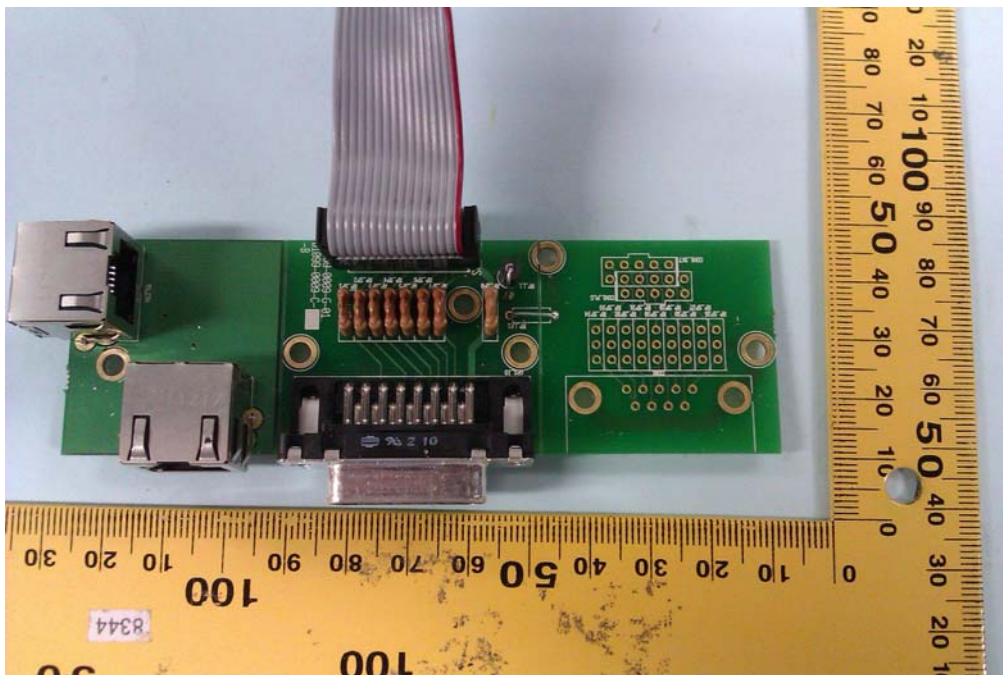

Underside view Digital I/O PCB

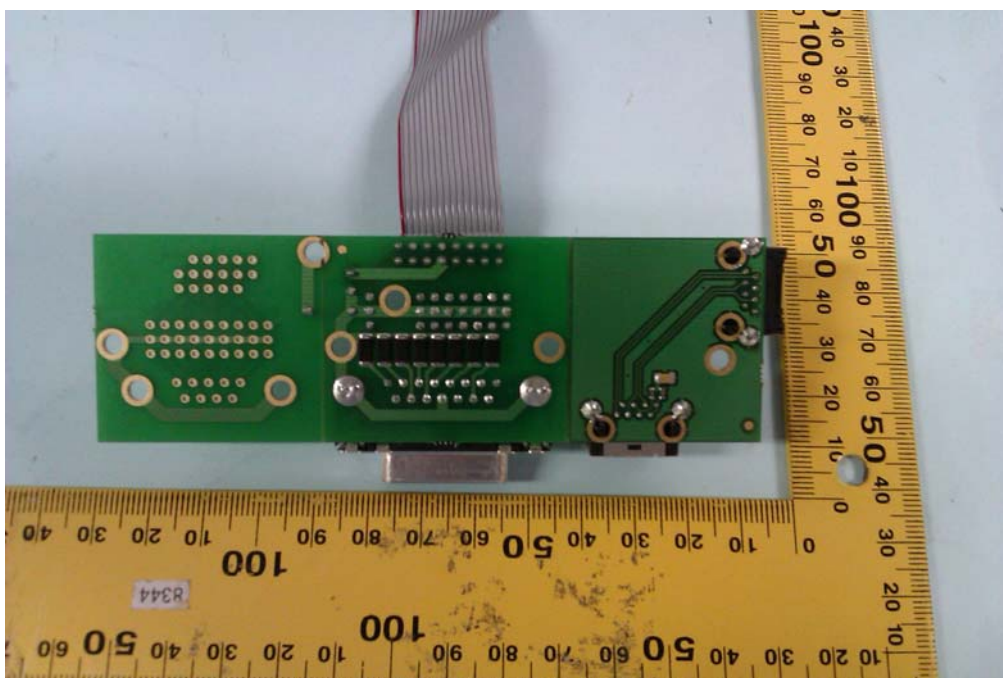

Photograph 23: Top View 100W P. A. PCB

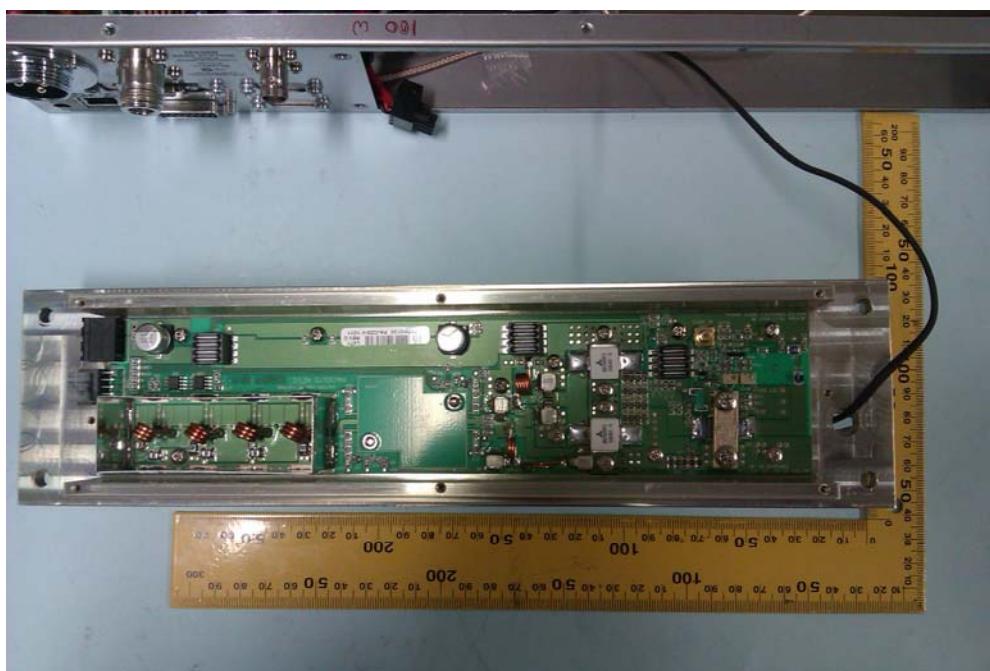

**ANNEX B**  
**APPLICANT'S DECLARATION**

## APPLICANT'S DECLARATION



Field House  
Uttoxeter Old Road  
Derby  
DE1 1NH

24-Feb-2012

Federal Communications Commission  
Authorization and Evaluation Division  
7435 Oakland Mills Road  
Columbia, MD 21046

Subject: FCC Part 90 Band Re-farming

Dear Sir/Madam

The SB2025NT conforms to the P25 standard of 9600bps within a 12.5KHz bandwidth which therefore meets the requirement of 4800bps per 6.25KHz of channel bandwidth.

Yours faithfully

A handwritten signature in black ink, appearing to read 'Richard Stimson'.

**Richard Stimson**



**Team Simoco Ltd**  
Field House  
Uttoxeter Old Road  
Derby DE1 1NH  
**Tel:** +44 (0)1332 375500  
**Fax:** +44 (0)1332 375501  
**Web:** [www.teamsimoco.com](http://www.teamsimoco.com)

Registered Office: Field House, Uttoxeter Old Road, Derby DE1 1NH England. Registered in England No. 04382515 VAT No. GB 974073750 Part of the Team Telecom Group of Companies

**ANNEX C**  
**EQUIPMENT CALIBRATION**

TRAC Ref	Type	Description	Manufacturer	Date Calibrated.
TRL281	FSU46	Spectrum Analyser	Rhode & Schwarz	10/02/2011
TRL139	3115	Horn Antenna	EMCO	14/09/2011
TRL572	8449B	Pre amp	Agilent	24/11/2010
TRLUH04	ESVS10	Receiver	Rhode & Schwarz	14/12/2010
TRLUH372	6201-69	Pre amp	Watkins& Johnson	14/04/2010
TRLUH93	CBL6112B	Antenna	Chase	20/06/2011
UH122	TDS520B	Oscilloscope	Tektronix	12/11/2010
TRL222	8304-100-N	ATTENUATOR	BIRD	Cal In Use
TRLUH225	745357	ATTENUATOR	SPINNER	Cal In Use
REF916	SMBV100A	Signal Generator	Rhode & Schwarz	13/12/2010
TRL426	52 Series 11	Temperature Indicator	Fluke	04/03/2011
TRL11	-	Environmental Chamber	Sharetree	USE TRL426
TRLUH41	M3004	Multimeter	AVOmeter	04/03/2011
TRLUH194	AP60/50	Power Supply	Farnell	USE TRLUH41



**ANNEX D**  
**MEASUREMENT UNCERTAINTY**

## **Radio Testing – General Uncertainty Schedule**

*All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.*

### **[1] Adjacent Channel Power**

Uncertainty in test result = **1.86dB**

### **[2] Carrier Power**

Uncertainty in test result (Power Meter) = **1.08dB**

Uncertainty in test result (Spectrum Analyser) = **2.48dB**

### **[3] Effective Radiated Power**

Uncertainty in test result = **4.71dB**

### **[4] Spurious Emissions**

Uncertainty in test result = **4.75dB**

### **[5] Maximum frequency error**

Uncertainty in test result (Power Meter) = **0.113ppm**

Uncertainty in test result (Spectrum Analyser) = **0.265ppm**

### **[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field**

Uncertainty in test result (14kHz – 30MHz) = **4.8dB**,

Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,

Uncertainty in test result (1GHz – 18GHz) = **4.7dB**

### **[7] Frequency deviation**

Uncertainty in test result = **3.2%**

### **[8] Magnetic Field Emissions**

Uncertainty in test result = **2.3dB**

### **[9] Conducted Spurious**

Uncertainty in test result – Up to 8.1GHz = **3.31dB**

Uncertainty in test result – 8.1GHz – 15.3GHz = **4.43dB**

Uncertainty in test result – 15.3GHz – 21GHz = **5.34dB**

Uncertainty in test result – Up to 26GHz = **3.14dB**

### **[10] Channel Bandwidth**

Uncertainty in test result = **15.5%**

### **[11] Amplitude and Time Measurement – Oscilloscope**

Uncertainty in overall test level = **2.1dB**,

Uncertainty in time measurement = **0.59%**,

Uncertainty in Amplitude measurement = **0.82%**

### **[12] Power Line Conduction**

Uncertainty in test result = **3.4dB**

**[13] Spectrum Mask Measurements**

Uncertainty in test result = **2.59% (frequency)**  
Uncertainty in test result = **1.32dB (amplitude)**

**[14] Adjacent Sub Band Selectivity**

Uncertainty in test result = **1.24dB**

**[15] Receiver Blocking – Listen Mode, Radiated**

Uncertainty in test result = **3.42dB**

**[16] Receiver Blocking – Talk Mode, Radiated**

Uncertainty in test result = **3.36dB**

**[17] Receiver Blocking – Talk Mode, Conducted**

Uncertainty in test result = **1.24dB**

**[18] Receiver Threshold**

Uncertainty in test result = **3.23dB**

**[19] Transmission Time Measurement**

Uncertainty in test result = **7.98%**