

3 EQUIPMENT UNDER TEST


3.1 Photo documentation of the EuT – Detailed photos see Attachment A

3.2 Power supply system utilised


Power supply voltage : 8.4 VDC (battery)

Power supply voltage (alternate) : Input: 100-240 V / 50-60 Hz / 1φ, Output: +24 V DC

3.3 Test setup

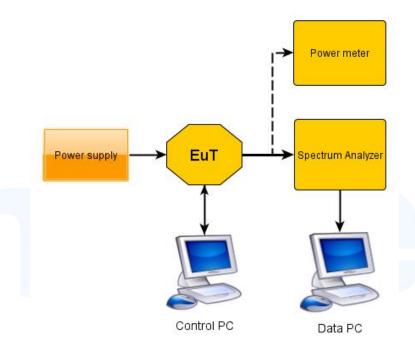

Conducted measurements

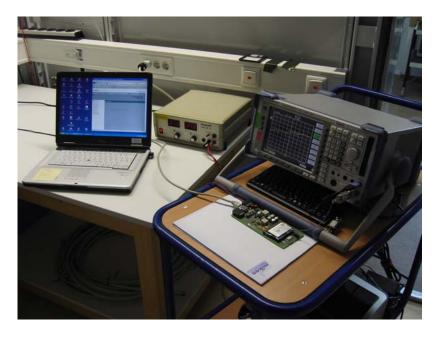

mikes-testingpartners gmbh Ohmstrasse 2-4 · 94342 Strasskirchen Tel.:+49(0)9424-94810 · Fax:+49(0)9424-9481240 File No. T33962-00-10AA, page 7 of 51

Rev. No. 1.1



5.6 Undiserable emissions

For test instruments and accessories used see section 6 Part SEC 1-3, SER 1, SER 2 and SER 3.

5.6.1 Description of the test location


Test location: OATS1

Anechoic Chamber A2

Test distance: 3 metres

5.6.2 Photo documentation of the test set-up


Anechoic chamber

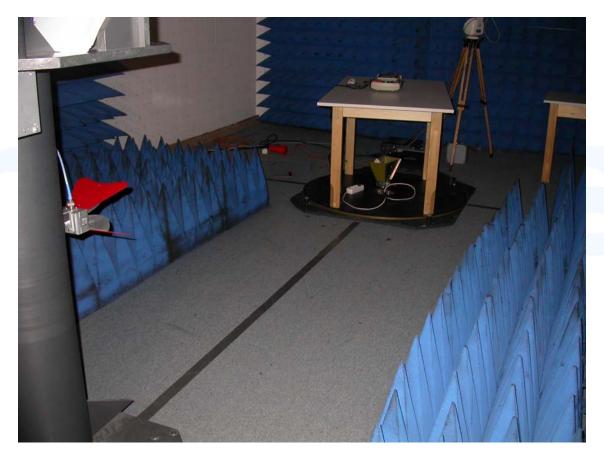

File No. **T33962-00-10AA**, page **26** of **51**

mikes-testingpartners gmbh Ohmstrasse 2-4 · 94342 Strasskirchen Tel.:+49(0)9424-94810 · Fax:+49(0)9424-9481240











5.10 Receiver Spurious Emissions

For test instruments and accessories used see section 6 Part SER 2 and SER 3.

5.10.1 Description of the test location

Test location: OATS1

Anechoic Chamber A2

Test distance: 3 metres

5.10.2 Photo documentation of the test set-up

Anechoic chamber

