

FCC PART 15.247

TEST REPORT

For

Deliberant LLC

138 Mountain Brook Dr., Canton, GA 30115, USA

FCC ID: UB8-APC5MV2

Report Type: Original Report	Product Type: Broadband Digital Transmission System
Test Engineer: Felix Li <i>Felix Li</i>	
Report Number: RSZ111019014-00	
Report Date: 2011-12-16	
Reviewed By: Alvin Huang <i>Alvin Huang</i> EMC Engineer	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
CONFIGURATION OF TEST SETUP	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
APPLICABLE STANDARD	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP.....	11
EMI TEST RECEIVER SETUP.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST PROCEDURE	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY	15
EUT SETUP.....	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.247(a) (2) – 6 dB BANDWIDTH TESTING.....	33
APPLICABLE STANDARD	33
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST PROCEDURE	33
TEST DATA	33

FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER	43
APPLICABLE STANDARD	43
TEST EQUIPMENT LIST AND DETAILS.....	43
TEST PROCEDURE	43
TEST DATA	43
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	53
APPLICABLE STANDARD	53
TEST EQUIPMENT LIST AND DETAILS.....	53
TEST PROCEDURE	53
TEST DATA	53
FCC §15.247(e) - POWER SPECTRAL DENSITY	61
APPLICABLE STANDARD	61
TEST EQUIPMENT LIST AND DETAILS.....	61
TEST PROCEDURE	61
TEST DATA	61

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Deliberant LLC*'s product, model number: *APC 5M V2 (FCC ID: UB8-APC5MV2)* (the "EUT") in this report is a *Broadband Digital Transmission System*, which was measured approximately: 15.0 cm (L) x 11.5 cm (W) x 5.5 cm (H), rated input voltage: DC 18V from adapter.

Adapter information (PoE Adapter):

Model: PP1807V1

Input: 100-240VAC 50-60Hz 0.3A

Output: 18VDC 0.7A

** All measurement and test data in this report was gathered from production sample serial number: 0101104600000065(Assigned by Applicant). The EUT was received on 2011-10-19.*

Objective

This Type approval report is prepared on behalf of *Deliberant LLC* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No Related Submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11a, 802.11n-HT20 and 802.11n-HT40 mode, Channel lists as below:

Channel	Frequency (MHz)	Comments
149	5745	802.11a & 802.11n-HT20
153	5765	
157	5785	
161	5805	
165	5825	
151	5755	802.11n-HT40
159	5795	

Channel 149,153,157,161&165 are available for 802.11a & 802.11n-HT20 mode, the EUT was tested with Channel 149, 157 & 165. For 802.11n-HT40 mode, EUT was tested with Channel 151 & 159.

EUT Exercise Software

PUTTY, provided by client

The test was performed under:

802.11a: Data rate: 6Mbps

802.11n-HT20: Data rate: 15Mbps

802.11n-HT40: Data rate: 30Mbps

Equipment Modifications

No modification was made to the unit tested.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Notebook	D600	00045-438-852-864


External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded Detachable Power Cable	0.7	PoE Adapter	LISN
Shielded Detachable RJ45 Cable	1.00	EUT	PoE

Configuration of Test Setup

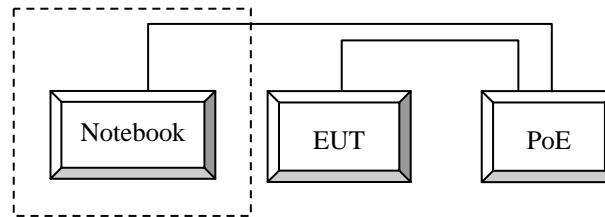

Block Diagram of Test Setup

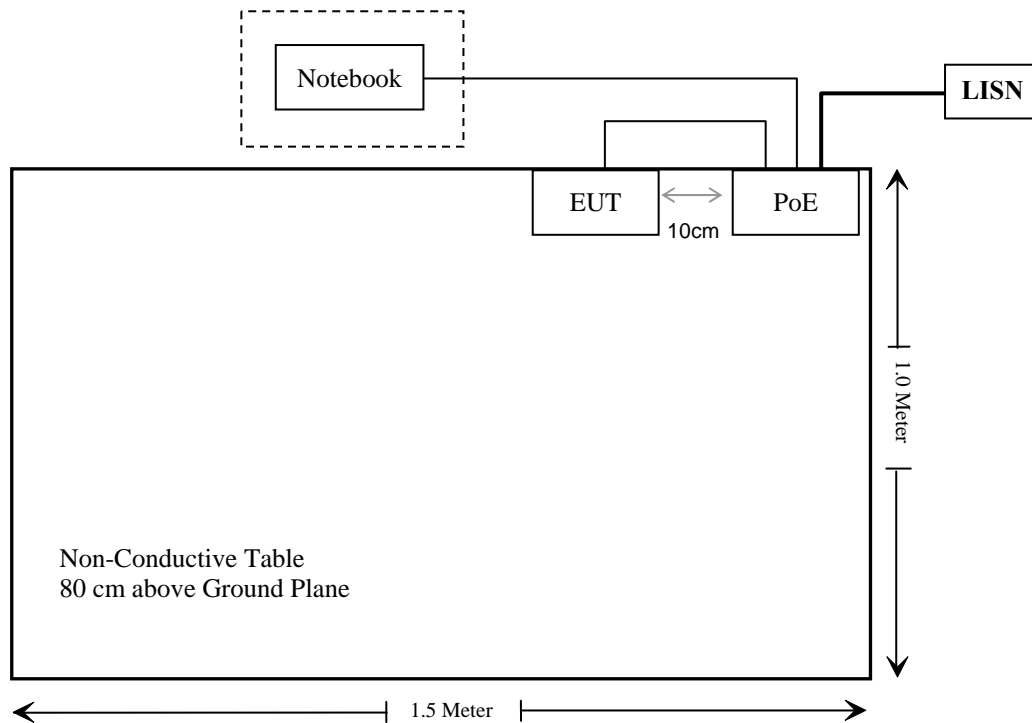

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b)(1), §2.1091	Maximum Permissible exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to FCC §15.247(i) and subpart §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz;

* = Plane-wave equivalent power density;

MPE Calculation:

Predication of MPE limit at a given distance

$$S = PG/4\pi R^2$$

Where: S = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Mode	Frequency (MHz)	Antenna Gain		Conducted Output Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
6 dBi Omni Antenna								
802.11n-HT40	5795	6	3.98	28.42	695.02	500	0.0009	1.0
23 dBi Panel Antenna								
802.11n-HT40	5795	23	199.53	28.42	695.02	500	0.0442	1.0
34 dBi Dish Antenna								
802.11n-HT40	5795	34	2511.88	28.42	695.02	500	0.5560	1.0

Result: The device meets FCC MPE limit at 16.4 feet (500 cm) distance which specified by the manufacture, the RF exposure information has been addressed on the manual.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two antenna connectors and can be connected to three types antenna (Omni, Panel and Dish), and the maximum gain are 6 dBi, 23 dBi, 34 dBi. All of them need the professional installation. Please refer to the EUT external photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard


FCC§15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 2.4 dB (k=2, 95% level of confidence).

EUT Setup

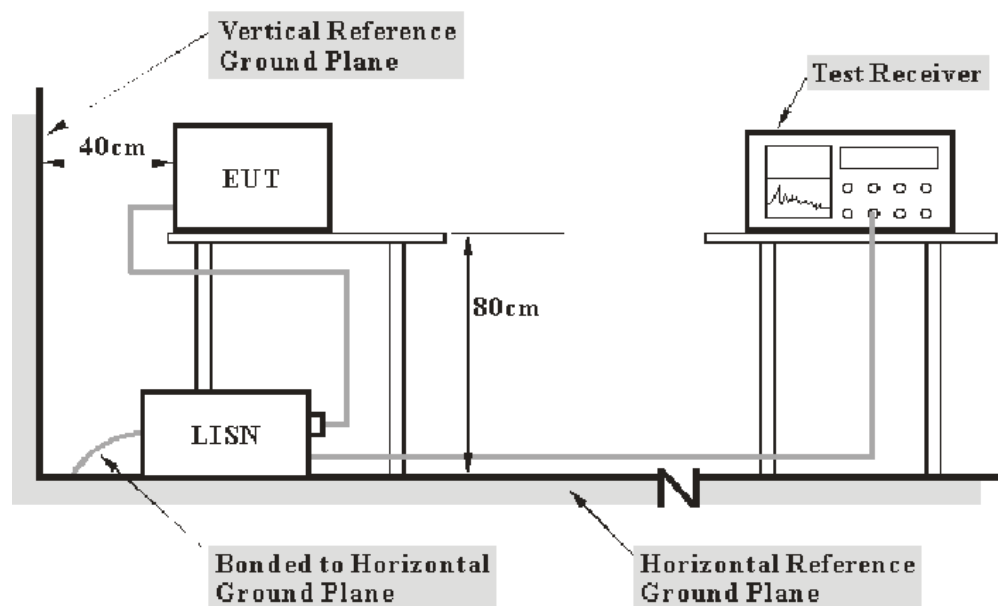

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The 18 V DC adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IF B/W</i>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245	2011-03-03	2012-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-03-09	2012-03-08

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

11.39 dB at 0.150 MHz in the Neutral conducted mode

Test Data


Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Felix Li on 2011-11-19.


Test Mode: Transmitting (Scan with three antennas, and worse case as below)

AC 120 V, 60 Hz, Line:

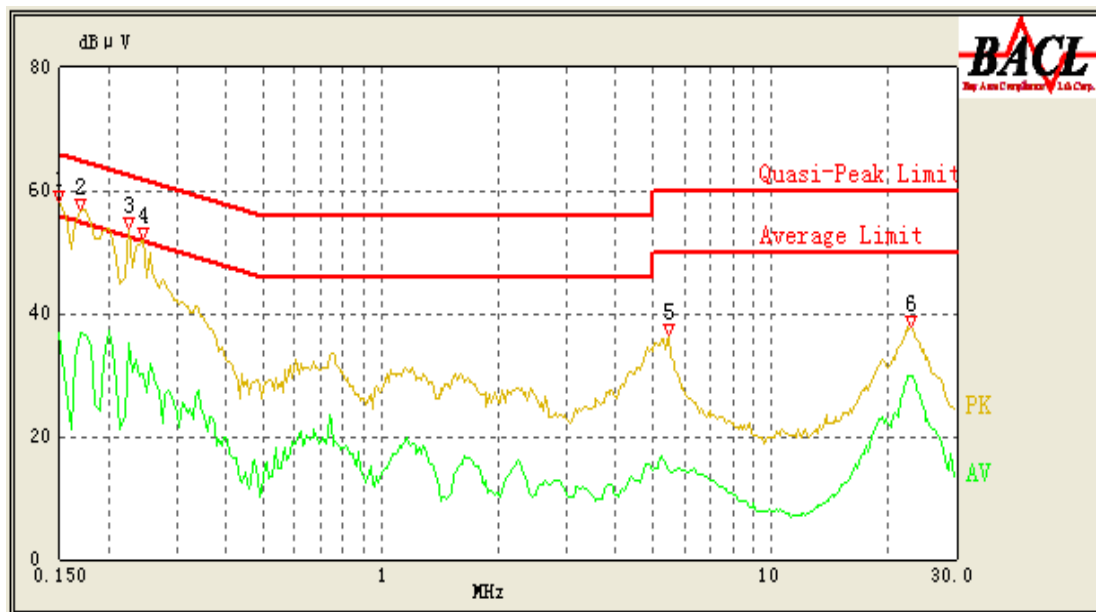

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Corrected Result (dB μ V)	Correction Factor (dB)	Limit (dB μ V)	Margin (dB)	Detector (QP/Ave.)
0.150	54.51	10.23	66.00	11.49	QP
0.170	53.39	10.23	65.43	12.04	QP
0.170	36.97	10.23	55.43	18.46	Ave.
0.225	35.17	10.23	53.86	18.69	Ave.
0.150	36.88	10.23	56.00	19.12	Ave.
0.245	43.57	10.23	63.29	19.72	QP
22.720	29.70	11.92	50.00	20.30	Ave.
0.225	43.13	10.23	63.86	20.73	QP
0.245	30.05	10.23	53.29	23.24	Ave.
22.915	30.98	11.94	60.00	29.02	QP
5.460	26.78	10.63	60.00	33.22	QP
5.435	14.79	10.63	50.00	35.21	Ave.

AC 120V, 60 Hz, Neutral:

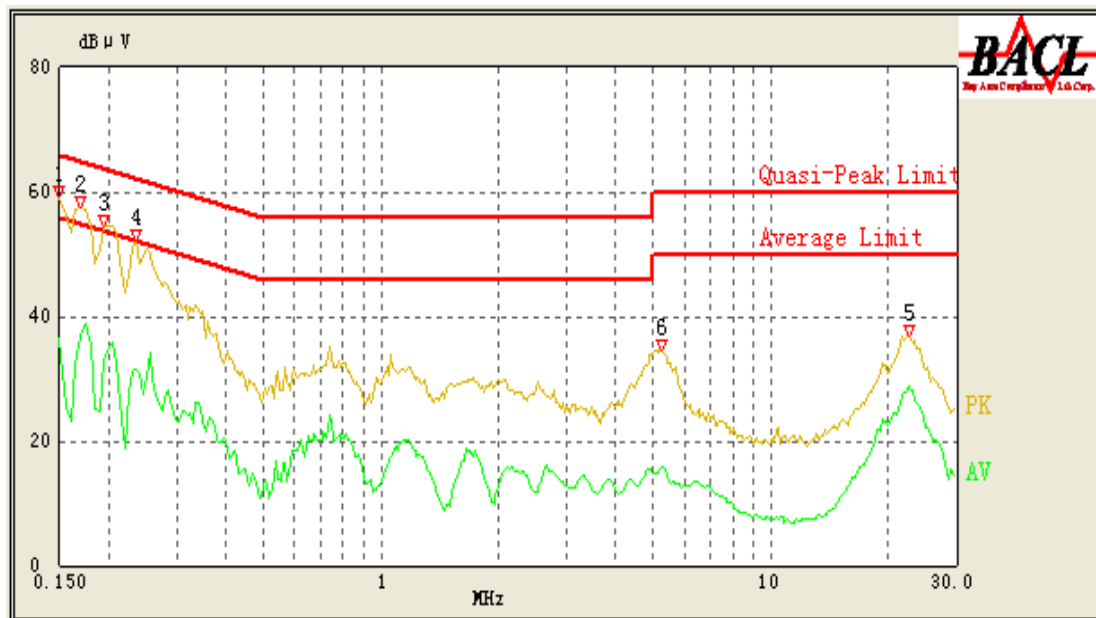

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Corrected Result (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (QP/Ave.)
0.150	54.61	10.23	66.00	11.39	QP
0.170	53.79	10.23	65.43	11.64	QP
0.195	49.60	10.23	64.71	15.11	QP
0.235	46.74	10.23	63.57	16.83	QP
0.170	36.86	10.23	55.43	18.57	Ave.
0.150	36.48	10.23	56.00	19.52	Ave.
22.695	28.72	11.91	50.00	21.28	Ave.
0.195	32.89	10.23	54.71	21.82	Ave.
0.235	31.52	10.23	53.57	22.05	Ave.
22.570	29.47	11.89	60.00	30.53	QP
5.255	29.00	10.62	60.00	31.00	QP
5.250	15.82	10.62	50.00	34.18	Ave.

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB($k=2$, 95% level of confidence) .

EUT Setup

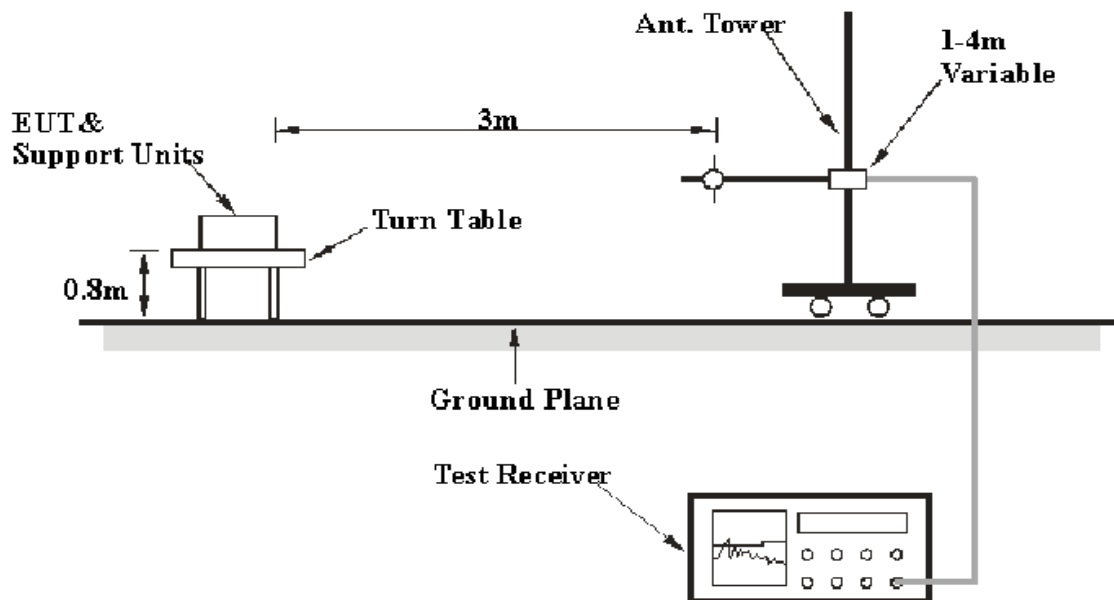

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>Detector</i>
30MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 40 GHz	1 MHz	3 MHz	PK
1000 MHz – 40 GHz	1 MHz	10 Hz	Ave

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2011-08-02	2012-08-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2011-11-11	2012-11-10
Sunol Sciences	Broadband Antenna	AT1080	301902	2011-08-25	2012-08-25
Mini-Circuits	Amplifier	ZVA-213+	T-E27H	2011-03-08	2012-03-08
Sunol Sciences	Horn Antenna	DRH-118	A052604	2011-05-05	2012-05-04
HP	Spectrum Analyzer	8593A	51475684	2011-07-08	2012-07-07
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2011-07-08	2012-07-08
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2011-05-05	2012-05-04

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

0.7 dB at 53.911500 MHz in the Vertical polarization

Test Data


Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Felix Li on 2011-11-19.

1) Below 1 GHz:

Test Mode: Transmitting (Scan with three antennas, and worse case as below)

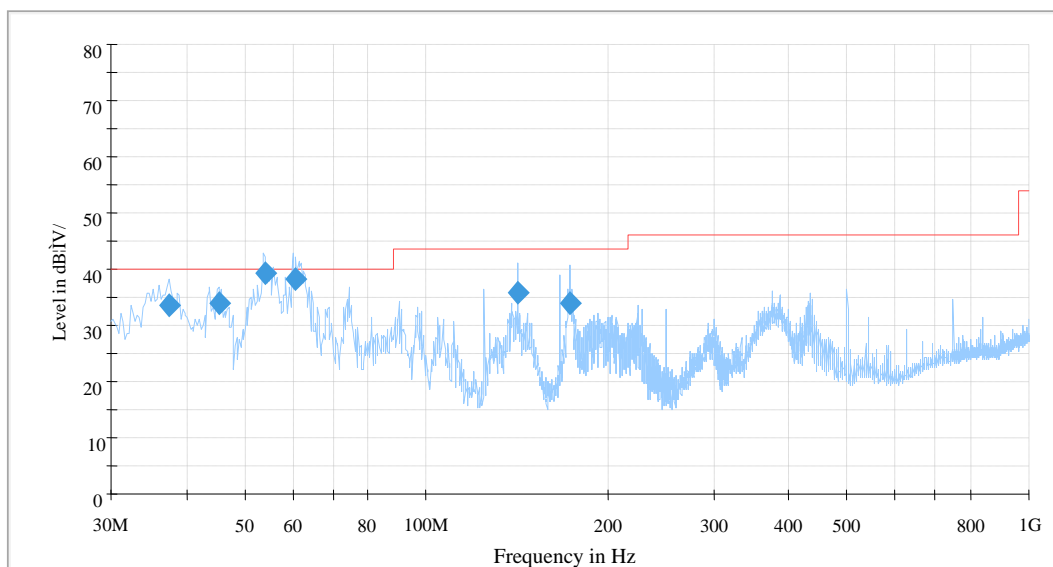

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Ant. Height (cm)	Ant. Polarity (H/V)	Turntable Position (degree)	Limit (dBµV/m)	Margin (dB)
53.911500	39.3	102.0	V	31.0	40.0	0.7*
60.826250	38.1	101.0	V	200.0	40.0	1.9*
45.266000	33.8	102.0	V	151.0	40.0	6.2
37.537500	33.6	101.0	V	172.0	40.0	6.4
141.692750	34.9	277.0	H	138.0	43.5	8.6
173.560500	33.8	175.0	H	0.0	43.5	9.7

* Within measurement uncertainty.

2) Above 1 GHz: (with Omni antenna 6 dBi)

Indicated		Detector (PK/Ave.)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247/15.209/15.205			
Frequency (MHz)	S.A. Reading (dBμV)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
802.11a, Low Channel (5745 MHz)												
11490	23.44	Ave.	55	1.0	H	41.4	6.69	26.20	45.33	54	8.67	harmonic
11490	23.22	Ave.	12	1.0	V	40.4	6.69	26.20	44.11	54	9.89	harmonic
11490	40.63	PK	55	1.0	H	41.4	6.69	26.20	62.52	74	11.48	harmonic
11490	40.12	PK	12	1.0	V	40.4	6.69	26.20	61.01	74	12.99	harmonic
5460	44.22	PK	305	1.2	H	36.7	4.49	26.70	58.71	74	15.29	spurious
5460	23.22	Ave.	305	1.2	H	36.7	4.49	26.70	37.71	54	16.29	spurious
5460	43.32	PK	185	1.1	V	35.9	4.49	26.70	57.01	74	16.99	spurious
5460	23.02	Ave.	185	1.1	V	35.9	4.49	26.70	36.71	54	17.29	spurious
802.11a, Middle Channel (5785 MHz)												
11570	23.98	Ave.	134	1.1	H	41.4	6.71	26.20	45.89	54	8.11	harmonic
11570	23.45	Ave.	111	1.0	V	40.4	6.71	26.20	44.36	54	9.64	harmonic
11570	41.35	PK	134	1.1	H	41.4	6.71	26.20	63.26	74	10.74	harmonic
11570	40.36	PK	111	1.0	V	40.4	6.71	26.20	61.27	74	12.73	harmonic
802.11a, High Channel (5825 MHz)												
11650	23.18	Ave.	63	1.2	H	41.4	6.71	26.20	45.09	54	8.91	harmonic
11650	23.02	Ave.	258	1.2	V	40.4	6.71	26.20	43.93	54	10.07	harmonic
11650	40.87	PK	63	1.2	H	41.4	6.71	26.20	62.78	74	11.22	harmonic
11650	40.26	PK	258	1.2	V	40.4	6.71	26.20	61.17	74	12.83	harmonic
Indicated		Detector (PK/Ave.)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247/15.209/15.205			
Frequency (MHz)	S.A. Reading (dBμV)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
802.11n HT20, Low Channel (5745 MHz)												
11490	23.62	Ave.	156	1.1	H	41.4	6.69	26.20	45.51	54	8.49	harmonic
11490	23.52	Ave.	2	1.1	V	40.4	6.69	26.20	44.41	54	9.59	harmonic
11490	40.87	PK	156	1.1	H	41.4	6.69	26.20	62.76	74	11.24	harmonic
11490	40.36	PK	2	1.1	V	40.4	6.69	26.20	61.25	74	12.75	harmonic
5460	44.56	PK	305	1.2	H	36.7	4.49	26.70	59.05	74	14.95	spurious
5460	23.97	Ave.	305	1.2	H	36.7	4.49	26.70	38.46	54	15.54	spurious
5460	44.26	PK	227	1.2	V	35.9	4.49	26.70	57.95	74	16.05	spurious
5460	23.85	Ave.	227	1.2	V	35.9	4.49	26.70	37.54	54	16.46	spurious
802.11n HT20, Middle Channel (5785 MHz)												
11570	24.01	Ave.	108	1.2	H	41.4	6.71	26.20	45.92	54	8.08	harmonic
11570	23.65	Ave.	174	1.0	V	40.4	6.71	26.20	44.56	54	9.44	harmonic
11570	41.82	PK	108	1.2	H	41.4	6.71	26.20	63.73	74	10.27	harmonic
11570	41.22	PK	174	1.0	V	40.4	6.71	26.20	62.13	74	11.87	harmonic
802.11n HT20, High Channel (5825 MHz)												
11650	23.37	Ave.	358	1.1	H	41.4	6.71	26.20	45.28	54	8.72	harmonic
11650	23.21	Ave.	211	1.2	V	40.4	6.71	26.20	44.12	54	9.88	harmonic
11650	40.88	PK	358	1.1	H	41.4	6.71	26.20	62.79	74	11.21	harmonic
11650	40.36	PK	211	1.2	V	40.4	6.71	26.20	61.27	74	12.73	harmonic

Indicated		Detector (PK/Ave.)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247/15.209/15.205			
Frequency (MHz)	S.A. Reading (dBμV)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
802.11n HT40, Low Channel (5755 MHz)												
11510	22.13	Ave.	114	1.4	H	41.4	6.69	26.2	44.02	54	9.98	harmonic
11510	42.54	PK	114	1.4	H	41.4	6.69	26.2	64.43	74	9.57	harmonic
11510	22.98	Ave.	32	1.5	V	40.4	6.69	26.2	43.87	54	10.13	harmonic
11510	43.65	PK	32	1.5	V	40.4	6.69	26.2	64.54	74	9.46	harmonic
5460	42.45	PK	258	1.2	H	36.7	4.49	26.7	56.94	74	17.06	spurious
5460	23.08	Ave.	258	1.2	H	36.7	4.49	26.7	37.57	54	16.43	spurious
5460	43.52	PK	45	1.2	V	35.9	4.49	26.7	57.21	74	16.79	spurious
5460	22.35	Ave.	45	1.2	V	35.9	4.49	26.7	36.04	54	17.96	spurious
802.11n HT40, High Channel (5795 MHz)												
11590	23.82	Ave.	12	1.2	H	41.4	6.71	26.2	45.73	54	8.27	harmonic
11590	43.12	PK	12	1.2	H	41.4	6.71	26.2	65.03	74	8.97	harmonic
11590	22.44	Ave.	325	1.1	V	40.4	6.71	26.2	43.35	54	10.65	harmonic
11590	42.85	PK	325	1.1	V	40.4	6.71	26.2	63.76	74	10.24	harmonic

3) Above 1 GHz: (with Panel antenna 23 dBi)

Indicated		Detector (PK/Ave.)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247/15.209/15.205			
Frequency (MHz)	S.A. Reading (dBμV)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
802.11a, Low Channel (5745 MHz)												
11490	44.52	PK	0	1.0	H	40.4	6.69	26.20	65.41	74	8.59	harmonic
11490	43.1	PK	0	1.0	V	41.4	6.69	26.20	64.99	74	9.01	harmonic
11490	23.65	Ave.	0	1.0	H	40.4	6.69	26.20	44.54	54	9.46	harmonic
11490	22.36	Ave.	0	1.0	V	41.4	6.69	26.20	44.25	54	9.75	harmonic
5460	40.78	PK	0	1.0	V	36.7	4.49	26.70	55.27	74	18.73	spurious
5460	21.45	Ave.	0	1.0	H	35.9	4.49	26.70	35.14	54	18.86	spurious
5460	41.23	PK	0	1.0	H	35.9	4.49	26.70	54.92	74	19.08	spurious
5460	20.35	Ave.	0	1.0	V	36.7	4.49	26.70	34.84	54	19.16	spurious
802.11a, Middle Channel (5785 MHz)												
11570	43.51	PK	0	1.0	H	40.4	6.71	26.20	64.42	74	9.58	harmonic
11570	22.47	Ave.	0	1.0	V	41.4	6.71	26.20	44.38	54	9.62	harmonic
11570	23.20	Ave.	0	1.0	H	40.4	6.71	26.20	44.11	54	9.89	harmonic
11570	42.17	PK	0	1.0	V	41.4	6.71	26.20	64.08	74	9.92	harmonic
802.11a, High Channel (5825 MHz)												
11650	41.28	PK	0	1.0	V	41.4	6.71	26.20	63.19	74	10.81	harmonic
11650	21.17	Ave.	0	1.0	V	41.4	6.71	26.20	43.08	54	10.92	harmonic
11650	21.44	Ave.	0	1.0	H	40.4	6.71	26.20	42.35	54	11.65	harmonic
11650	41.32	PK	0	1.0	H	40.4	6.71	26.20	62.23	74	11.77	harmonic
Indicated		Detector (PK/Ave.)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247/15.209/15.205			
Frequency (MHz)	S.A. Reading (dBμV)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
802.11n HT20, Low Channel (5745 MHz)												
11490	22.57	Ave.	0	1.0	V	41.4	6.69	26.20	44.46	54	9.54	harmonic
11490	42.32	PK	0	1.0	V	41.4	6.69	26.20	64.21	74	9.79	harmonic
11490	43.25	PK	0	1.0	H	40.4	6.69	26.20	64.14	74	9.86	harmonic
11490	23.14	Ave.	0	1.0	H	40.4	6.69	26.20	44.03	54	9.97	harmonic
5016	43.95	PK	0	1.0	V	36.7	4.49	26.70	58.44	74	15.56	spurious
5016	44.21	PK	0	1.0	H	35.9	4.49	26.70	57.9	74	16.10	spurious
5016	24.16	Ave.	0	1.0	H	35.9	4.49	26.70	37.85	54	16.15	spurious
5016	22.36	Ave.	0	1.0	V	36.7	4.49	26.70	36.85	54	17.15	spurious
802.11n HT20, Middle Channel (5785 MHz)												
11570	42.54	PK	0	1.0	V	41.4	6.71	26.20	64.45	74	9.55	harmonic
11570	22.17	Ave.	0	1.0	V	41.4	6.71	26.20	44.08	54	9.92	harmonic
11570	22.96	Ave.	0	1.0	H	40.4	6.71	26.20	43.87	54	10.13	harmonic
11570	42.68	PK	0	1.0	H	40.4	6.71	26.20	63.59	74	10.41	harmonic
802.11n HT20, High Channel (5825 MHz)												
11650	43.04	PK	0	1.0	V	41.4	6.71	26.20	64.95	74	9.05	harmonic
11650	22.41	Ave.	0	1.0	V	41.4	6.71	26.20	44.32	54	9.68	harmonic
11650	43.21	PK	0	1.0	H	40.4	6.71	26.20	64.12	74	9.88	harmonic
11650	22.54	Ave.	0	1.0	H	40.4	6.71	26.20	43.45	54	10.55	harmonic

Indicated		Detector (PK/Ave.)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247/15.209/15.205			
Frequency (MHz)	S.A. Reading (dBμV)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
802.11n HT40, Low Channel (5755 MHz)												
11510	23.56	Ave.	0	1.0	H	41.4	6.69	26.2	45.45	54	8.55	harmonic
11510	24.32	Ave.	0	1.0	V	40.4	6.69	26.2	45.21	54	8.79	harmonic
11510	43.45	PK	0	1.0	V	40.4	6.69	26.2	64.34	74	9.66	harmonic
11510	42.11	PK	0	1.0	H	41.4	6.69	26.2	64.00	74	10.00	harmonic
5460	23.58	Ave.	0	1.0	H	36.7	4.49	26.7	38.07	54	15.93	spurious
5460	43.25	PK	0	1.0	H	36.7	4.49	26.7	57.74	74	16.26	spurious
5460	43.65	PK	0	1.0	V	35.9	4.49	26.7	57.34	74	16.66	spurious
5460	23.45	Ave.	0	1.0	V	35.9	4.49	26.7	37.14	54	16.86	spurious
802.11n HT40, High Channel (5795 MHz)												
11590	24.54	Ave.	0	1.0	H	41.4	6.71	26.2	46.45	54	7.55	harmonic
11590	43.78	PK	0	1.0	H	41.4	6.71	26.2	65.69	74	8.31	harmonic
11590	24.56	Ave.	0	1.0	V	40.4	6.71	26.2	45.47	54	8.53	harmonic
11590	44.37	PK	0	1.0	V	40.4	6.71	26.2	65.28	74	8.72	harmonic


4) Above 1 GHz: (with Dish antenna 34 dBi)

Indicated		Detector (PK/Ave.)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247/15.209/15.205			
Frequency (MHz)	S.A. Reading (dBμV)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
802.11a, Low Channel (5745 MHz)												
11490	43.54	PK	0	1.3	H	40.4	6.69	26.20	64.43	74	9.57	harmonic
11490	42.32	PK	0	1.3	V	41.4	6.69	26.20	64.21	74	9.79	harmonic
11490	22.18	Ave.	0	1.3	H	40.4	6.69	26.20	43.07	54	10.93	harmonic
11490	21.07	Ave.	0	1.3	V	41.4	6.69	26.20	42.96	54	11.04	harmonic
5460	43.15	PK	0	1.3	H	35.9	4.49	26.70	56.84	74	17.16	spurious
5460	42.11	PK	0	1.3	V	36.7	4.49	26.70	56.60	74	17.40	spurious
5460	22.08	Ave.	0	1.3	H	35.9	4.49	26.70	35.77	54	18.23	spurious
5460	21.08	Ave.	0	1.3	V	36.7	4.49	26.70	35.57	54	18.43	spurious
802.11a, Middle Channel (5785 MHz)												
11570	43.51	PK	0	1.2	H	40.4	6.71	26.20	64.42	74	9.58	harmonic
11570	22.47	Ave.	0	1.3	V	41.4	6.71	26.20	44.38	54	9.62	harmonic
11570	23.20	Ave.	0	1.2	H	40.4	6.71	26.20	44.11	54	9.89	harmonic
11570	42.17	PK	0	1.3	V	41.4	6.71	26.20	64.08	74	9.92	harmonic
802.11a, High Channel (5825 MHz)												
11650	41.28	PK	0	1.2	V	41.4	6.71	26.20	63.19	74	10.81	harmonic
11650	21.17	Ave.	0	1.2	V	41.4	6.71	26.20	43.08	54	10.92	harmonic
11650	21.44	Ave.	0	1.3	H	40.4	6.71	26.20	42.35	54	11.65	harmonic
11650	41.32	PK	0	1.3	H	40.4	6.71	26.20	62.23	74	11.77	harmonic
Indicated		Detector (PK/Ave.)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247/15.209/15.205			
Frequency (MHz)	S.A. Reading (dBμV)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
802.11n HT20, Low Channel (5745 MHz)												
11490	42.45	PK	0	1.2	V	41.4	6.69	26.20	64.34	74	9.66	harmonic
11490	43.35	PK	0	1.2	H	40.4	6.69	26.20	64.24	74	9.76	harmonic
11490	22.31	Ave.	0	1.2	V	41.4	6.69	26.20	44.20	54	9.80	harmonic
11490	22.32	Ave.	0	1.2	H	40.4	6.69	26.20	43.21	54	10.79	harmonic
5460	44.82	PK	0	1.2	H	35.9	4.49	26.70	58.51	74	15.49	spurious
5460	23.63	Ave.	0	1.2	H	35.9	4.49	26.70	37.32	54	16.68	spurious
5460	42.24	PK	0	1.2	V	36.7	4.49	26.70	56.73	74	17.27	spurious
5460	21.84	Ave.	0	1.2	V	36.7	4.49	26.70	36.33	54	17.67	spurious
802.11n HT20, Middle Channel (5785 MHz)												
11570	42.35	PK	0	1.2	V	41.4	6.71	26.20	64.26	74	9.74	harmonic
11570	22.11	Ave.	0	1.2	V	41.4	6.71	26.20	44.02	54	9.98	harmonic
11570	42.45	PK	0	1.2	H	40.4	6.71	26.20	63.36	74	10.64	harmonic
11570	22.01	Ave.	0	1.2	H	40.4	6.71	26.20	42.92	54	11.08	harmonic
802.11n HT20, High Channel (5825 MHz)												
11650	43.32	PK	0	1.2	H	40.4	6.71	26.20	64.23	74	9.77	harmonic
11650	22.23	Ave.	0	1.2	V	41.4	6.71	26.20	44.14	54	9.86	harmonic
11650	42.02	PK	0	1.2	V	41.4	6.71	26.20	63.93	74	10.07	harmonic
11650	22.15	Ave.	0	1.2	H	40.4	6.71	26.20	43.06	54	10.94	harmonic


Indicated		Detector (PK/Ave.)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247/15.209/15.205			
Frequency (MHz)	S.A. Reading (dBμV)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
802.11n HT40, Low Channel (5755 MHz)												
11510	43.84	PK	0	1.3	V	40.4	6.69	26.2	64.73	74	9.27	harmonic
11510	22.35	Ave.	0	1.3	H	41.4	6.69	26.2	44.24	54	9.76	harmonic
11510	23.32	Ave.	0	1.3	V	40.4	6.69	26.2	44.21	54	9.79	harmonic
11510	42.24	PK	0	1.3	H	41.4	6.69	26.2	64.13	74	9.87	harmonic
5460	43.41	PK	0	1.3	V	35.9	4.49	26.7	57.10	74	16.90	spurious
5460	42.32	PK	0	1.3	H	36.7	4.49	26.7	56.81	74	17.19	spurious
5460	21.44	Ave.	0	1.3	H	36.7	4.49	26.7	35.93	54	18.07	spurious
5460	22.16	Ave.	0	1.3	V	35.9	4.49	26.7	35.85	54	18.15	spurious
802.11n HT40, High Channel (5795 MHz)												
11590	44.45	PK	0	1.3	V	40.4	6.71	26.2	65.36	74	8.64	harmonic
11590	43.35	PK	0	1.3	H	41.4	6.71	26.2	65.26	74	8.74	harmonic
11590	23.54	Ave.	0	1.3	V	40.4	6.71	26.2	44.45	54	9.55	harmonic
11590	22.51	Ave.	0	1.3	H	41.4	6.71	26.2	44.42	54	9.58	harmonic

Antenna Port Conducted Spurious Emissions:


802.11a Low Channel, TX0

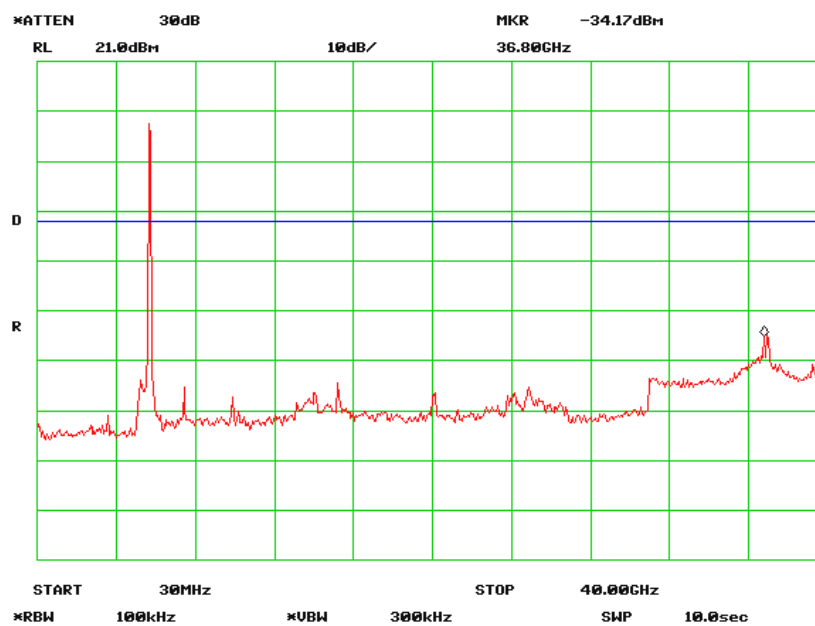


802.11a Middle Channel, TX0

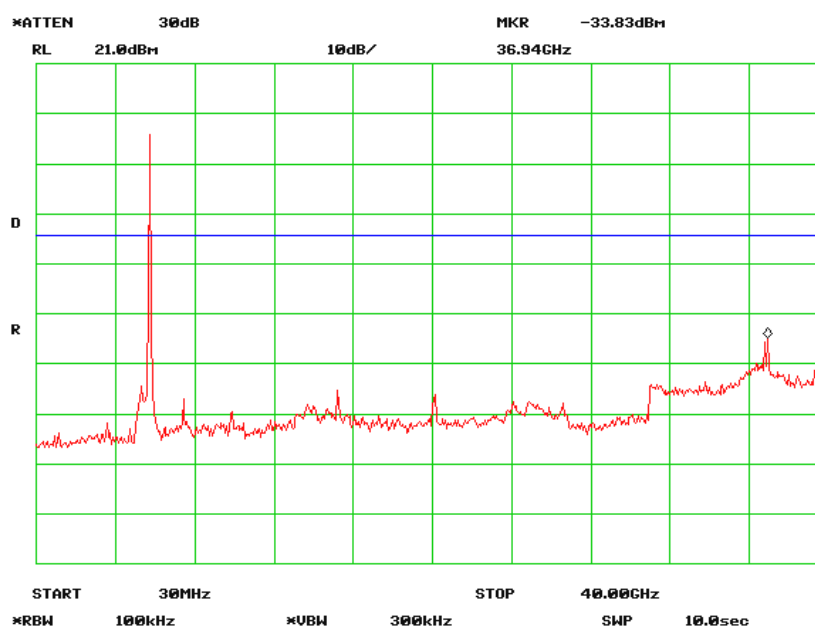


802.11a High Channel, TX0

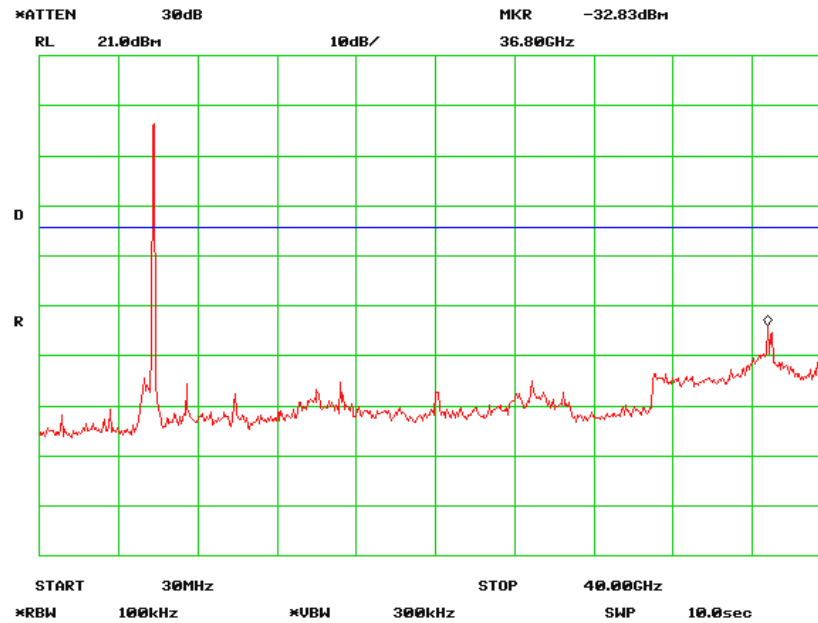


802.11a Low Channel, TX1

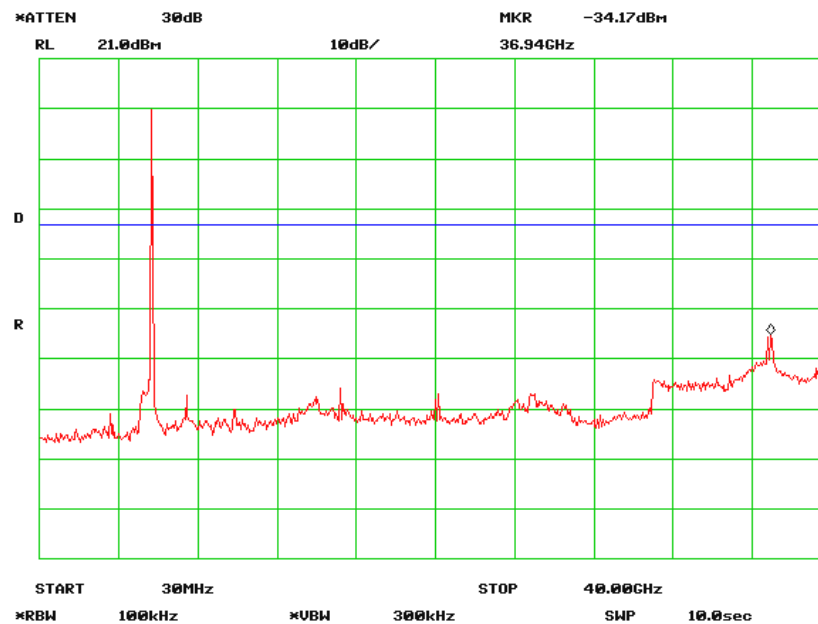


802.11a Middle Channel, TX1

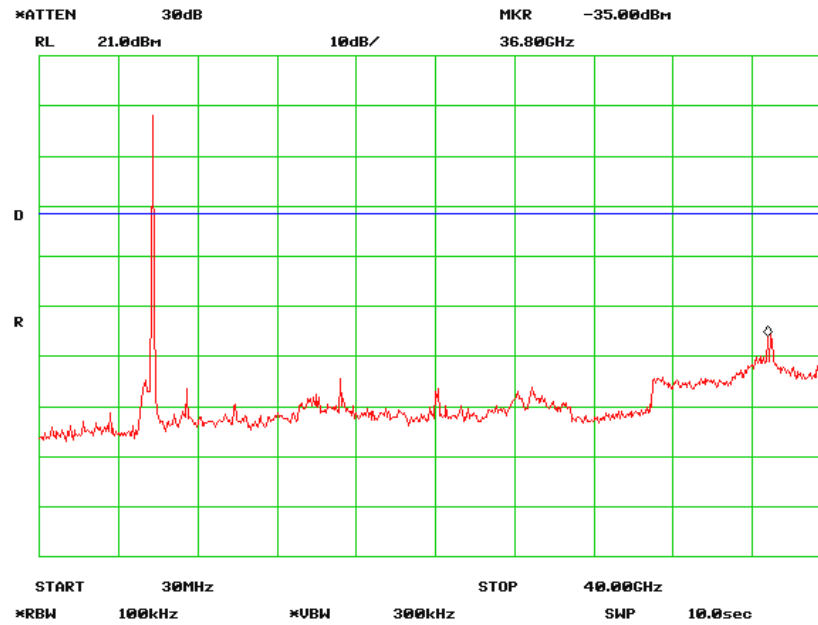


802.11a High Channel, TX1

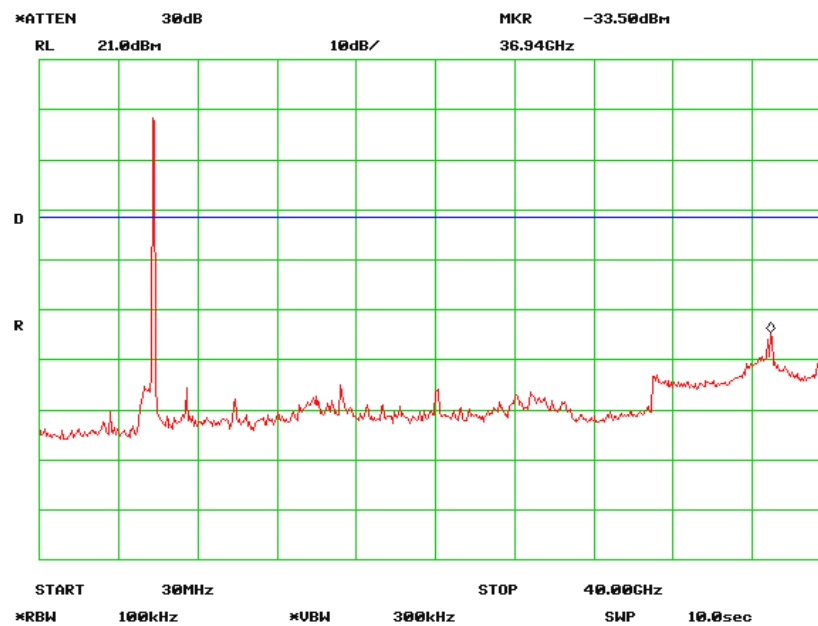


802.11n-HT20 Low Channel, TX0

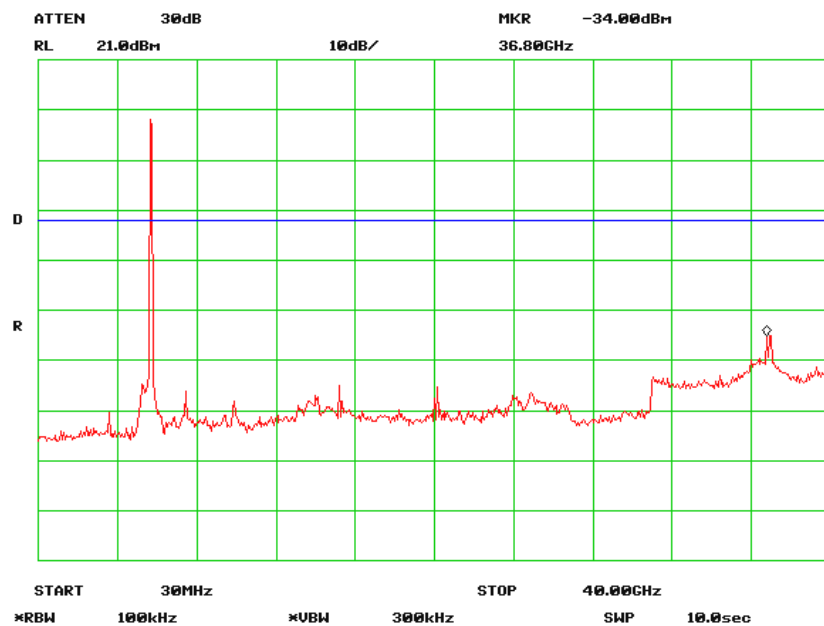


802.11n-HT20 Middle Channel, TX0

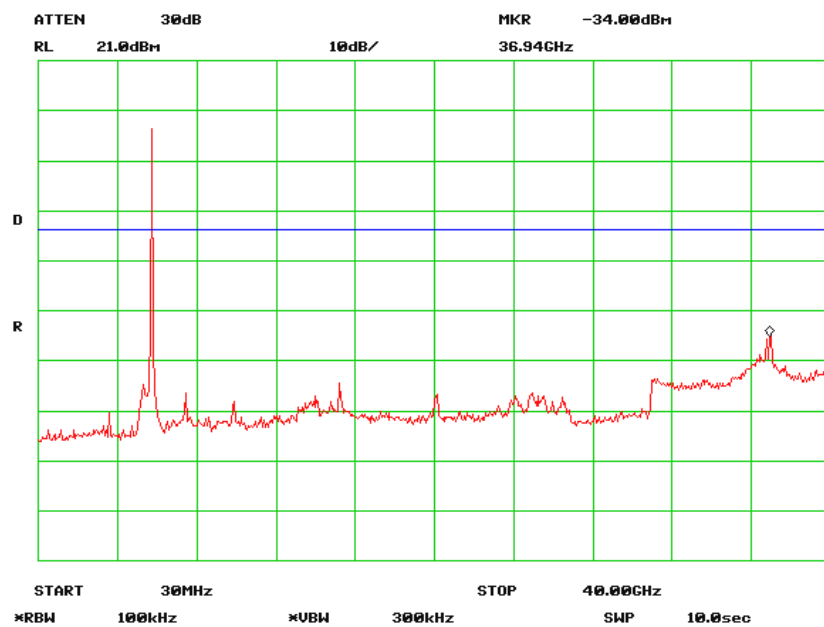


802.11n-HT20 High Channel, TX0

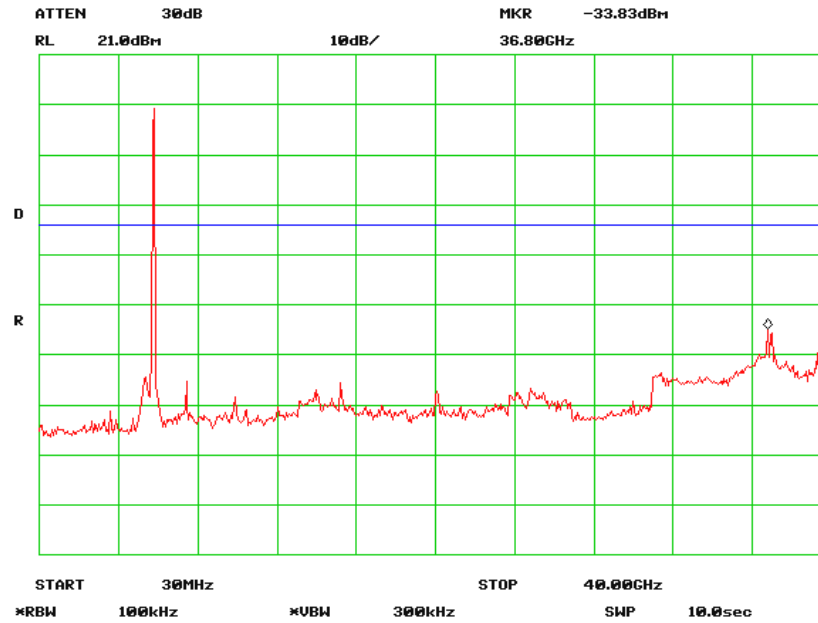


802.11n-HT20 Low Channel, TX1

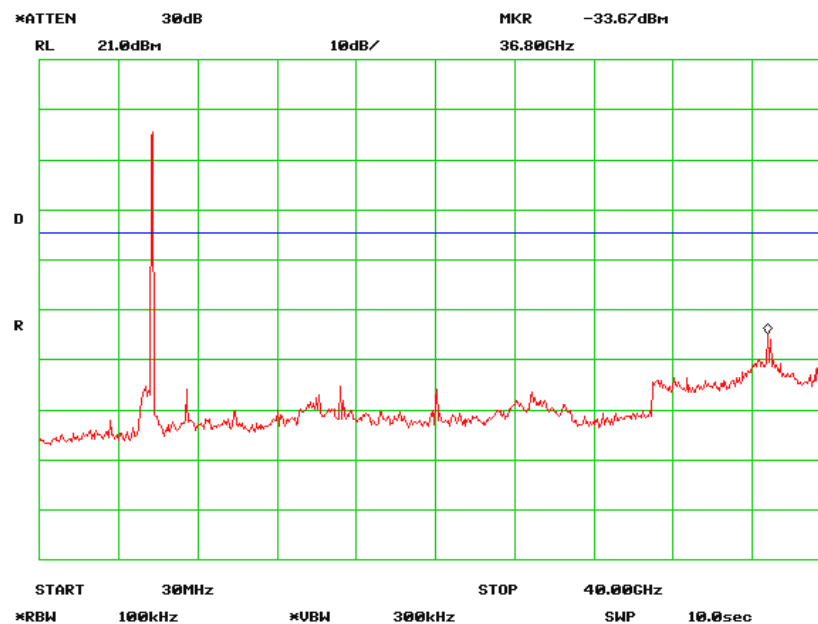


802.11n-HT20 Middle Channel, TX1

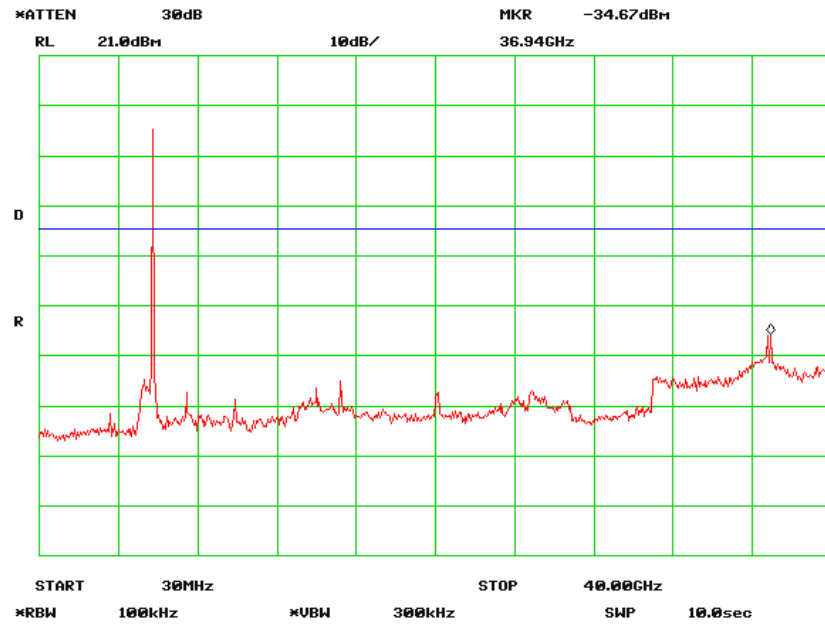


802.11n-HT20 High Channel, TX1

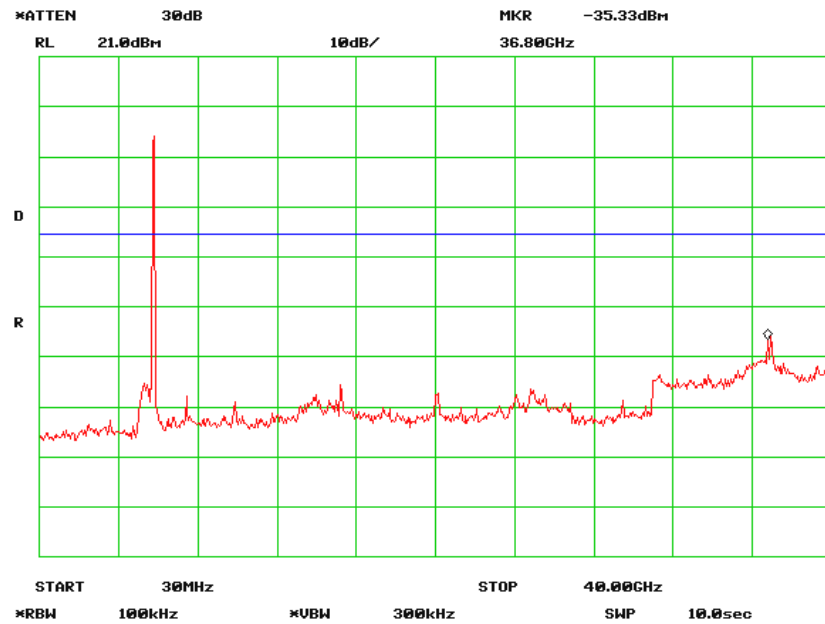


802.11n-HT40 Channel 151, TX0

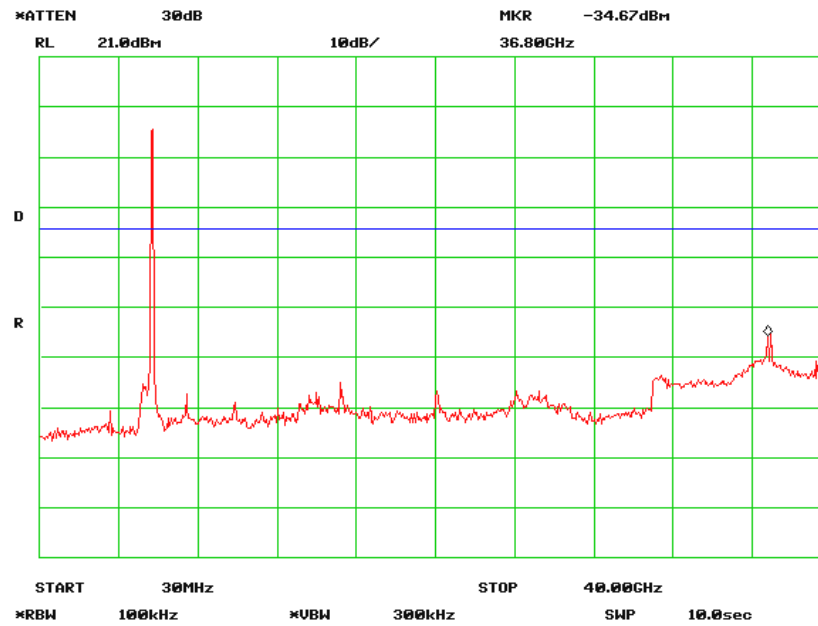


802.11n-HT40 Channel 159, TX0

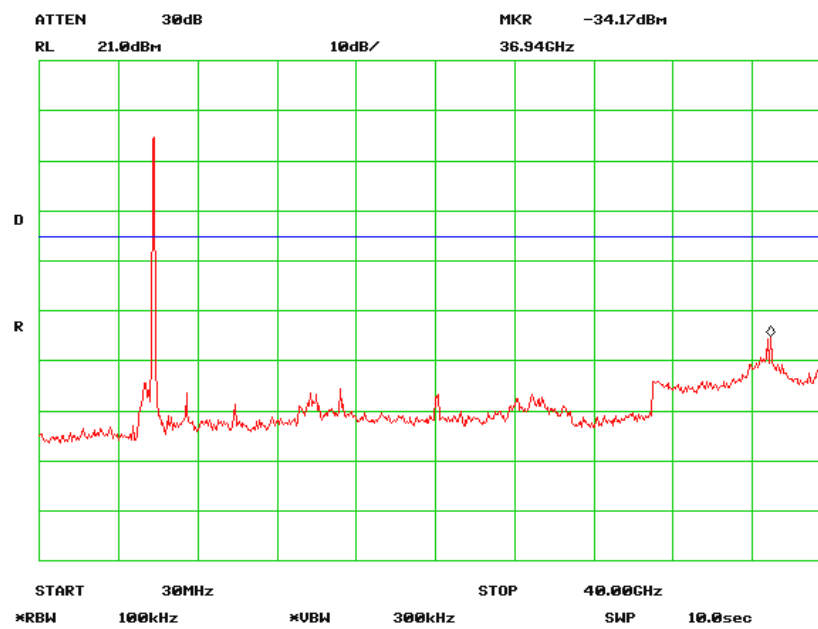

802.11n-HT40 Channel 151, TX1

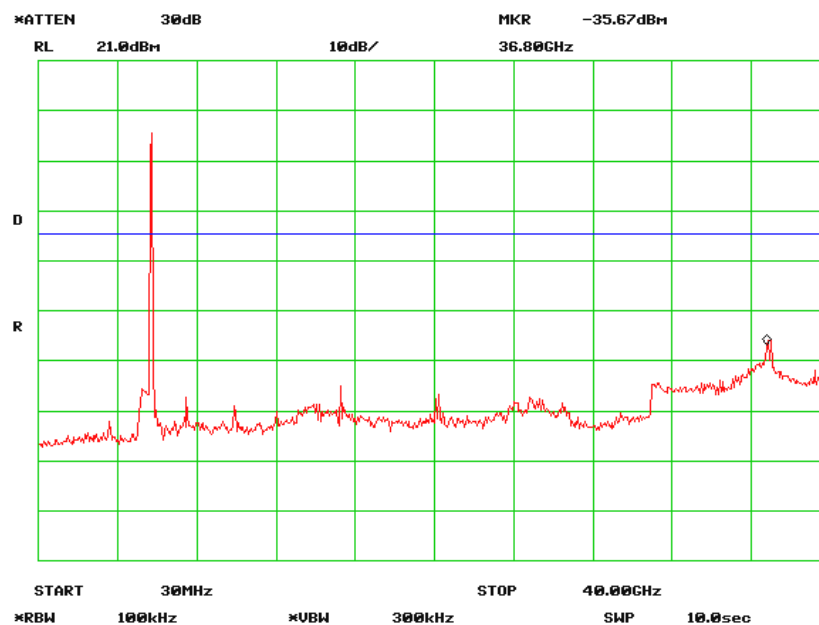

802.11n-HT40 Channel 159, TX1

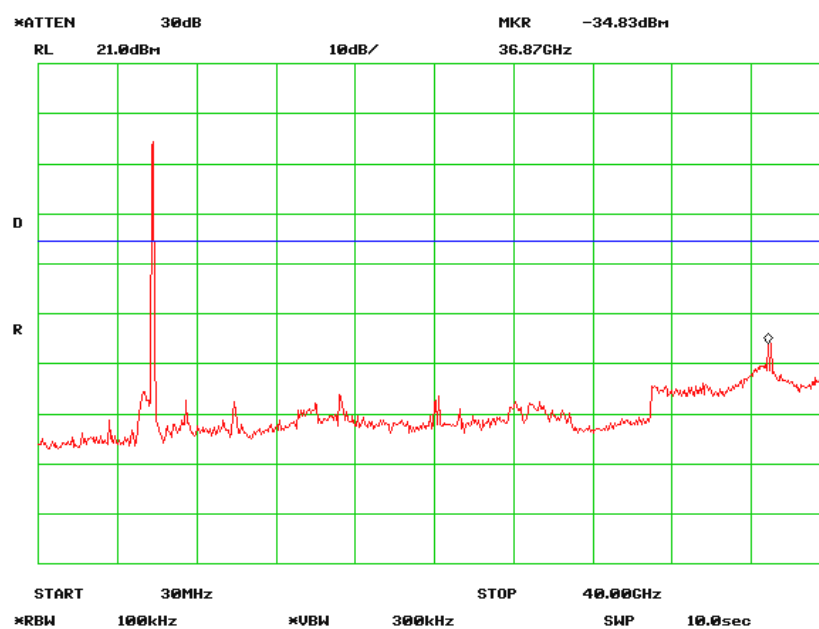

FCC §15.247(a) (2) – 6 dB BANDWIDTH TESTING

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ 26	609358	2011-07-08	2012-07-07

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56%
ATM Pressure:	100.0kPa

The testing was performed by Jim Huang on 2011-11-03 to 2011-12-05.

Test Result: Compliance, please refer to the following tables and plots.

Channel	Frequency (MHz)	Antenna Port	6 dB Bandwidth (MHz)	FCC Part 15.247 Limit (MHz)
802.11a mode				
Low	CH 149 5745 MHz	TX0	15.95	> 0.5
		TX1	15.95	> 0.5
Middle	CH 157 5785 MHz	TX0	15.95	> 0.5
		TX1	15.95	> 0.5
High	CH 165 5825 MHz	TX0	15.95	> 0.5
		TX1	15.95	> 0.5
802.11n-HT20 mode				
Low	CH 149 5745 MHz	TX0	16.27	> 0.5
		TX1	16.59	> 0.5
Middle	CH 157 5785 MHz	TX0	16.43	> 0.5
		TX1	16.59	> 0.5
High	CH 165 5825 MHz	TX0	16.27	> 0.5
		TX1	16.59	> 0.5
802.11n-HT40 mode				
Low	CH 151 5755 MHz	TX0	35.27	> 0.5
		TX1	35.27	> 0.5
High	CH 159 5795 MHz	TX0	35.27	> 0.5
		TX1	35.27	> 0.5

Delta 1 [T1] -0.53 dB RBW 100 kHz RF Att 40 dB

Ref Lvl 31 dBm 15.95190381 MHz SWT 10 ms Unit dBm

1 dB Offset

D1 13.68 dBm

D2 7.68 dBm

1MAX

1 [T1] 13.67 dBm

1 [T2] -0.53 dBm

15.95190381 MHz

Center 5.745 GHz 4 MHz/ Span 40 MHz

Date: 3.NOV.2011 11:07:06

Delta 1 [T1] 0.83 dB RBW 100 kHz RF Att 40 dB

Ref Lvl 31 dBm 15.95190381 MHz SWT 10 ms Unit dBm

1 dB Offset

1 [T1] 13.66 dBm

D1 13.66 dBm

D2 7.66 dBm


1MAX

1MA


Center 5.785 GHz 4 MHz/ Span 40 MHz

Date: 3.NOV.2011 10:53:04


802.11a High Channel, TX0

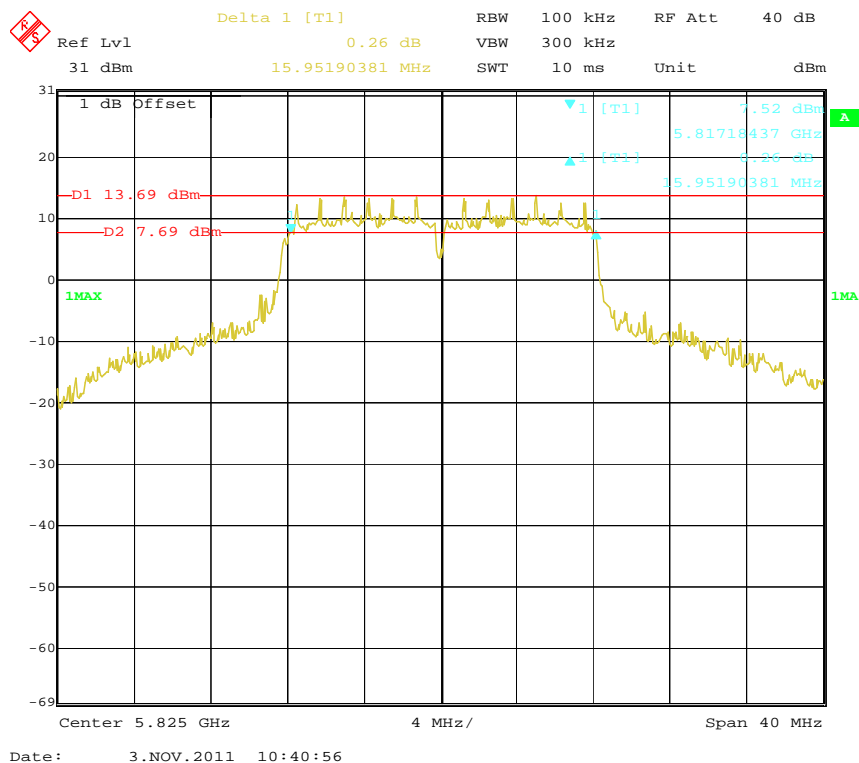


802.11a Low Channel, TX1

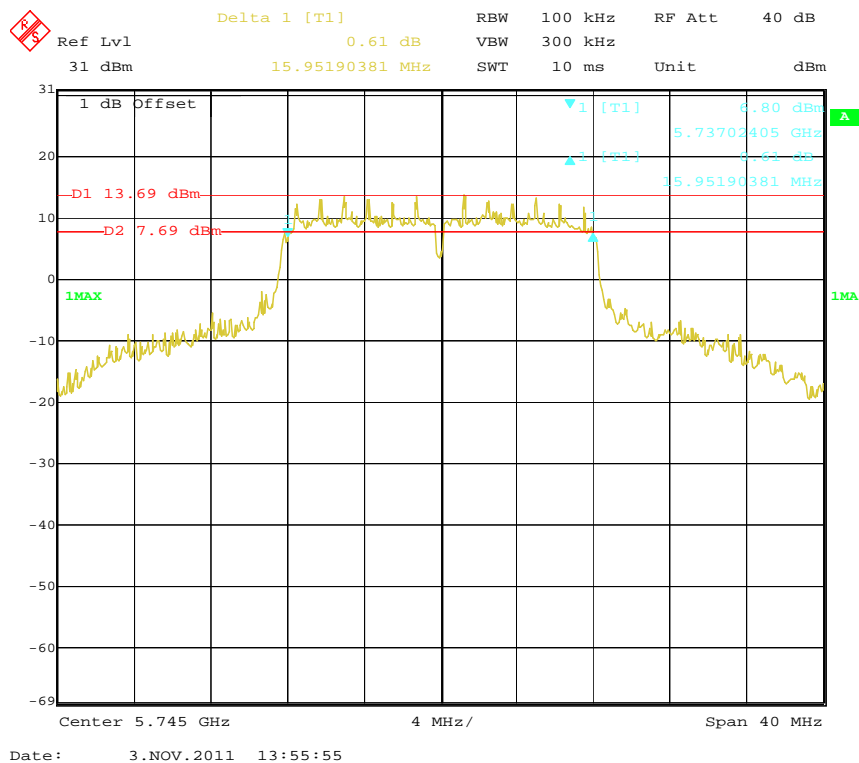


802.11a Middle Channel, TX1

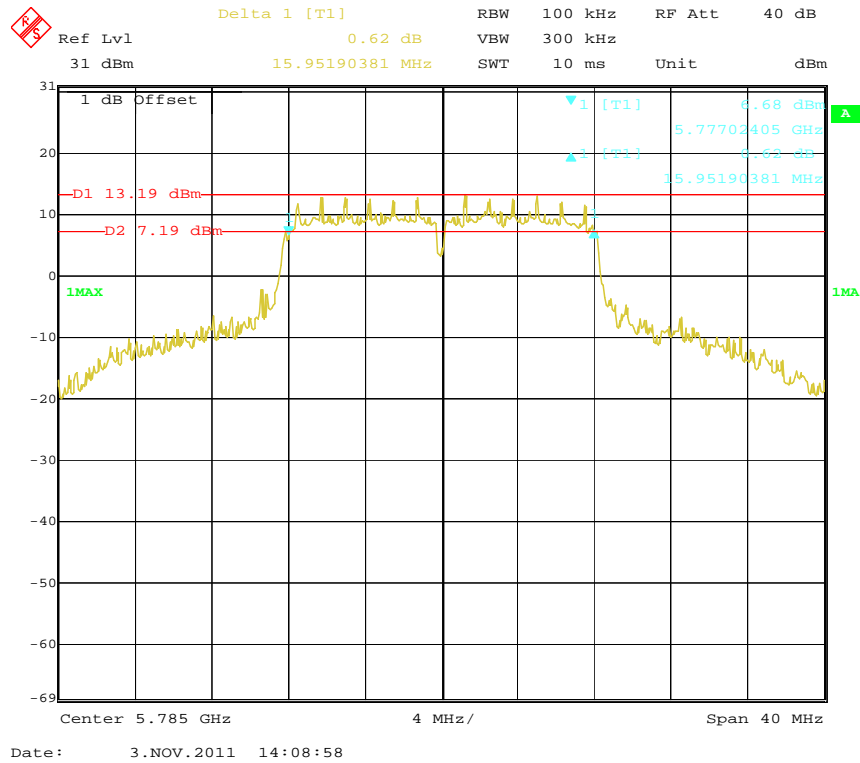


802.11a High Channel, TX1

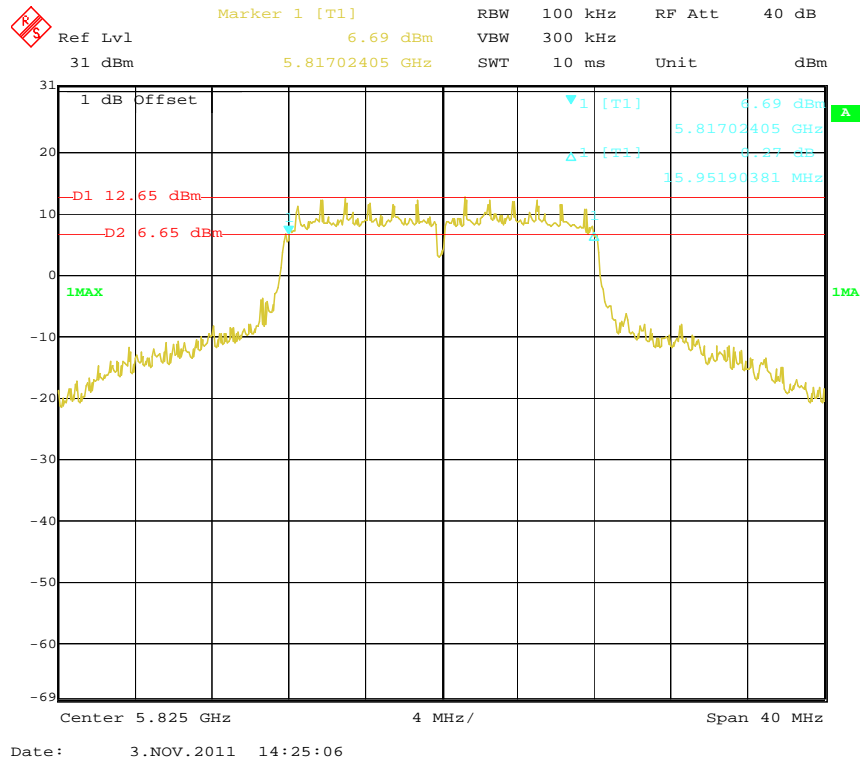

802.11n-HT20 Low Channel, TX0

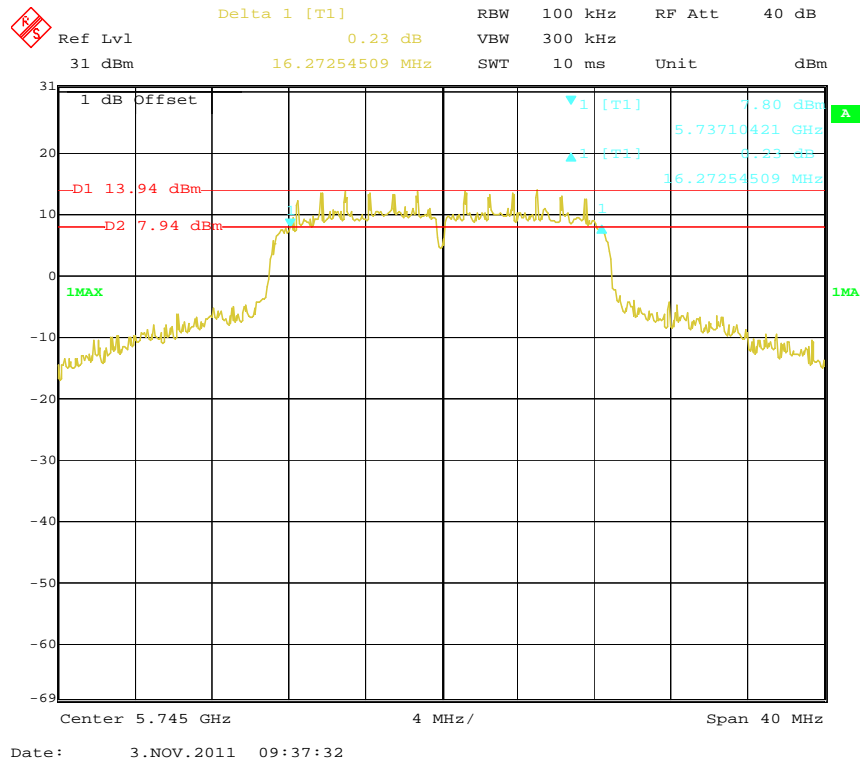

802.11n-HT20 Middle Channel, TX0

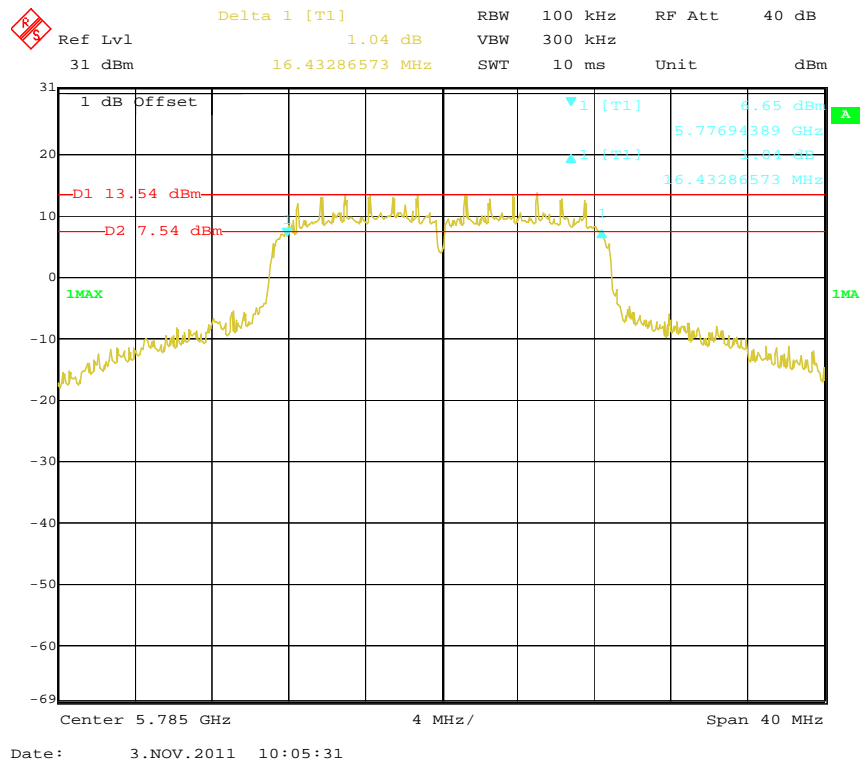

[illegible]

Delta 1 [T1] -0.20 dB RBW 100 kHz RF Att 40 dB

Ref Lvl 31 dBm 16.59318637 MHz VSW 300 kHz Unit dBm

1 dB Offset

D1 13.65 dBm

D2 7.65 dBm

1MAX

1 [T1] 13.72 dBm


1 [T2] 13.18 dBm

16.59318637 MHz


Center 5.745 GHz 4 MHz/ Span 40 MHz

Date: 3.NOV.2011 14:39:54


802.11n-HT20 Middle Channel, TX1

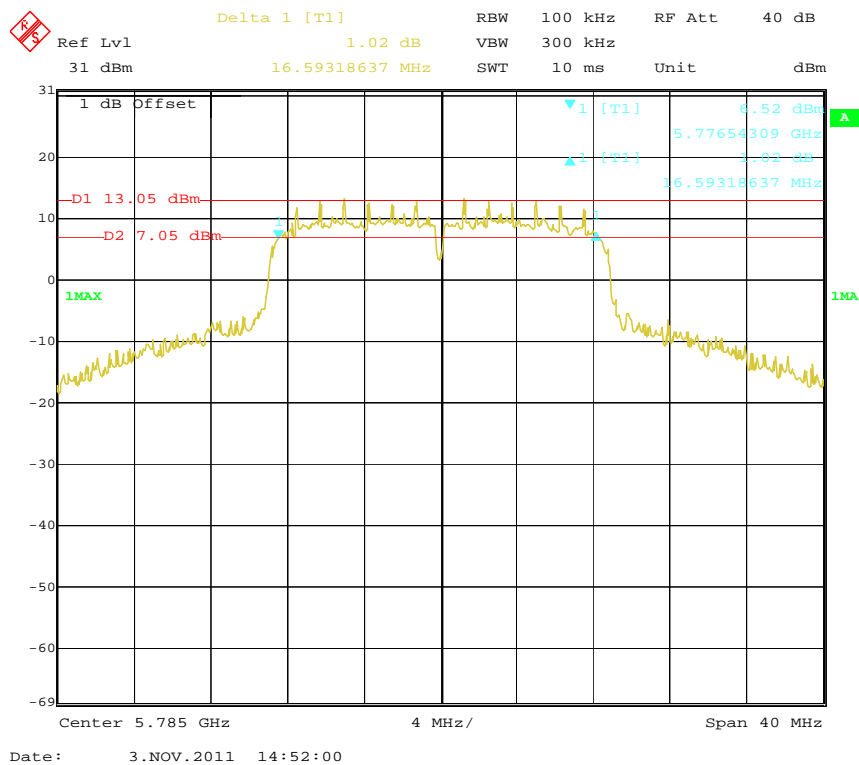


802.11n-HT20 High Channel, TX1

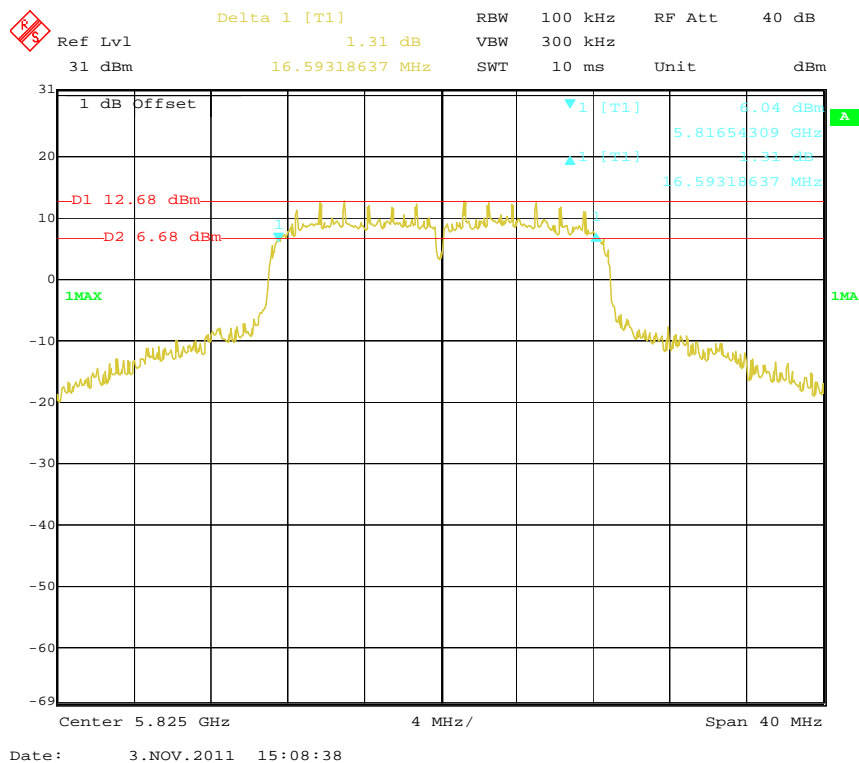

802.11n-HT40 Channel 151, TX0

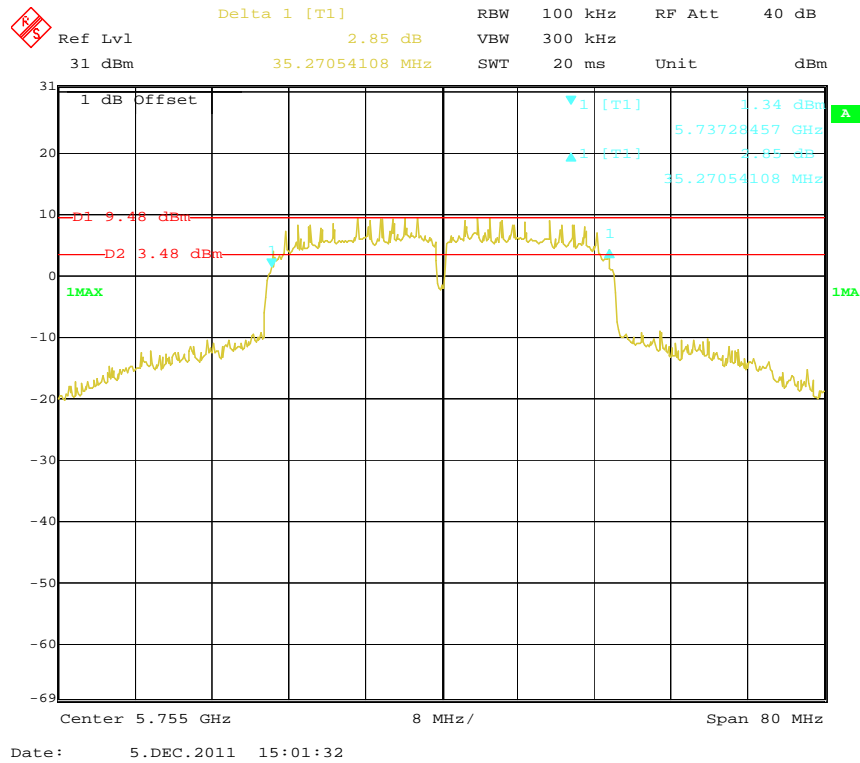

802.11n-HT40 Channel 159, TX0

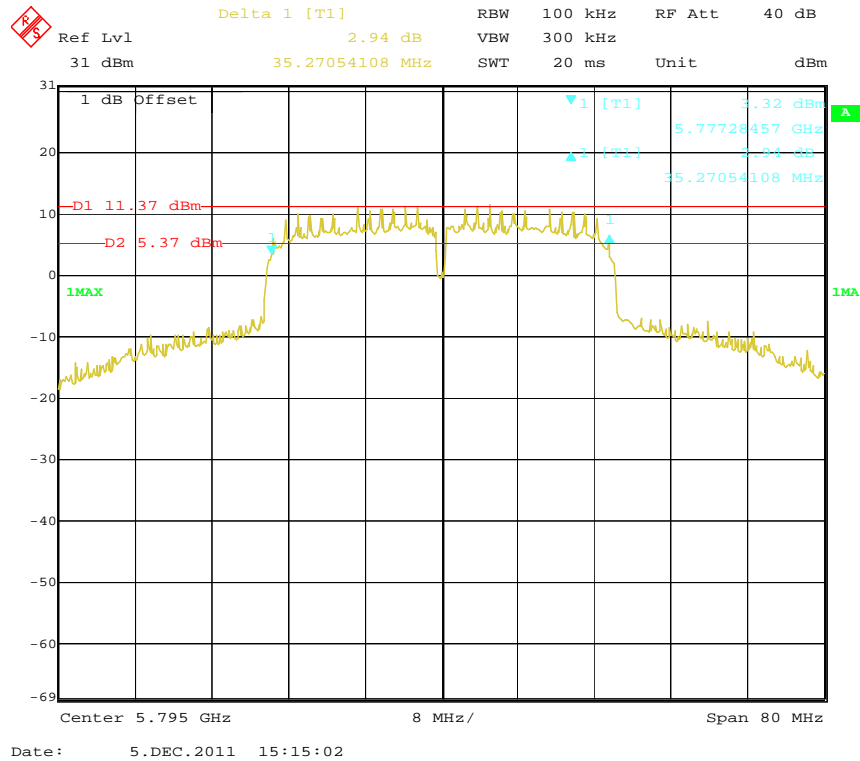

Ref Lvl 31 dBm Delta 1 [T1] 2.82 dB RBW 100 kHz RF Att 40 dB

31 dBm 35.27054108 MHz SWT 20 ms Unit dBm

1 dB Offset

1 [T1] 2.37 dBm 5.73728457 GHz

D1 10 32 dBm

D2 4.32 dBm

1MAX

Center 5.755 GHz 8 MHz/ Span 80 MHz

Date: 5.DEC.2011 15:45:18

[illegible]

FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ 26	609358	2011-07-08	2012-07-07

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa


The testing was performed by Jim Huang on 2011-11-03 to 2011-12-05.

Test Mode: Transmitting


Channel	Frequency (MHz)	Antenna Port	Conducted Output Power (dBm)	Calculated Total Power (dBm)	FCC Limit (dBm)	Result
802.11a mode						
Low	CH 149 5745 MHz	TX0	25.42	/	30	Pass
		TX1	25.43			
Middle	CH 157 5785 MHz	TX0	25.27	/	30	Pass
		TX1	25.07			
High	CH 165 5825 MHz	TX0	25.30	/	30	Pass
		TX1	24.86			
802.11n-HT20 mode						
Low	CH 149 5745 MHz	TX0	25.61	28.56	30	Pass
		TX1	25.50			
Middle	CH 157 5785 MHz	TX0	25.34	28.19	30	Pass
		TX1	25.01			
High	CH 165 5825 MHz	TX0	25.40	28.05	30	Pass
		TX1	24.66			
802.11n-HT40 mode						
Low	CH 151 5755 MHz	TX0	24.32	27.69	30	Pass
		TX1	25.01			
High	CH 159 5795 MHz	TX0	25.64	28.42	30	Pass
		TX1	25.17			

Note: The device operating in 5725-5850 MHz band and used for fixed Point to Point, according to FCC Part 15.247(c)(ii), the conducted output power is not necessary to reduce.


802.11a RF Output Power, Low Channel, TX0

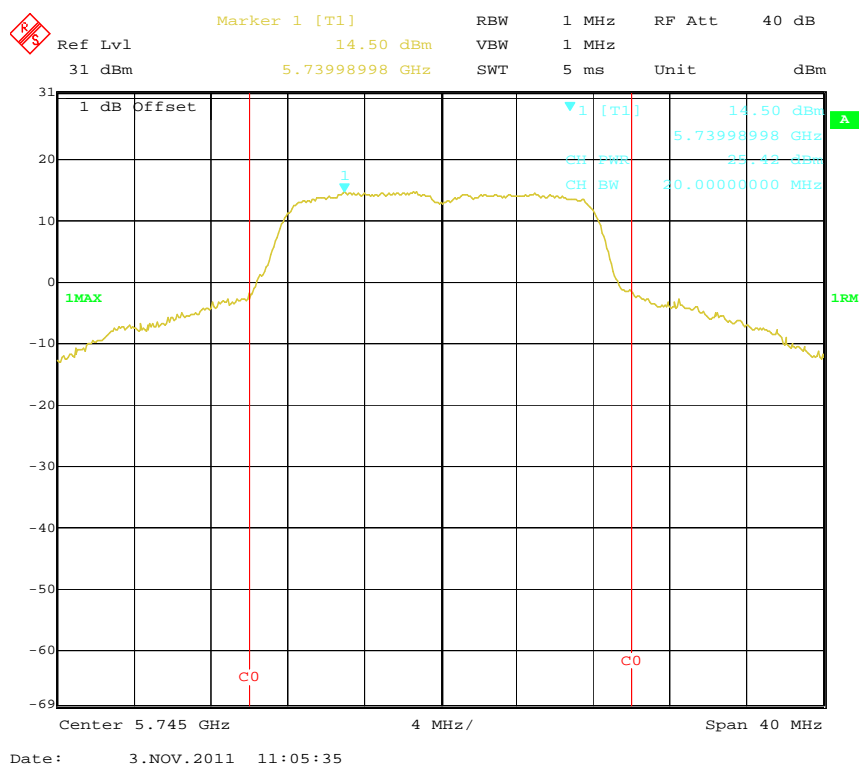


802.11a RF Output Power, Middle Channel, TX0


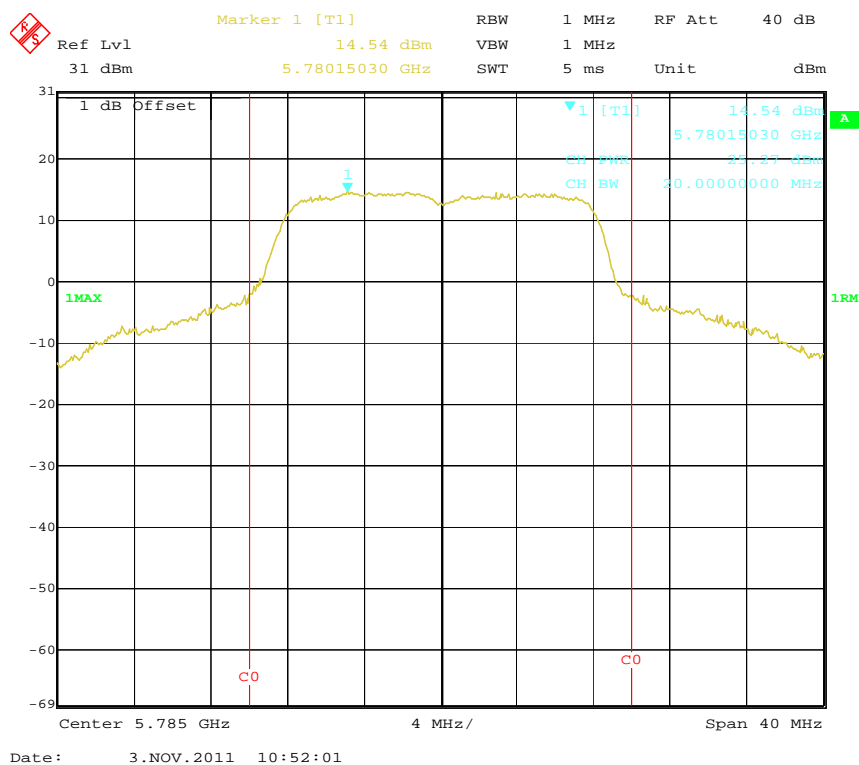




802.11a RF Output Power, High Channel, TX0


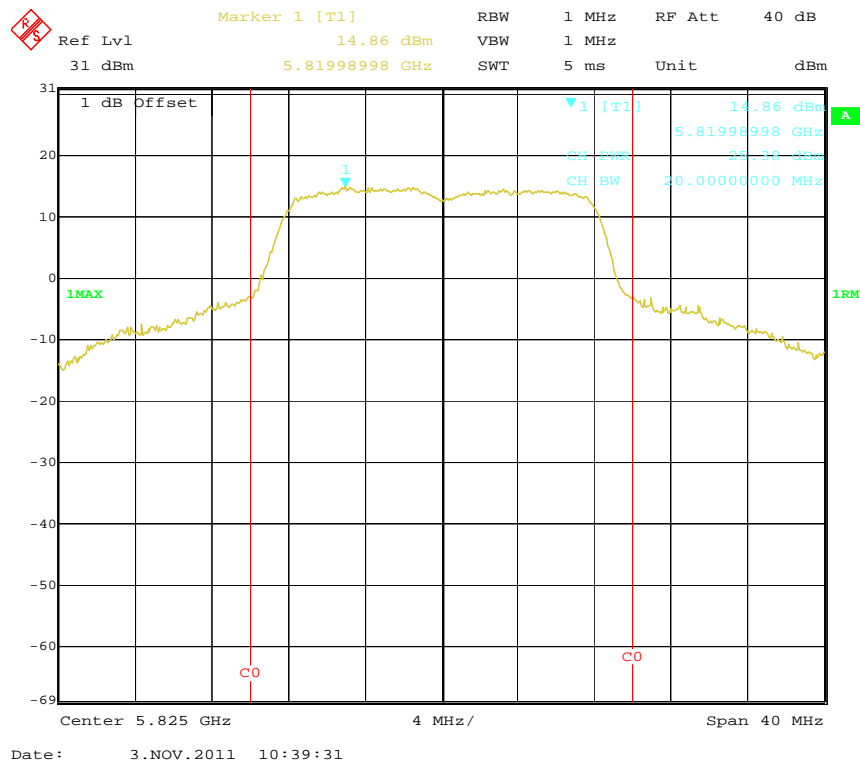




802.11a RF Output Power, Low Channel, TX1


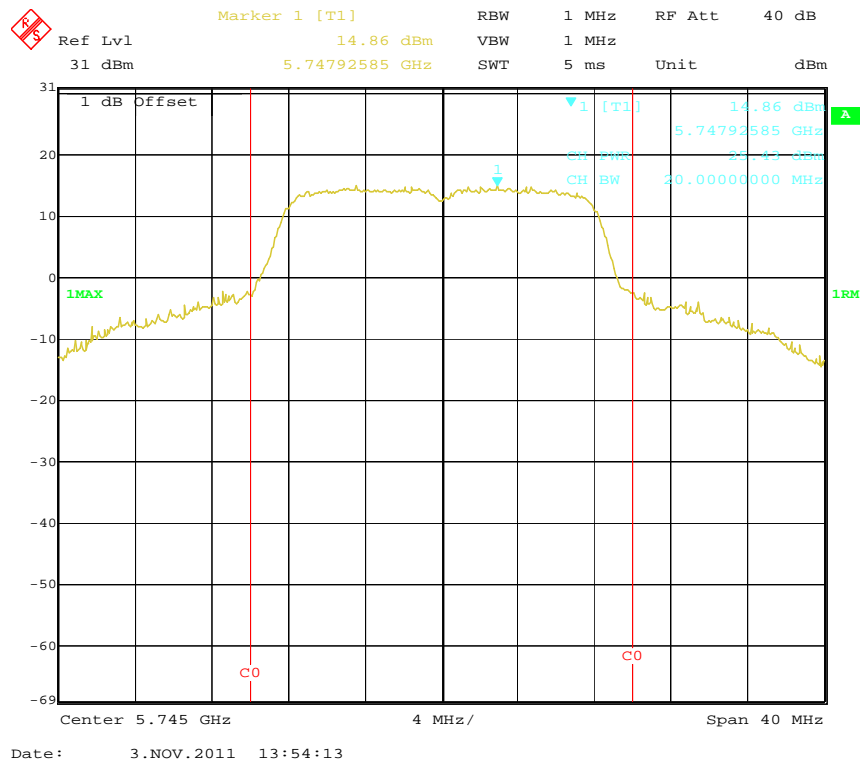


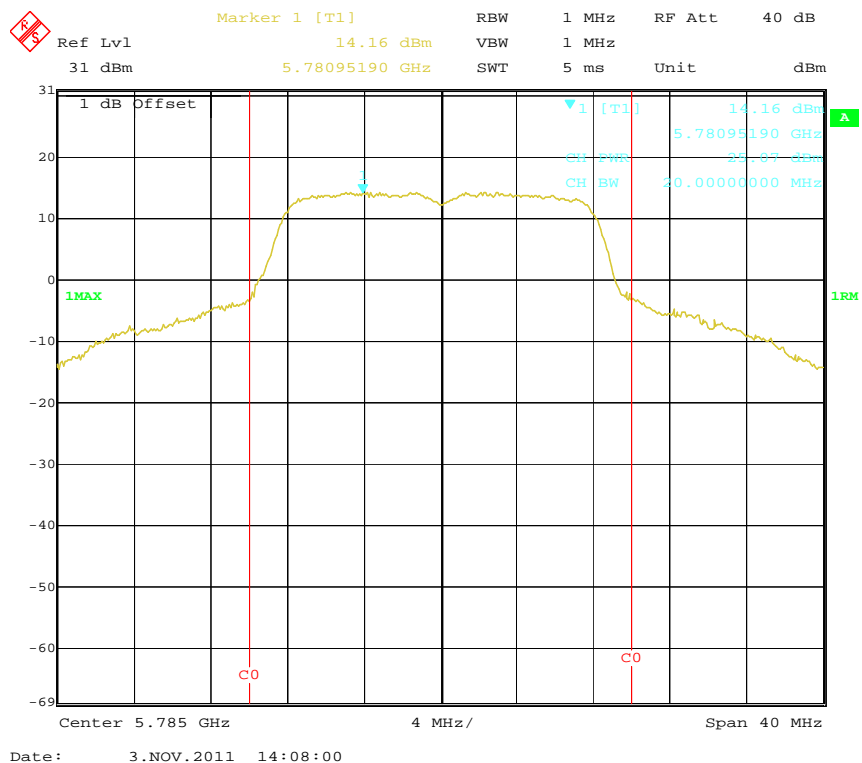
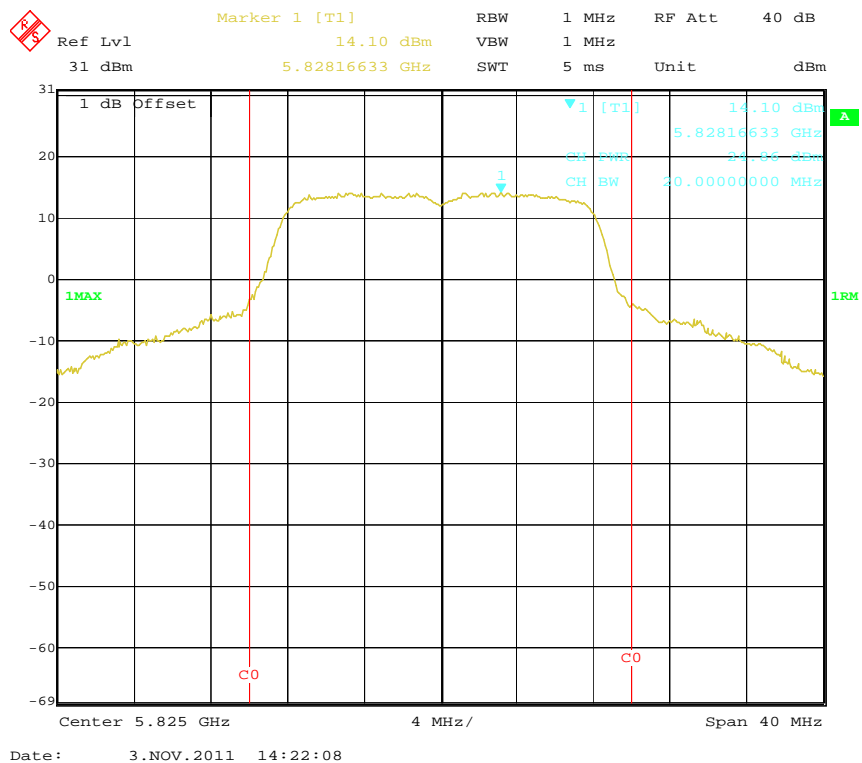
802.11a RF Output Power, Middle Channel, TX1**802.11a RF Output Power, High Channel, TX1**

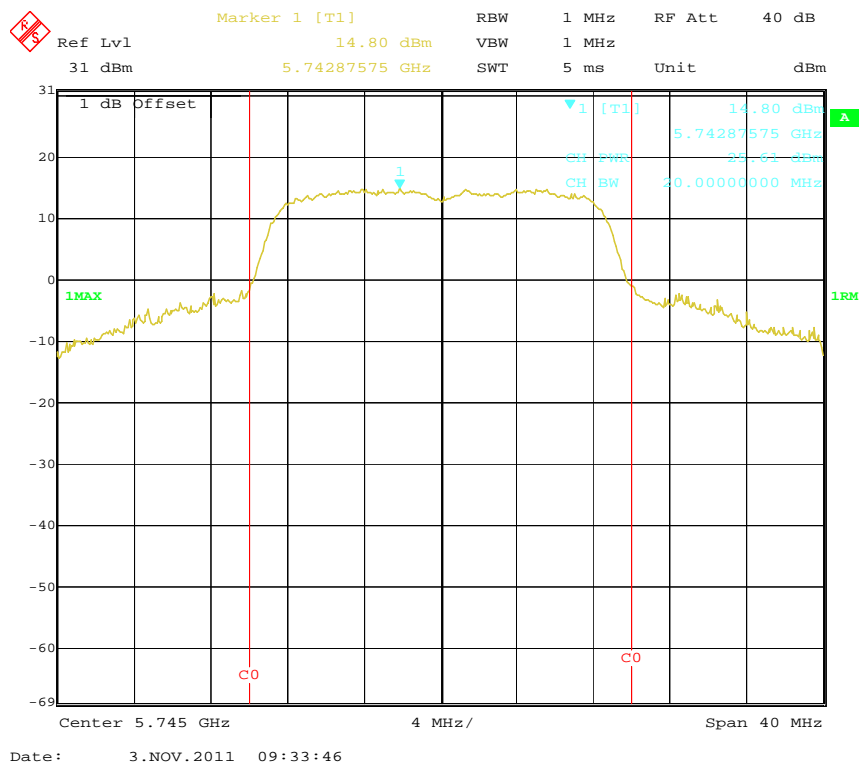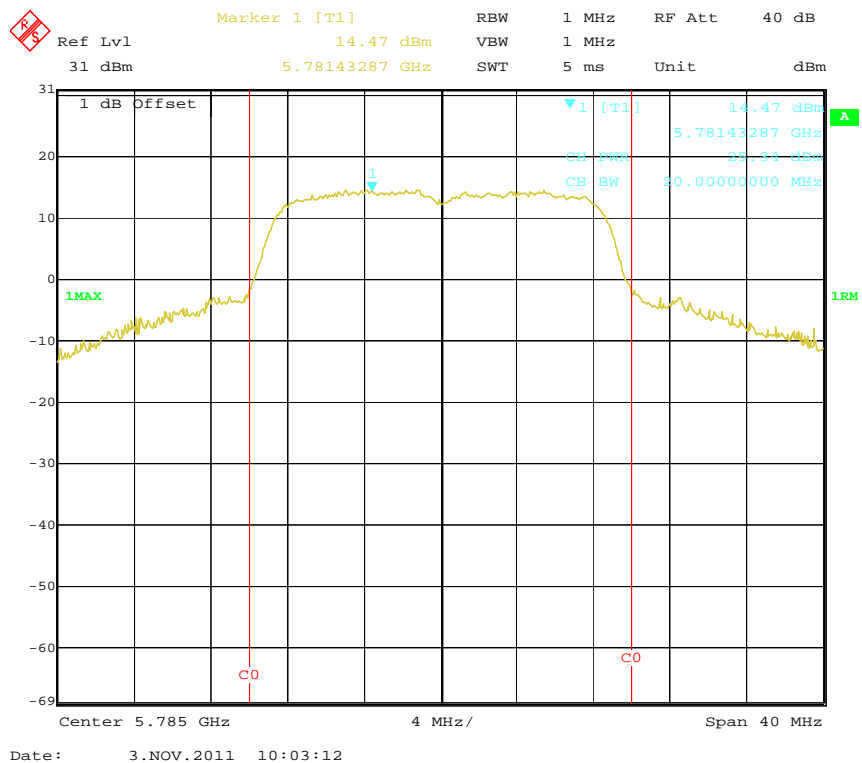802.11n-HT20 RF Output Power, Low Channel, TX0**802.11n-HT20 RF Output Power, Middle Channel, TX0**

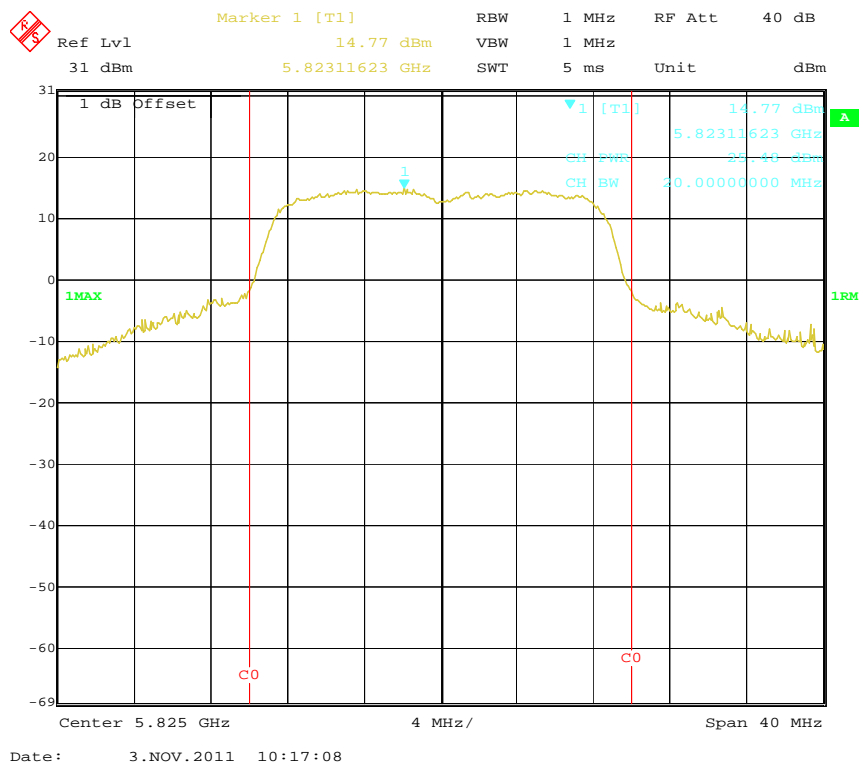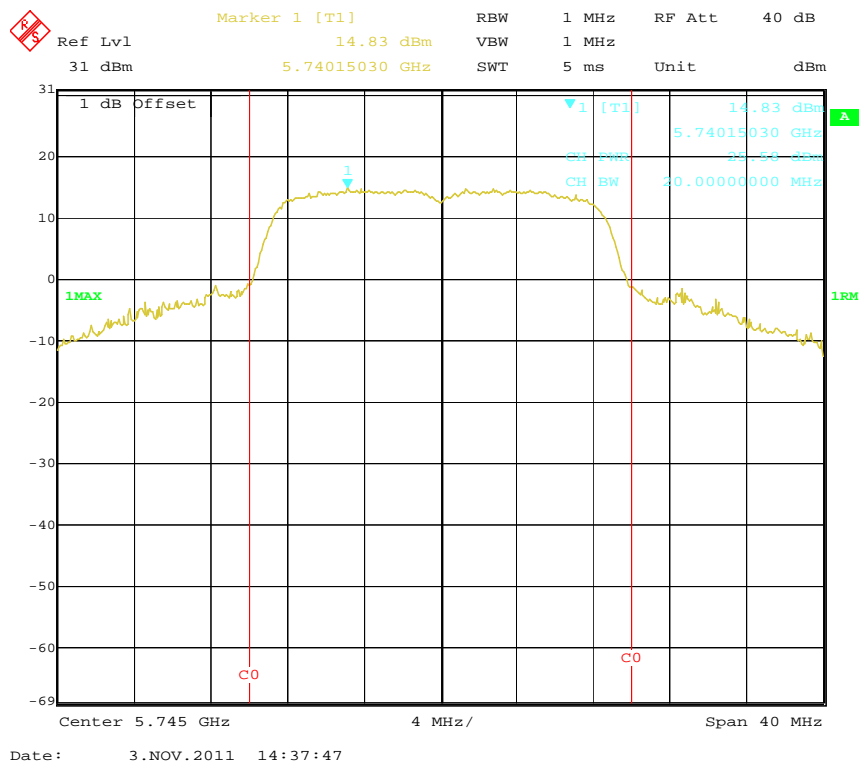802.11n-HT20 RF Output Power, High Channel, TX0**802.11n-HT20 RF Output Power, Low Channel, TX1**

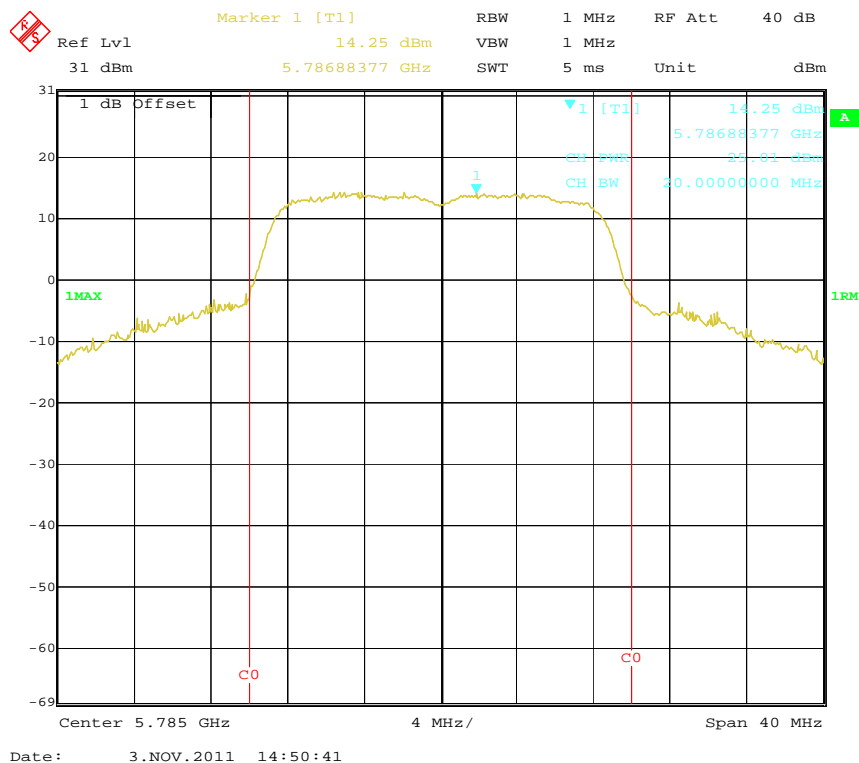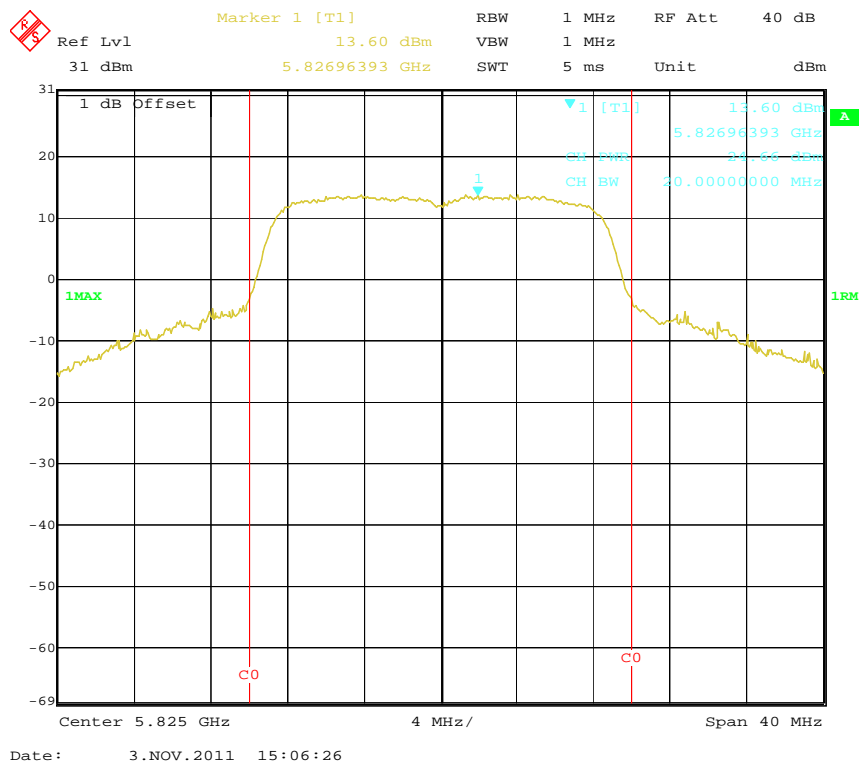802.11n-HT20 RF Output Power, Middle Channel, TX1**802.11n-HT20 RF Output Power, High Channel, TX1**

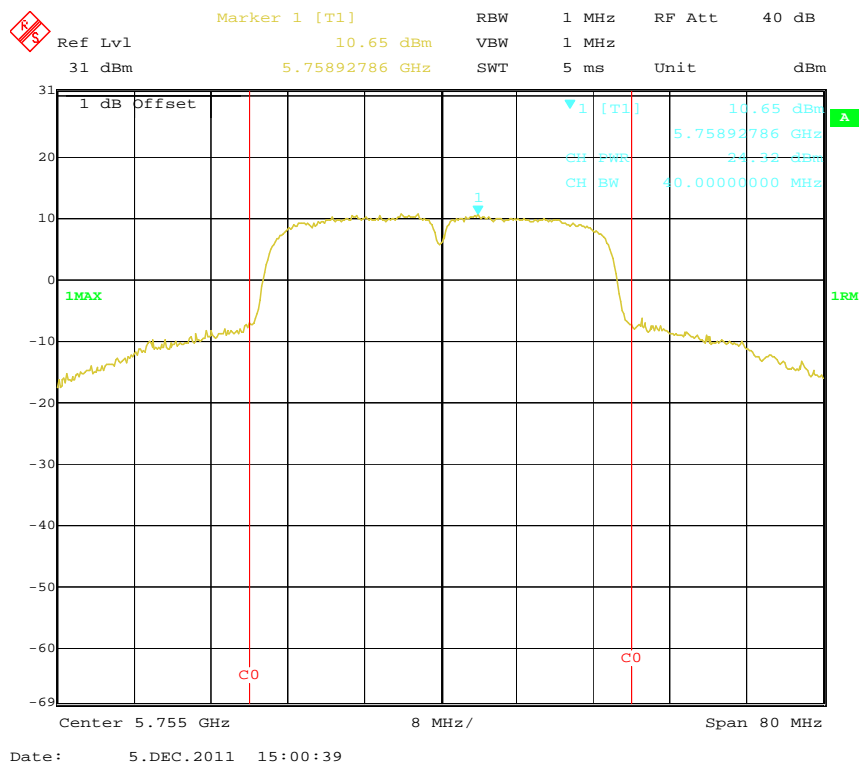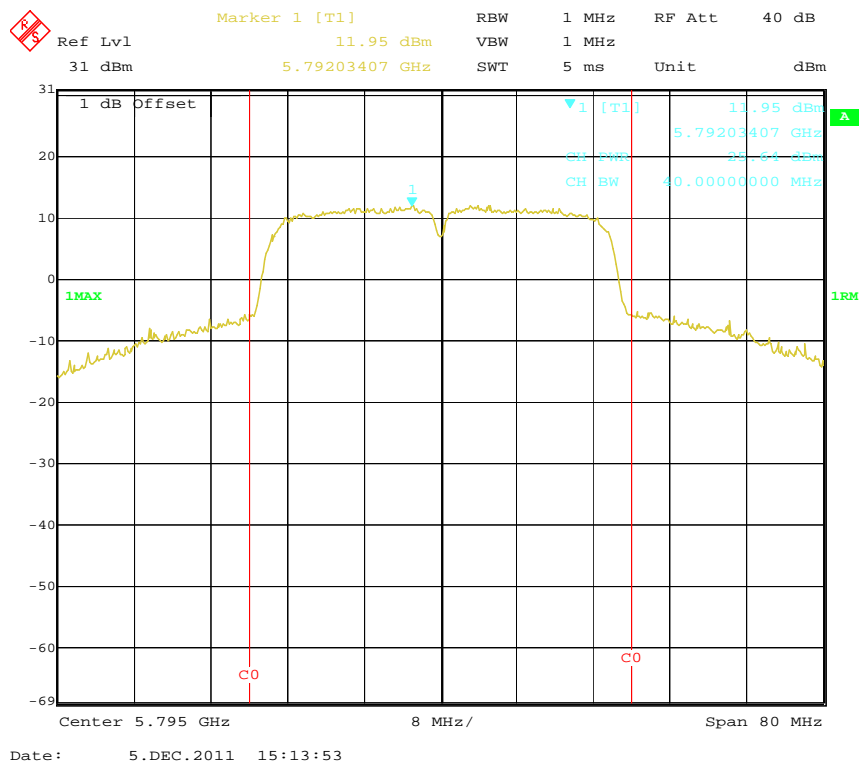802.11n-HT40 RF Output Power, Channel 151, TX0**802.11n-HT40 RF Output Power, Channel 159, TX0**

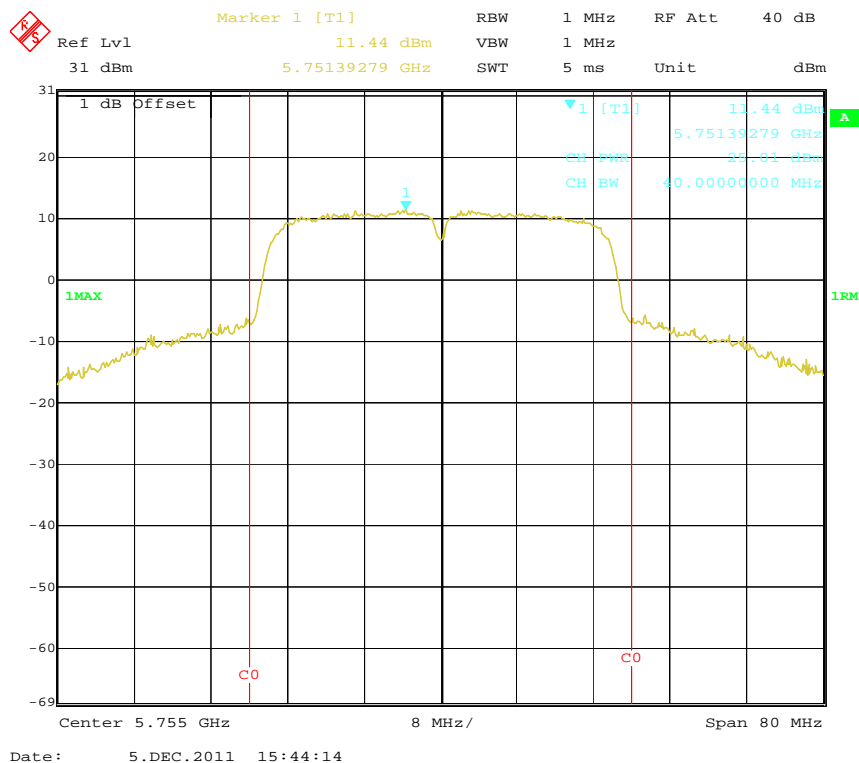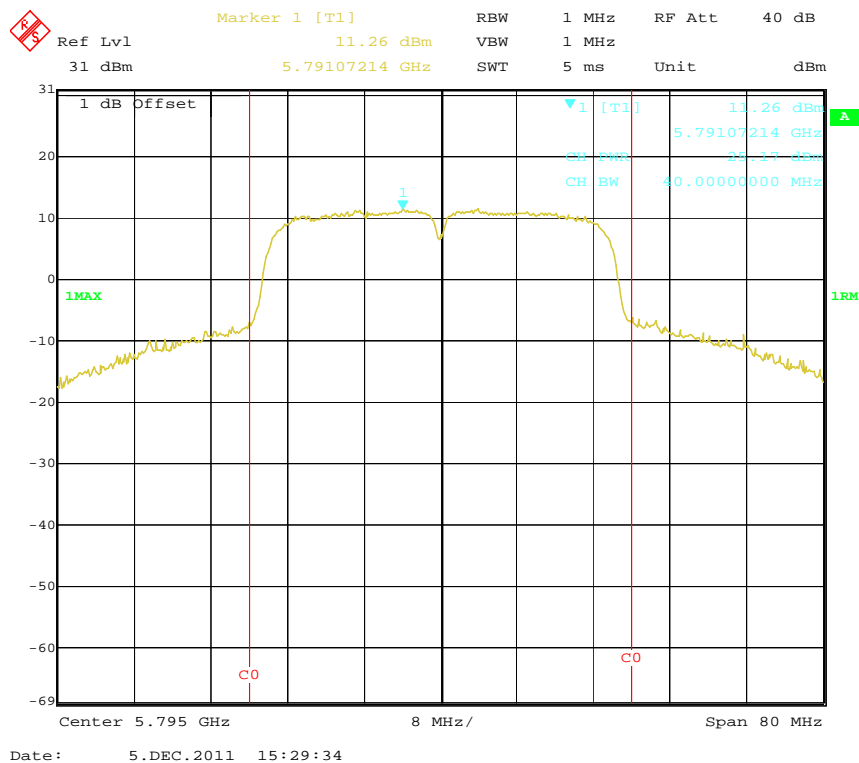802.11n-HT40 RF Output Power, Channel 151, TX1**802.11n-HT40 RF Output Power, Channel 159, TX1**

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ 26	609358	2011-07-08	2012-07-07

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 1 MHz and VBW of spectrum analyzer to 1 MHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data**Environmental Conditions**


Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Jim Huang on 2011-11-03 to 2011-12-05.


Test Result: Compliance, please refer to the following table and plots.



Channel Frequency (MHz)	Antenna Port	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
802.11a mode				
5745	TX0	29.25	> 20	Pass
	TX1	27.68	> 20	Pass
5825	TX0	38.89	> 20	Pass
	TX1	39.56	> 20	Pass
802.11n-HT20 mode				
5745	TX0	26.37	> 20	Pass
	TX1	27.10	> 20	Pass
5825	TX0	36.80	> 20	Pass
	TX1	38.37	> 20	Pass
802.11n-HT40 mode				
5755	TX0	21.24	> 20	Pass
	TX1	21.29	> 20	Pass
5795	TX0	36.20	> 20	Pass
	TX1	37.96	> 20	Pass



802.11a: Band Edge, Left Side, TX0


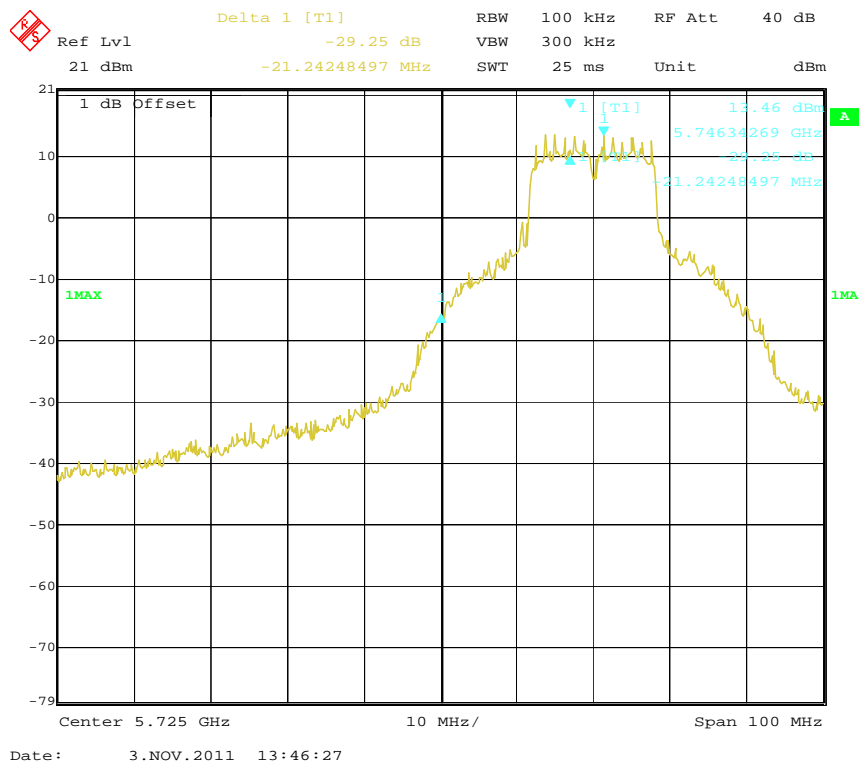




802.11a: Band Edge, Right Side, TX0


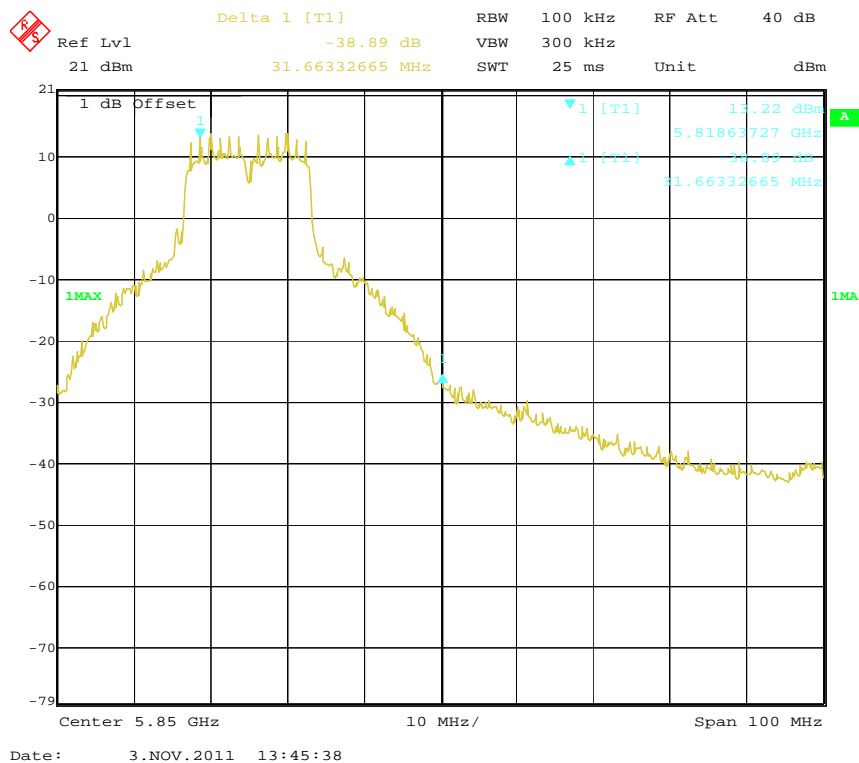


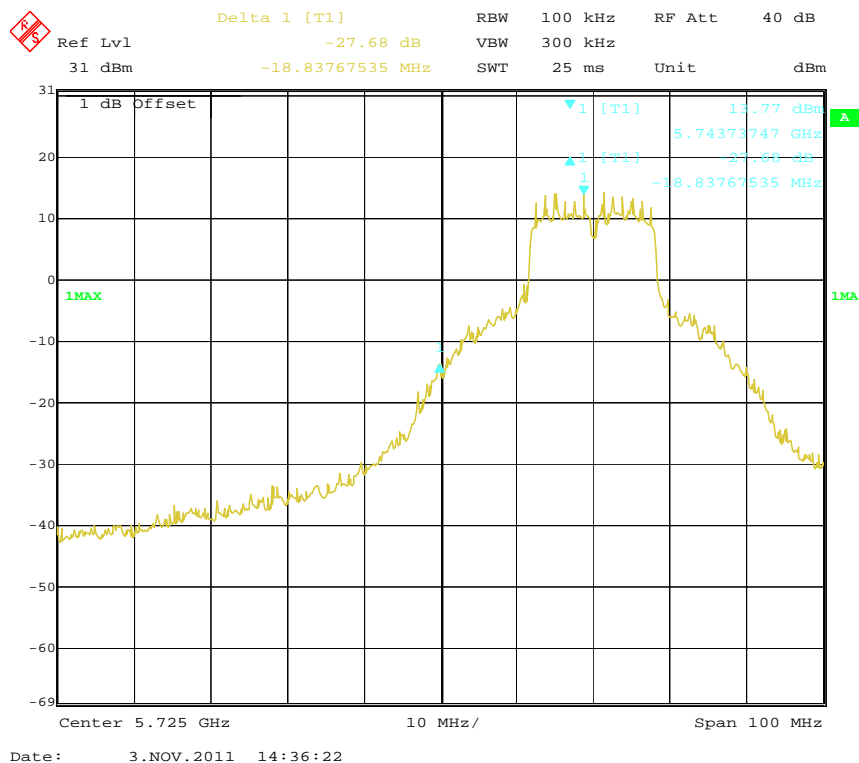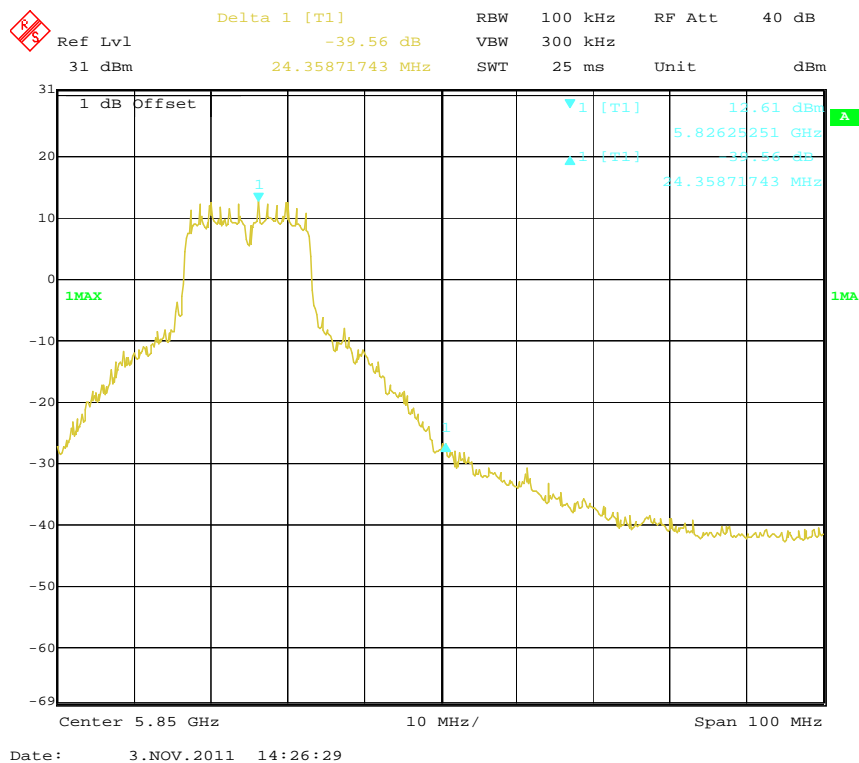802.11a: Band Edge, Left Side, TX1**802.11a: Band Edge, Right Side, TX1**

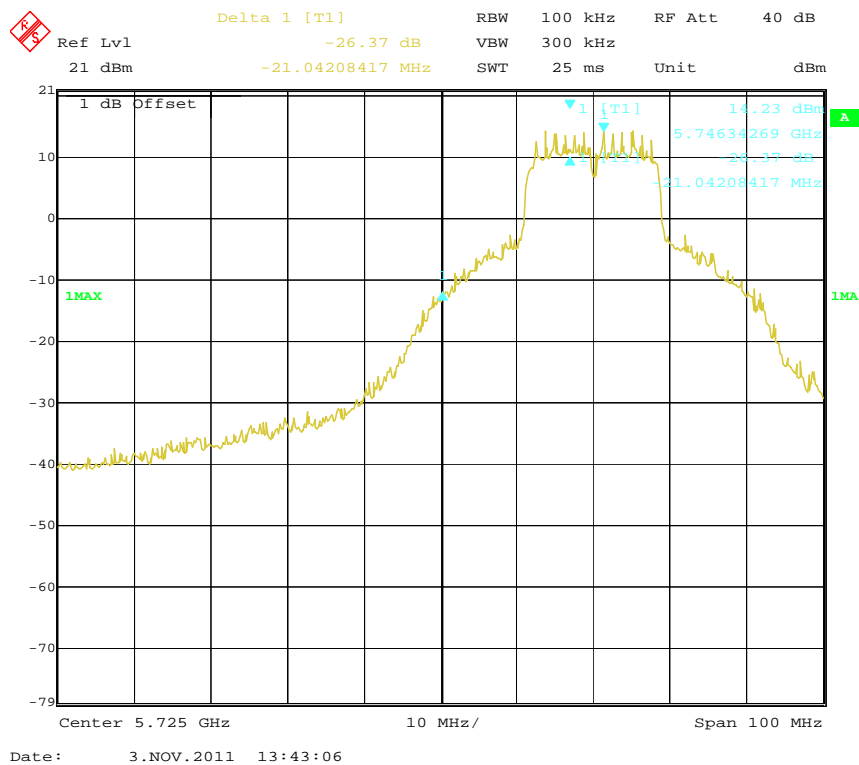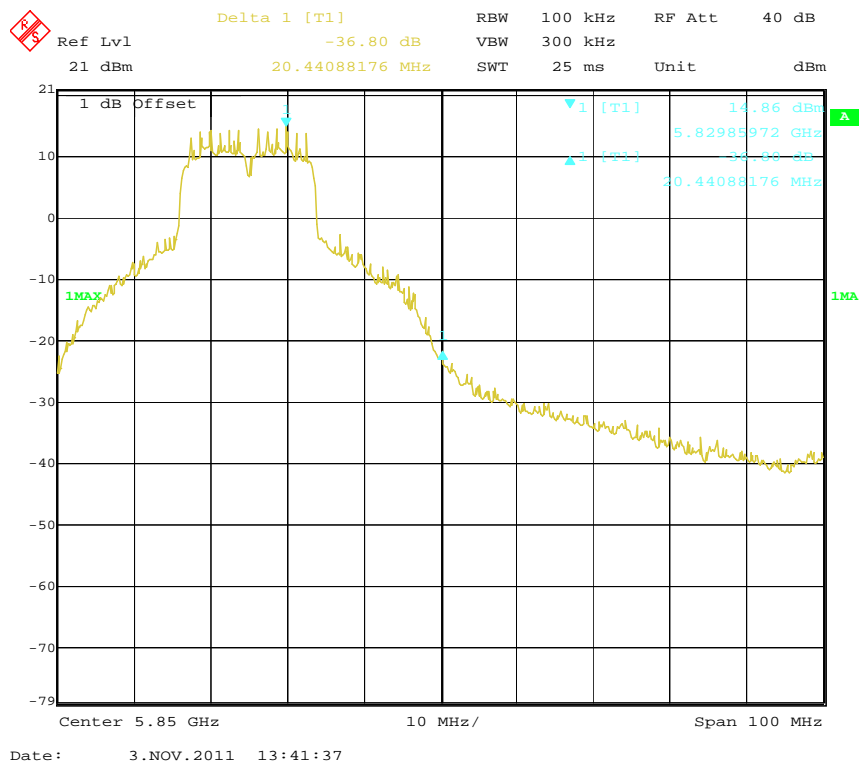802.11n-HT20: Band Edge, Left Side, TX0**802.11n-HT20: Band Edge, Right Side, TX0**

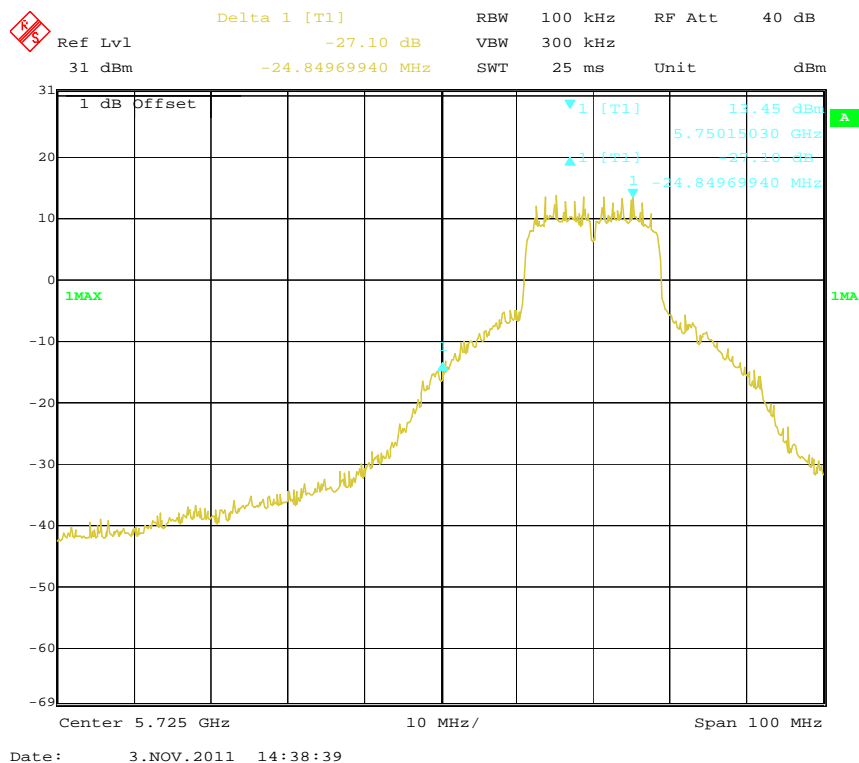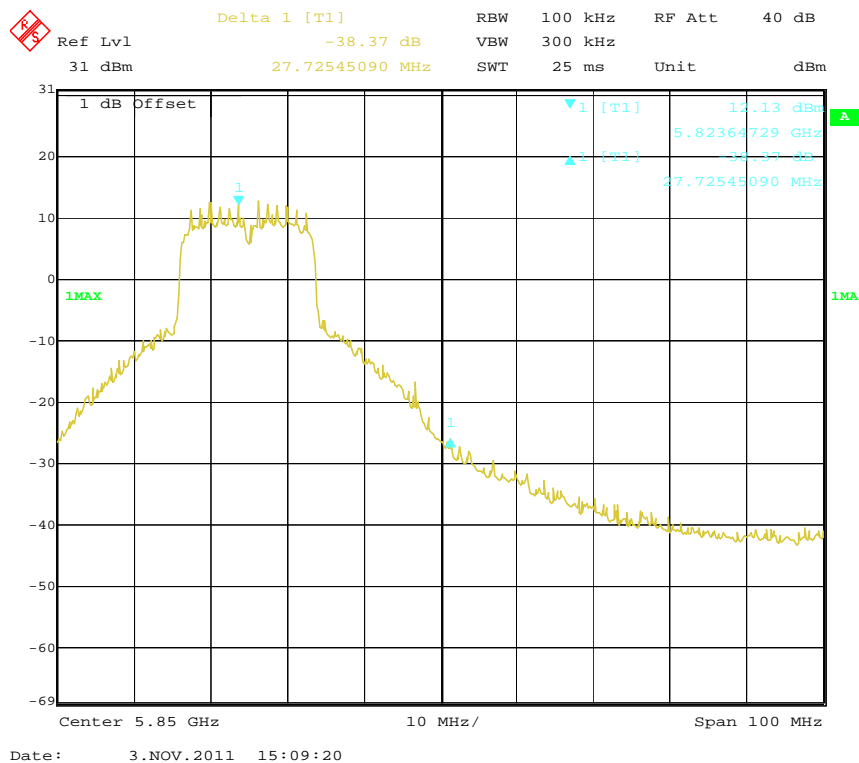802.11n-HT20: Band Edge, Left Side, TX1**802.11n-HT20: Band Edge, Right Side, TX1**

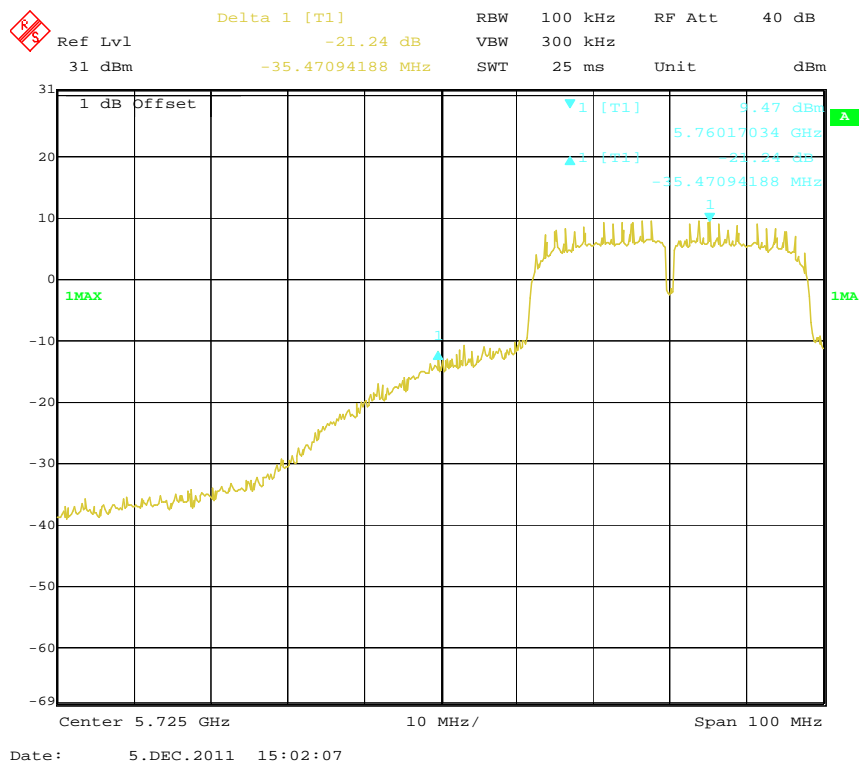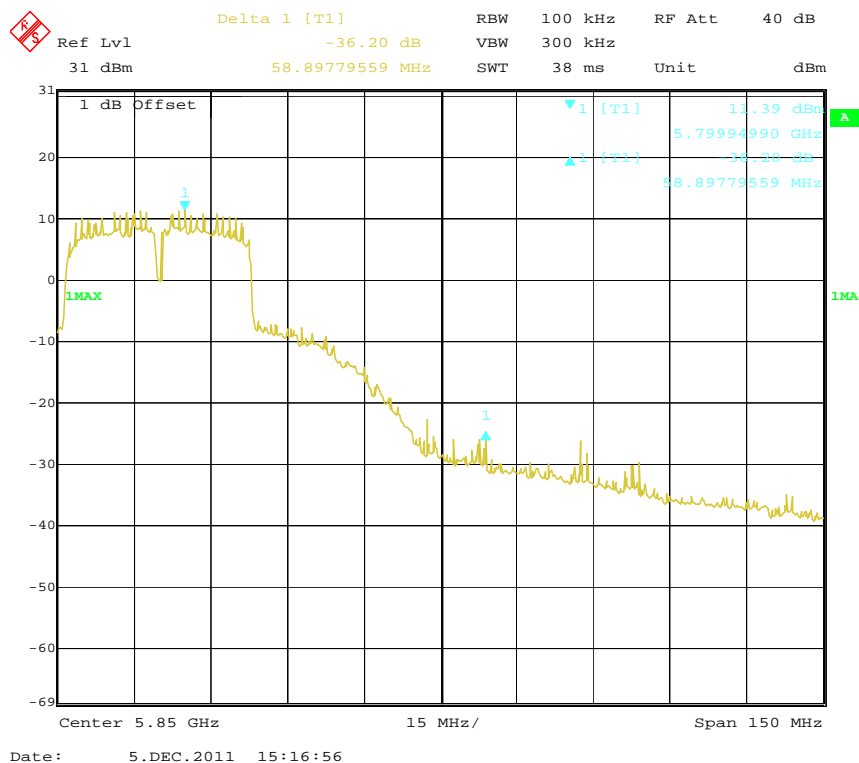802.11n-HT40: Band Edge, Left Side, TX0**802.11n-HT40: Band Edge, Right Side, TX0**

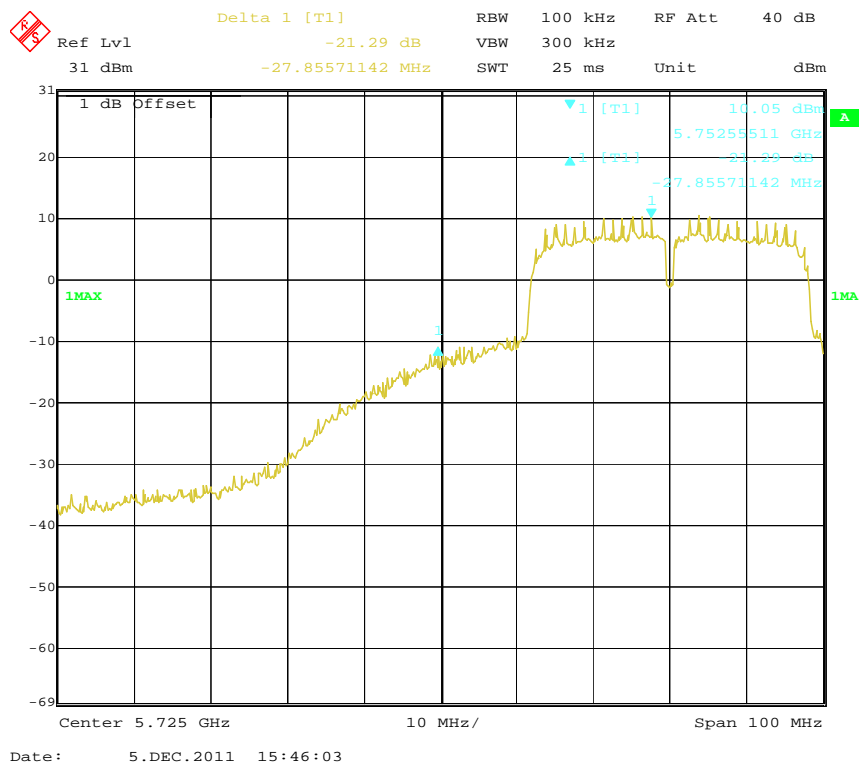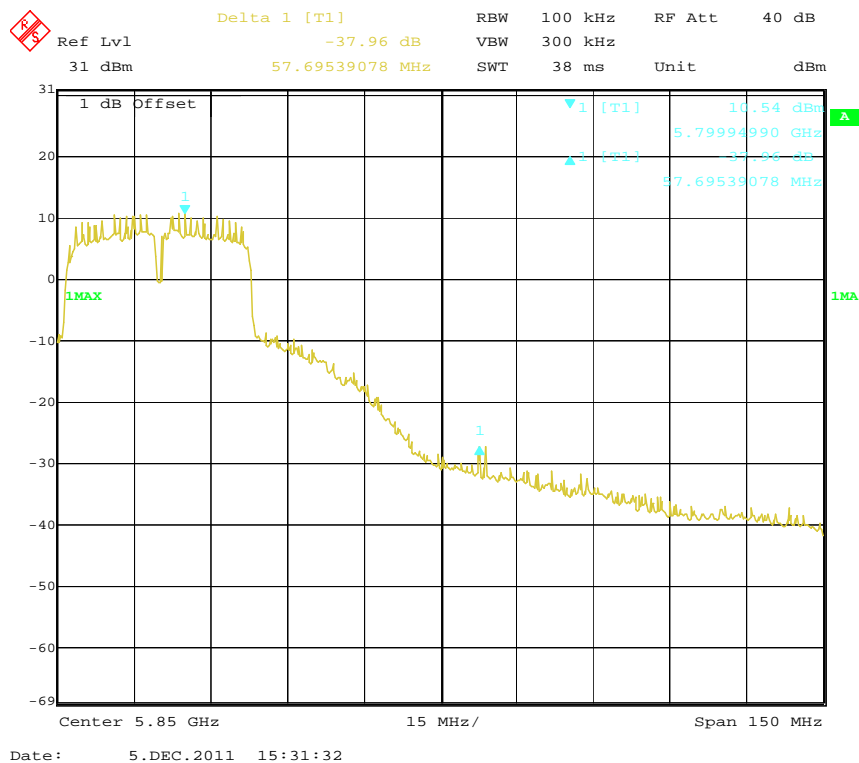802.11n-HT40: Band Edge, Left Side, TX1**802.11n-HT40: Band Edge, Right Side, TX1**

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ 26	609358	2011-07-08	2012-07-07

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to 1.5MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value. (DTS)
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions



Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa



The testing was performed by Jim Huang on 2011-11-02 and 2011-12-05.



Test Mode: Transmitting



Test Result: Compliance, please refer to the following table and plots.



Channel	Frequency (MHz)	Antenna Port	Conducted PSD (dBm)	Calculated PSD (dBm)	Limit (dBm)	Result
802.11a mode						
Low	CH 149 5745 MHz	TX0	-1.99	/	8	Pass
		TX1	-2.82			
Middle	CH 157 5785 MHz	TX0	-1.94	/	8	Pass
		TX1	-2.65			
High	CH 165 5825 MHz	TX0	-2.21	/	8	Pass
		TX1	-2.95			
802.11n-HT20 mode						
Low	CH 149 5745 MHz	TX0	-2.42	0.38	8	Pass
		TX1	-2.84			
Middle	CH 157 5785 MHz	TX0	-2.81	-0.09	8	Pass
		TX1	-3.41			
High	CH 165 5825 MHz	TX0	-2.91	0.05	8	Pass
		TX1	-3			
802.11n-HT40 mode						
Low	CH 151 5755 MHz	TX0	-2.63	-0.57	8	Pass
		TX1	-4.80			
High	CH 159 5795 MHz	TX0	-3.84	-1.12	8	Pass
		TX1	-4.45			

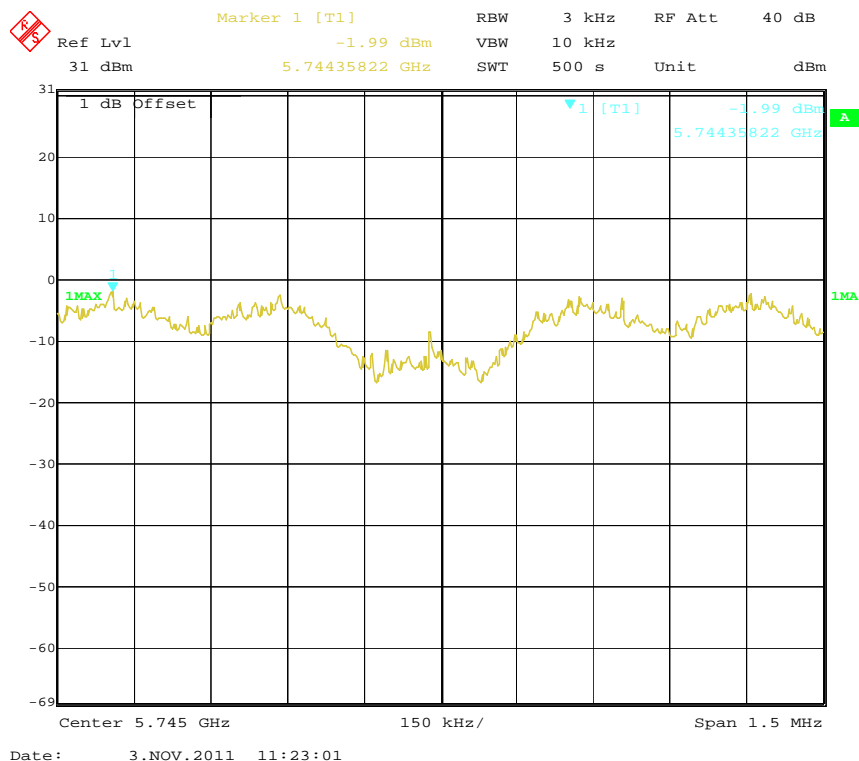
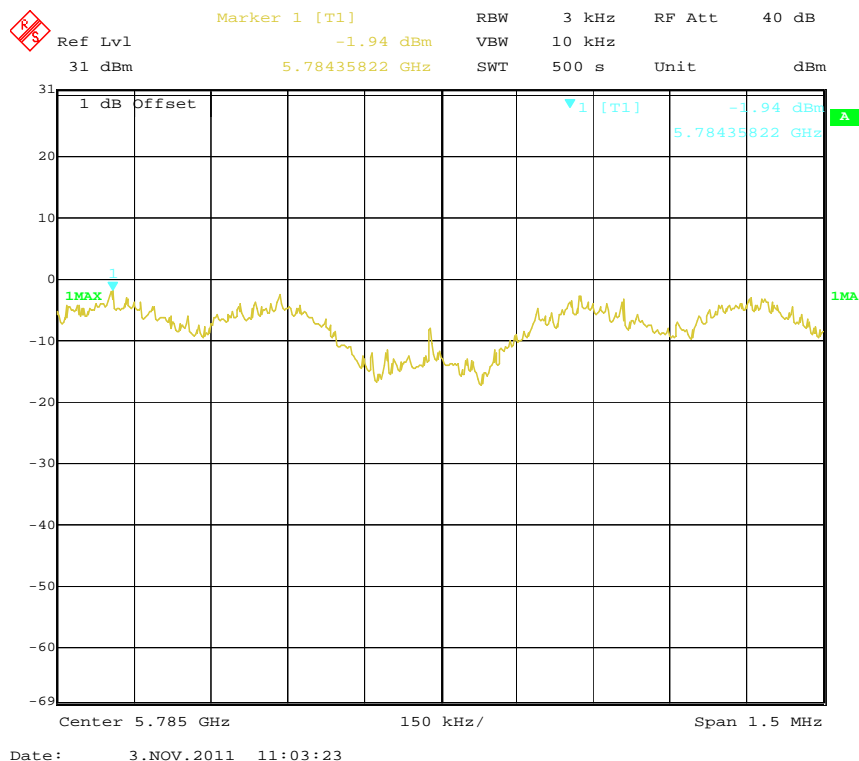
Power Spectral Density, 802.11a Low Channel, TX0**Power Spectral Density, 802.11a Middle Channel, TX0**

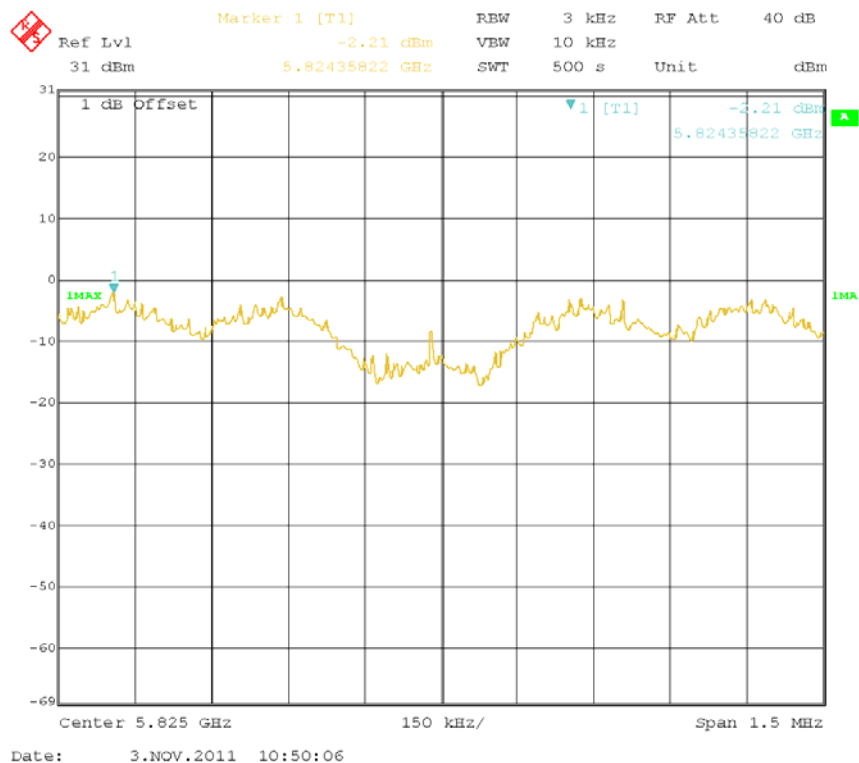
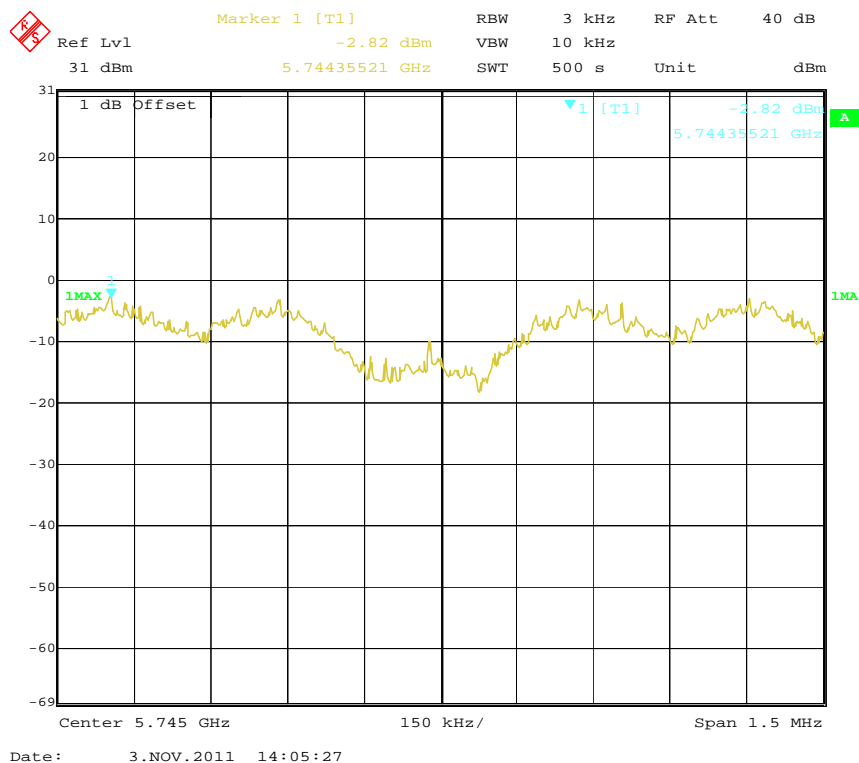
Power Spectral Density, 802.11a High Channel, TX0**Power Spectral Density, 802.11a Low Channel, TX1**

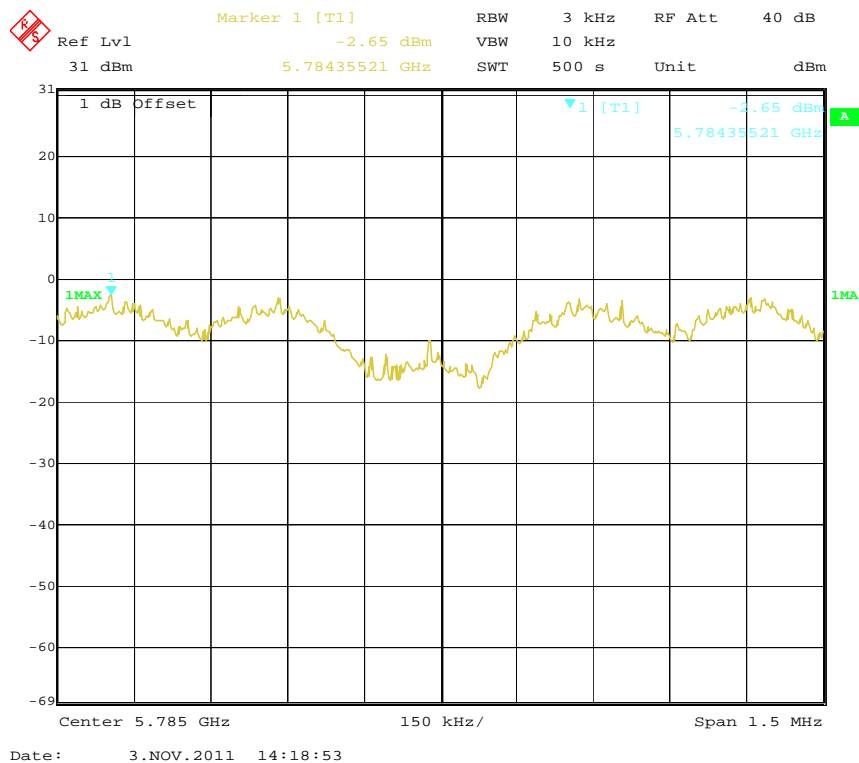
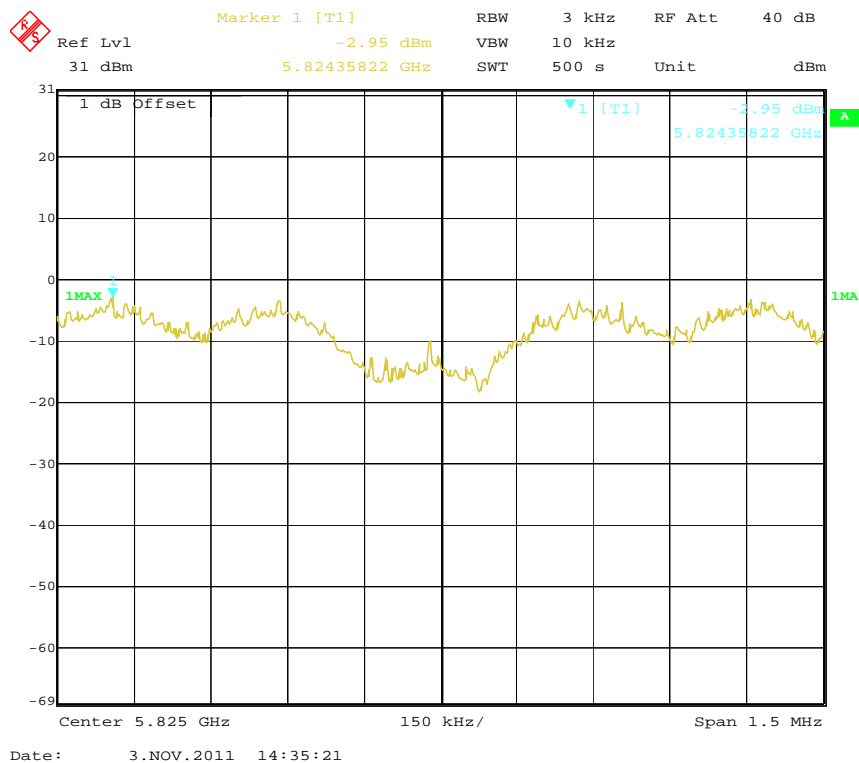
Power Spectral Density, 802.11a Middle Channel, TX1**Power Spectral Density, 802.11a High Channel, TX1**

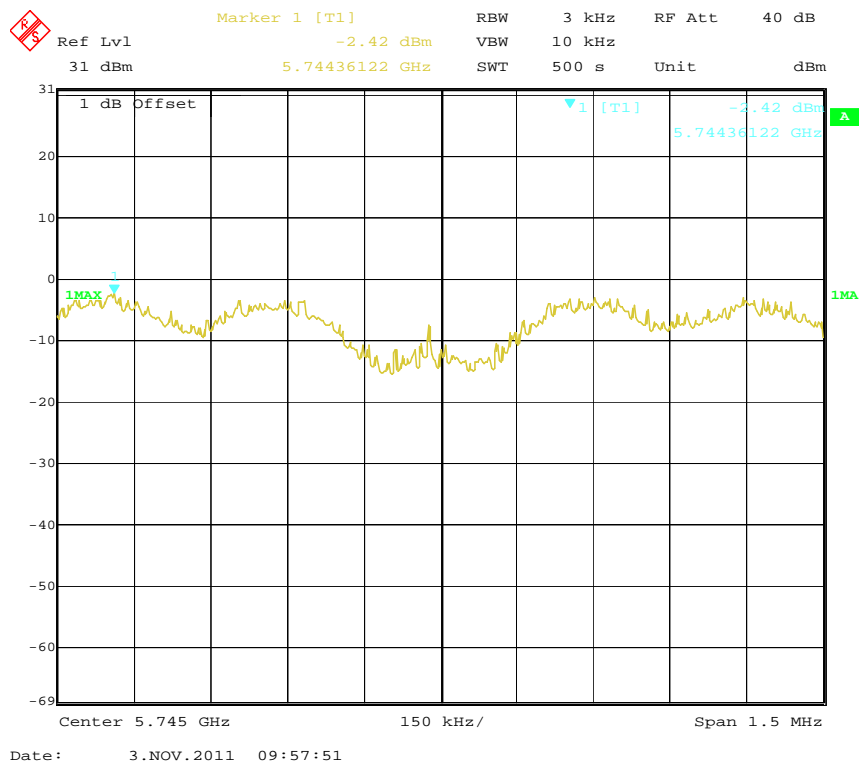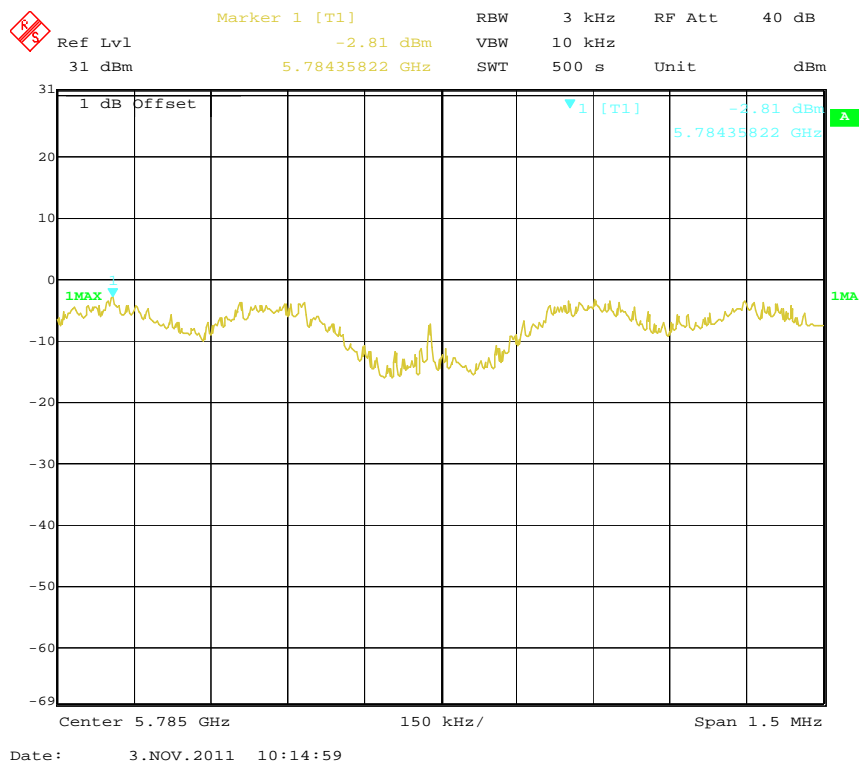Power Spectral Density, 802.11n-HT20 Low Channel, TX0**Power Spectral Density, 802.11n-HT20 Middle Channel, TX0**

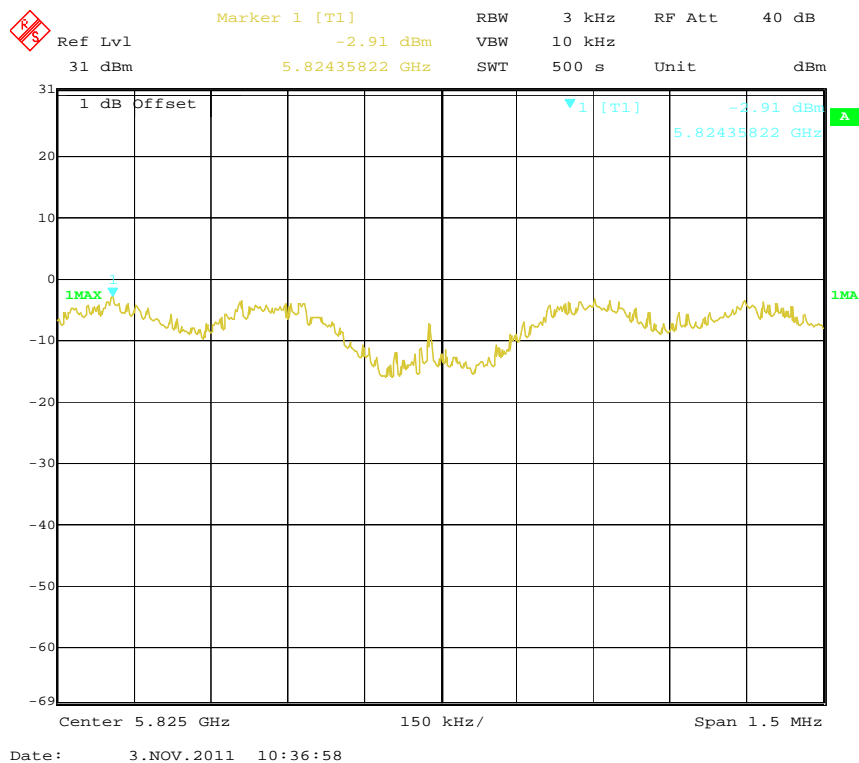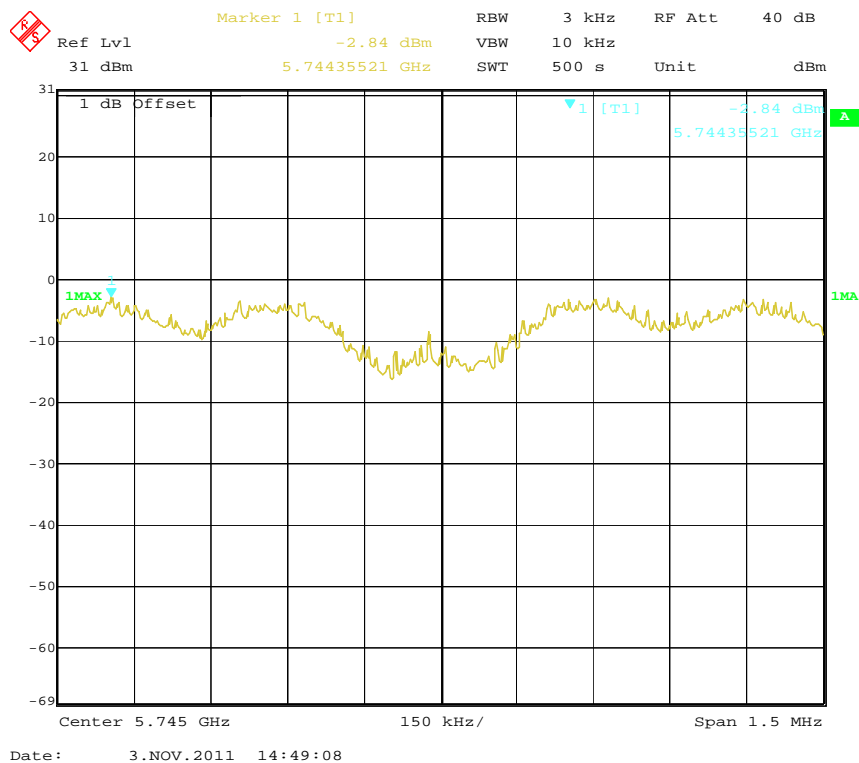Power Spectral Density, 802.11n-HT20 High Channel, TX0**Power Spectral Density, 802.11n-HT20 Low Channel, TX1**

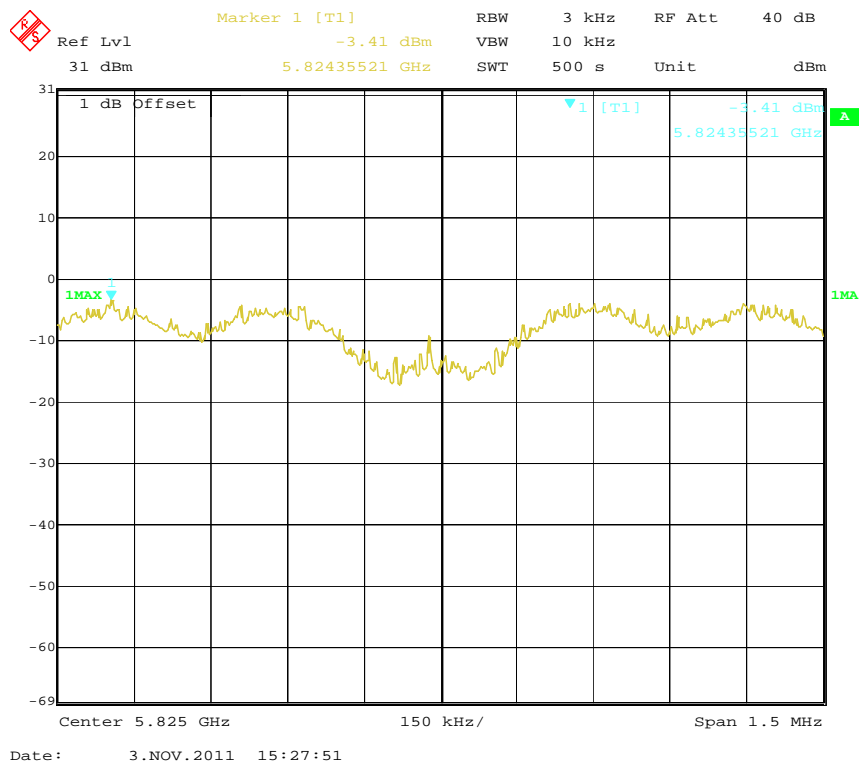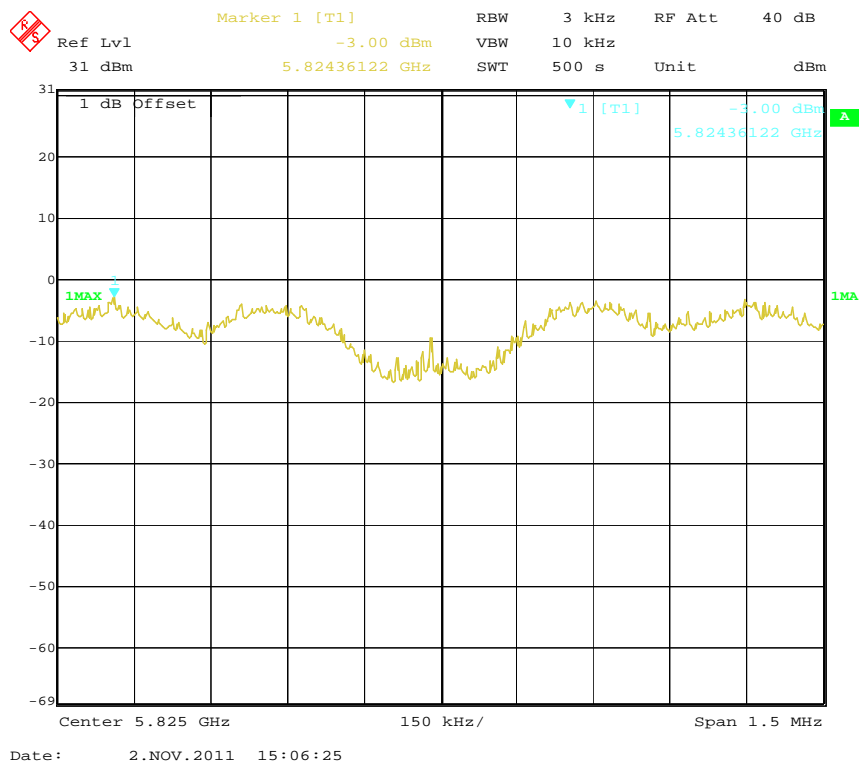Power Spectral Density, 802.11n-HT20 Middle Channel, TX1**Power Spectral Density, 802.11n-HT20 High Channel, TX1**

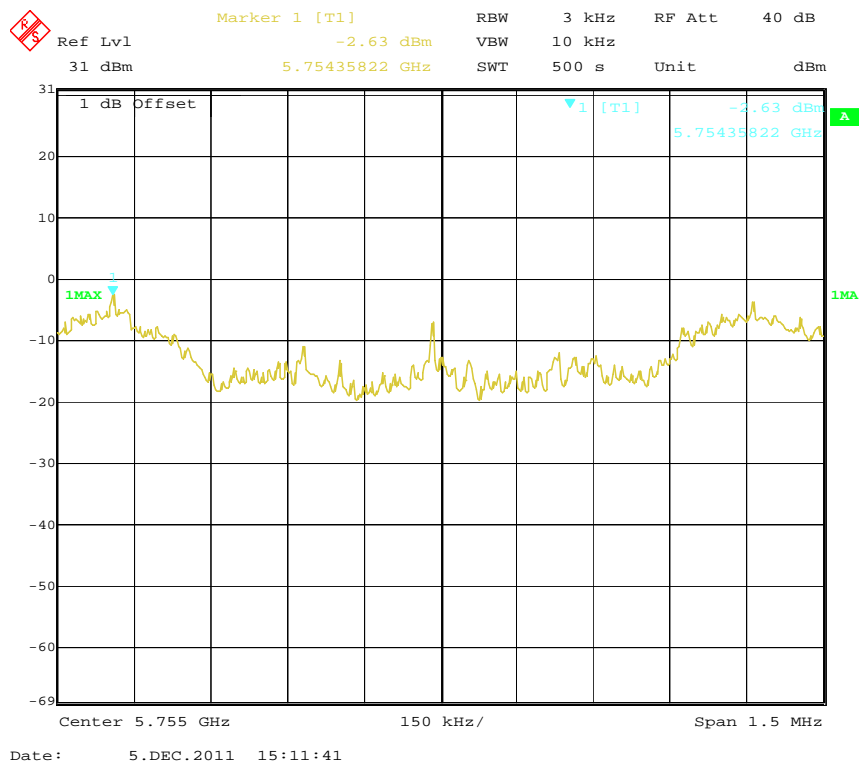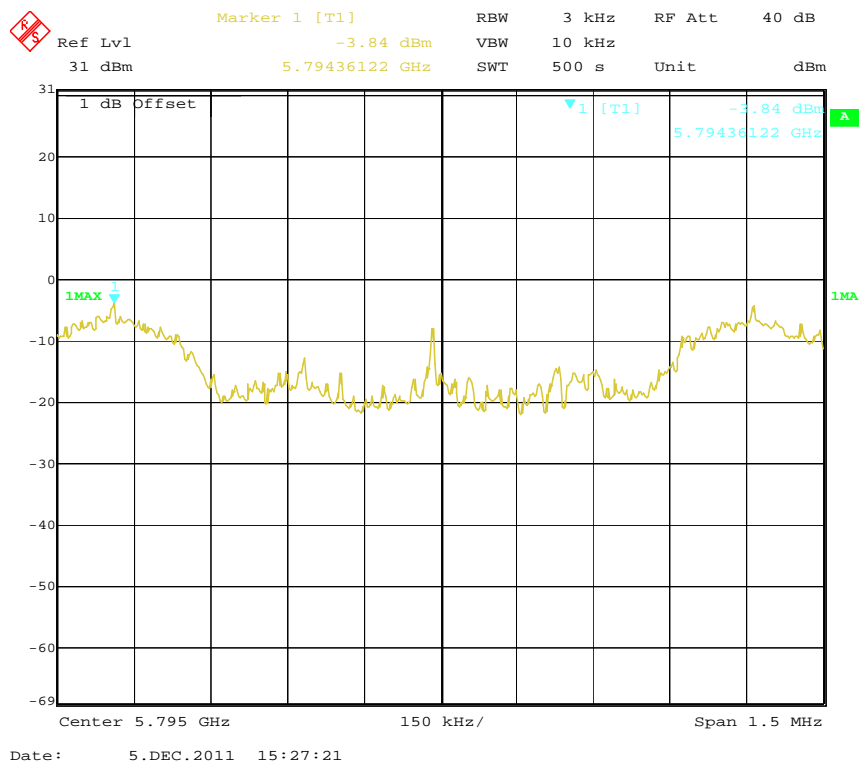Power Spectral Density, 802.11n-HT40 Channel 151, TX0**Power Spectral Density, 802.11n-HT40 Channel 159, TX0**

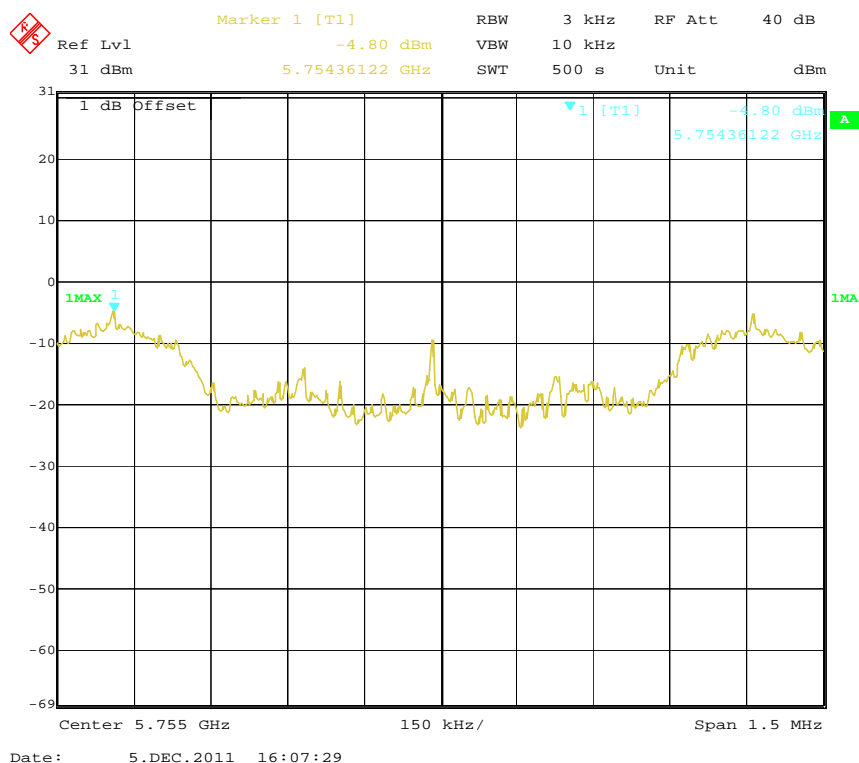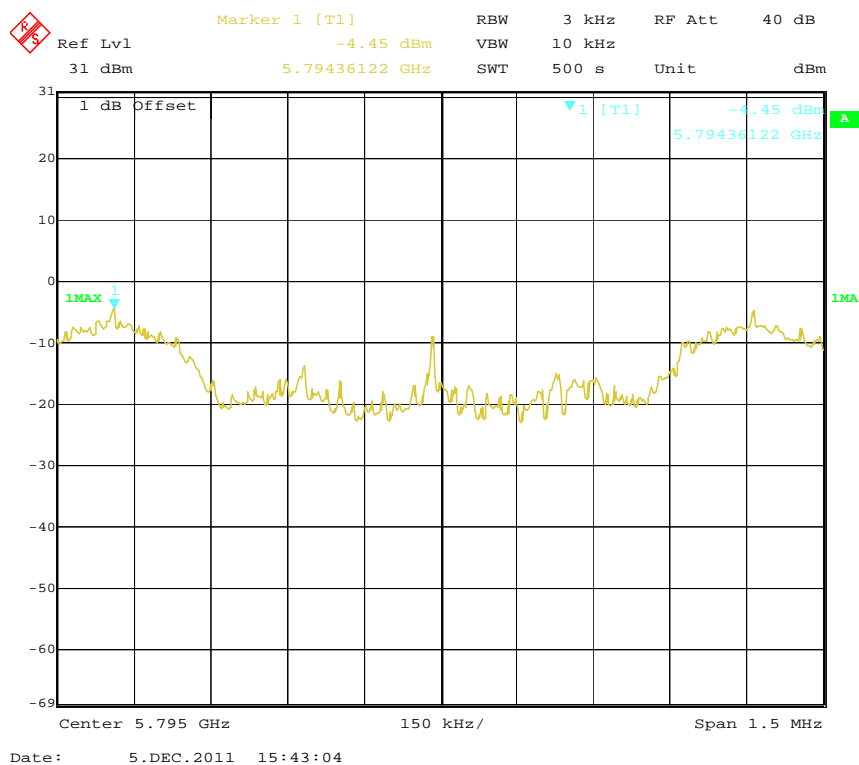Power Spectral Density, 802.11n-HT40 Channel 151, TX1**Power Spectral Density, 802.11n-HT40 Channel 159, TX1********* END OF REPORT *******