

FCC TEST REPORT

FCC ID : UC3R062G4000

Applicant : INTECH ELECTRONICS CORP.

Address : Hall B3 , Yuan-Hu Industry Park , Golf Blvd., Song-Yuan Village,
Guan-Lan , Shenzhen , China

Equipment Under Test (EUT) :


Product description : 2.4G Wireless Mouse

Model No. : R06

Standards : FCC 15 Paragraph 15.247

Date of Test : Aug. 21, 2008

Test Engineer : Olic.huang

Reviewed By : 

PERPARED BY:

Waltek Services (Shenzhen) Co., Ltd.

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen
518105, China

Tel :86-755-27553488

Fax: 86-755-27553868

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS.....	2
3 TEST SUMMARY.....	4
4 GENERAL INFORMATION.....	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF E.U.T.....	5
4.3 DETAILS OF E.U.T.	5
4.4 DESCRIPTION OF SUPPORT UNITS	5
4.5 STANDARDS APPLICABLE FOR TESTING.....	5
4.6 TEST FACILITY.....	6
4.7 TEST LOCATION.....	6
5 EQUIPMENT USED DURING TEST	7
6 CONDUCTED EMISSION TEST	9
6.1 TEST EQUIPMENT.....	9
6.2 TEST PROCEDURE	9
6.3 CONDUCTED TEST SETUP	10
6.4 EUT OPERATING CONDITION	10
6.5 CONDUCTED EMISSION LIMITS	11
6.6 CONDUCTED EMISSION TEST DATA	11
7 RADIATION EMISSION TEST.....	12
7.1 TEST EQUIPMENT.....	12
7.2 MEASUREMENT UNCERTAINTY.....	12
7.3 TEST PROCEDURE	12
7.4 RADIATED TEST SETUP	13
7.5 SPECTRUM ANALYZER SETUP.....	13
7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION	14
7.7 SUMMARY OF TEST RESULTS.....	14
7.8 EUT OPERATING CONDITION	15
7.9 RADIATED EMISSIONS LIMIT ON PARAGRAPH 15.209	15
7.10 RADIATED EMISSIONS TEST RESULT.....	16
7.11 RADIATED EMISSION DATA	16
8 MAXIMUM PEAK OUTPUT POWER.....	21
9 HOPPING CHANNEL NUMBER.....	22
10 FREQUENCY SEPARATED.....	25
11 DWELL TIME.....	28

12	20-DB BANDWIDTH.....	32
13	RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND	34
14	RF EXPOSURE TEST.....	36
15	PHOTOGRAPHS OF TESTINGZ.....	38
16	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	39
16.1	EUT - FRONT VIEW	39
16.2	EUT - BACK VIEW	39
16.3	PCB – FRONT VIEW	40
16.4	PCB - BACK VIEW	40
17	FCC ID LABEL.....	41

3 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (30MHz to 25GHz)	FCC PART 15: 2003	ANSI C63.4: 2003	N/A	PASS
Conducted Emission (150KHz to 30MHz)	FCC PART 15: 2003	ANSI C63.4: 2003	N/A	N/A

4 General Information

4.1 Client Information

Applicant: INTECH ELECTRONICS CORP.
Address of Applicant: Hall B3 , Yuan-Hu Industry Park , Golf Blvd., Song-Yuan
Village, Guan-Lan , Shenzhen , China
Manufacturer: INTECH ELECTRONICS CORP.
Address of manufacturer: Hall B3 , Yuan-Hu Industry Park , Golf Blvd., Song-Yuan
Village, Guan-Lan , Shenzhen , China

4.2 General Description of E.U.T.

Product description: 2.4G Wireless Mouse
Model No.: R06

4.3 Details of E.U.T.

Power Supply: DC 5.0V By USB Port

4.4 Description of Support Units

The EUT has been tested as an independent unit.

4.5 Standards Applicable for Testing

The customer requested FCC tests for a 2.4G Wireless Mouse. The standards used were FCC 15 Paragraph 15.247, Paragraph 15.205, Paragraph 15.207, Paragraph 15.209, Paragraph 15.31, Paragraph 15.33, Paragraph 15.35.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581.June 24,2008.

- **IC – Registration No.:IC7760**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration IC7760, July 24, 2008.

4.7 Test Location

All Emissions tests were performed at:-

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen
518105, China

5 Equipment Used during Test

Equipment	Brand Name	Model	Related standards	Cal.Intal Months	Last Cal. Date	Serial No
3m Semi-anechoic chamber						
EMC Analyzer	Agilent	E7405A	ISO9001:2000	12	Jan-08	MY4511494 3
Trilog Broadband Antenne 30-3000 MHz	SCHWARZB ECK MESS- ELEKTROM	VULB9163	EN/ISO/IEC 17025 DIN EN ISO9001	12	Jan-08	336
Broad-band Horn Antenna	SCHWARZB ECK MESS- ELEKTROM	BBHA 9120 D	EN/ISO/IEC 17025 DIN EN ISO9001	12	Jan-08	667
Broadband Preamplifier	SCHWARZB ECK MESS- ELEKTROM	BBV 9718	EN/ISO/IEC 17025 DIN EN ISO9001	12	Jan-08	9718-148
10m Coaxial Cable with N-male Connectors usable	SCHWARZB ECK MESS- ELEKTROM	AK 9515 H	EN/ISO/IEC 17025 DIN EN ISO9001	12	Jan-08	-
10m 50 Ohm Coaxial Cable with N- plug, individual length, usable up to 3(5)GHz, Connectors	SCHWARZB ECK MESS- ELEKTROM	AK 9513	EN/ISO/IEC 17025 DIN EN ISO9001	12	Jan-08	-
Positioning Controller	C&C LAB	CC-C-IF	ISO9001	12	Jan-08	MF7802108
Color Monitor	SUNSPO	SP-14C	ISO9001	12	Jan-08	-
EMI Shielded Room						
Test Receiver	ROHDE&SC HWARZ	ESPI	ISO9001	12	Jan-08	101155
Two-Line V-Network	ROHDE&SC HWARZ	ENV216	ISO9001 EN/ISO/IEC 17025	12	Jan-08	100115
Absorbing Clamp	ROHDE&SC HWARZ	MDS-21	ISO9001 EN/ISO/IEC 17025	12	Jan-08	100205
10m 50 Ohm Coaxial	SCHWARZB	AK 9514	EN/ISO/IEC	12	Jan-08	-

Cable with N- plug,individual length,usable up to 3(5)GHz, Connectors	ECK MESS- ELEKTROM		17025 DIN EN ISO9001			
--	-----------------------	--	-------------------------	--	--	--

6 Conducted Emission Test

Test Requirement:	FCC Part15 Paragraph 15.207
Test Method:	Based on ANSI C63.4:2003
Test Date:
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 Test Equipment


Please refer to Section 5 this report.

6.2 Test Procedure

1. The EUT was connected with signal generator and placed on a table.
2. The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.
3. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.3 Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

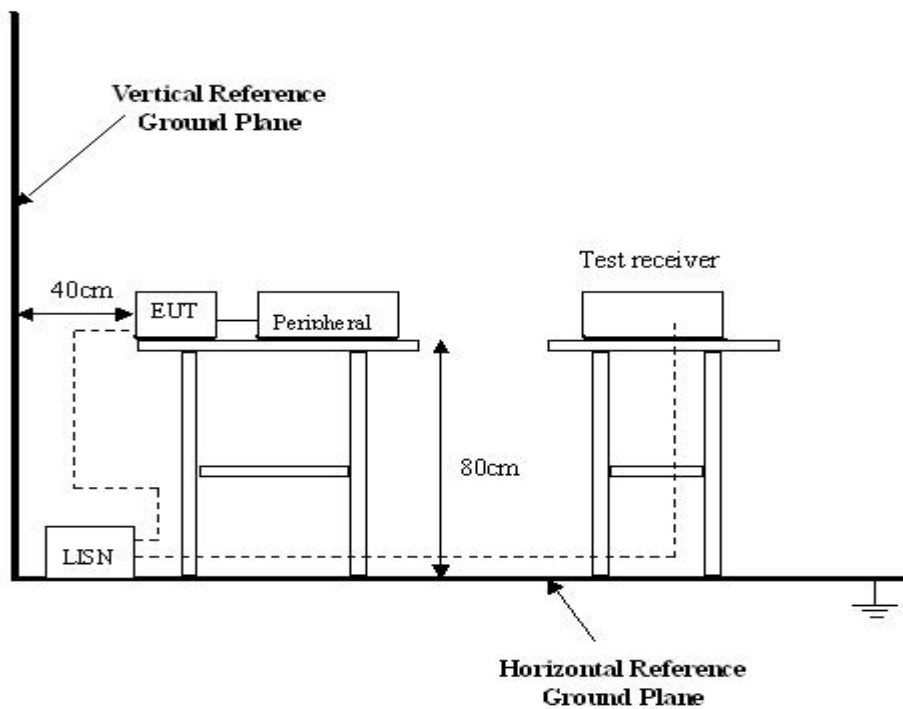

6.4 EUT Operating Condition

Operating condition is according to ANSI C63.4:2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

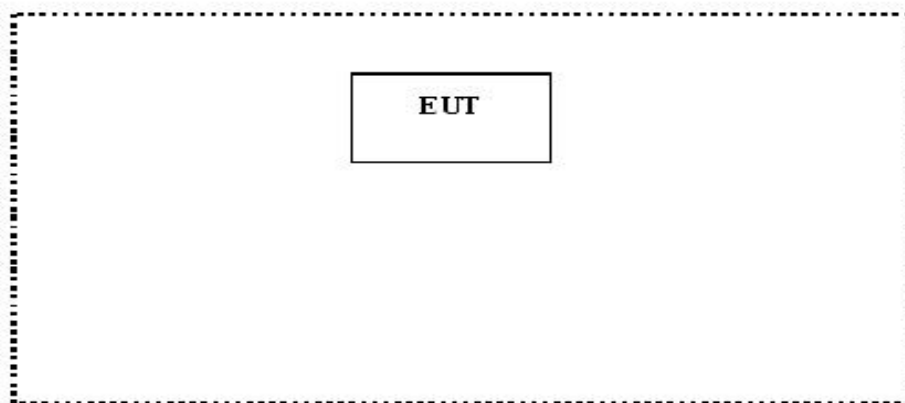

6.5 Conducted Emission Limits

66-56 dB μ V between 0.15MHz & 0.5MHz

56 dB μ V between 0.5MHz & 5MHz

60 dB μ V between 5MHz & 30MHz

Note: In the above limits, the tighter limit applies at the band edges.

6.6 Conducted Emission Test Data

Owing to the DC operation of EUT, this test is not performed.

7 Radiation Emission Test

Test Requirement:	FCC Part15 Paragraph 15.247
Test Method:	Based on ANSI C63.4:2003
Test Date:	Aug. 21, 2008
Frequency Range:	30MHz to 25GHz
Measurement Distance:	3m
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

7.1 Test Equipment

Please refer to Section 5 this report.

7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4:2003, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at WALTEK SERVICES EMC Lab is +4.0 dB.

7.3 Test Procedure

1. The EUT was connected with signal generator and placed on a turntable.
2. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
3. All data was recorded in the peak and average detection mode.
4. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.

7.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.209 limits and Paragraph 15.247 limits.

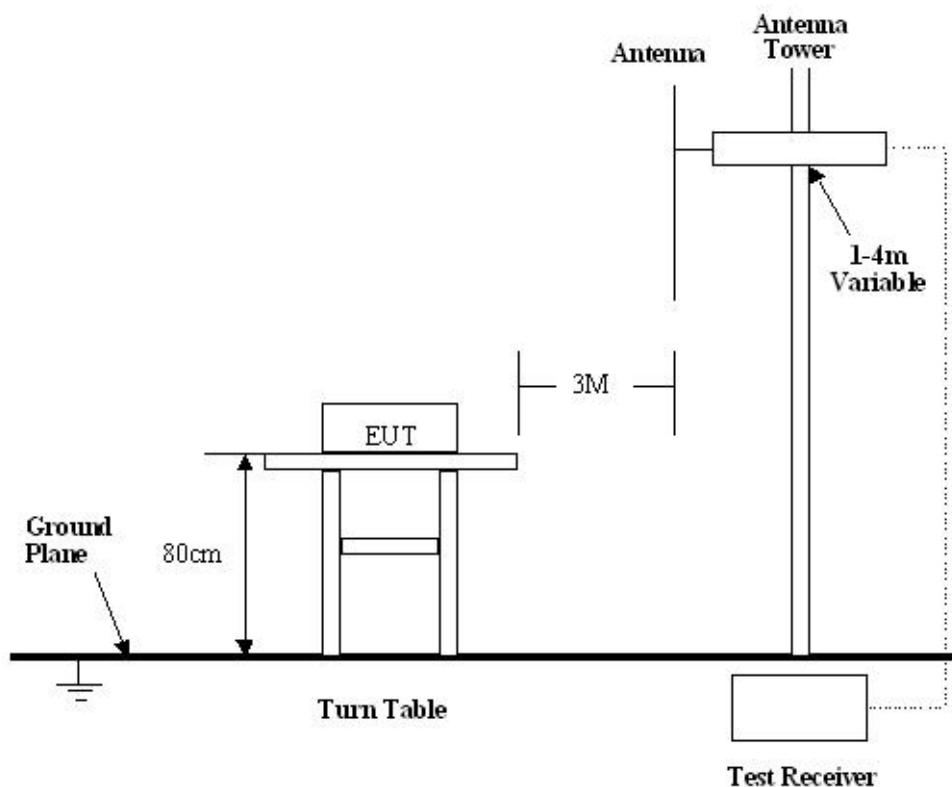

7.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.247 Rules, the system was tested to 25000 MHz.

Start Frequency30 MHz
Stop Frequency25000 MHz
Sweep Speed Auto
IF Bandwidth100 kHz
Video Bandwidth1 MHz
Quasi-Peak Adapter Bandwidth120 kHz
Quasi-Peak Adapter Mode.....Normal
Resolution Bandwidth1MHz

7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

7.7 Summary of Test Results

According to the data in section 7.11, the EUT complied with the FCC Part15 Paragraph 15.247 standards.

7.8 EUT Operating Condition

The same as section 6.4 of this report.

Let the EUT work in test mode and test it.

7.9 Radiated Emissions Limit on Paragraph 15.209

Frequency(MHZ)	Distance(m)	Field strength(dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- Note:**
- (1) $\text{RF Voltage(dBuV)} = 20 \log \text{RF Voltage(uV)}$
 - (2) In the Above Table, the tighter limit applies at the band edges.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna.
 - (4) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. Measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
 - (5) Above 1GHz, do a Peak and average measurements for all emissions, Limit for peak is 74dBuV/m, According to Part 15.35(b) and average is 54dBuV/m.

7.10 Radiated Emissions Test Result

Formula of conversion factors: the field strength at 3m was established by adding
 The meter reading of the spectrum analyzer (which is set to read in units of dBuV)
 To the antenna correction factor supplied by the antenna manufacturer. The antenna
 Correction factors are stated in terms of dB. The gain of the preselector was accounted
 For in the spectrum analyzer meter reading.

Example:

Freq(MHz) Meter Reading +ACF=FS

33 20dBuV+10.36dB=30.36dBuV/m @3m

7.11 Radiated Emission Data

A. Test Item:	Radiated Emission Data
Test Voltage:	DC 5.0V
Test Mode:	TX On
Temperature:	24 °C
Humidity:	52%RH
Test Result:	PASS

Remarks: 30-1000MHz radiation test no significant emissions above the equipment noise floor were detected.

Frequency (MHz)	Detector	Antenna Polarization	Emission Level (dBuV/m)	FCC 15 Subpart C Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
Low frequency							
2402.00	AV	Vertical	91.27		(Fund.)	1.5	120
4804.00	AV	Vertical	35.34	54.00	18.66	1.6	90
7206.00	AV	Vertical	34.13	54.00	19.87	1.8	100
9608.00	AV	Vertical	32.37	54.00	21.63	1.4	90
12010.00	AV	Vertical	33.17	54.00	20.83	1.7	90
14412.00	AV	Vertical	32.21	54.00	21.79	1.5	60
16814.00	AV	Vertical	32.28	54.00	21.72	1.8	120
19216.00	AV	Vertical	31.98	54.00	22.02	1.6	180
21618.00	AV	Vertical	32.37	54.00	21.63	1.5	180
24020.00	AV	Vertical	32.51	54.00	21.49	1.4	45

2402.00	AV	Horizontal	89.36		(Fund.)	1.5	120
4804.00	AV	Horizontal	34.31	54.00	19.69	1.6	180
7206.00	AV	Horizontal	34.12	54.00	19.88	1.8	90
9608.00	AV	Horizontal	32.73	54.00	21.27	1.0	120
12010.00	AV	Horizontal	33.11	54.00	20.89	1.6	45
14412.00	AV	Horizonta	31.46	54.00	22.54	1.5	180
16814.00	AV	Horizontal	31.74	54.00	22.26	1.5	180
19216.00	AV	Horizontal	31.82	54.00	22.18	1.8	90
21618.00	AV	Horizontal	31.13	54.00	22.87	1.8	120
24020.00	AV	Horizontal	32.06	54.00	21.94	1.0	90
2402.00	PK	Vertical	103.14		(Fund.)	1.5	90
4804.00	PK	Vertical	44.23	74.00	29.77	1.4	100
7206.00	PK	Vertical	41.67	74.00	32.33	1.6	90
9608.00	PK	Vertical	39.81	74.00	34.19	1.8	80
12010.00	PK	Vertical	38.66	74.00	35.34	1.7	100
14412.00	PK	Vertical	38.17	74.00	35.83	1.4	60
16814.00	PK	Vertical	39.11	74.00	34.89	1.6	90
19216.00	PK	Vertical	38.71	74.00	35.29	1.5	60
21618.00	PK	Vertical	37.43	74.00	36.57	1.5	120
24020.00	PK	Vertical	36.21	74.00	37.79	1.7	90
2402.00	PK	Horizontal	90.30		(Fund.)	1.5	45
4804.00	PK	Horizontal	42.21	74.00	31.79	1.6	60
7206.00	PK	Horizontal	36.46	74.00	37.54	1.5	100
9608.00	PK	Horizontal	37.26	74.00	36.74	1.0	90
12010.00	PK	Horizontal	34.18	74.00	39.82	1.0	60
14412.00	PK	Horizontal	33.81	74.00	40.19	1.5	60
16814.00	PK	Horizontal	31.26	74.00	42.74	1.8	100
19216.00	PK	Horizontal	31.48	74.00	42.52	1.8	120
21618.00	PK	Horizontal	32.13	74.00	41.87	1.8	180
24020.00	PK	Horizontal	33.14	74.00	40.86	1.0	120
Middle frequency							
2441.00	AV	Vertical	101.16		(Fund.)	1.8	120
4882.00	AV	Vertical	32.46	54.00	21.54	1.4	45
7323.00	AV	Vertical	33.12	54.00	20.88	1.8	60

9764.00	AV	Vertical	32.43	54.00	21.57	1.0	100
12205.00	AV	Vertical	33.15	54.00	20.85	1.3	90
14646.00	AV	Vertical	31.78	54.00	22.22	1.0	120
17087.00	AV	Vertical	31.64	54.00	22.36	1.6	180
19528.00	AV	Vertical	32.04	54.00	21.96	1.5	120
21969.00	AV	Vertical	31.34	54.00	22.66	1.5	90
24410.00	AV	Vertical	30.72	54.00	23.28	1.0	90
2441.00	AV	Horizontal	89.37		(Fund.)	1.8	100
4882.00	AV	Horizontal	34.85	54.00	19.15	1.5	180
7323.00	AV	Horizontal	34.32	54.00	19.68	1.6	90
9764.00	AV	Horizontal	33.81	54.00	20.19	1.0	100
12205.00	AV	Horizontal	34.19	54.00	19.81	1.0	120
14646.00	AV	Horizontal	32.15	54.00	21.85	1.5	90
17087.00	AV	Horizontal	33.27	54.00	20.73	1.8	45
19528.00	AV	Horizontal	31.65	54.00	22.35	1.4	120
21969.00	AV	Horizontal	31.74	54.00	22.26	1.6	90
24410.00	AV	Horizontal	30.42	54.00	23.58	1.8	120
2441.00	PK	Vertical	101.30		(Fund.)	1.5	120
4882.00	PK	Vertical	41.77	74.00	32.23	1.5	60
7323.00	PK	Vertical	39.67	74.00	34.33	1.5	90
9764.00	PK	Vertical	38.93	74.00	35.07	1.6	100
12205.00	PK	Vertical	36.46	74.00	37.54	1.5	120
14646.00	PK	Vertical	36.22	74.00	37.78	1.8	90
17087.00	PK	Vertical	37.01	74.00	36.99	1.0	180
19528.00	PK	Vertical	34.11	74.00	39.89	1.5	120
21969.00	PK	Vertical	34.09	74.00	39.91	1.6	45
24410.00	PK	Vertical	32.84	74.00	41.16	1.8	90
2441.00	PK	Horizontal	102.89		(Fund.)	1.5	100
4882.00	PK	Horizontal	45.38	74.00	28.62	1.8	45
7323.00	PK	Horizontal	44.37	74.00	29.63	1.5	60
9764.00	PK	Horizontal	44.21	74.00	29.79	1.5	90
12205.00	PK	Horizontal	40.87	74.00	33.13	1.6	100
14646.00	PK	Horizontal	39.98	74.00	34.02	1.0	120
17087.00	PK	Horizontal	40.37	74.00	33.63	1.8	180

19528.00	PK	Horizontal	38.35	74.00	35.65	1.5	120
21969.00	PK	Horizontal	36.48	74.00	37.52	1.5	100
24410.00	PK	Horizontal	36.87	74.00	37.13	1.6	45
High frequency							
2480.00	AV	Vertical	88.52		(Fund.)	1.5	180
4960.00	AV	Vertical	33.34	54.00	20.66	1.5	90
7440.00	AV	Vertical	32.12	54.00	21.88	1.5	180
9920.00	AV	Vertical	31.23	54.00	22.77	1.6	45
12400.00	AV	Vertical	30.98	54.00	23.02	1.8	90
14880.00	AV	Vertical	31.23	54.00	22.77	1.5	150
17360.00	AV	Vertical	30.87	54.00	23.13	1.6	180
19840.00	AV	Vertical	30.79	54.00	23.21	1.8	0
22320.00	AV	Vertical	30.01	54.00	23.99	1.5	0
24800.00	AV	Vertical	29.54	54.00	24.46	1.5	45
2480.00	AV	Horizontal	100.85		(Fund.)	1.5	0
4960.00	AV	Horizontal	34.21	54.00	19.79	1.5	135
7440.00	AV	Horizontal	33.32	54.00	20.68	1.5	60
9920.00	AV	Horizontal	32.13	54.00	21.87	1.0	60
12400.00	AV	Horizontal	32.32	54.00	21.68	1.6	90
14880.00	AV	Horizontal	32.21	54.00	21.79	1.0	180
17360.00	AV	Horizontal	30.98	54.00	23.02	1.8	150
19840.00	AV	Horizontal	31.31	54.00	22.69	1.5	180
22320.00	AV	Horizontal	31.65	54.00	22.35	1.0	150
24800.00	AV	Horizontal	30.80	54.00	23.20	1.6	0
2480.00	PK	Vertical	89.63		(Fund.)	1.5	90
4960.00	PK	Vertical	37.89	74.00	36.11	1.5	60
7440.00	PK	Vertical	37.12	74.00	36.88	1.5	0
9920.00	PK	Vertical	36.78	74.00	37.22	1.8	90
12400.00	PK	Vertical	36.23	74.00	37.77	1.0	90
14880.00	PK	Vertical	35.15	74.00	38.85	1.6	60
17360.00	PK	Vertical	34.35	74.00	39.65	1.8	90
19840.00	PK	Vertical	33.65	74.00	40.35	1.5	180
22320.00	PK	Vertical	33.21	74.00	40.79	1.5	90
24800.00	PK	Vertical	31.40	74.00	42.60	1.6	0

2480.00	PK	Vertical	101.72		(Fund.)	1.5	90
4960.00	PK	Vertical	38.76	74.00	35.24	1.5	90
7440.00	PK	Vertical	39.98	74.00	34.02	1.5	0
9920.00	PK	Vertical	37.88	74.00	36.12	1.6	45
12400.00	PK	Vertical	33.45	74.00	40.55	1.6	45
14880.00	PK	Vertical	36.43	74.00	37.57	1.5	60
17360.00	PK	Vertical	36.78	74.00	37.22	1.8	150
19840.00	PK	Vertical	34.21	74.00	39.79	1.8	100
22320.00	PK	Vertical	33.12	74.00	40.88	1.0	120
24800.00	PK	Vertical	33.41	74.00	40.59	1.6	90

8 Maximum Peak Output Power

Test Requirement:	FCC Part15 Paragraph 15.247
Test Method:	Based on ANSI 63.4:2003
Test Date:	Aug. 21, 2008
Test mode:	Compliance test in the worse case: Tx Lower/Tx Middle/Tx Upper
Requirements:	Regulation 15.247(b) The limit of Maximum Peak Output Power Measurement is 1W(30dBm)

Test procedure:

The following test procedure as below:

The transmitter output (antenna port) was connected to the spectrum analyzer.EUT and its simulators are placed on a table, let EUT working in test mode,then test it.

The bandwidth of the fundamental frequency was measured with the spectrum analyser using 100kHz RBW and 100kHz VBW.

Test Result: The unit does meet the FCC requirements.


Test Channel	Fundamental Frequency(GHz)	Output Power (mW)	Limit (W)	Power output level
Lower	2.402	0.276	1	ERP
Middle	2.448	0.468	1	ERP
Upper	2.480	0.298	1	ERP

9 Hopping Channel Number


Test Requirement:	FCC Part15 C
Test Method:	Based on FCC Part15 Paragraph 15.247
Test Date:	Aug. 20,2008
Test mode:	The EUT work in test mode(Tx) and test it
Requirements:	Regulation 15.247(b) For frequency hopping systems operating In the 2400-2483.5MHz band employing at least 15 hopping channels.
Test result:	The total number of channels would be 16 channels. The unit does meet the FCC requirements.

Please refer the graph as below:


Channel 1 to Channel 4:

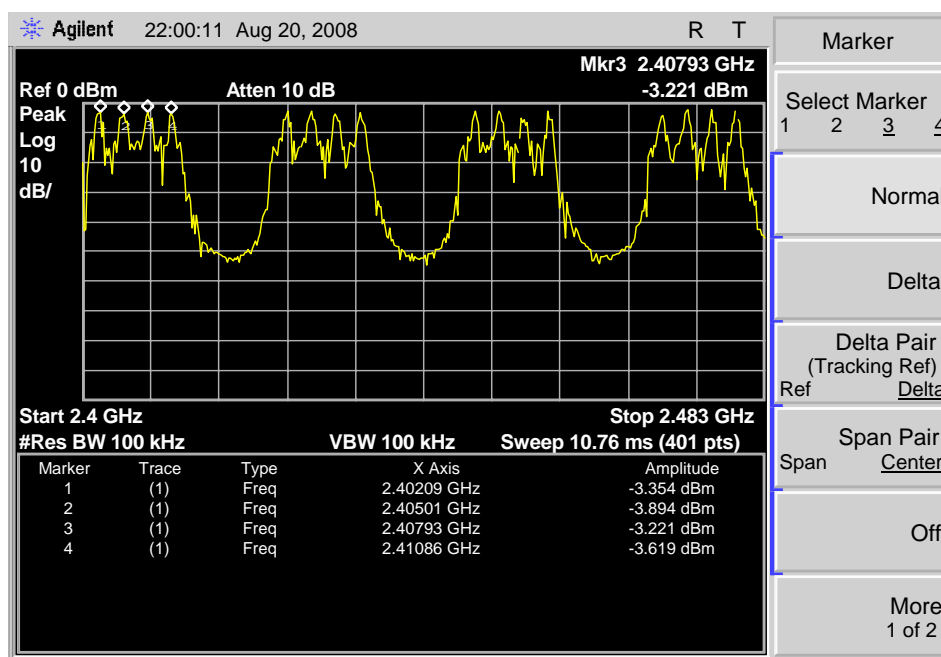


Channel 5 to Channel 8:

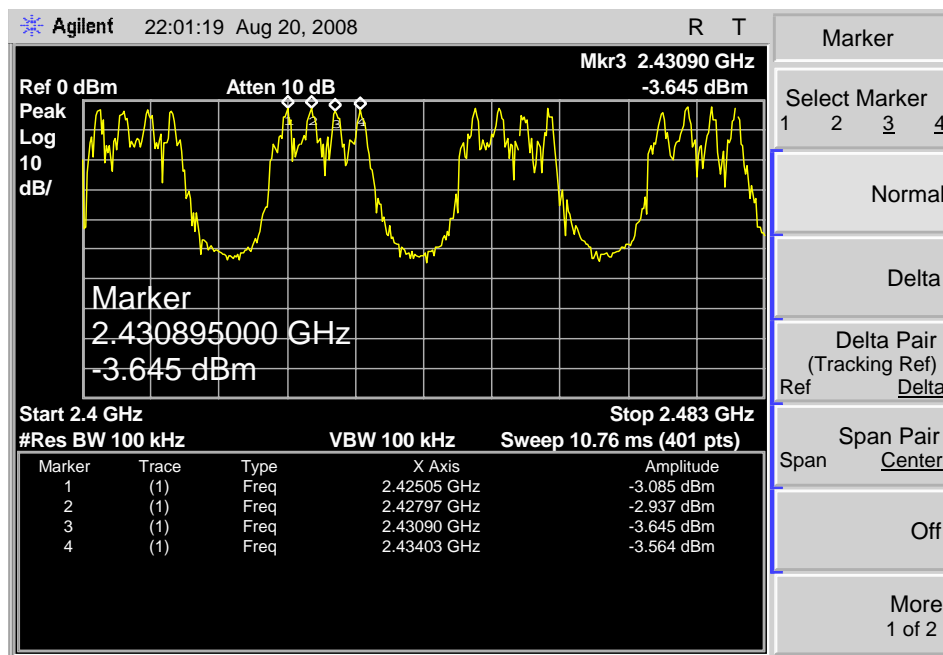

Channel 9 to Channel 12:

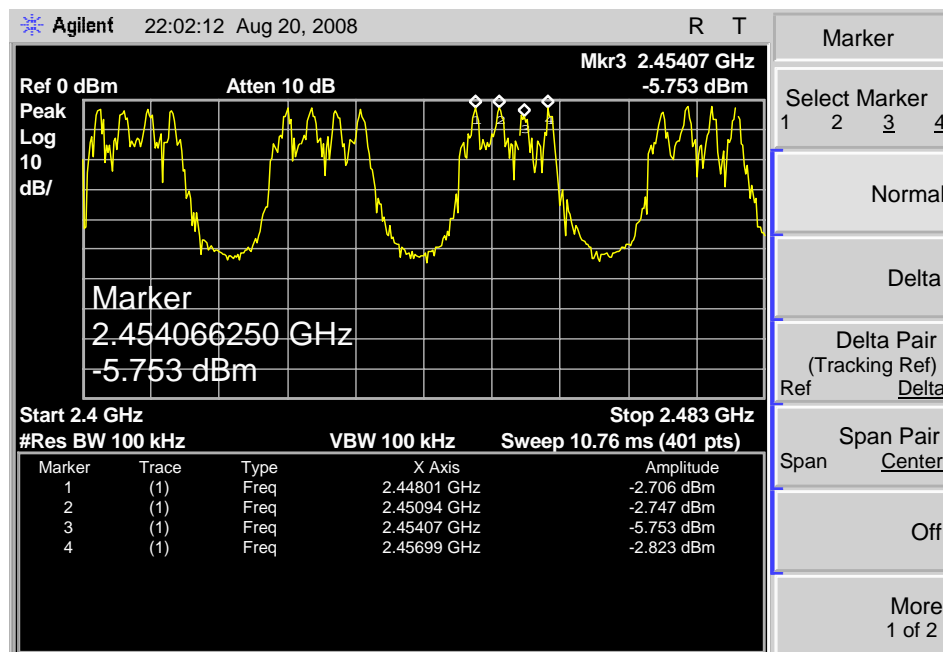

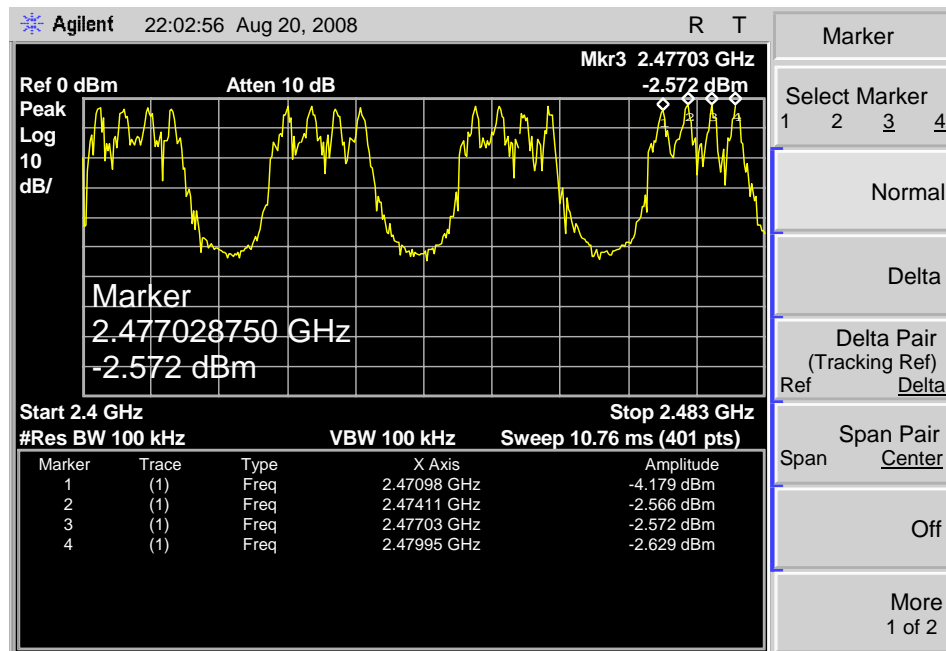Channel 13 to Channel 16:

10 Frequency Separated

The requirements in this clause are only applicable to equipment using frequency hopping spread spectrum (FHSS) modulation.

Channel Separated

Definition:

A hopping channel is any of the centre frequencies defined within the hopping sequence of a FHSS system.

Limit:

Non-adaptive frequency hopping system shall make use of non-overlapping channels separated by the channel bandwidth as measured at 20dB below peak power.

The hopping channels defined within a hopping sequence shall be at least 1MHz apart(channel separation)

Operating Environment:

Temperature: 22.0 °C

Humidity: 55 % RH



Barometric Pressure: 1012 mbar


EUT Operation Condition:

The EUT was programmed to be in continuously transmitting mode.

Test Result: PASS

Please refer to the below photos for more details

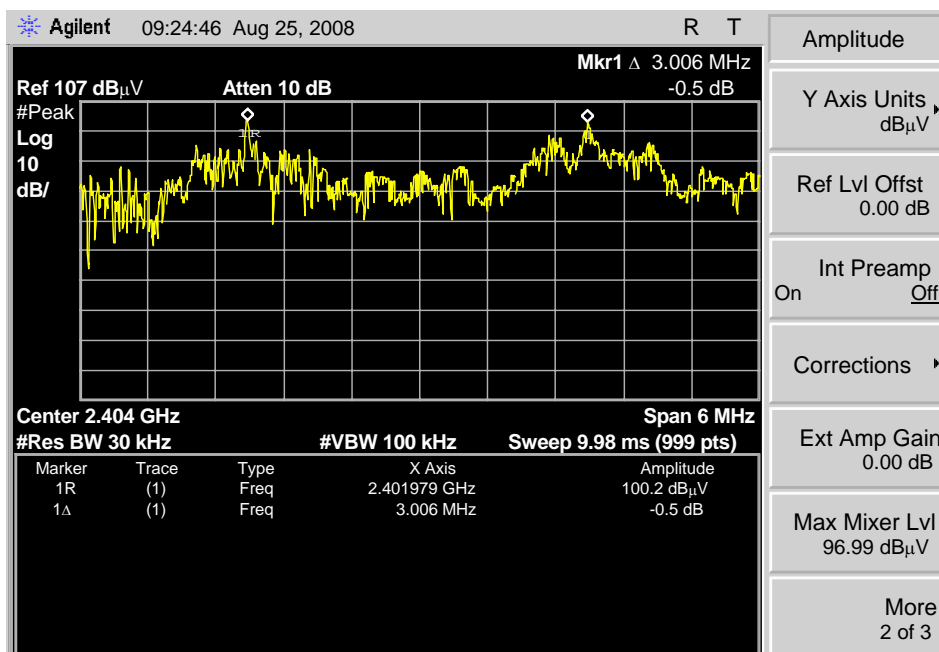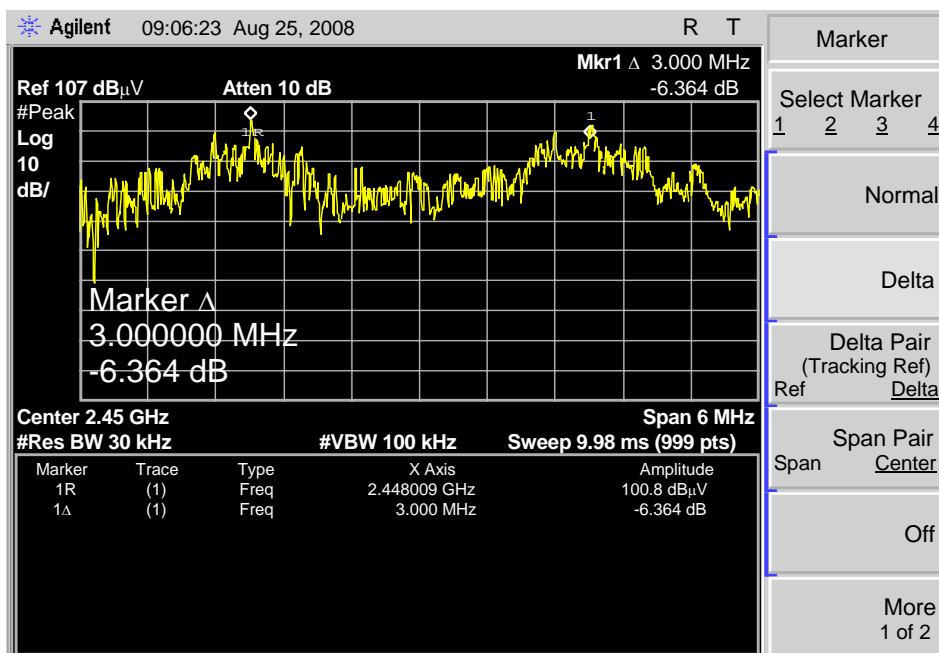Lower Channel 2402MHz**Middle Channel 2448MHz**

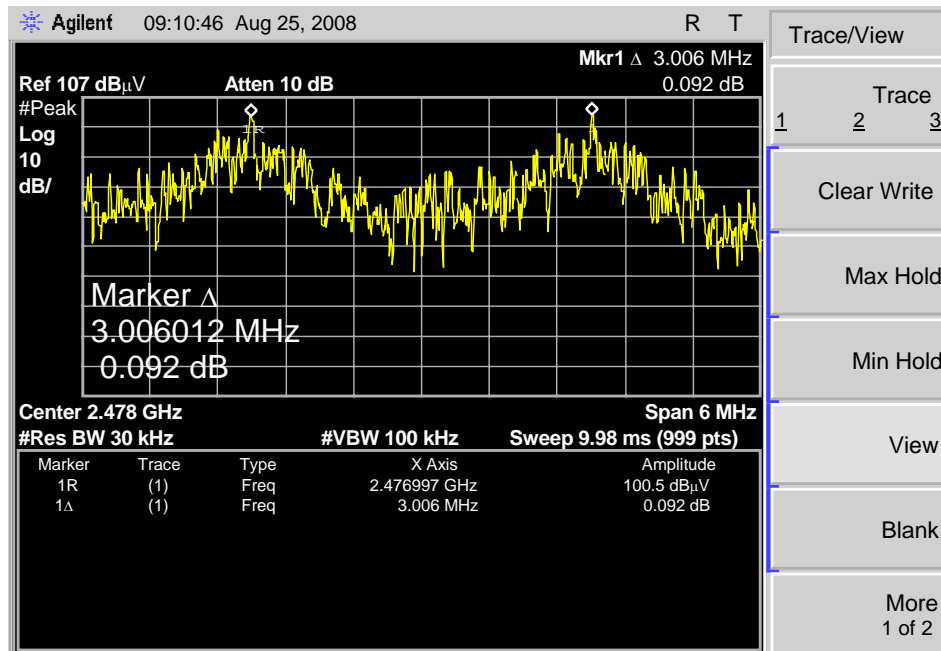Upper Channel 2480MHz

11 Dwell Time

Definition:

The dwell time is the time spent at a particular frequency during any single hop.

Limit: the maximum dwell time shall be less than 0.4s.

Operating Environment:

Temperature: 22.0 °C

Humidity: 55 % RH

Barometric Pressure: 1012 mbar

EUT Operation Condition:

The EUT was programmed to be in continuously transmitting mode.

Test Procedure

The EUT output antenna port was connected to the spectrum analyzer. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz, and the frequency span to zero span, measure the maximum time duration of one single pulse. So, the Dwell Time can be calculated as follows:

$$T = T_{\text{on time}} * N_{\text{times}} / 1S * 0.4 * M_{\text{ch no.}} \leq 0.4S$$

Note : Mkr Delta is once pulse time .

Test Result: PASS

Please refer to the below photos for more details.


Channel 2402MHz

Dwell time of each occupation in this channel as follows:

$$0.000113 \times 320 / 15 \times 0.4 \times 16 = 0.231424 \text{ S} \leq 0.4 \text{ S}$$

Test Result: PASS

The Results are not be greater than 0.4 seconds.

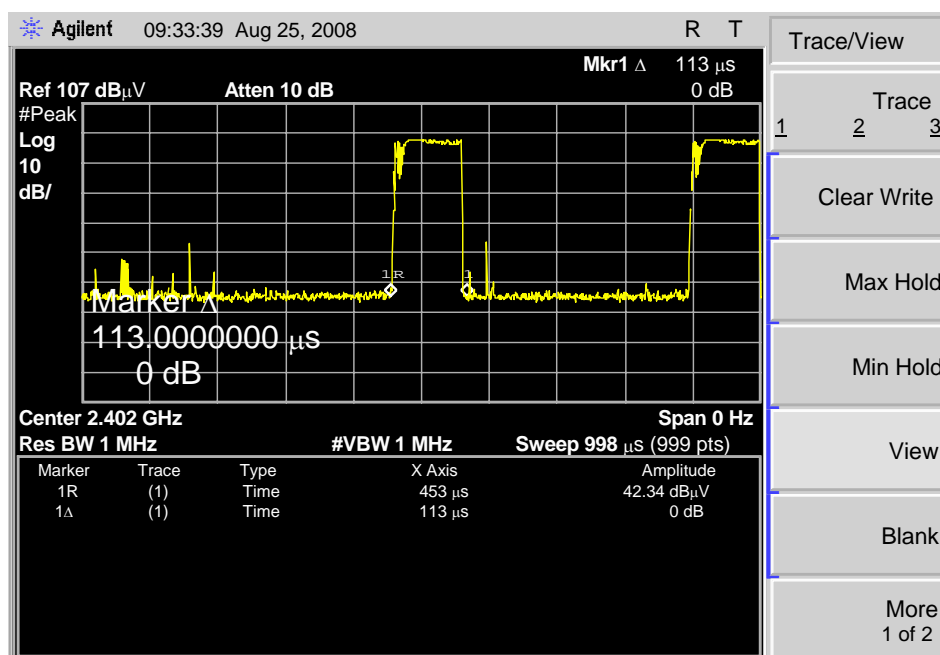


Channel 2448MHz

Dwell time of each occupation in this channel as follows:

$$0.000105 \times 320 / 15 \times 0.4 \times 16 = 0.21504 \text{ S} \leq 0.4 \text{ S} .$$

Test Result: PASS

The Results are not be greater than 0.4 seconds.

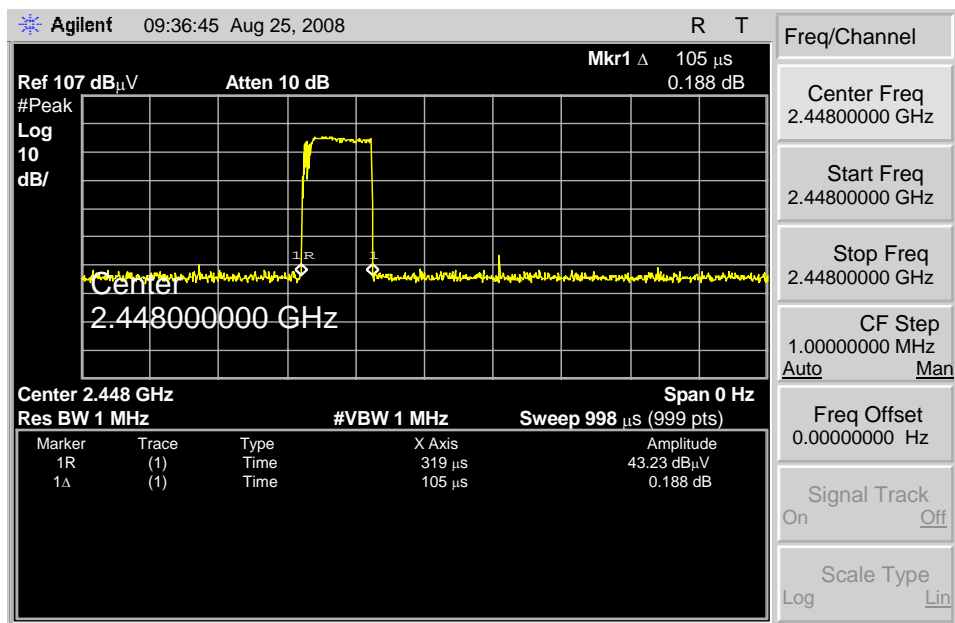


Channel 2480MHz

Dwell time of each occupation in this channel as follows:

$$0.000107 \times 320 / 1S \times 0.4 \times 16 = 0.219136 \text{ S} \leq 0.4 \text{ S}.$$

Test Result: PASS

The Results are not be greater than 0.4 seconds.

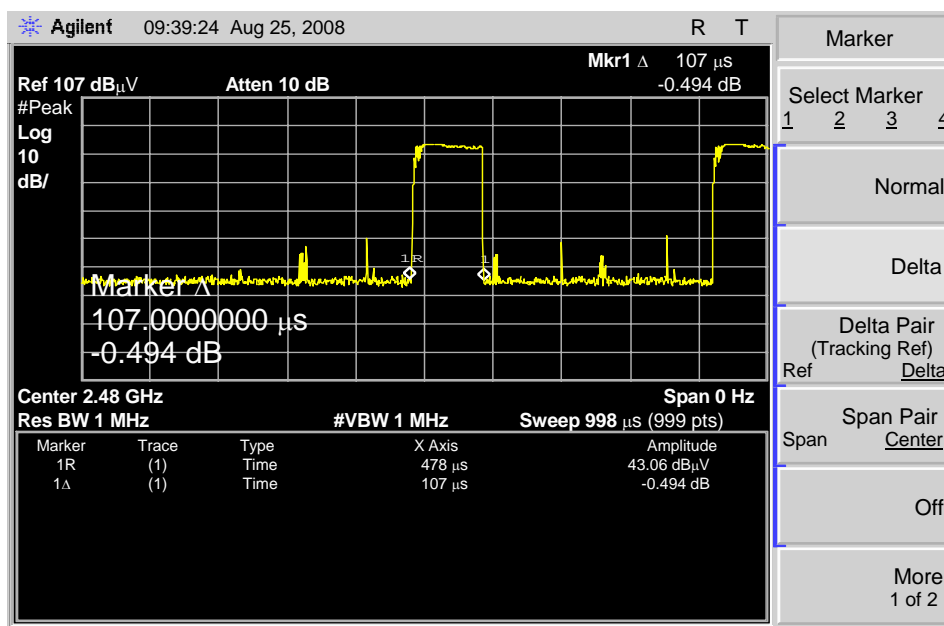

12 20-dB Bandwidth

Test Requirement:	FCC Part15 C
Test Method:	Based on FCC Part15 Paragraph 15.247
Test Date:	Aug. 21, 2008
Test mode:	The EUT work in test mode and test it


Test Procedure:

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. The bandwidth of the fundamental frequency was measure by spectrum analyser with 100KHz RBW and 100KHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power 20dB.


Test Result:

Please refer the graph as below.


Lower

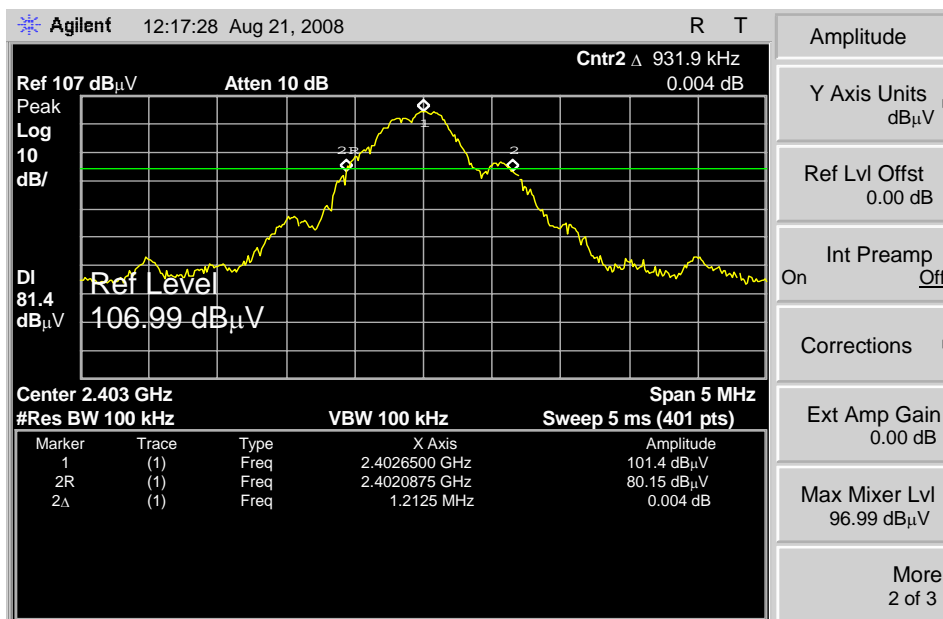

Middle

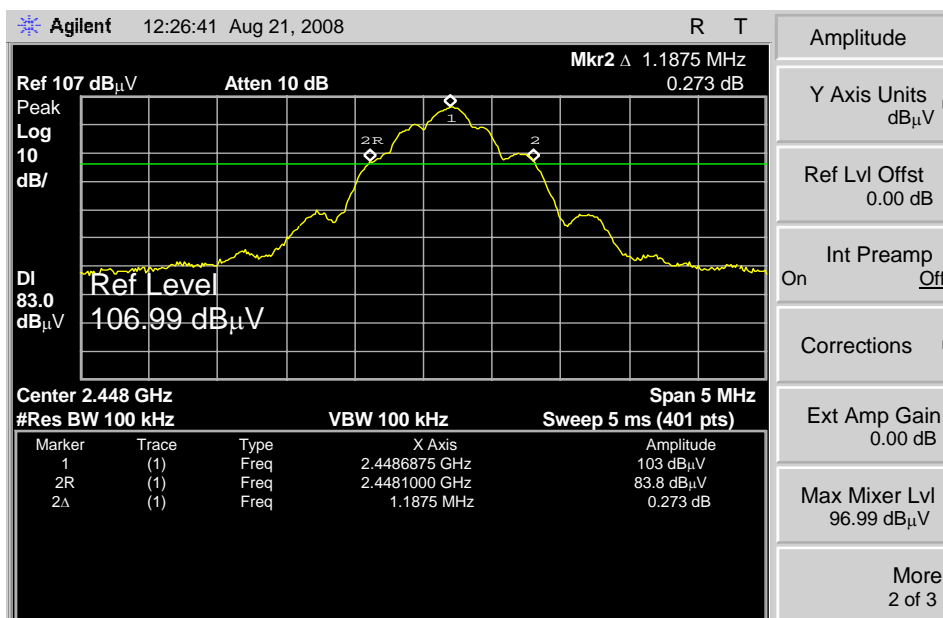

Upper

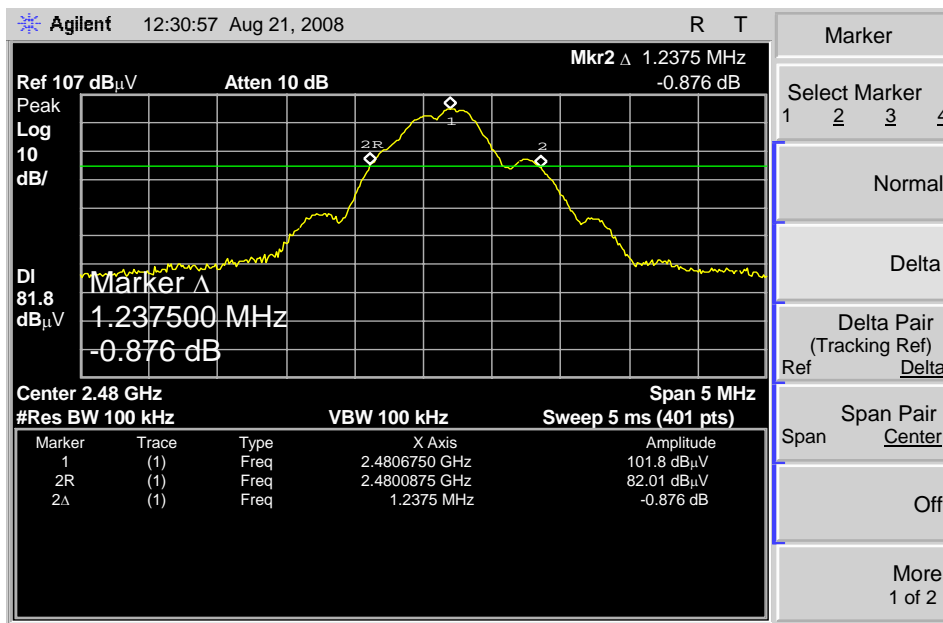

13 Radiated spurious emissions into adjacent restricted band

Test Requirement: FCC Part15 Paragraph 15.205
 Test Method: Based on FCC Part 15 Paragraph 15.247
 Test Date: Aug. 21, 2008
 Requirements: The EUT work in test mode and test it


Requiments:


emissions that fall in the restricted bands(15.205).Above 1000MHz, compliance with the emissions limits in section 15.209 shall be demonstrated based on the average value of the measured emissions,The provisions in section 15.35apply to these measurements.

Test procedure:

An in band field strength measurement of the fundamental emission using the RBW and detector function required by C63.4-2003 and FCC Rules.The procedure was repeated with an average detector and a plot made.The calculated field strength in the adjacent restricted band is presented below.

Lower Bandedge/ Restricted Band (Peak Value)

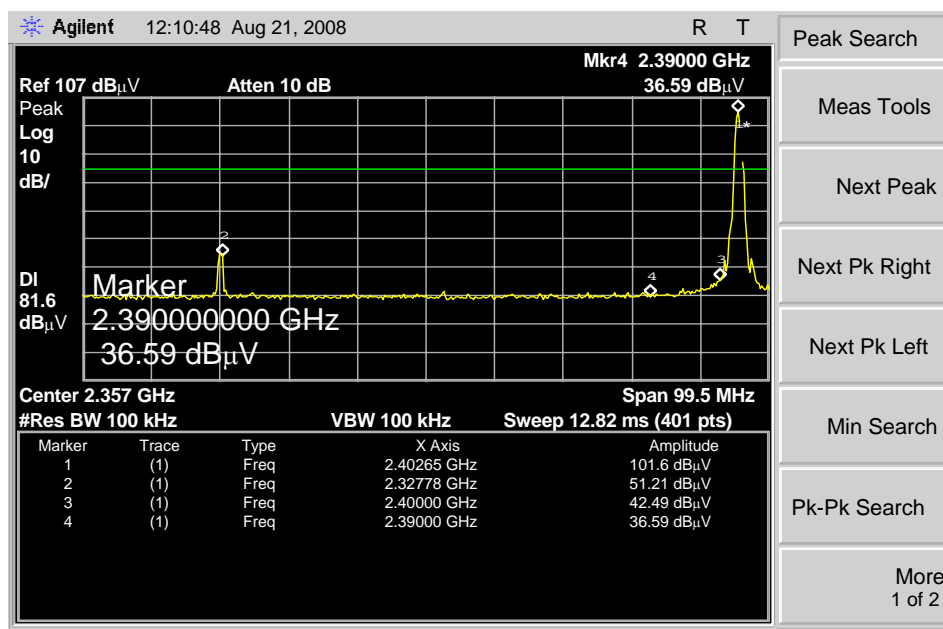

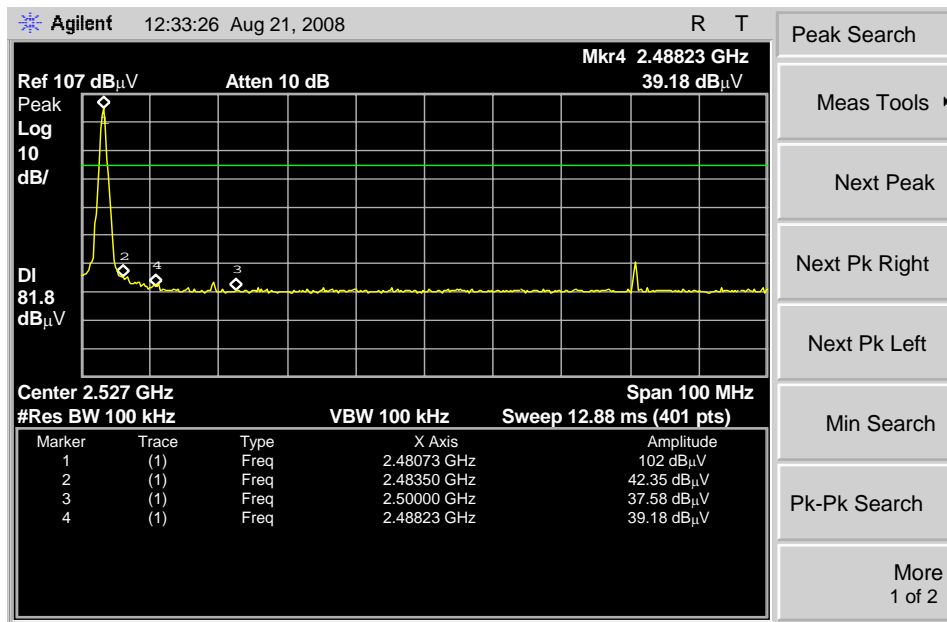Upper Bandedge/ Restricted Band (Peak Value)

14 RF Exposure Test

Test Requirement:	FCC Part 2 Subpart J
Test Method:	Based on FCC Part 15 Paragraph 15.247
Test Date:	Aug. 21, 2008
Requirements:	The EUT work in test mode and test it

Requiments:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained


Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
-.198	0.633	-5,588	0.276	0.000035	1	Complies
-.198	0.633	-3.291	0.468	0.000059	1	Complies
-.198	0.633	-5.525	0.298	0.000037	1	Complies

15 Photographs of Testingz

Radiation Emission Test View For 30MHz-1000MH



Radiation Emission Test View For 1GHz-25GH

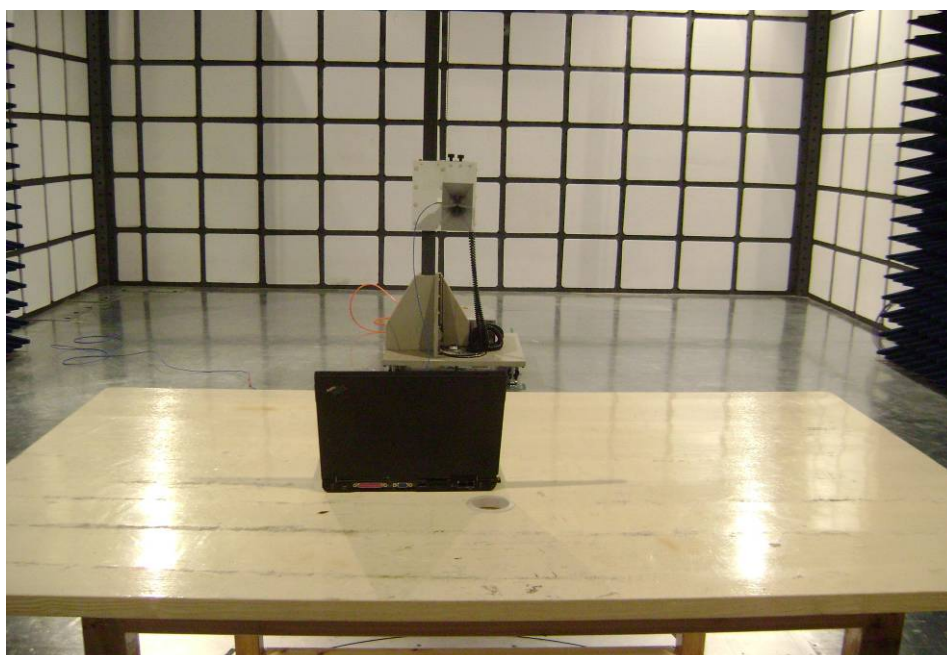

16 Photographs - Constructional Details


16.1 EUT - Front View




16.2 EUT - Back View



16.3 PCB – Front View

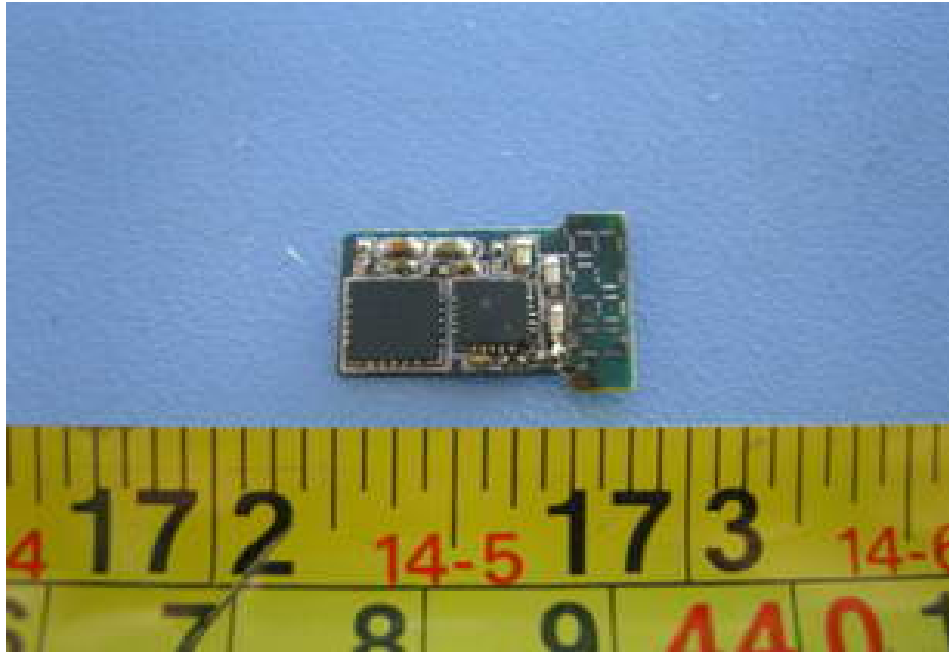

16.4 PCB - Back View

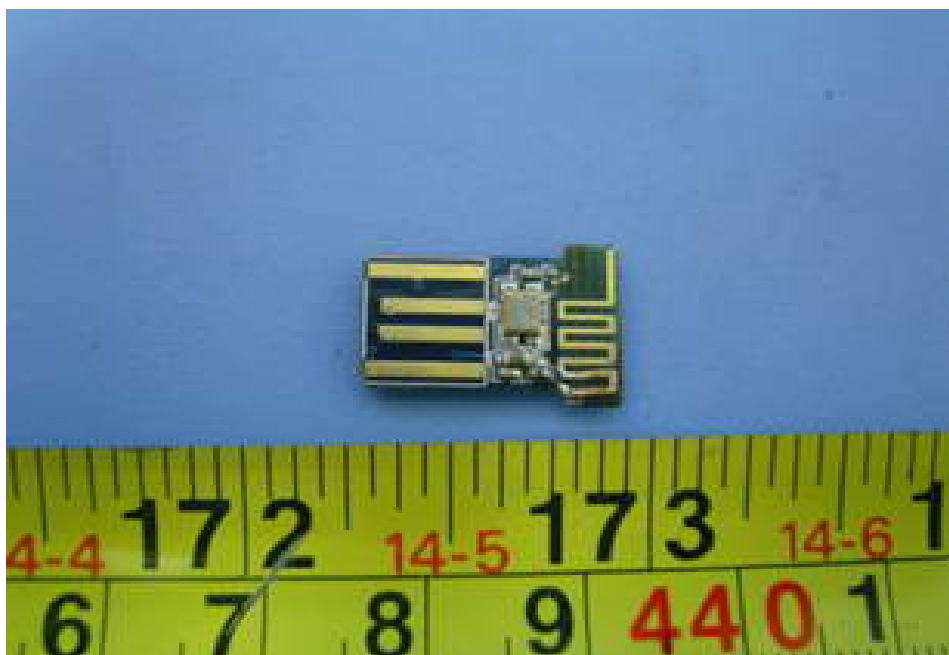

17 FCC ID Label

This device complies with Part 15 of the FCC Rules.

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Bottom View/proposed FCC Mark Location

