

FCC TEST REPORT

FCC ID : UC3M-498BT

Applicant : INTECH ELECTRONICS CORP.

Address of Applicant : Hall B3 , Yuan-Hu Industry Park , Golf Blvd.,
Song-Yuan Village, Guan-Lan , Shenzhen , China

Equipment Under Test (EUT) :


Product description : Bluetooth Mouse

Model No. : M-298,M-498,M-556,M-598 ,M-765

Standards : FCC 15 Paragraph 15.247

Date of Test : June 09,2009

Test Engineer : Olic huang

Reviewed By : 

PERPARED BY:

Waltek Services (Shenzhen) Co., Ltd.

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen
518105, China

Tel :86-755-27553488

Fax: 86-755-27553868

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS.....	2
3 TEST SUMMARY.....	4
4 GENERAL INFORMATION.....	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF E.U.T.....	5
4.3 DETAILS OF E.U.T.	5
4.4 DESCRIPTION OF SUPPORT UNITS	5
4.5 STANDARDS APPLICABLE FOR TESTING.....	5
4.6 TEST FACILITY.....	6
4.7 TEST LOCATION.....	6
5 EQUIPMENT USED DURING TEST	7
6 CONDUCTED EMISSION TEST	10
6.1 TEST EQUIPMENT.....	10
6.2 TEST PROCEDURE	10
6.3 CONDUCTED TEST SETUP	11
6.4 EUT OPERATING CONDITION	11
6.5 CONDUCTED EMISSION LIMITS	12
6.6 CONDUCTED EMISSION TEST DATA	12
7 RADIATION EMISSION TEST.....	13
7.1 TEST EQUIPMENT.....	13
7.2 MEASUREMENT UNCERTAINTY.....	13
7.3 TEST PROCEDURE	13
7.4 RADIATED TEST SETUP	14
7.5 SPECTRUM ANALYZER SETUP.....	14
7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION	15
7.7 SUMMARY OF TEST RESULTS.....	15
7.8 EUT OPERATING CONDITION	16
7.9 RADIATED EMISSIONS LIMIT ON PARAGRAPH 15.209	16
7.10 RADIATED EMISSIONS TEST RESULT.....	17
7.11 RADIATED EMISSION DATA	17
8 MAXIMUM PEAK OUTPUT POWER.....	21
9 HOPPING CHANNEL NUMBER.....	22
10 FREQUENCY SEPARATED.....	23
11 DWELL TIME.....	27

12	20-DB BANDWIDTH.....	37
13	RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND	40
14	RF EXPOSURE TEST.....	42
15	PHOTOGRAPHS OF TESTING.....	44
16	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	45
16.1	EUT1 - FRONT VIEW (M-498)	45
16.2	EUT2 - FRONT VIEW (M-298)	45
16.3	EUT3 - FRONT VIEW (M-556)	46
16.4	EUT3 - FRONT VIEW (M-598)	46
16.5	EUT3 - FRONT VIEW (M-765)	47
16.6	PCB1- FRONT VIEW.....	47
16.7	PCB1 - BACK VIEW	48
16.8	PCB2- FRONT VIEW.....	48
16.9	PCB2 - BACK VIEW	49
17	FCC ID LABEL.....	50

3 Test Summary

Test Items	Test Requirement	Test Method	Limit / Severity	Result
Maximum peak output power	FCC Part 15:2007	ANSI C63.4: 2003	30dBm	PASS
Restricted Band	FCC Part 15:2007	ANSI C63.4: 2003	Note	PASS
Dwell time	FCC Part 15:2007	ANSI C63.4: 2003	Maximum:0.4 s	PASS
Channel separation	FCC Part 15:2007	ANSI C63.4: 2003	Channel separation at least 1MHz	PASS
Hopping channel No.	FCC Part 15:2007	ANSI C63.4: 2003	Total 79 channels	PASS
20-dB Bandwidth	FCC Part 15:2007	ANSI C63.4: 2003	Note	PASS
RF Exposure Test	FCC Part 15:2007	ANSI C63.4: 2003	Note	PASS
Mains Terminal Disturbance Voltage, 150kHz to 30MHz	FCC Part 15:2007	ANSI C63.4: 2003	N/A	N/A
Radiation Emission, 30MHz to 25GHz	FCC Part 15:2007	ANSI C63.4: 2003	N/A	PASS

Note : denote that for more details of the EUT , please refer to the relating test items as below .

Remark : the methods of measurement in all the test items were according to the FCC Public Notice DA 00-705 .

4 General Information

4.1 Client Information

Applicant: INTECH ELECTRONICS CORP.
Address of Applicant: Hall B3 , Yuan-Hu Industry Park , Golf Blvd.,
Song-Yuan Village, Guan-Lan , Shenzhen , China

manufacture: INTECH ELECTRONICS CORP.
Address of manufacture: Hall B3 , Yuan-Hu Industry Park , Golf Blvd.,
Song-Yuan Village, Guan-Lan , Shenzhen , China

4.2 General Description of E.U.T.

Product description: Bluetooth Mouse
Model No.: M-298,M-498,M-556,M-598 ,M-765

4.3 Details of E.U.T.

Power Supply: DC 3.0V,SIZE 2*AAA
The PCB of all the models are the same except that the appearance is different..

4.4 Description of Support Units

The EUT has been tested as an independent unit.

4.5 Standards Applicable for Testing

The customer requested FCC tests for a Bluetooth Mouse. The standards used were FCC 15 Paragraph 15.247,Paragraph 15.205, Paragraph 15.207,Paragraph 15.209, Paragraph 15.31,Paragraph 15.33, Paragraph 15.35.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, June 24, 2008.

- **IC – Registration No.: 7760**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration IC7760, July 24, 2008.

4.7 Test Location

All Emissions tests were performed at:-

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen 518105, Guangdong, China.

5 Equipment Used during Test

NO	Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertainty
1.	EMC Analyzer	Agilent/ E7405A	MY45114 943	W20080 01	9k-26.5GHz	Aug-08	Aug-09	Wws20 081596	±1dB
2.	Trilog Broadband Antenne 30-3000 MHz	SCHWARZ BECK MESS-ELEKTROM / VULB9163	336	W20080 02	30-3000 MHz	Aug-08	Aug-09		±1dB
3.	Broad-band Horn Antenna 1-18 GHz	SCHWARZ BECK MESS-ELEKTROM / VULB9163	667	W20080 03	1-18GHz	Aug-08	Aug-09		f < 10 GHz: ±1dB 10GHz < f < 18 GHz : ±1.5dB
4.	Broadband Preamplifier 0.5-18 GHz	SCHWARZ BECK MESS-ELEKTROM / BBV 9718	9718-148	W20080 04	0.5-18GHz	Aug-08	Aug-09		±1.2dB
5.	10m Coaxial Cable with N-male Connectors usable up to 18GHz,	SCHWARZ BECK MESS-ELEKTROM / AK 9515 H	-	-	-	Aug-08	Aug-09		-
6.	10m 50 Ohm Coaxial Cable with N-plug, individual length, usable up to 3(5)GHz, Connectors	SCHWARZ BECK MESS-ELEKTROM / AK 9513				Aug-08	Aug-09		
7.	Positioning Controller	C&C LAB/ CC-C-IF				Aug-08	Aug-09		
8.	Color Monitor	SUNSP0/ SP-14C				Aug-08	Aug-09		
9.	Test Receiver	ROHDE&SC HWARZ/ ESPI	101155	W20050 01	9k-3GHz	Jul-08	Jul-09	Wws20 080942	±1dB
10.	EMI Receiver	Bejingkehua n	KH3931		9k-1Ghz	Aug-08			
11.	Two-Line V-Network	ROHDE&SC HWARZ/ ENV216	100115	W20050 02	50Ω/50μH	Jul-08	Jul-09	Wws20 080941	±10%

NO	Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertainty
V — LI SN	SCHWARZ BECK MESS — ELEKTRO NIK	NSLK 8128	8128- 259	9k- 30MHz	Jul-08	Jul-09			
12.	Absorbing Clamp	ROHDE&SC HWARZ/ MDS-21	100205	W20050 03	impandance50 Ω loss : 17 d B	Jul-08	Jul-09	Wws20 080943	± 1 d B
13.	10m 50 Ohm Coaxial Cable with N- plug,individ ual length,usabl e up to 3(5)GHz, Connectors	SCHWARZ BECK MESS- ELEKTROM / AK 9514				Jul-08	Jul-09		
14.	Digital Power Analyzer	Em Test AG/Switzerla nd/ DPA 500	V07451 03095	W20080 12	Power : 2000VA Vol-range: 0- 300V Freq_range : 10-80Hz	Aug-08	Aug-09	Wwd2 008118 5	Voltage distinguish:0 .025%Power _freq distinguish:0 .02Hz
15.	Power Source	Em Test AG/Switzerla nd/ ACS 500	V07451 03096	W20080 13	Vol-range: 0- 300V Power_freq : 10-80Hz				
16.	Electrostatic Discharge Simulator	Em Test AG/Switzerla nd/DITO	V07451 03094	W20080 05	Contact discharge : 500V-10KV Air diacharge : 500V-16.5KV	Aug-08	Aug-09	Wwc20 082400	7.5A current will be changed in $V_m=1.5V$
17.	RF Generator	TESEQ GmbH/ NSG4070	25781	W20080 08	Fraq-range : 9K-1GHz RF voltage: - 60 d B m-+10d B m	Aug-08	Aug-09	Wws20 081890	Power_freq distinguish0. 1Hz RFelectricity distinguish 0.1 B
18.	CDN M- Type	TESEQ GmbH/ CDN M016	25112	W20080 09	Voltage correct factor 9.5 d B	Aug-08	Aug-09	Wwc20 082396	150K- 80MHz : ± 1 d B 80- 230MHz: -2- +3d B

NO	Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertainty
19.	EM-Clamp	TESEQ GmbH/ KEMZ 801	25153	W2008010	Freq_range : 0.15-1000 MHz	Aug-08	Aug-09	Wwc20082397	0.3-400 MHz: ±4dB Other freq: ±5d B
20.	Attenuator 6dB	TESEQ GmbH/ ATN6050	25365			Aug-08	Aug-09	Wws20081597	
21.	All Modules Generator	SCHAFFNER/6150	34579	W2008006	voltage:200V-4.4KV Pulse current: 100A-2.2KA	Aug-08	Aug-09	Wwc20082401	voltage: ±10% Pulse current : ±10%
22.	Capacitive Coupling Clamp	SCHAFFNER/CDN 8014	25311			Aug-08	Aug-09	Wwc20082398	-
23.	Signal and Data Line Coupling Network	SCHAFFNER/CDN 117	25627	W2008011	1.2/50µS	Aug-08	Aug-09	Wwc20082399	-
24.	AC Power Supply	TONGYUN/DTDGC-4				Aug-08	Aug-09	Wws20080944	-
25.	Exposure Level Tester ELT-400	Narda Safety TEST Solutions/2304/03	M-0155	w2008022	Test freq range : 1 — 400kHz	Aug-08	Aug-09	Wwd20081191	Test uncertainty: 1 — 120kHz: ±1.83%, 120 kHz-400 kHz: ±4.06%
26.	Magnetic Field Probe 100cm ²	Narda Safety TEST Solutions/2300/90.10	M-1070	w2008021	Test freq range : 1 — 400kHz				Test uncertainty : 1Hz-10Hz: ±16.2%, 10Hz - 120kHz: ±2.2%, 120 kHz-400 kHz: ±4.7%
27.	Active Loop Antenna Charger 10kHz-30MHz	Beijing Dazhi / ZN30900A	-	-	10kHz-30MHz	Aug-08	Aug-09		±1d B

6 Conducted Emission Test

Test Requirement:	FCC Part15 Paragraph 15.207
Test Method:	Based on FCC Part15 Paragraph 15.207
Test Date:
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 Test Equipment


Please refer to Section 5 this report.

6.2 Test Procedure

1. The EUT was connected with signal generator and placed on a table.
2. The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.
3. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.3 Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

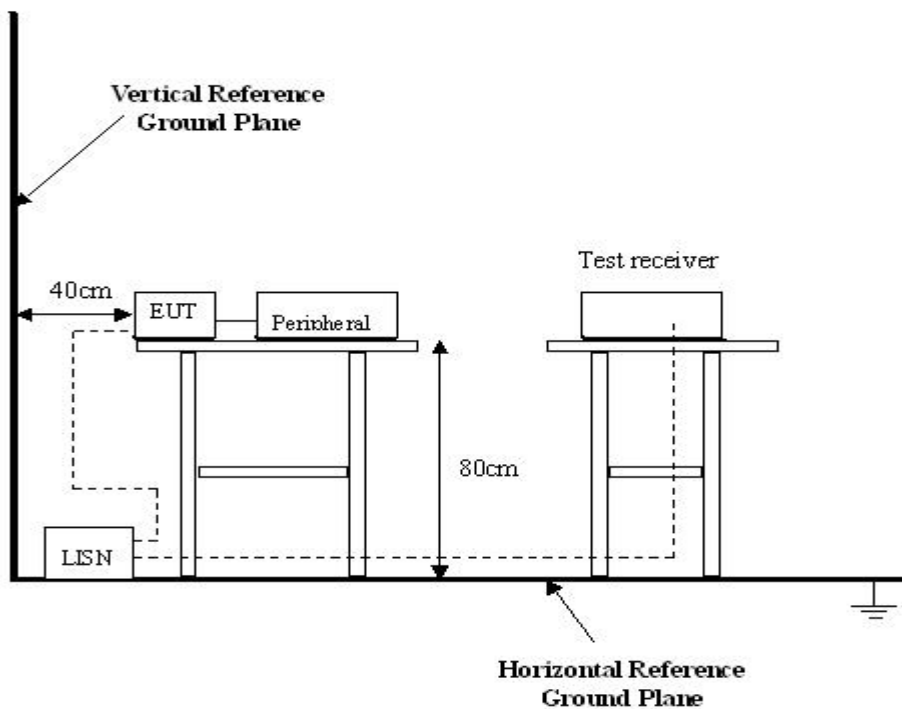

6.4 EUT Operating Condition

Operating condition is according to ANSI C63.4:2003.

- Setup the EUT and simulators as shown on follow.
- Enable RF signal and confirm EUT active.
- Modulate output capacity of EUT up to specification.

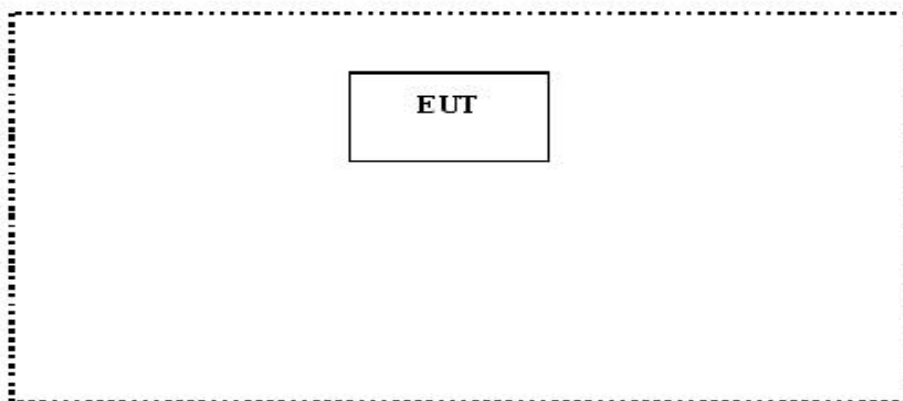

6.5 Conducted Emission Limits

66-56 dB μ V between 0.15MHz & 0.5MHz

56 dB μ V between 0.5MHz & 5MHz

60 dB μ V between 5MHz & 30MHz

Note: In the above limits, the tighter limit applies at the band edges.

6.6 Conducted Emission Test Data

Owing to the DC operation of EUT, this test is not performed.

7 Radiation Emission Test

Test Requirement:	FCC Part15 Paragraph 15.247
Test Method:	Based on ANSI 63.4:2003
Test Date:	June 09,2009
Frequency Range:	30MHz to 25GHz
Measurement Distance:	3m
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

7.1 Test Equipment

Please refer to Section 5 this report.

7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4:2003, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at WALTEK SERVICES EMC Lab is +/-5.03 dB.

7.3 Test Procedure

1. New battery were installed in the equipment under test for radiated emissions test.
2. This is a handheld device, The radiation emission should be tested under 3-axes position (lying, side and stand), After pre-test, It was found that the worse radiation emission was get at the lying position.
3. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
4. All data was recorded in the peak and average detection mode.
5. The EUT was under working mode during the final qualification test and the configuration was used to represent the worst case results.

7.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.209 limits and Paragraph 15.247 limits.

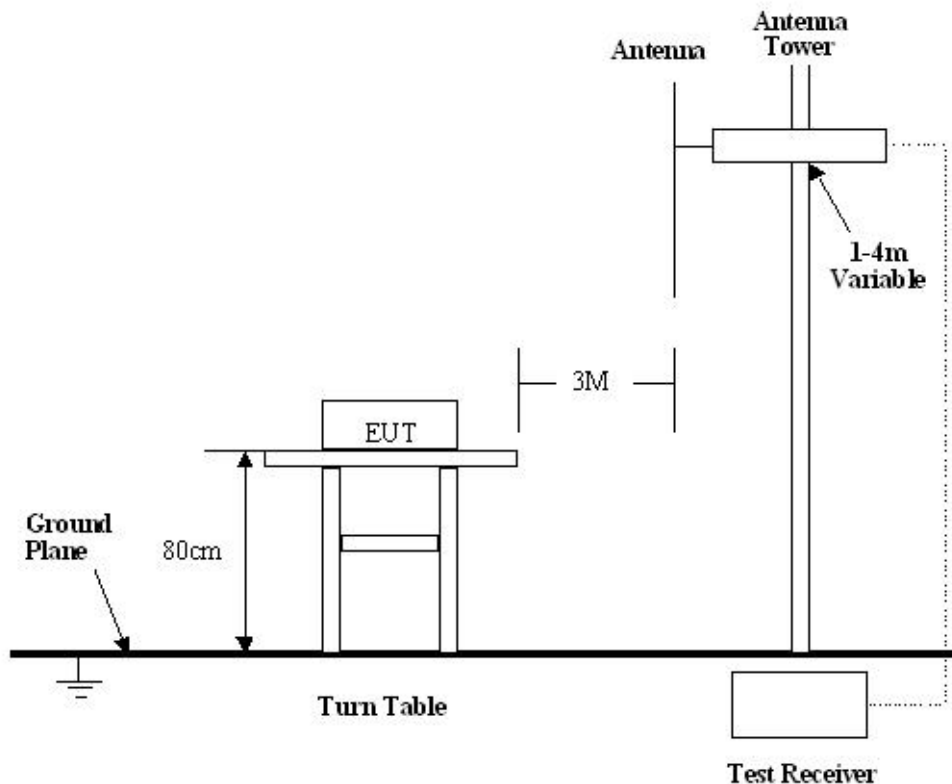

7.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.247 Rules, the system was tested to 25000 MHz.

Below 1GHz

Start Frequency	30 MHz
Stop Frequency	1000 MHz
Sweep Speed	Auto
IF Bandwidth	120 kHz
Video Bandwidth	100 kHz
Quasi-Peak Adapter Bandwidth	120 kHz
Quasi-Peak Adapter Mode.....	Normal
Resolution Bandwidth	100 kHz

Above 1GHz

Start Frequency	1GHz
Stop Frequency	25GHz
Sweep Speed	Auto
IF Bandwidth	120 kHz
Video Bandwidth	1 MHz
Quasi-Peak Adapter Bandwidth	120 kHz
Quasi-Peak Adapter Mode.....	Normal
Resolution Bandwidth	1MHz

7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

7.7 Summary of Test Results

According to the data in section 7.11, the EUT complied with the FCC Part15 Paragraph 15.247 standards.

7.8 EUT Operating Condition

The same as section 6.4 of this report.

Let the EUT work in test mode and test it.

7.9 Radiated Emissions Limit on Paragraph 15.209

Frequency(MHZ)	Distance(m)	Field strength(dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- Note:**
- (1) $\text{RF Voltage(dBuV)} = 20 \log \text{RF Voltage(uV)}$
 - (2) In the Above Table, the tighter limit applies at the band edges.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna.
 - (4) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. Measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
 - (5) Above 1GHz, make a Peak and average measurements for all emissions, Limit for peak is 74dBuV/m, According to Part 15.35(b) and average is 54BuV/m.

7.10 Radiated Emissions Test Result

Formula of conversion factors: the field strength at 3m was established by adding
The meter reading of the spectrum analyzer (which is set to read in units of dBuV/m)
To the antenna correction factor supplied by the antenna manufacturer. The antenna
Correction factors are stated in terms of dB. The gain of the pressletor was accounted
For in the spectrum analyser meter reading.

Example:

Freq(MHz) Meter Reading +ACF=FS

33 20dBuV+10.36dB=30.36dBuV/m @3m

7.11 Radiated Emission Data

A. Test Item: Radiated Emission Data
Test Voltage: DC 3.0V
Test Mode: TX On
Temperature: 25.5 °C
Humidity: 51%RH
Test Result: PASS

Remarks: 30-1000MHz radiation test no significant emissions above the equipment noise floor were detected.

And the below is the Fundamental and Harmonic .

Frequency (MHz)	Detect or	Antenna Polarization	Emission Level (dBuV/m)	FCC Part15 Subpart C Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
Low frequency							
2402.00	AV	Vertical	96.52		(Fund.)	1.2	150
4804.00	AV	Vertical	41.02	54.00	13.98	1.2	0
7206.00	AV	Vertical	35.23	54.00	19.73	1.5	120
9608.00	AV	Vertical	32.52	54.00	21.48	1.8	60
12010.00	AV	Vertical	31.25	54.00	22.75	1.6	90
14412.00	AV	Vertical	31.01	54.00	22.99	1.4	120
16814.00	AV	Vertical	30.02	54.00	23.98	1.7	100
19216.00	AV	Vertical	30.67	54.00	23.33	1.5	180
21618.00	AV	Vertical	29.63	54.00	24.34	1.6	120
24020.00	AV	Vertical	29.01	54.00	24.99	1.2	135
2402.00	AV	Horizontal	92.23		(Fund.)	1.2	120
4804.00	AV	Horizontal	41.12	54.00	12.88	1.2	150

7206.00	AV	Horizontal	36.21	54.00	17.79	1.5	120
9608.00	AV	Horizontal	34.25	54.00	19.75	1.2	180
12010.00	AV	Horizontal	33.21	54.00	20.79	1.5	135
14412.00	AV	Horizontal	31.25	54.00	22.75	1.2	120
16814.00	AV	Horizontal	30.74	54.00	23.26	1.5	180
19216.00	AV	Horizontal	32.01	54.00	21.99	1.8	60
21618.00	AV	Horizontal	31.53	54.00	22.47	1.2	90
24020.00	AV	Horizontal	30.01	54.00	23.99	1.5	90
2402.00	PK	Vertical	106.41		(Fund.)	1.5	180
4804.00	PK	Vertical	45.21	74.00	29.64	1.8	30
7206.00	PK	Vertical	40.01	74.00	33.99	1.6	110
9608.00	PK	Vertical	37.42	74.00	36.58	1.4	100
12010.00	PK	Vertical	36.21	74.00	37.79	1.2	90
14412.00	PK	Vertical	32.01	74.00	41.99	1.2	60
16814.00	PK	Vertical	33.21	74.00	40.79	1.4	90
19216.00	PK	Vertical	30.10	74.00	43.90	1.2	120
21618.00	PK	Vertical	29.01	74.00	44.99	1.7	120
24020.00	PK	Vertical	29.01	74.00	44.99	1.4	135
2402.00	PK	Horizontal	102.32		(Fund.)	1.8	180
4804.00	PK	Horizontal	41.24	74.00	32.76	1.8	60
7206.00	PK	Horizontal	38.25	74.00	35.75	1.8	120
9608.00	PK	Horizontal	36.98	74.00	37.02	1.2	180
12010.00	PK	Horizontal	35.69	74.00	38.31	1.2	90
14412.00	PK	Horizontal	35.62	74.00	38.38	1.5	90
16814.00	PK	Horizontal	33.35	74.00	40.65	1.8	150
19216.00	PK	Horizontal	33.01	74.00	40.99	1.5	150
21618.00	PK	Horizontal	30.21	74.00	43.79	1.2	120
24020.00	PK	Horizontal	30.01	74.00	43.99	1.2	180
Middle frequency							
2441.00	AV	Vertical	92.21		(Fund.)	1.5	0
4882.00	AV	Vertical	39.02	54.00	14.98	1.2	90
7323.00	AV	Vertical	35.21	54.00	18.71	1.0	90
9764.00	AV	Vertical	33.33	54.00	20.67	1.2	0
12205.00	AV	Vertical	32.02	54.00	21.98	1.2	0
14646.00	AV	Vertical	32.01	54.00	21.99	1.2	150
17087.00	AV	Vertical	30.26	54.00	23.74	1.5	0
19528.00	AV	Vertical	30.01	54.00	23.99	1.5	0
21969.00	AV	Vertical	29.02	54.00	24.98	1.8	180
24410.00	AV	Vertical	28.23	54.00	25.77	1.2	90
2441.00	AV	Horizontal	92.96		(Fund.)	1.0	120
4882.00	AV	Horizontal	35.69	54.00	18.31	1.0	90
7323.00	AV	Horizontal	34.25	54.00	19.75	1.5	270

9764.00	AV	Horizontal	33.52	54.00	20.48	1.2	120
12205.00	AV	Horizontal	31.21	54.00	22.79	1.2	150
14646.00	AV	Horizontal	30.25	54.00	23.75	1.4	180
17087.00	AV	Horizontal	29.25	54.00	24.75	1.6	135
19528.00	AV	Horizontal	28.36	54.00	25.64	1.4	90
21969.00	AV	Horizontal	28.02	54.00	25.98	1.2	150
24410.00	AV	Horizontal	28.02	54.00	25.98	1.7	120
2441.00	PK	Vertical	107.52		(Fund.)	1.0	0
4882.00	PK	Vertical	44.21	74.00	29.79	1.1	90
7323.00	PK	Vertical	38.25	74.00	35.75	1.4	100
9764.00	PK	Vertical	37.94	74.00	36.06	1.3	120
12205.00	PK	Vertical	37.87	74.00	36.13	1.7	180
14646.00	PK	Vertical	36.10	74.00	38.90	1.2	0
17087.00	PK	Vertical	32.03	74.00	41.97	1.4	0
19528.00	PK	Vertical	30.21	74.00	43.79	1.5	120
21969.00	PK	Vertical	28.30	74.00	45.70	1.5	135
24410.00	PK	Vertical	28.30	74.00	45.70	1.2	120
2441.00	PK	Horizontal	103.45		(Fund.)	1.0	0
4882.00	PK	Horizontal	43.56	74.00	30.44	1.7	45
7323.00	PK	Horizontal	41.51	74.00	32.49	1.6	90
9764.00	PK	Horizontal	40.14	74.00	33.86	1.5	60
12205.00	PK	Horizontal	39.36	74.00	34.64	1.4	150
14646.00	PK	Horizontal	37.44	74.00	36.56	1.2	150
17087.00	PK	Horizontal	34.21	74.00	39.79	1.1	120
19528.00	PK	Horizontal	38.86	74.00	35.14	1.5	150
21969.00	PK	Horizontal	34.21	74.00	39.79	1.1	0
24410.00	PK	Horizontal	33.33	74.00	40.67	1.6	135
High frequency							
2480.00	AV	Vertical	93.42		(Fund.)	1.0	0
4960.00	AV	Vertical	36.25	54.00	17.75	1.2	45
7440.00	AV	Vertical	32.25	54.00	21.75	1.2	120
9920.00	AV	Vertical	30.26	54.00	23.74	1.4	60
12400.00	AV	Vertical	30.55	54.00	23.45	1.5	135
14880.00	AV	Vertical	30.34	54.00	23.66	1.8	120
17360.00	AV	Vertical	30.62	54.00	23.38	1.1	100
19840.00	AV	Vertical	30.13	54.00	23.87	1.1	60
22320.00	AV	Vertical	30.27	54.00	23.73	1.4	0
24800.00	AV	Vertical	28.25	54.00	25.75	1.5	60
2480.00	AV	Horizontal	92.51		(Fund.)	1.0	0
4960.00	AV	Horizontal	34.56	54.00	19.44	1.8	120
7440.00	AV	Horizontal	30.35	54.00	23.65	1.2	60
9920.00	AV	Horizontal	31.47	54.00	22.53	1.5	100

12400.00	AV	Horizontal	31.89	54.00	22.11	1.2	60
14880.00	AV	Horizontal	32.42	54.00	21.58	1.2	120
17360.00	AV	Horizontal	31.17	54.00	22.83	1.4	100
19840.00	AV	Horizontal	32.55	54.00	21.45	1.8	100
22320.00	AV	Horizontal	32.86	54.00	21.14	1.3	100
24800.00	AV	Horizontal	30.25	54.00	22.75	1.6	10
2480.00	PK	Vertical	107.53		(Fund.)	1.0	0
4960.00	PK	Vertical	44.21	74.00	29.79	1.2	60
7440.00	PK	Vertical	35.62	74.00	38.38	1.8	90
9920.00	PK	Vertical	35.35	74.00	38.65	1.5	180
12400.00	PK	Vertical	35.56	74.00	38.44	1.4	60
14880.00	PK	Vertical	34.21	74.00	39.79	1.2	60
17360.00	PK	Vertical	33.54	74.00	40.46	1.2	135
19840.00	PK	Vertical	36.26	74.00	37.74	1.2	120
22320.00	PK	Vertical	36.73	74.00	37.27	1.6	60
24800.00	PK	Vertical	30.21	74.00	43.99	1.4	90
2480.00	PK	Horizontal	93.64		(Fund.)	1.1	60
4960.00	PK	Horizontal	42.58	74.00	31.42	1.4	90
7440.00	PK	Horizontal	38.64	74.00	35.36	1.5	60
9920.00	PK	Horizontal	35.37	74.00	38.63	1.3	0
12400.00	PK	Horizontal	35.52	74.00	38.48	1.2	135
14880.00	PK	Horizontal	35.26	74.00	38.74	1.7	0
17360.00	PK	Horizontal	36.41	74.00	37.59	1.8	180
19840.00	PK	Horizontal	32.41	74.00	41.59	1.5	60
22320.00	PK	Horizontal	31.11	74.00	42.89	1.8	120
24800.00	PK	Horizontal	28.21	74.00	45.79	1.0	60

8 Maximum Peak Output Power

Test Requirement:	FCC Part15 Paragraph 15.247
Test Method:	Based on ANSI 63.4:2003
Test Date:	June 09,2009
Test mode:	Compliance test in the worse case: Tx Lower/Tx Middle/Tx Upper
Requirements:	Regulation 15.247(b) The limit of Maximum Peak Output Power Measurement is 1W(30dBm)

Test procedure:

The following test procedure as below:

The transmitter output (antenna port) was connected to the spectrum analyzer.EUT and its simulators are placed on a table, let EUT working in test mode,then test it.

The bandwidth of the fundamental frequency was measured with the spectrum analyser using 100kHz RBW and 100kHz VBW.

Test Result: The unit does meet the FCC requirements.

Test Channel	Fundamental Frequency(MHz)	Output Power (mW)	Limit (W)	Power output level
Lower	2402	0.421	1	conducted
Middle	2441	0.382	1	conducted
Upper	2480	0.361	1	conducted

9 Hopping Channel Number

Test Requirement: FCC Part15 C

Test Method: Based on FCC Part15 Paragraph 15.247


Test Date: June 09,2009

Test mode: The EUT work in test mode(Tx) and test it

Requirements: Regulation 15.247(b) For frequency hopping systems operating
In the 2400-2483.5MHz band employing at least 15 hopping
channels.

Test result: The total number of channels would be 79 channels.
The unit does meet the FCC requirements.

Please refer the graph as below:

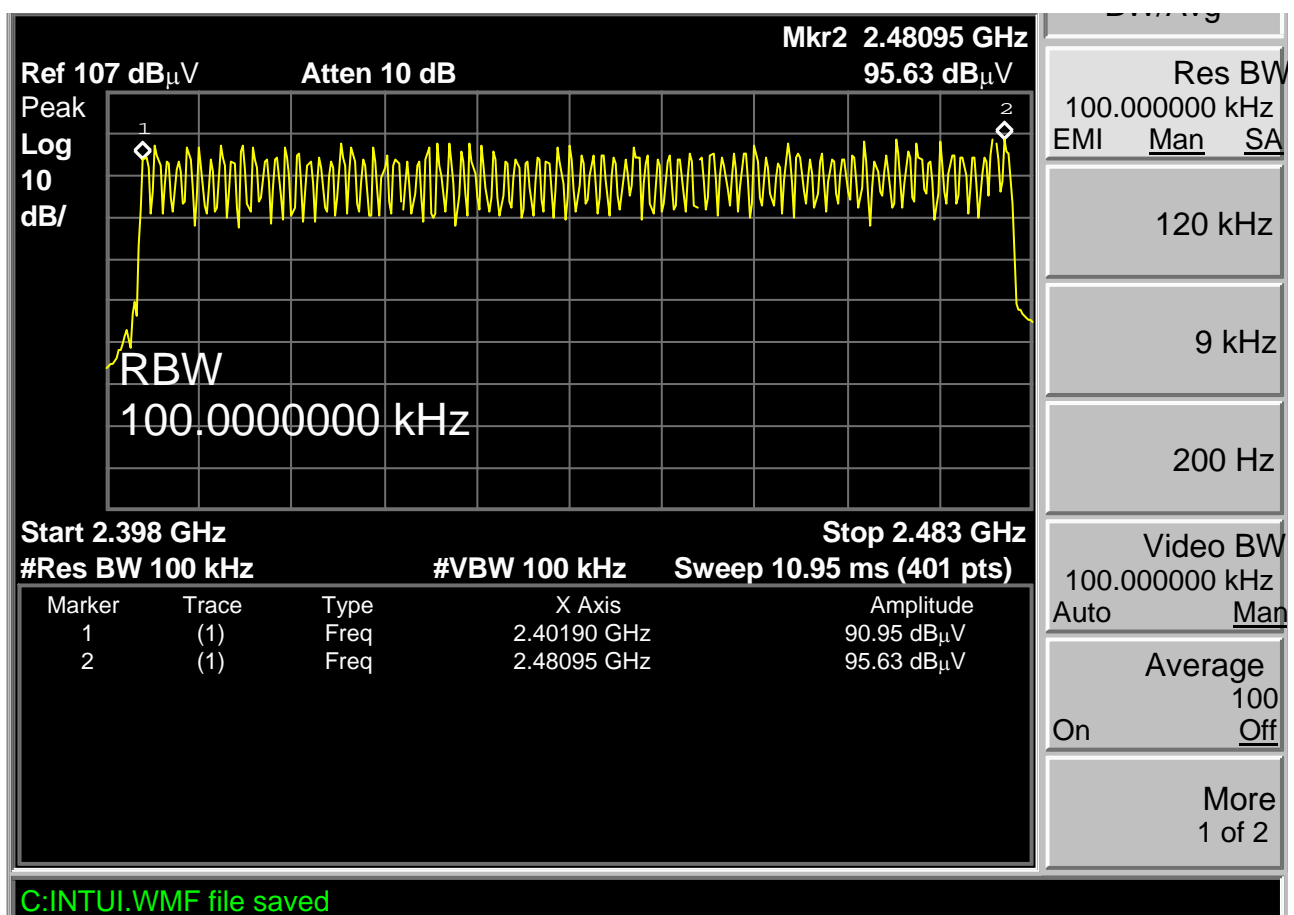

10 Frequency Separated

The requirements in this clause are only applicable to equipment using frequency hopping spread spectrum (FHSS) modulation.

Channel Separated

Definition:

A hopping channel is any of the centre frequencies defined within the hopping sequence of a FHSS system.

Limit:

Non-adaptive frequency hopping system shall make use of non-overlapping channels separated by the channel bandwidth as measured at 20dB below peak power.

The hopping channels defined within a hopping sequence shall be at least 1MHz apart(channel separation)

Operating Environment:

Temperature: 25.5 °C
Humidity: 51 % RH
Barometric Pressure: 1012 mbar

EUT Operation Condition:


The EUT was programmed to be in continuously transmitting mode.

Test Result: PASS


Test Channel	Channel Separation	PASS/FAIL
Lower Channels (channel 00 and channel 01)	1MHz	Pass
Middle Channels (channel 39 and channel 40)	1MHz	Pass
Upper Channels (channel 77 and channel 78)	1MHz	Pass

Please refer to the below photos for more details


Lower Channel 2402MHz

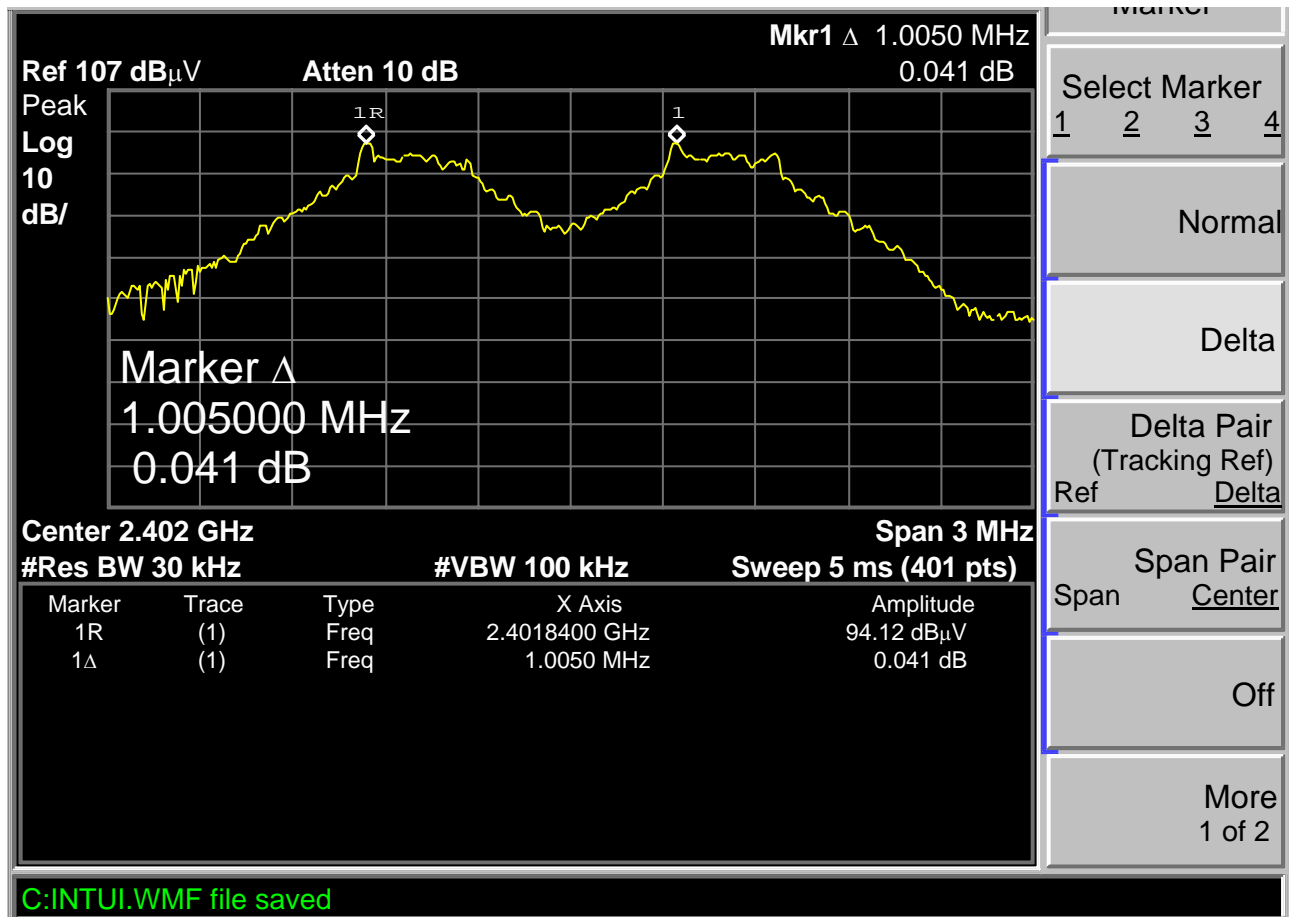

Middle Channel 2441MHz

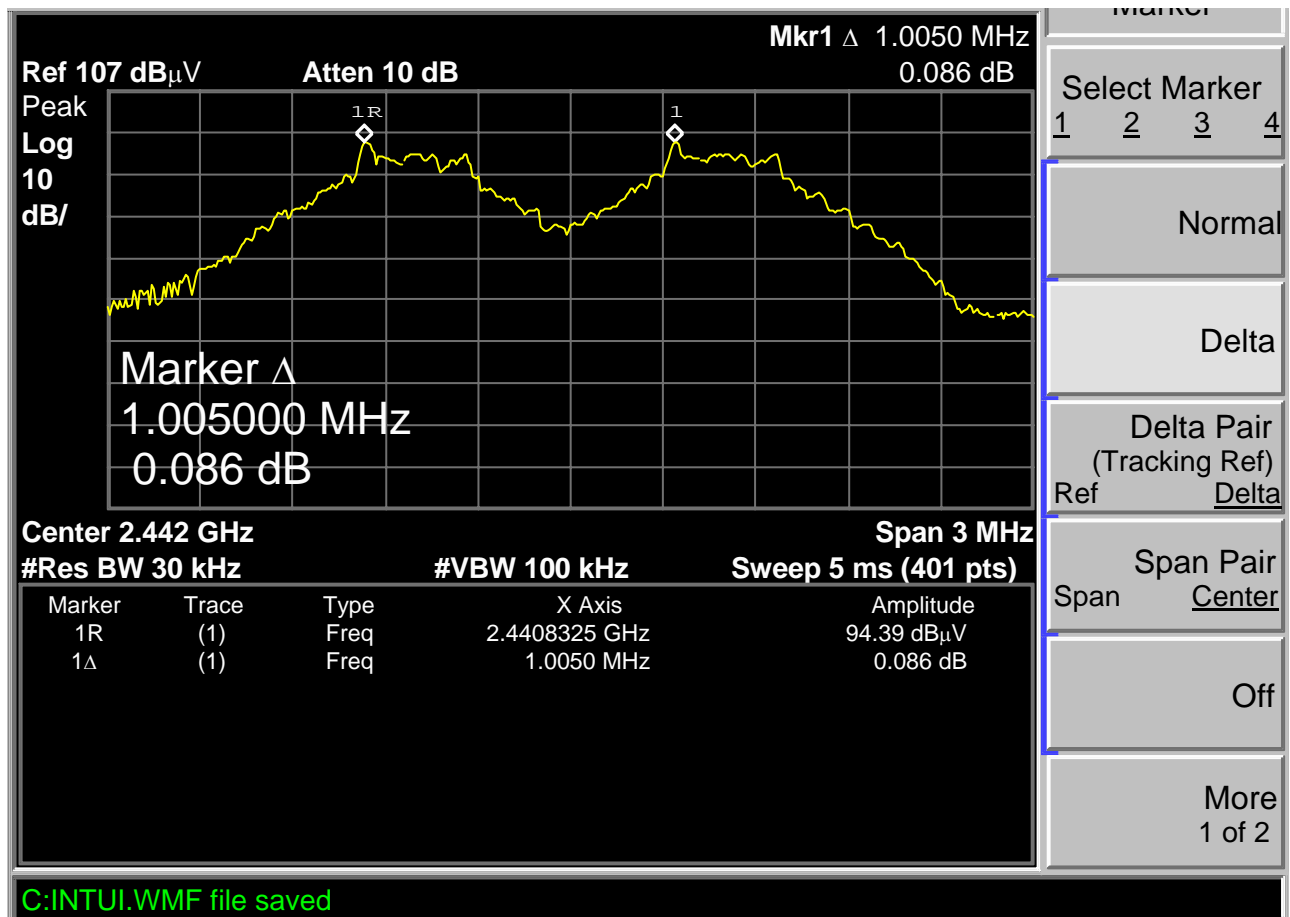

Upper Channel 2480MHz

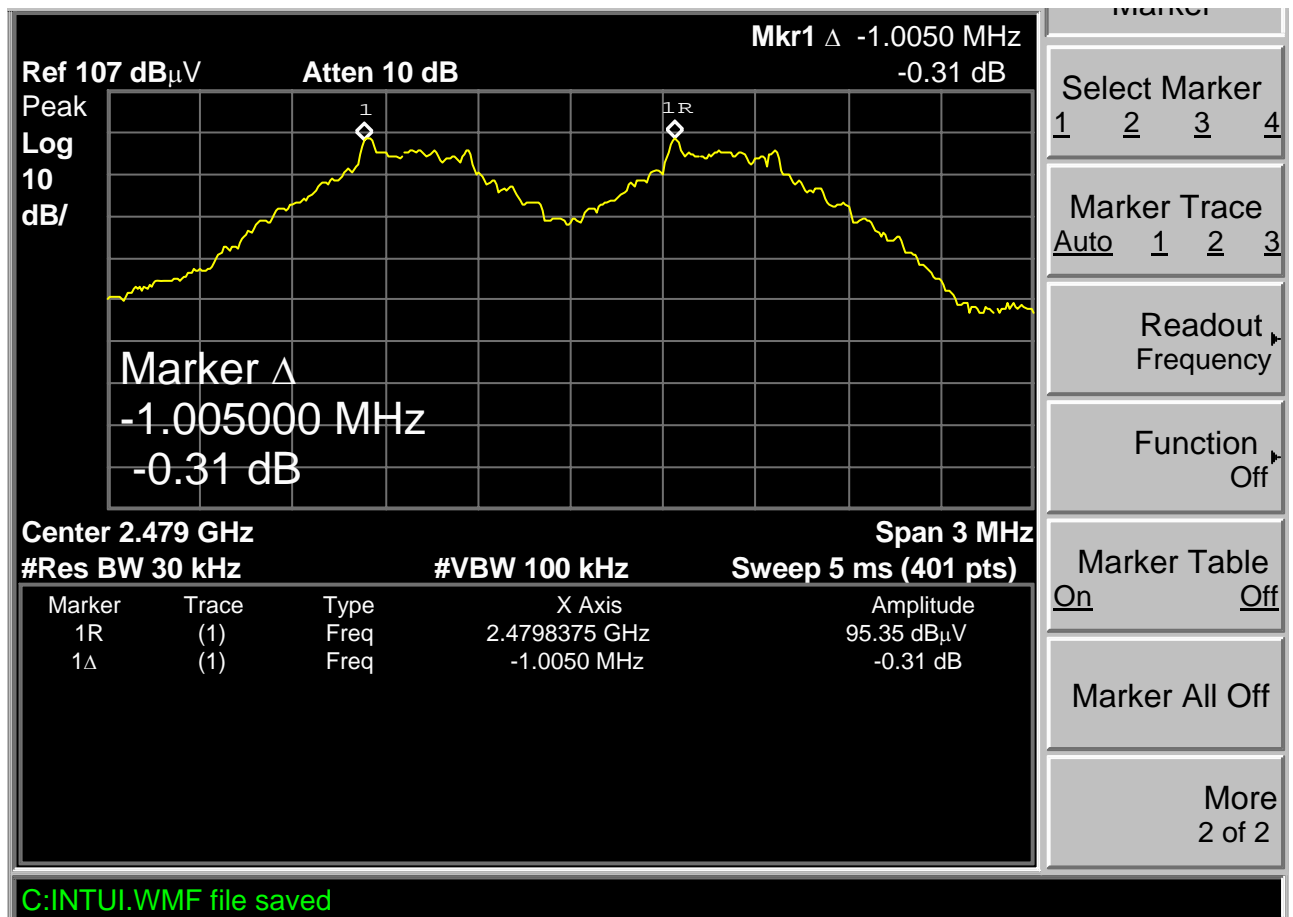

11 Dwell time

11.1 Definition:

The dwell time is the time spent at a particular frequency during any single hop.

Limit: the maximum dwell time shall be less than 0.4s.

Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Barometric Pressure: 1012 mbar

EUT Operation Condition:

The EUT was programmed to be in continuously transmitting mode.

11.2 Test Procedure

The EUT output antenna port was connected to the spectrum analyzer. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz, and the frequency span to 0 Hz, measure the maximum time duration of one single pulse. Set the EUT for DH5, DH3 and DH1 packet transmitting.

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

Data Packet	Dwell Time(s)
DH5	$1600/79/6*31.6*(MkrDelta)/1000$
DH3	$1600/79/4*31.6*(MkrDelta)/1000$
DH1	$1600/79/2*31.6*(MkrDelta)/1000$

Note : Mkr Delta is once pulse time .

11.3 Test Result: PASS

Please refer to the below photos for more details.

Channel 00 2402MHz


Dwell time of each occupation in this channel as follows:

Data Packet	Frequency	Mkr Delta(ms)	Dwell Time(s)	Limits(s)
DH5	2402 MHz	3.212	0.343	0.400
DH3	2402 MHz	1.950	0.312	0.400
DH1	2402 MHz	0.683	0.219	0.400


Test Result: PASS

The Results are not be greater than 0.4 seconds.


Channel 00 2402 MHz DH5

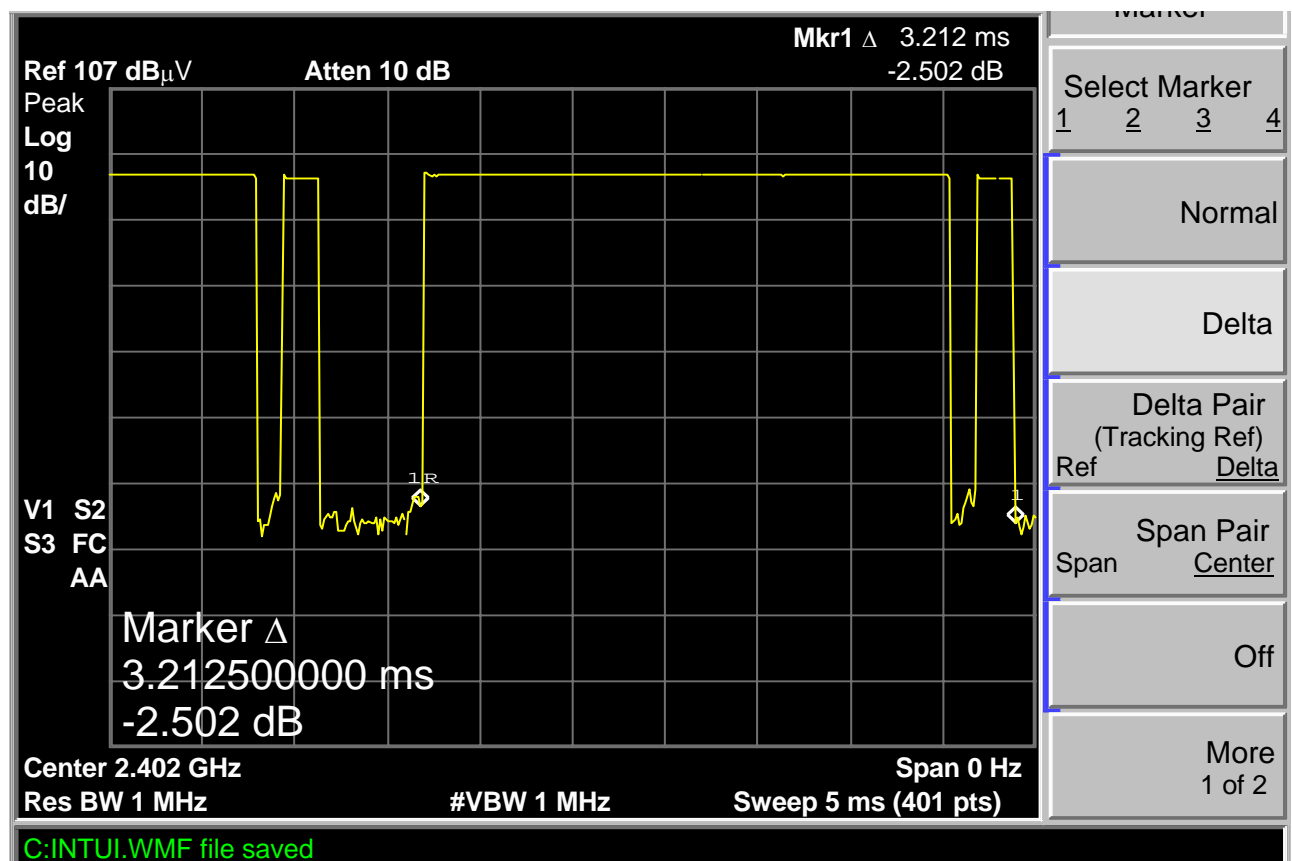

Channel 00 2402 MHz DH3

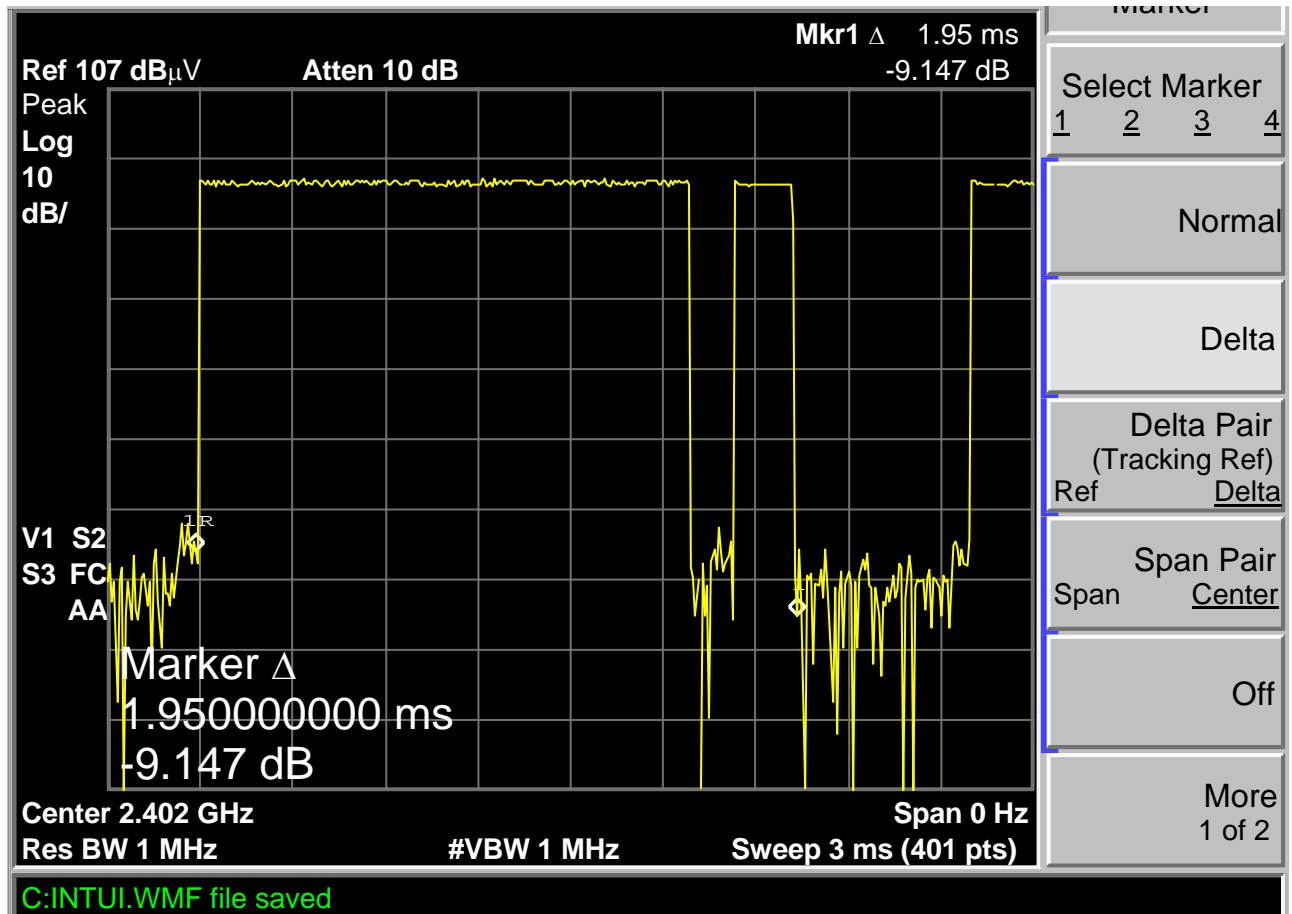

Channel 00 2402 MHz DH1

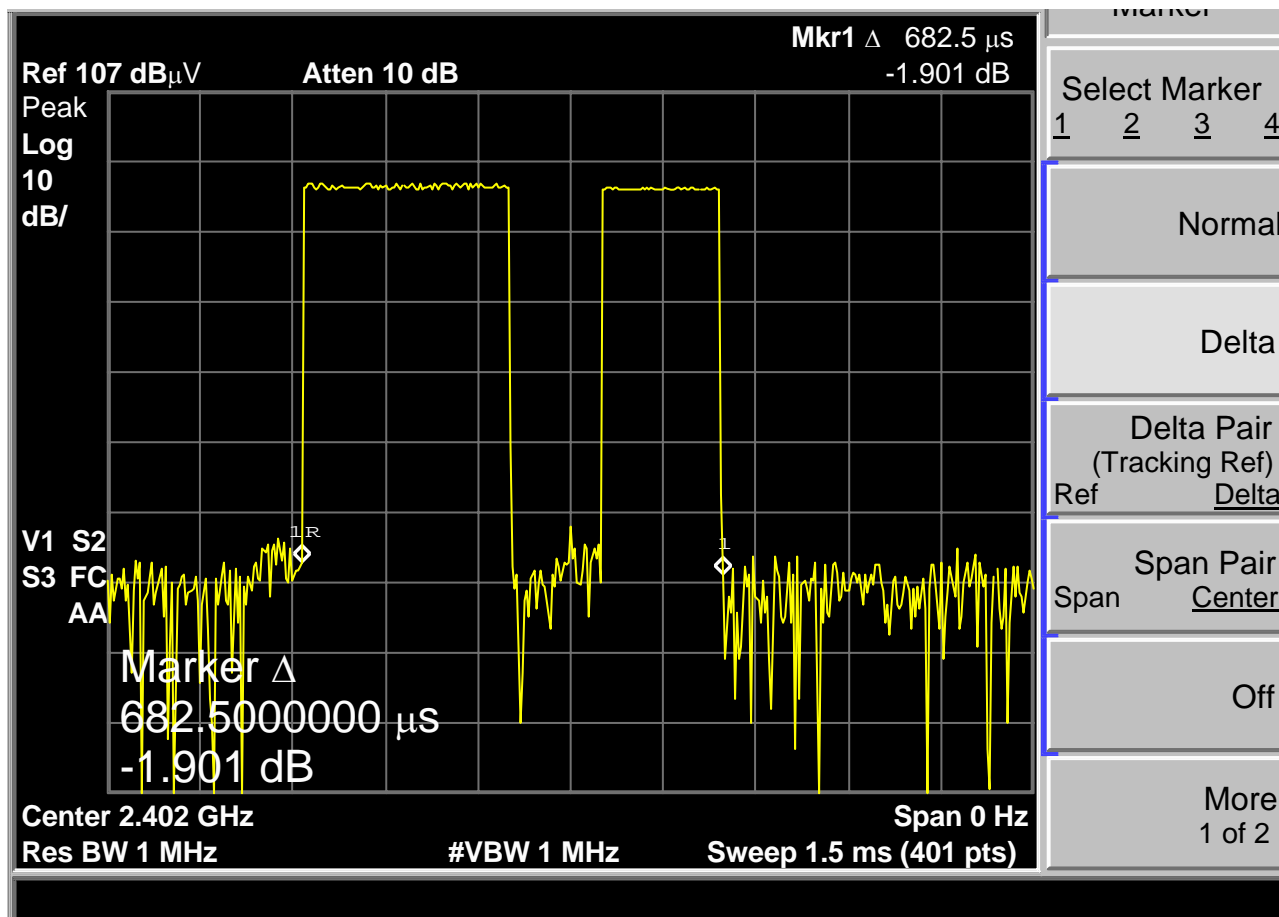


Channel 39 2441MHz

Dwell time of each occupation in this channel as follows:

Data Packet	Frequency	Mkr Delta(ms)	Dwell Time(s)	Limits(s)
DH5	2441 MHz	3.238	0.345	0.400
DH3	2441 MHz	1.950	0.312	0.400
DH1	2441 MHz	0.686	0.223	0.400

Test Result: PASS

The Results are not be greater than 0.4 seconds.

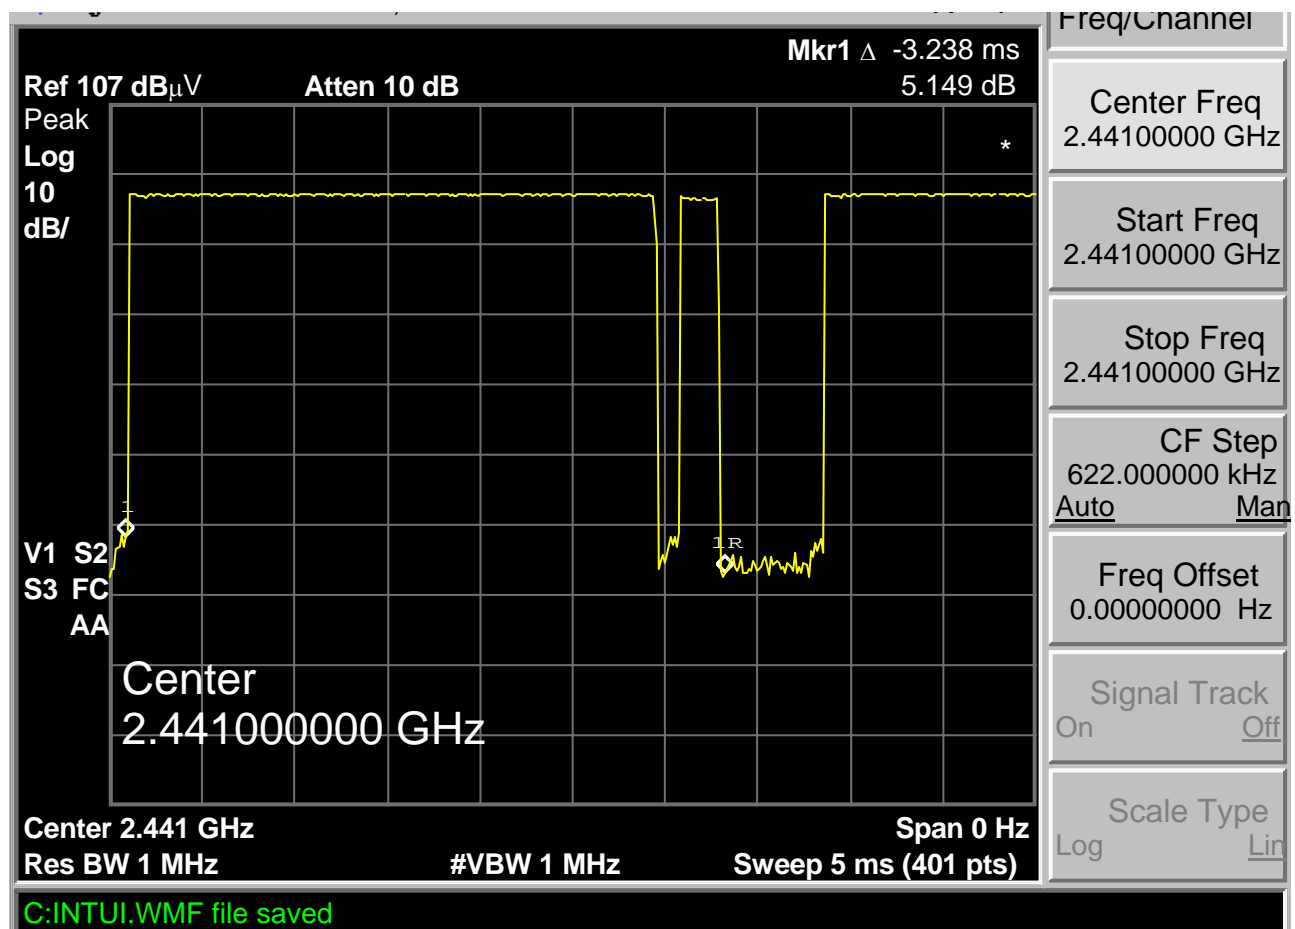Channel 39 2441 MHz DH5

Ref 107 dB μ V Atten 10 dB Mkr1 Δ -1.95 ms
0.995 dB

Peak
Log
10
dB/

V1 S2
S3 FC
AA

Center 2.441 GHz Span 0 Hz
Res BW 1 MHz #VBW 1 MHz Sweep 3 ms (401 pts)

Center Freq
2.44100000 GHz

Start Freq
2.44100000 GHz

Stop Freq
2.44100000 GHz


CF Step
622.000000 kHz
Auto Mar

Freq Offset
0.00000000 Hz

Signal Track
On Off

Scale Type
Log Lin

Channel 39 2441 MHz DH1

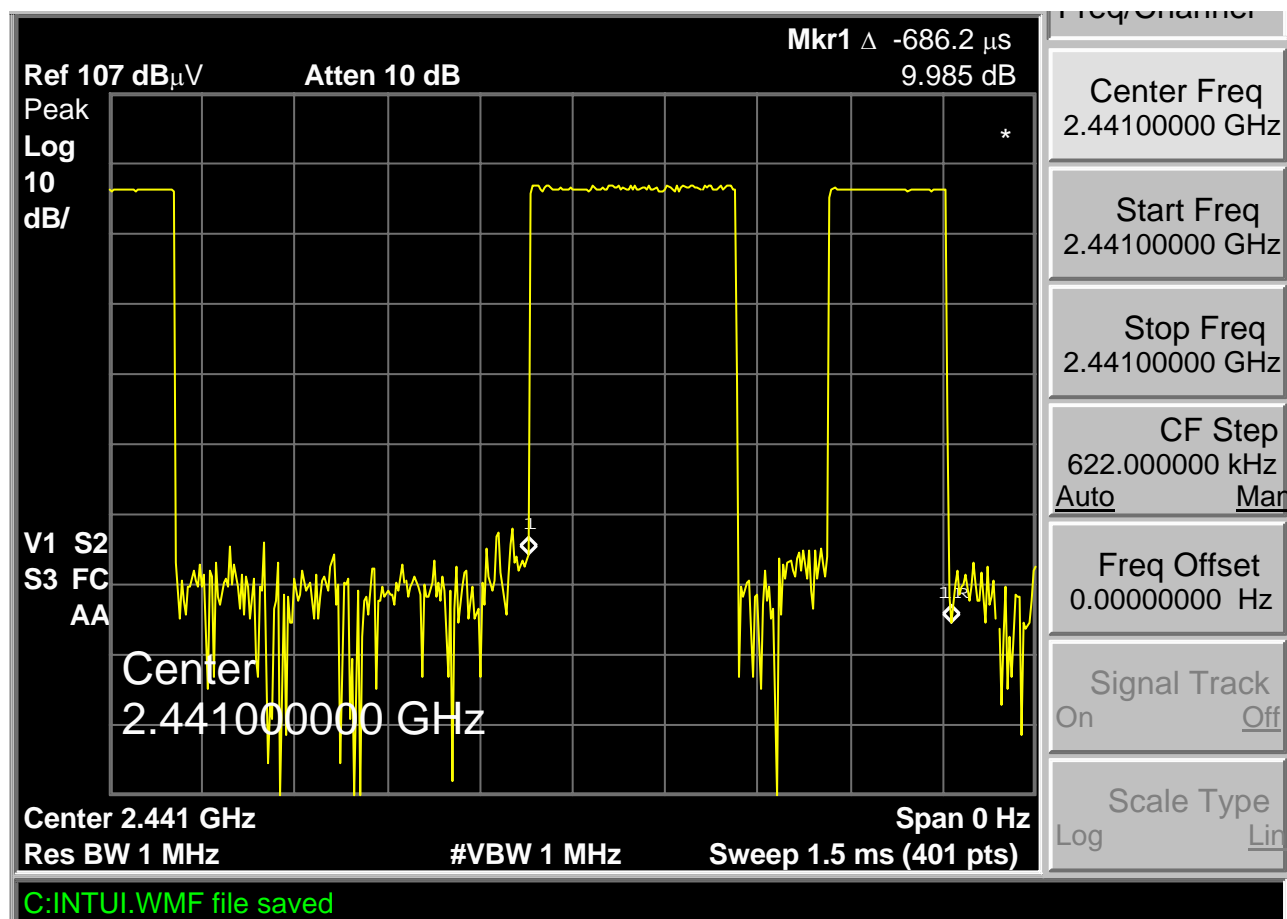


Channel 78 2480MHz

Dwell time of each occupation in this channel as follows:


Data Packet	Frequency	Mkr Delta(ms)	Dwell Time(s)	Limits(s)
DH5	2480 MHz	3.237	0.342	0.400
DH3	2480 MHz	1.965	0.318	0.400
DH1	2480 MHz	0.686	0.223	0.400

Test Result: PASS

The Results are not be greater than 0.4 seconds.

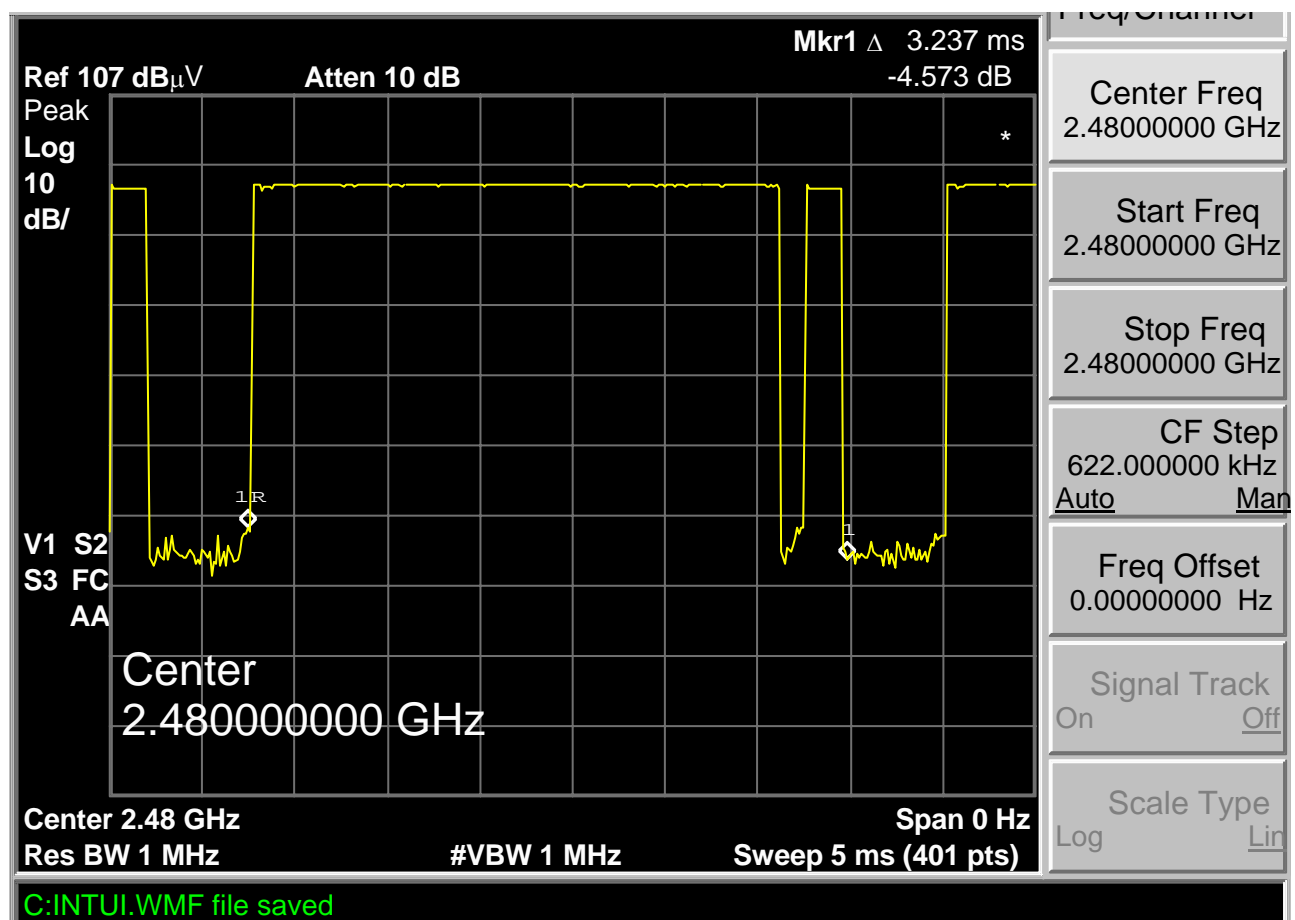Channel 78 2480 MHz DH5

Channel 78 2480 MHz DH1

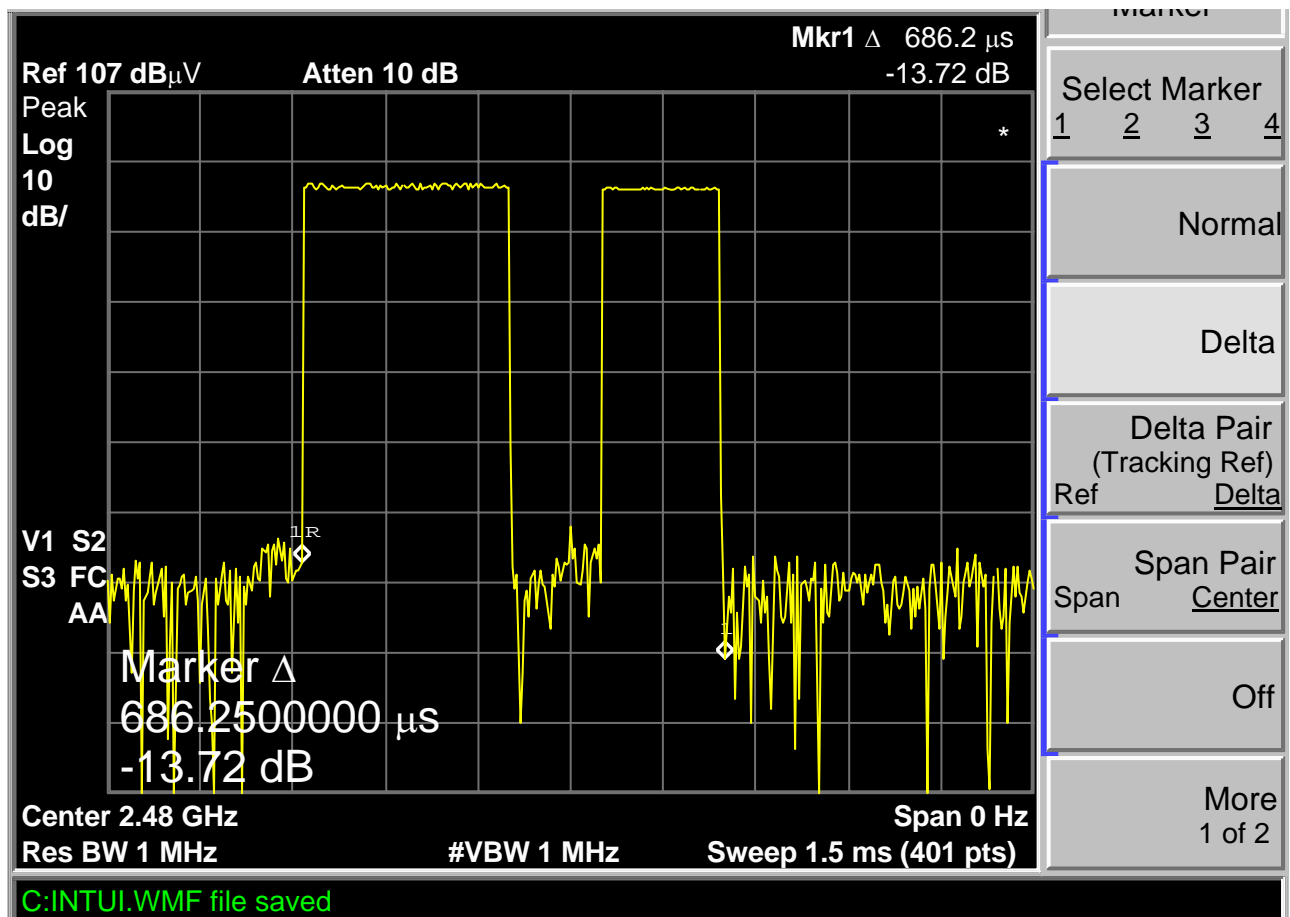

12 20-dB Bandwidth

Test Requirement: FCC Part15 C
 Test Method: Based on FCC Part15 Paragraph 15.247
 Test Date: June 09,2009
 Test mode: The EUT work in test mode(Tx) and test it


Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. The bandwidth of the fundamental frequency was measure by spectrum analyser with 100KHz RBW and 100KHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power 20dB.


Test Result

Please refer the graph as below:


Lower Channel 2402MHz

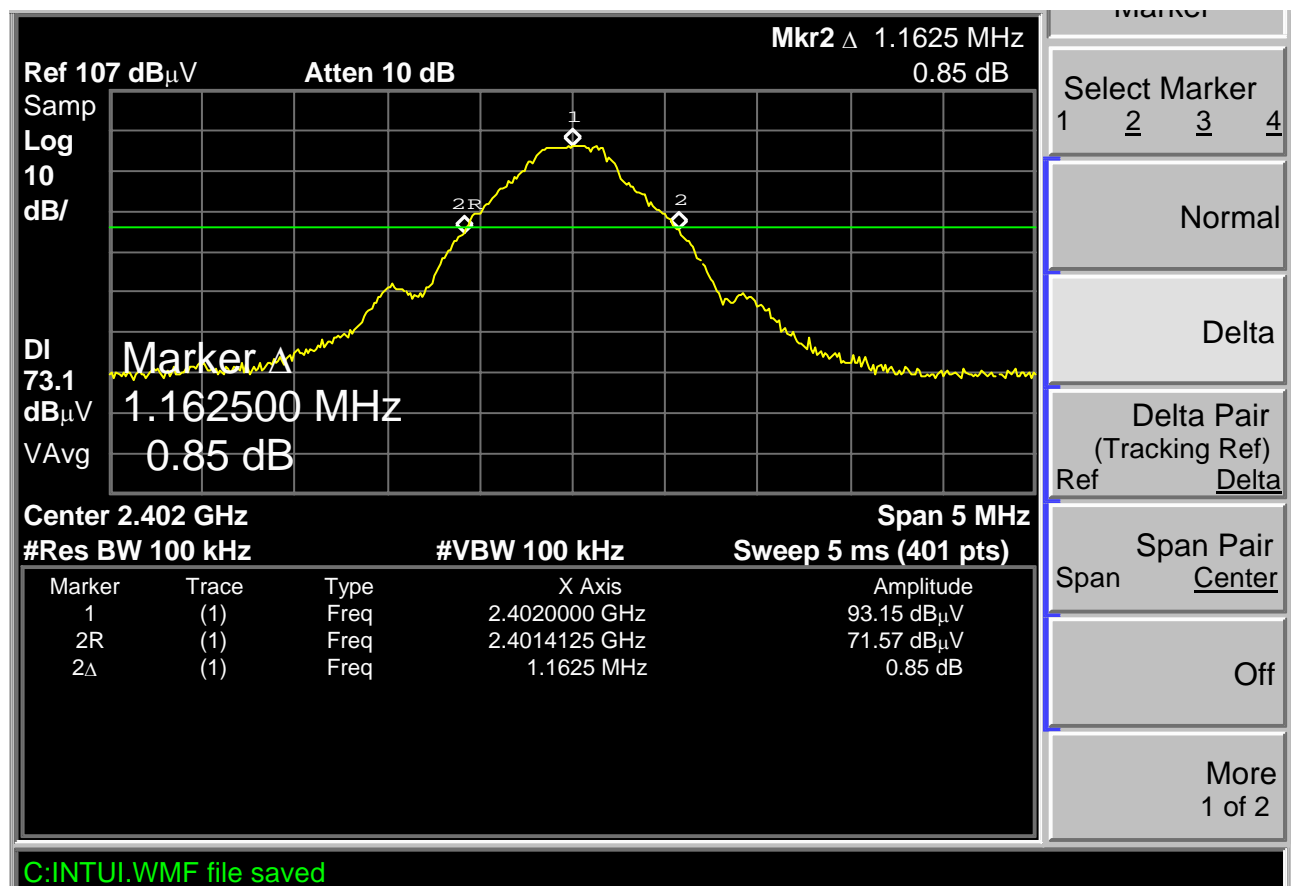

Middle Channel 2441MHz

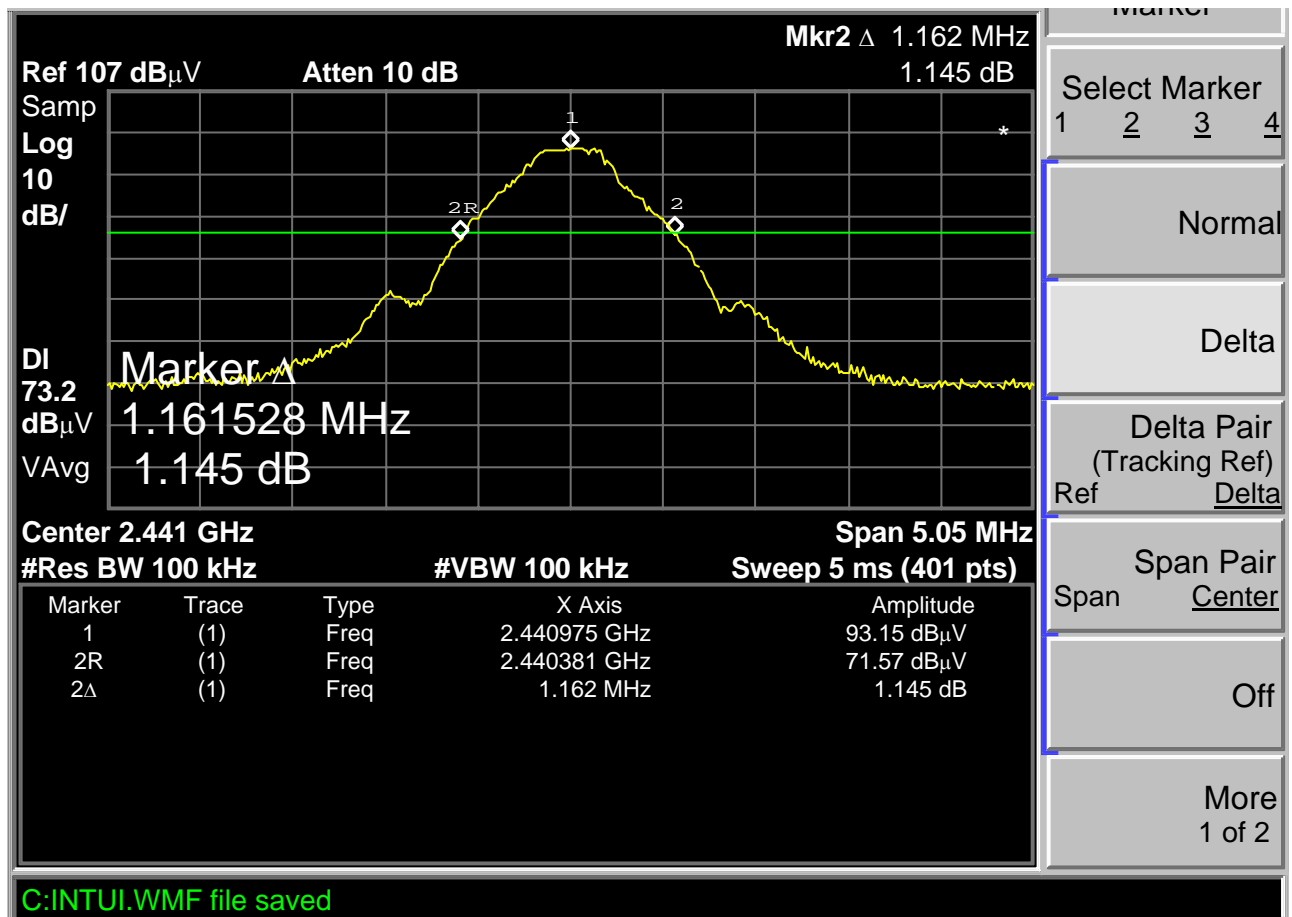

Upper Channel 2480MHz

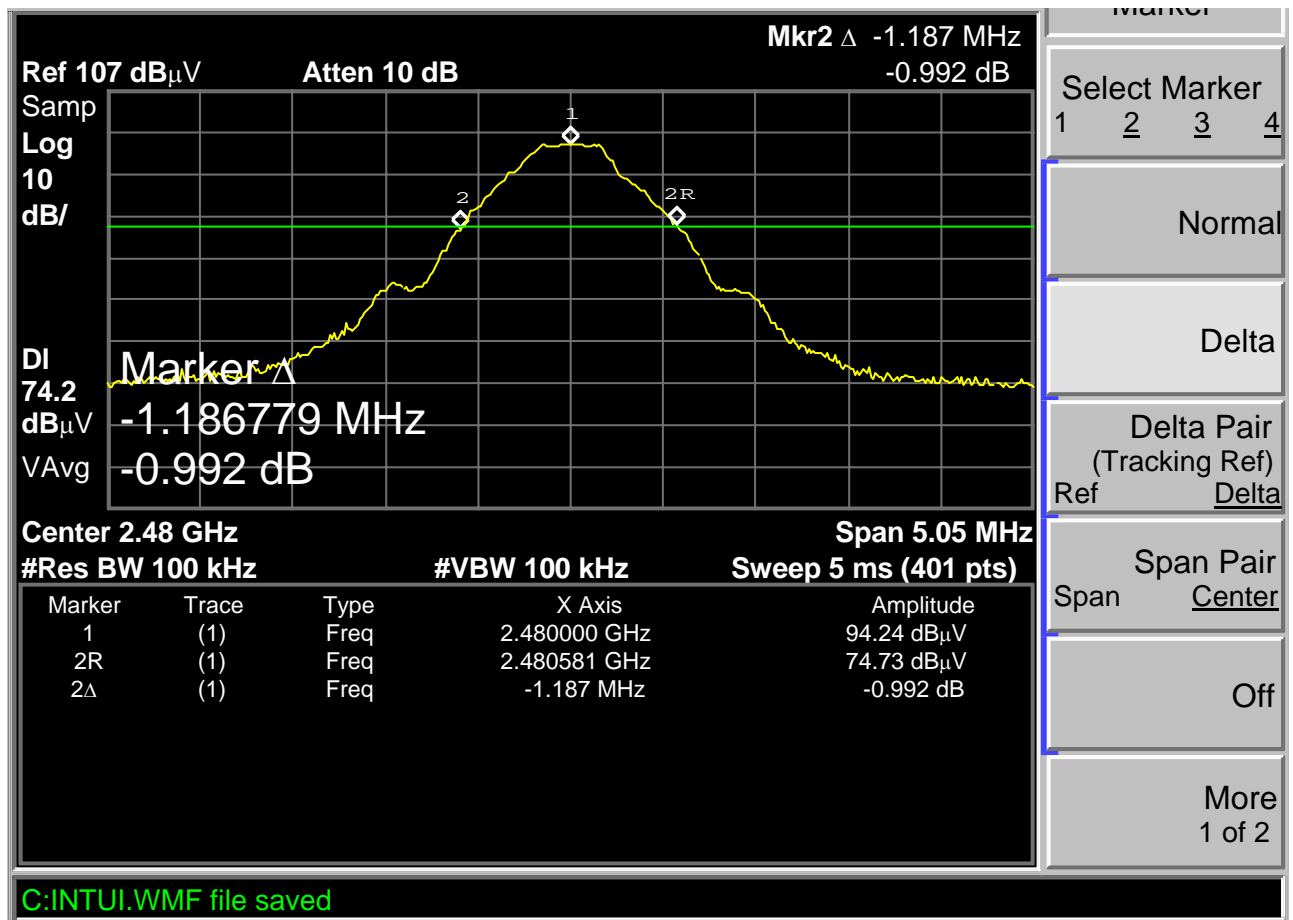

13 Radiated Spurious Emissions Into Adjacent Restricted Band

Test Requirement: FCC Part15 Paragraph 15.205
 Test Method: Based on FCC Part 15 Paragraph 15.247
 Test Date: June 09,2009
 Requirements: The EUT work in test mode(Tx) and test it


Requiments:

emissions that fall in the restricted bands(15.205).Above 1000MHz, compliance with the emissions limits in section 15.209 shall be demonstrated based on the average value of the measured emissions,The provisions in section 15.35 apply to these measurements.


Test procedure:

An in band field strength measurement of the fundamental emission using the RBW and detector function required by C63.4-2003 and FCC Rules.The procedure was repeated with an average detector and a plot made.The calculated field strength in the adjacent restricted band is presented below.

Lower Bandedge/ Restricted Band (AV Value)

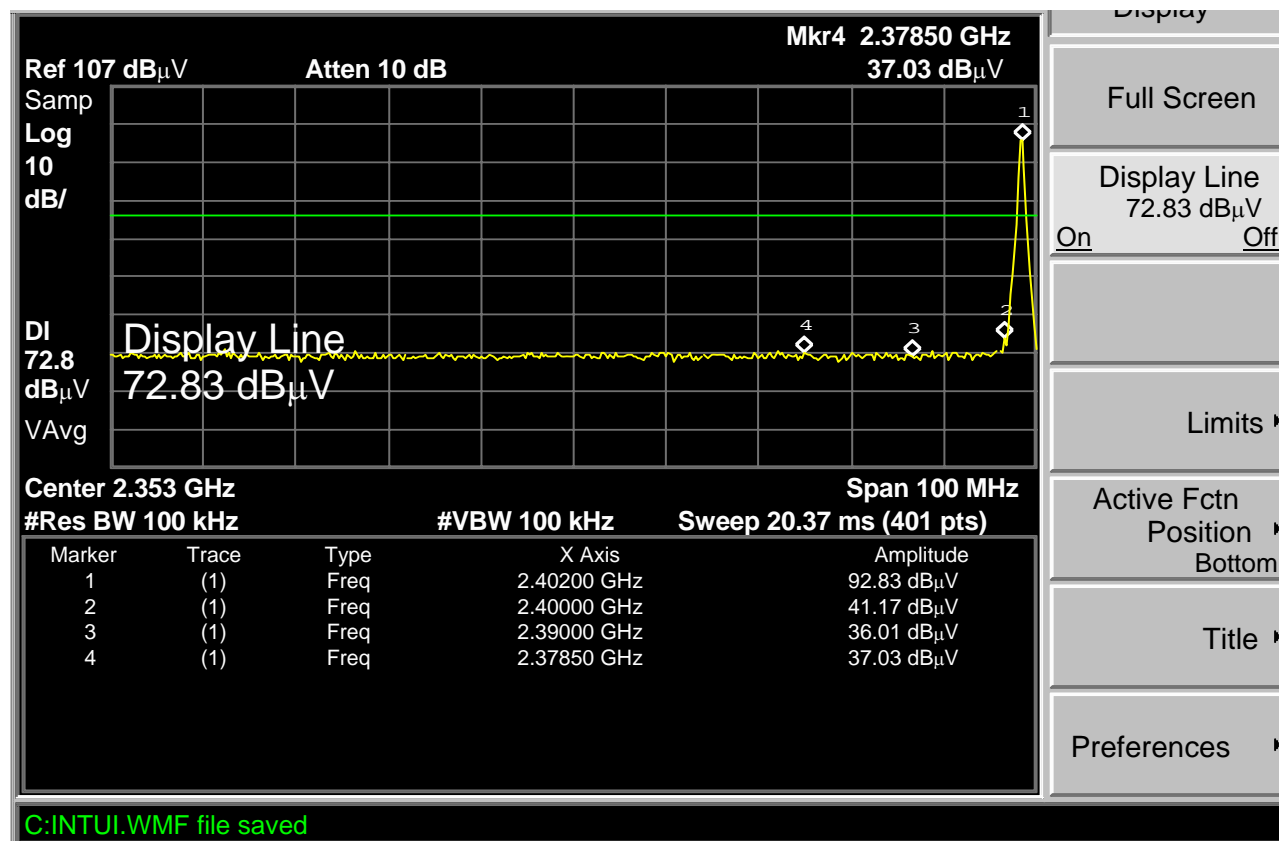

Upper Bandedge/ Restricted Band (AV Value)

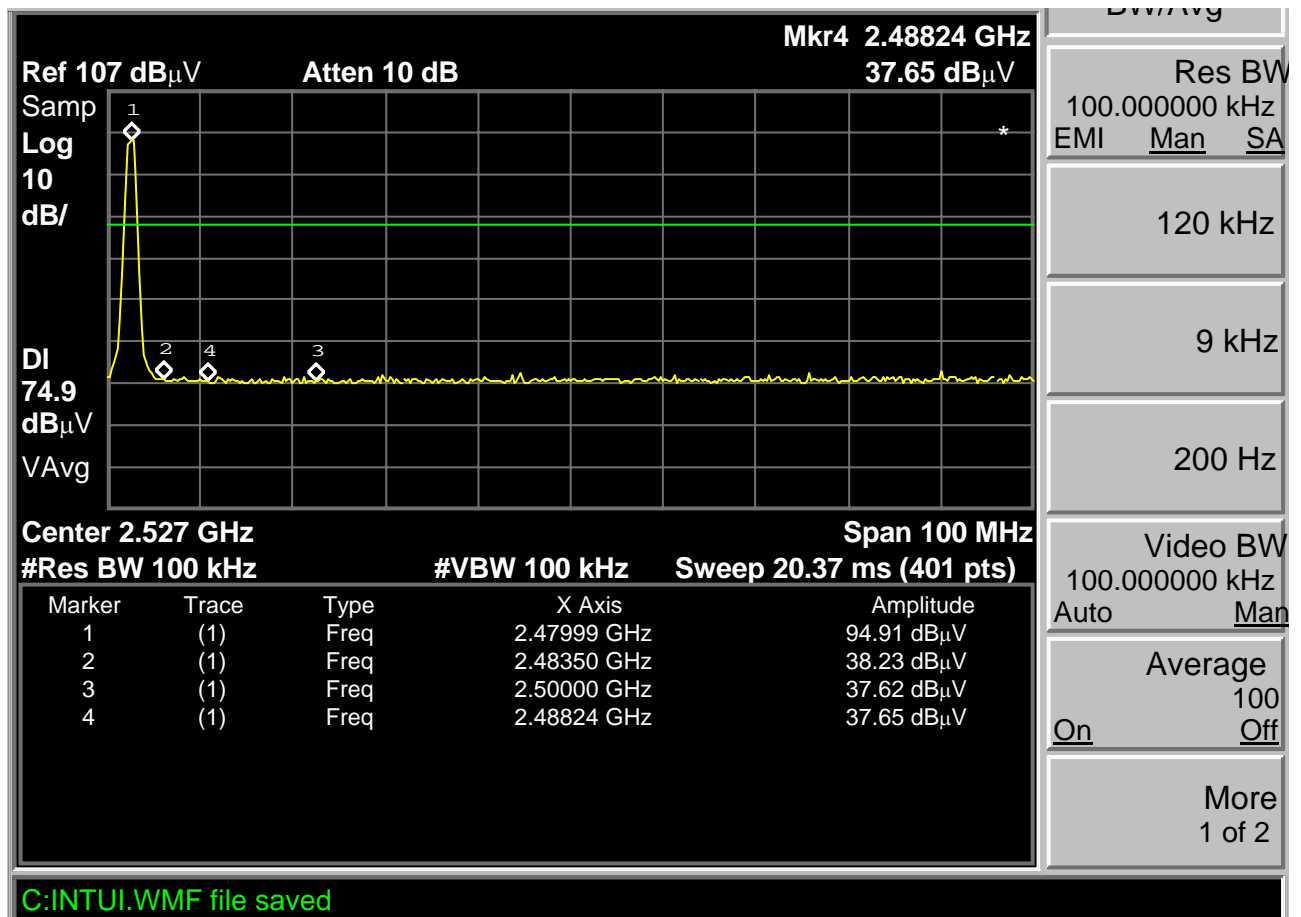

14 RF Exposure Test

Test Requirement:	FCC Part 2 Subpart J
Test Method:	Based on FCC Part 15 Paragraph 15.247
Test Date:	June 09,2009
Requirements:	The EUT work in test mode(Tx) and test it

Requiments:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d}$$

$$\text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to


$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained


Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
-2.54	0.557	-3.949	0.421	0.000492	1	Complies
-2.54	0.557	-4.184	0.382	0.000471	1	Complies
-2.54	0.557	-4.422	0.361	0.000452	1	Complies

15 Photographs of Testing

Radiation Emission Test View For 30MHz-1000MHz

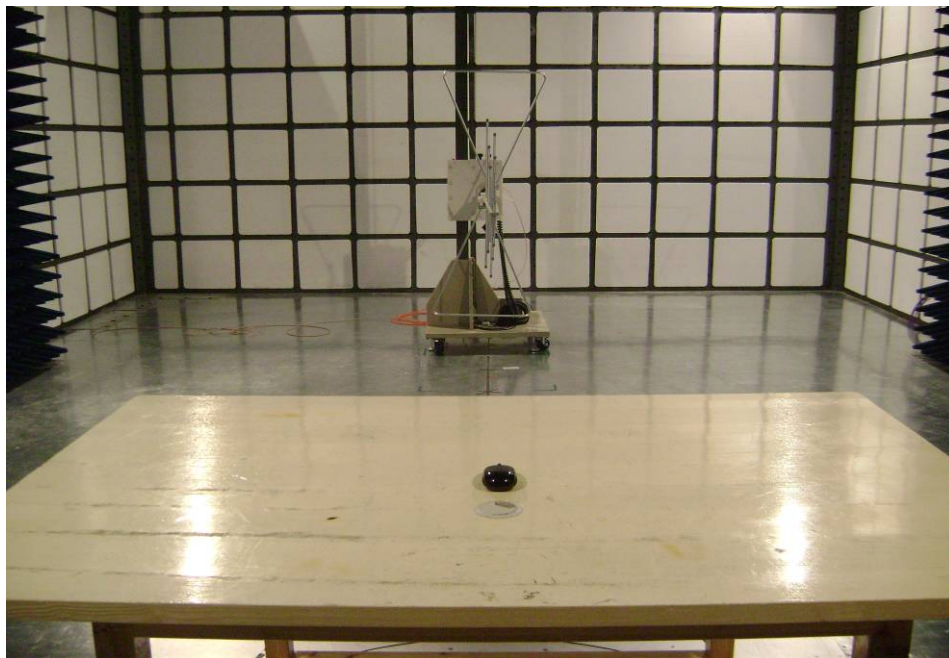

Radiation Emission Test View For 1GHz-25GHz

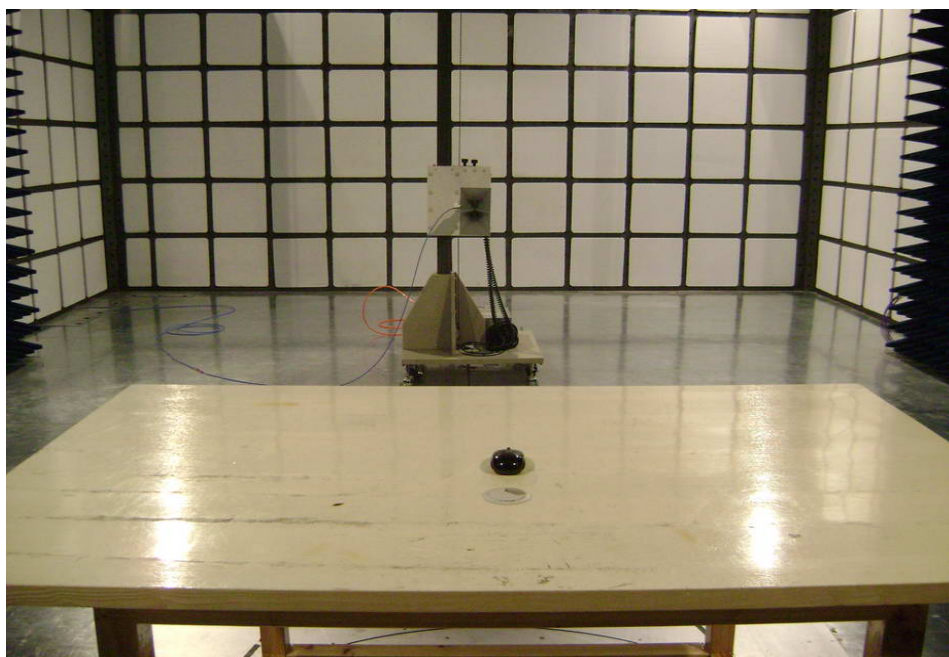

16 Photographs - Constructional Details

16.1EUT1 - Front View (M-498)



16.2EUT2 - Front View (M-298)



16.3EUT3 - Front View (M-556)




16.4EUT3 - Front View (M-598)




16.5EUT3 - Front View (M-765)




16.6PCB1- Front View

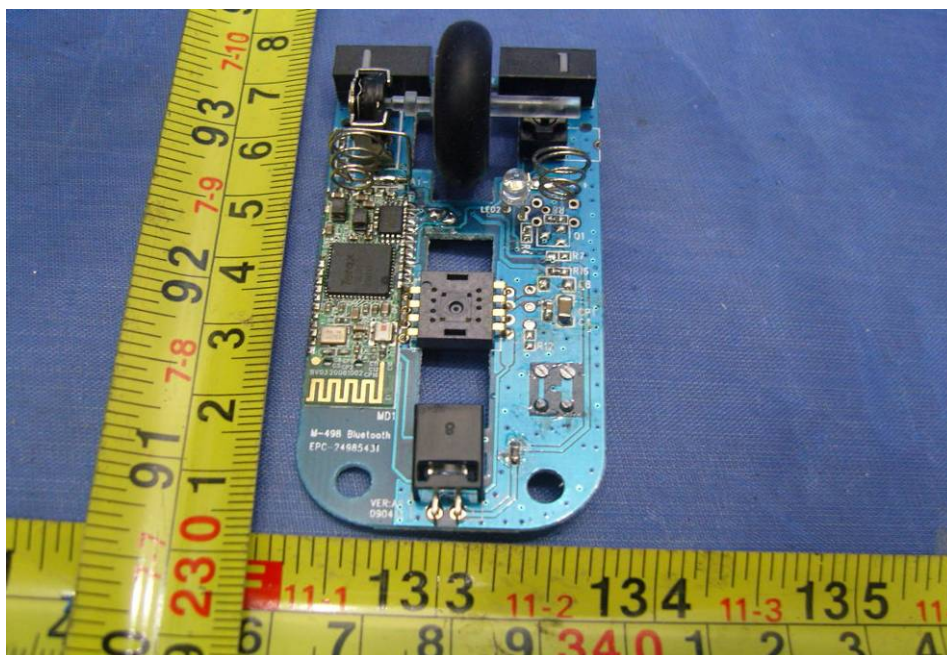


16.7PCB1 - Back View

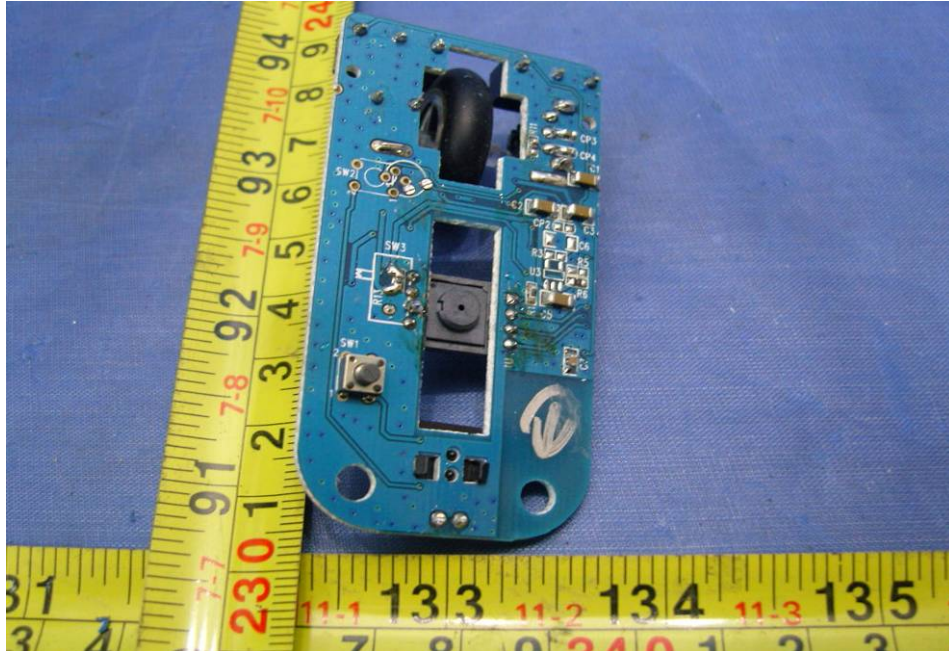

16.8PCB2– Front View

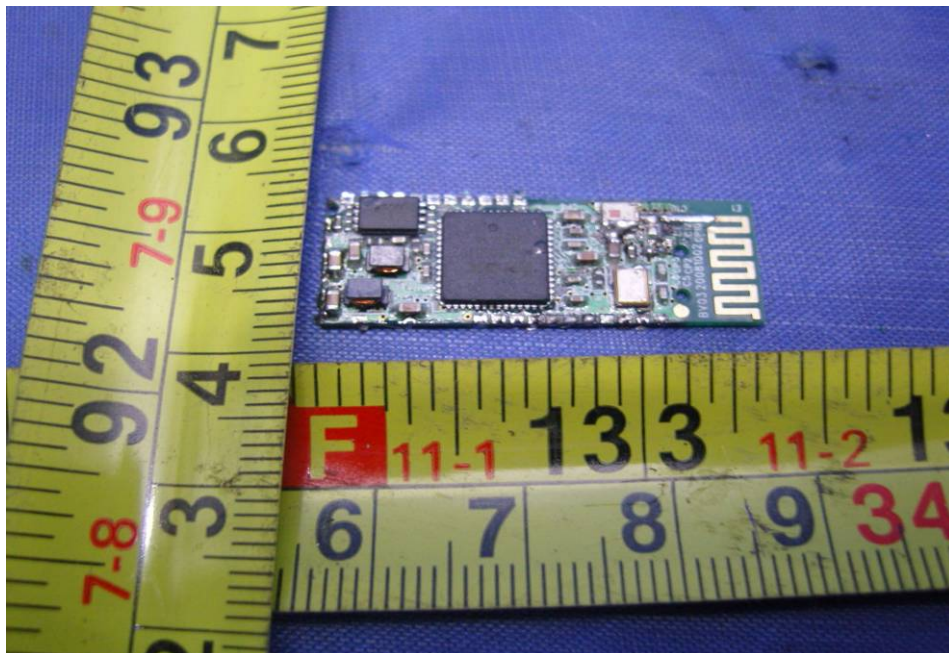

16.9PCB2 - Back View

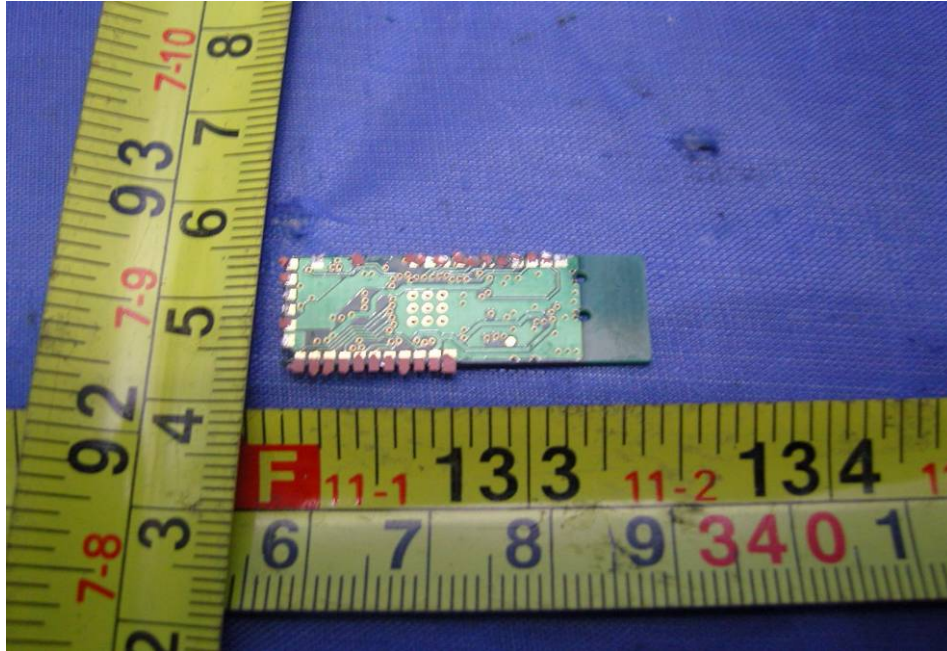

17 FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Bottom View/proposed FCC Mark Location

