

# TEST REPORT

## 1. Applicant

Name : Uriver Inc  
Address : 3rd., Fl., Bogwang Bldg, Gaepo-dong, 1238-7  
Gangnam-gu, Seoul, Korea

## 2. Products

Name : Tri-Band GSM Mobile Phone with Bluetooth  
Model/Type : UR801, ST-1  
Manufacturer : Uriver Inc

3. Test Standard : Uriver FCC CFR 47 Part 2, Part 22(H), Part 24(E)


4. Test Method : ANSI/TIA/EIA-603-C, ANSI C63.4-2003

5. Test Result : Positive

6. Date of Application : May 29, 2008

7. Date of Issue : June 09, 2008

Tested by



Sung-kyu Cho

Telecommunication Team  
Engineer

Approved by



Seok-Jin Kim

Telecommunication Team  
Manager

*The test results contained apply only to the test sample(s) supplied by the applicant, and this test report shall not be reproduced in full or in part without approval of the KTL in advance.*

## Korea Testing Laboratory

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION</b>	<b>4</b>
1.1. Applicant (Client)	4
1.2. Equipment (EUT)	4
1.3. Testing Laboratory	5
1.4. Channel numbers and Frequencies	5
<b>2. SUMMARY OF TEST RESULTS</b>	<b>6</b>
<b>3. MEASUREMENT &amp; RESULTS</b>	<b>7</b>
3.1. Effective Radiated Power	7
3.1.1. Test Procedure	7
3.1.2. Limit	7
3.1.3. Test Results (GSM850)	7
3.1.4. Test Results (GSM1900)	8
3.2. Field Strength of Spurious Radiation	9
3.2.1. Test Results (GSM850)	9
3.2.2. Test Results (GSM1900)	10
3.3. Conducted Output Power	12
3.3.1. Test Procedure	12
3.3.2. Test Results (GSM850) – PCL “5”	12
3.3.3. Test Results (GSM1900) – PCL “0”	17
3.4. Occupied Bandwidth	22
3.4.1. Test Procedure	22
3.4.2. Limit	22
3.4.3. Test Results (GSM850)	23
3.4.4. Test Results (GSM1900)	27
3.5. Conducted Spurious Emission	32
3.5.1. Test Procedure	32
3.5.2. Limit	32

---

3.5.3.	Test Results (GSM850) .....	32
3.5.4.	Test Results (GSM1900) .....	40
<b>3.6.</b>	<b>Frequency Stability / Temperature Variation .....</b>	<b>48</b>
3.6.1.	Test Procedure .....	48
3.6.2.	Limit .....	48
3.6.3.	Test Results (GSM850) .....	49
3.6.4.	Test Results (GSM1900) .....	51
<b>4.</b>	<b>TEST EQUIPMENTS .....</b>	<b>53</b>

## 1. GENERAL INFORMATION

### 1.1. Applicant (Client)

Name	Uriver Inc
Address	3rd., Fl., Bogwang Bldg, Gaepo-dong, 1238-7 Gangnam-gu, Seoul, Korea
Contact Person	TSJEONG
Telephone No.	+82-2-3497-8432
Facsimile No.	+82-2-579-6624
E-mail address	tsjeong@uriver.co.kr
Manufacturer Name	Uriver Inc
Manufacturer Address	3rd., Fl., Bogwang Bldg, Gaepo-dong, 1238-7 Gangnam-gu, Seoul, Korea

### 1.2. Equipment (EUT)

Type of equipment	Tri-Band GSM Mobile Phone with Bluetooth
Model Name	UR801, ST-1
FCC ID	UDTUR80
FCC Classification	Licensed Portabel Tx Held to Ear (PCE)
Tx frequency Band	824.2 ~ 848.8 MHz (GSM850) 1850.2 ~ 1909.8 MHz (GSM1900)
Rx frequency Band	869.2 ~ 893.8 MHz (GSM850) 1930.2 ~ 1989.8 MHz (GSM1900)
Max. Power Rating	1.472 W GSM850, 1.445 W GPRS850, 1.377 W EDGE850 0.794 W GSM1900, 0.785 W GPRS1900, 0.145 W EDGE1900
Emission Designators	249KGXW(GSM850), 246KGXW(GPRS850), 248KG7W(EDGE850) 247KGXW(GSM1900), 248KGXW(GPRS1900), 249KG7W(EDGE1900)
Frequency Tolerance	± 2.5 ppm
MODE	GSM / GPRS / EDGE
Antenna Type	PIFA
Hardware Version	UR80.03.01
Software Version	UR80.01.04.01

### 1.3. Testing Laboratory

Testing Place	Korea Testing Laboratory (KTL) 1271-12, Sa-Dong Sangnok-Gu, Ansan-si Gyunggi-Do , Korea
FCC registration number	408324
Industry Canada filing number	6298
Test Engineer	Sung-kyu Cho
Telephone number	+82 31 5000 132
Facsimile number	+82 31 5000 159
E-mail address	skcho@ktl.re.kr
Other Comments	-

### 1.4. Channel numbers and Frequencies

GSM850		GSM1900	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
128	824.20	512	1850.20
190	836.60	661	1880.00
251	848.80	810	1910.00

## 2. SUMMARY OF TEST RESULTS

Testing performed for : Uriver Inc.

Equipment Under Test : Tri-Band GSM Mobile Phone with Bluetooth

Receipt of Test Sample : , 2008.05. 28

Test Start Date : , 2008. 05. 29

Test End Date : , 2008. 06. 08

The following table represents the list of measurements required under the FCC CFR47 Part 22H and 24E.

FCC Rules	Test Requirements	Result
22.913(a), 24.232(c)	ERP & EIRP	Pass
22.917, 24.238	Radiated Spurious Emission	Pass
22.913(a), 24.232(c)	Conducted RF power output	Pass
2.1049	Occupied bandwidth	Pass
22.917, 24.238	Conducted Spurious Emission	Pass
22.355, 24.235	Frequency Stability	Pass

**Note 1** : Test results reported in this document relate only to the items tested

**Note 2** : The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

**Note 3** : Test results apply only to the item(s) tested

**\* Modifications required for compliance**

No modifications were implemented by KTL.

All results in this report pertain to the un-modified sample provided to KTL.

## 3. Measurement & Results

### 3.1. Effective Radiated Power

#### 3.1.1. Test Procedure

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004:

The EUT was placed on a nonconductive turntable 1.5 meter above the ground plane and set up for the max.output power.

The measurement was made in same test set up and configuration with 3 orthogonal planes which produced maximum emission level. Receiving antenna was installed at 3-meter distance from the EUT, and was connected to an spectrum analyzer.

The EUT was then replaced by an dipole antenna and polarized in accordance with the EUT's antenna polarization.The dipole antenna was connected to a RF signal generator with a coaxial cable. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration. The signal generator was adjusted to a level that produced the maximum radiated emission level. The signal generator level was recorded and corrected by the power loss in the cable between the signal generator and the antenna and further corrected for the gain of the substitution antenna. The signal generator corrected level is the ERP or EIRP level.

All modes of operation were investigated, and the worst-case results are reported.

#### 3.1.2.Limit

FCC 22.913(b) : The Effective Radiated Power (ERP) of mobile transmitters must not exceed 7 Watts.  
FCC 24.232(b) : The equivalent Isotropic Radiated Power (EIRP) must not exceed 2 Watts.

#### 3.1.3.Test Results (GSM850)

Frequency(MHz)	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]
824.2	-5.45	32.29	-1.02	H	29.46
836.6	-4.25	32.84	-0.65	H	30.38
848.8	-4.32	34.21	-0.71	H	31.68

#### Test Results (GPRS850)

Frequency(MHz)	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]
848.8	-4.40	34.13	-0.71	H	31.60

#### Test Results (EDGE850)

Frequency(MHz)	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]
848.8	-4.61	33.92	-0.71	H	31.39

#### 3.1.4. Test Results (GSM1900)

Frequency(MHz)	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	EIRP [dBm]
1850.20	-16.24	18.73	10.04	V	25.82
1880.00	-14.69	20.38	10.04	V	27.45
1909.80	-13.21	21.90	10.05	V	29.00

#### Test Results (GPRS1900)

Frequency(MHz)	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	EIRP [dBm]
1909.80	-13.26	21.85	10.05	V	28.95

#### Test Results (EDGE1900)

Frequency(MHz)	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	EIRP [dBm]
1909.80	-16.08	19.03	10.05	V	26.13



## 3.2. Field Strength of Spurious Radiation

### 3.2.1. Test Results (GSM850)

Operating Frequency : 824.2 MHz

Measured Output Power : 29.46 dBm = 0.883 W

Limit :  $43 + 10 \log 10 (W) = 42.46 \text{ dBc}$

Frequency(MHz)	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Correct Generator Level [dBm]	Result [dBc]	Pol [H/V]
1648.4	-35.53	7.56	-38.23	67.69	H
2472.6	-44.60	8.44	-43.80	73.26	H
3296.8	--	--	--	--	--
4121.0	--	--	--	--	--

Operating Frequency : 836.60 MHz

Measured Output Power : 30.38 dBm = 1.091 W

Limit :  $43 + 10 \log 10 (W) = 43.37 \text{ dBc}$

Frequency(MHz)	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Correct Generator Level [dBm]	Result [dBc]	Pol [H/V]
1673.2	-32.87	7.65	-35.23	65.61	H
2509.8	-41.99	8.50	-40.91	71.29	H
3346.4	--	--	--	--	--
4183.0	--	--	--	--	--

Operating Frequency : 848.80 MHz  
Measured Output Power : 31.68 dBm = 1.472 W  
Limit :  $43 + 10 \log 10 (W) = 44.68 \text{ dBc}$

Frequency(MHz)	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Correct Generator Level [dBm]	Result [dBc]	Pol [H/V]
1697.60	-32.60	7.68	-34.70	66.38	H
2546.40	-44.59	8.55	-43.44	75.12	H
3395.20	--	--	--	--	--
4244.0	--	--	--	--	--

### 3.2.2. Test Results (GSM1900)

Operating Frequency : 1850.2 MHz  
Measured Output Power : 25.82 dBm = 0.382 W  
Limit :  $43 + 10 \log 10 (W) = 38.82 \text{ dBc}$

Frequency(MHz)	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Correct Generator Level [dBm]	Result [dBc]	Pol [H/V]
3700.40	-40.11	12.32	-35.26	-61.08	V
5550.60	-49.73	13.02	-41.53	-67.35	V
7400.80	--	--	--	--	--
9251.00	--	--	--	--	--

Operating Frequency : 1880.0 MHz  
 Measured Output Power : 29.00 dBm = 0.794 W  
 Limit :  $43 + 10 \log 10 (W) = 42.00 \text{ dBc}$

Frequency(MHz)	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Correct Generator Level [dBm]	Result [dBc]	Pol [H/V]
3760.00	-40.77	7.00	-35.27	62.72	V
5640.00	-49.88	8.85	-41.43	68.88	V
7520.00	--	--	--	--	--
9400.00	--	--	--	--	--

Operating Frequency : 1909.8 MHz  
 Measured Output Power : 31.68 dBm = 1.472 W  
 Limit :  $43 + 10 \log 10 (W) = 44.68 \text{ dBc}$

Frequency(MHz)	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Correct Generator Level [dBm]	Result [dBc]	Pol [H/V]
3819.60	-42.03	7.00	-36.23	65.23	V
5729.40	-49.79	8.85	-41.11	70.11	V
7639.20	--	--	--	--	--
9549.00	--	--	--	--	--


### 3.3. Conducted Output Power


#### 3.3.1. Test Procedure

A base station simulator (CMU200) was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. GPRS/EDGE mode using 1 uplink and 1 downlink slot.


#### 3.3.2. Test Results (GSM850)"

Frequency(MHz)	GSM	GPRS	EDGE
824.2	32.10 dBm	32.05 dBm	26.67 dBm
836.6	32.28 dBm	32.28 dBm	27.75 dBm
848.8	32.38 dBm	32.43 dBm	26.46 dBm

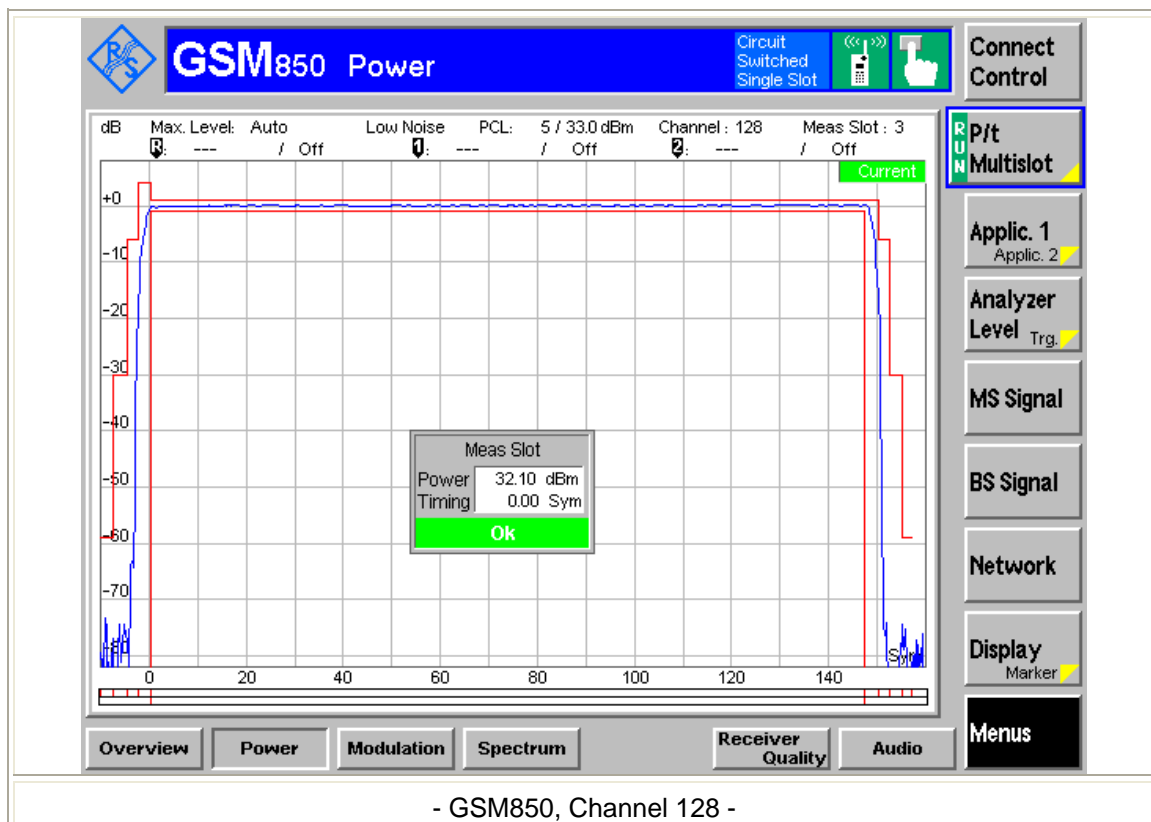


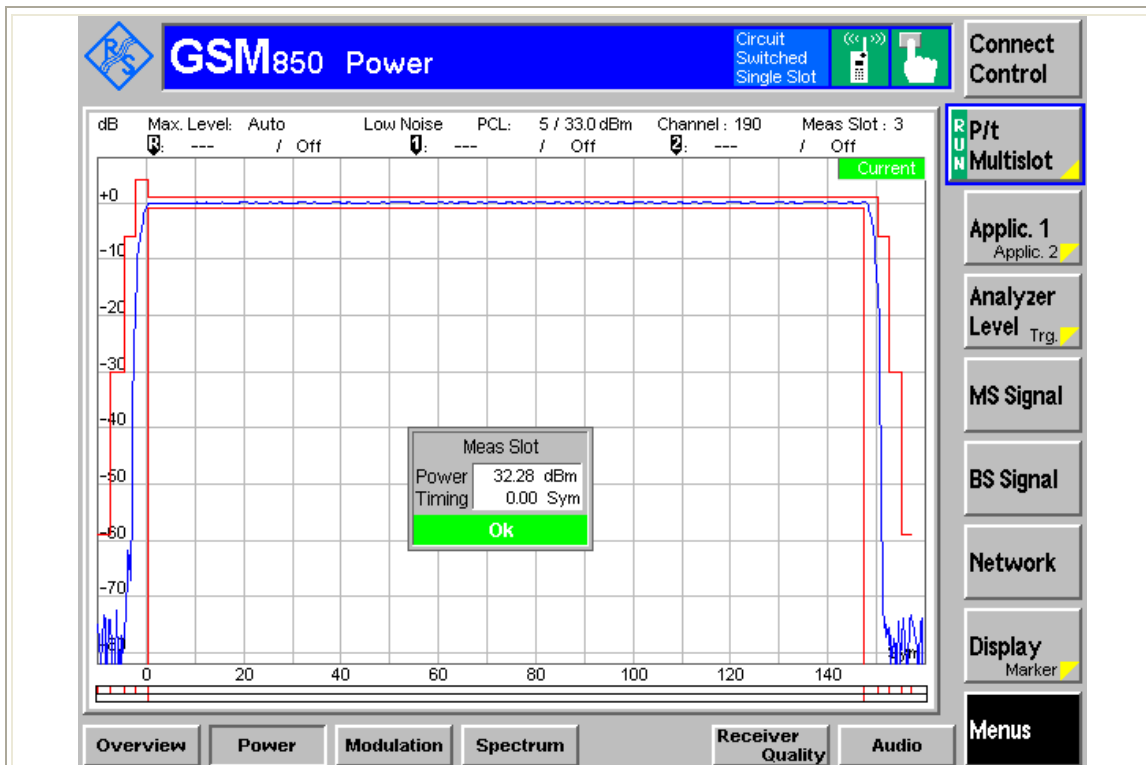


- GSM850, Channel 190 -

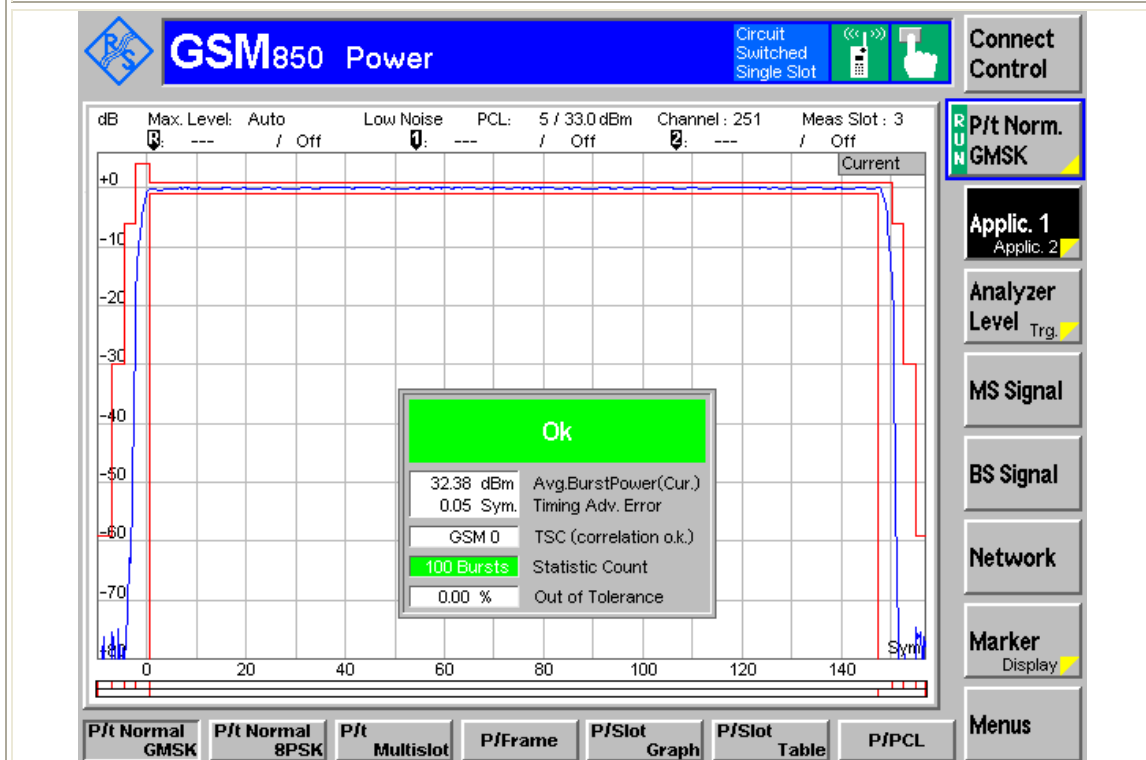


- GSM850, Channel 251 -

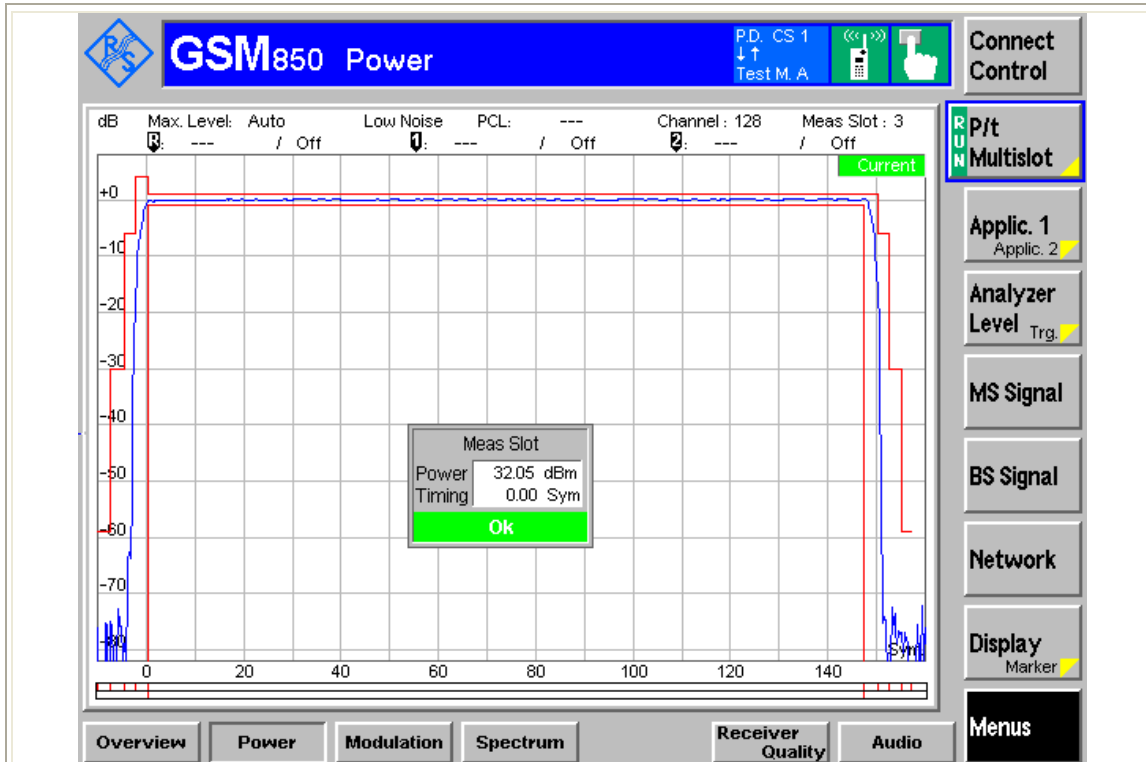


- GPRS850, Channel 128 -

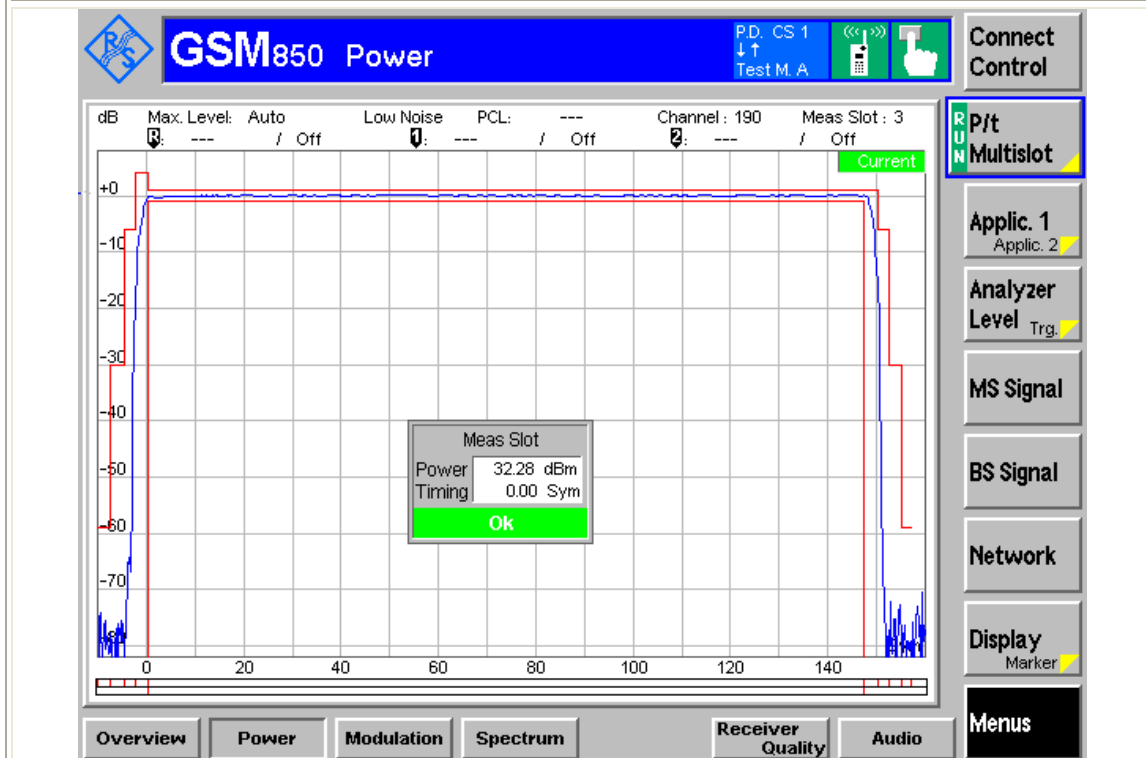


- GPRS850, Channel 190 -

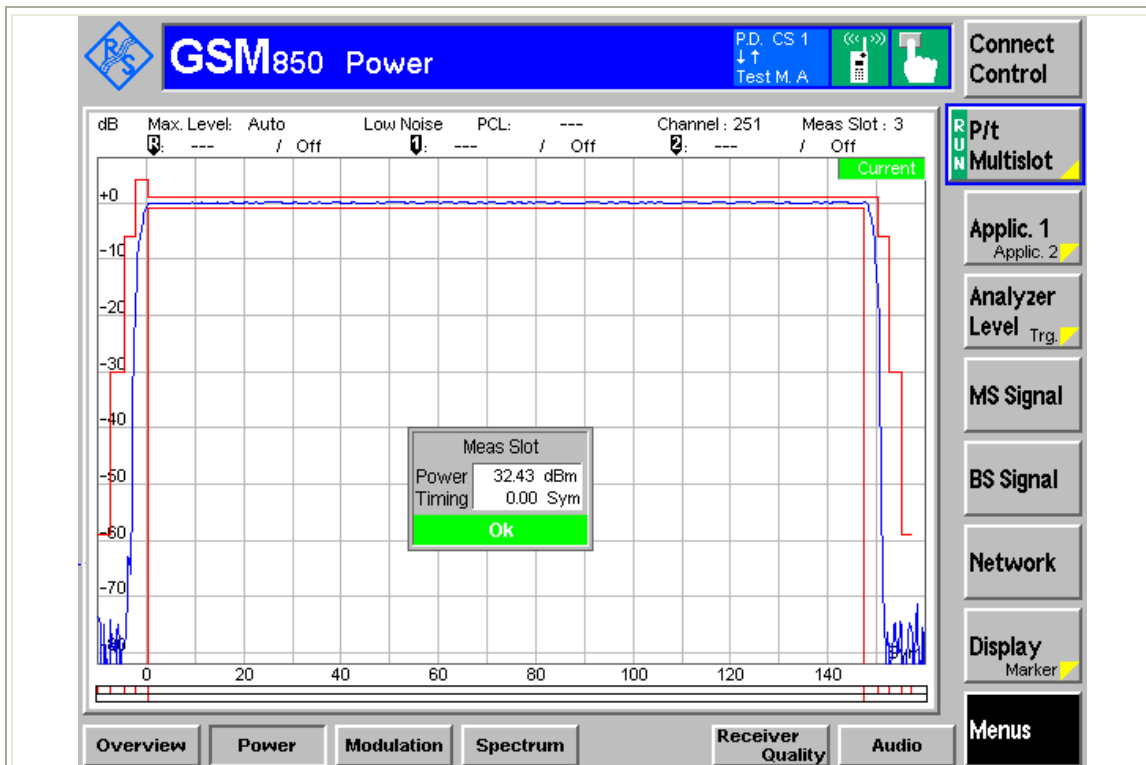


- GPRS850, Channel 251 -

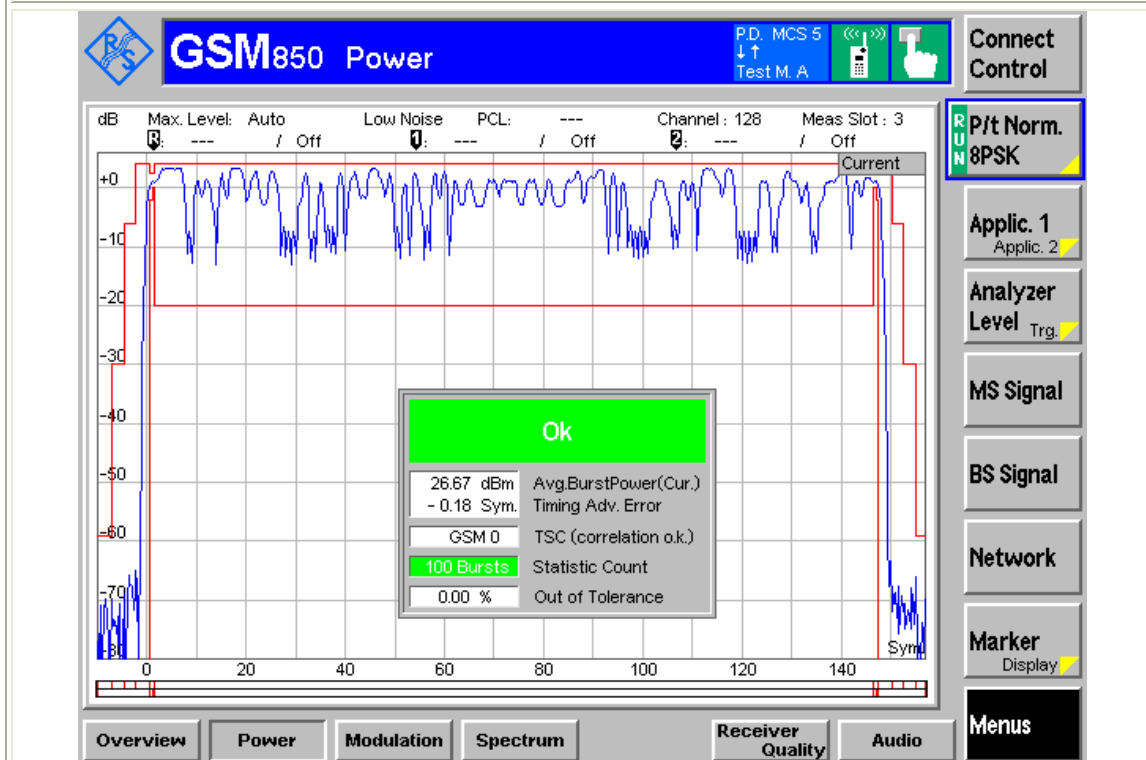

- EDGE850, Channel 128 -

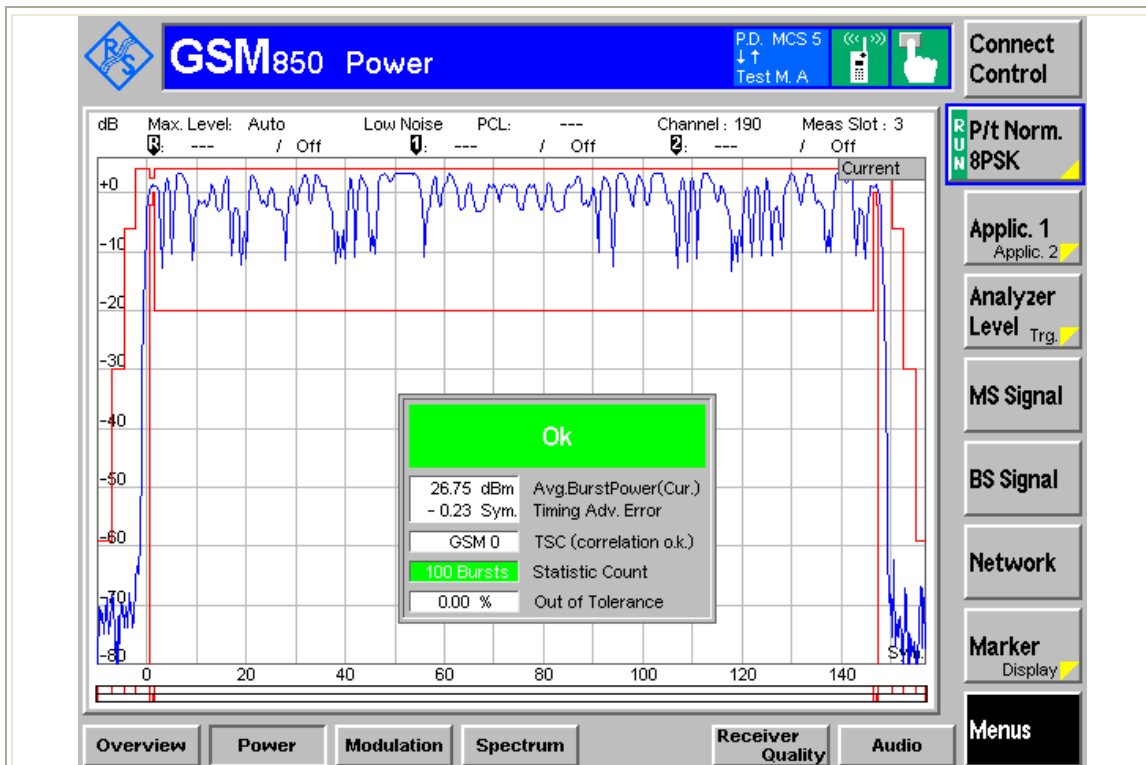

- EDGE850, Channel 190 -

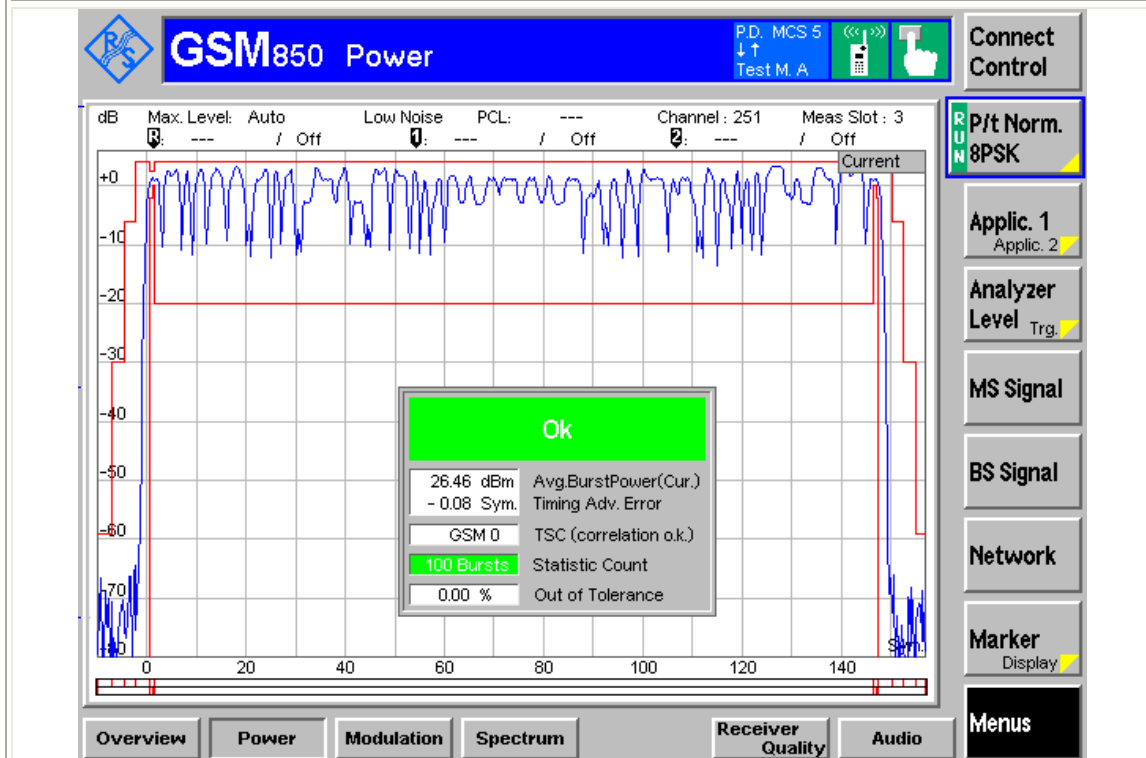



- EDGE850, Channel 251 -




### 3.3.3. Test Results (GSM1900)

Frequency(MHz)	GSM	GPRS	EDGE
1850.20	29.04 dBm	29.01 dBm	25.08 dBm
1880.00	29.04 dBm	29.06 dBm	25.09 dBm
1909.80	29.19 dBm	29.20 dBm	25.06 dBm

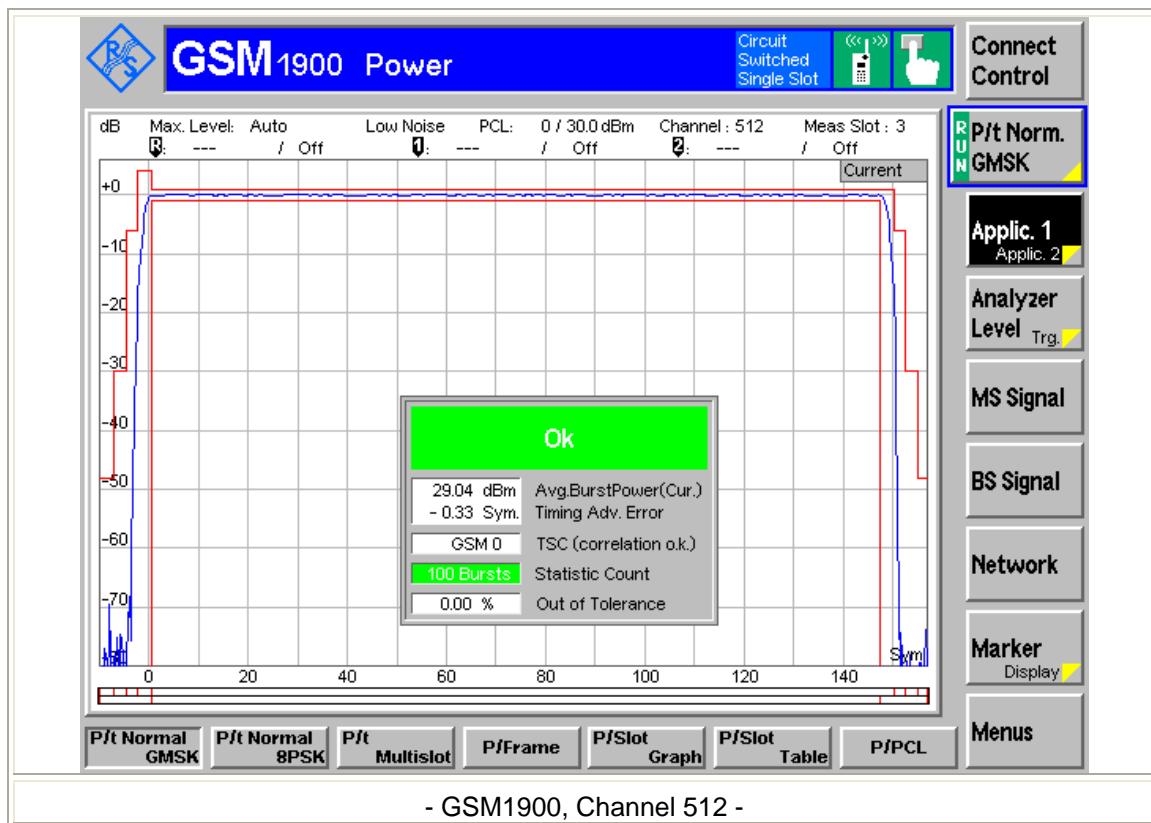


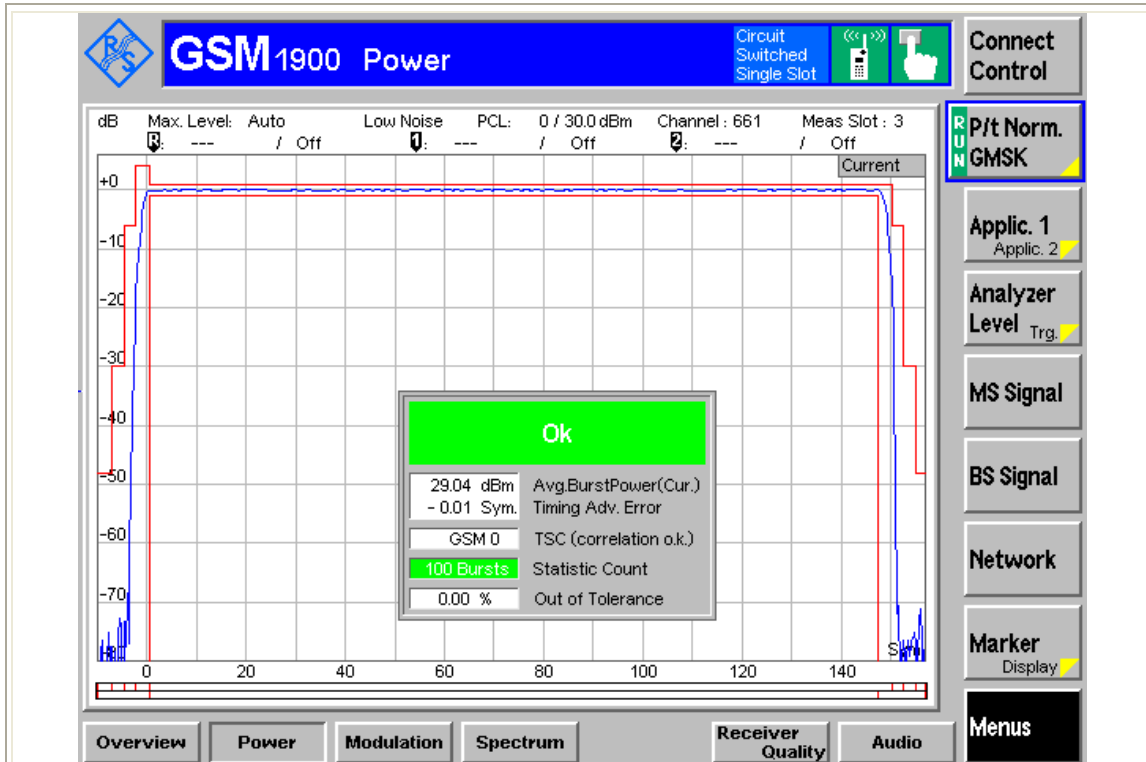


- GSM1900, Channel 661 -

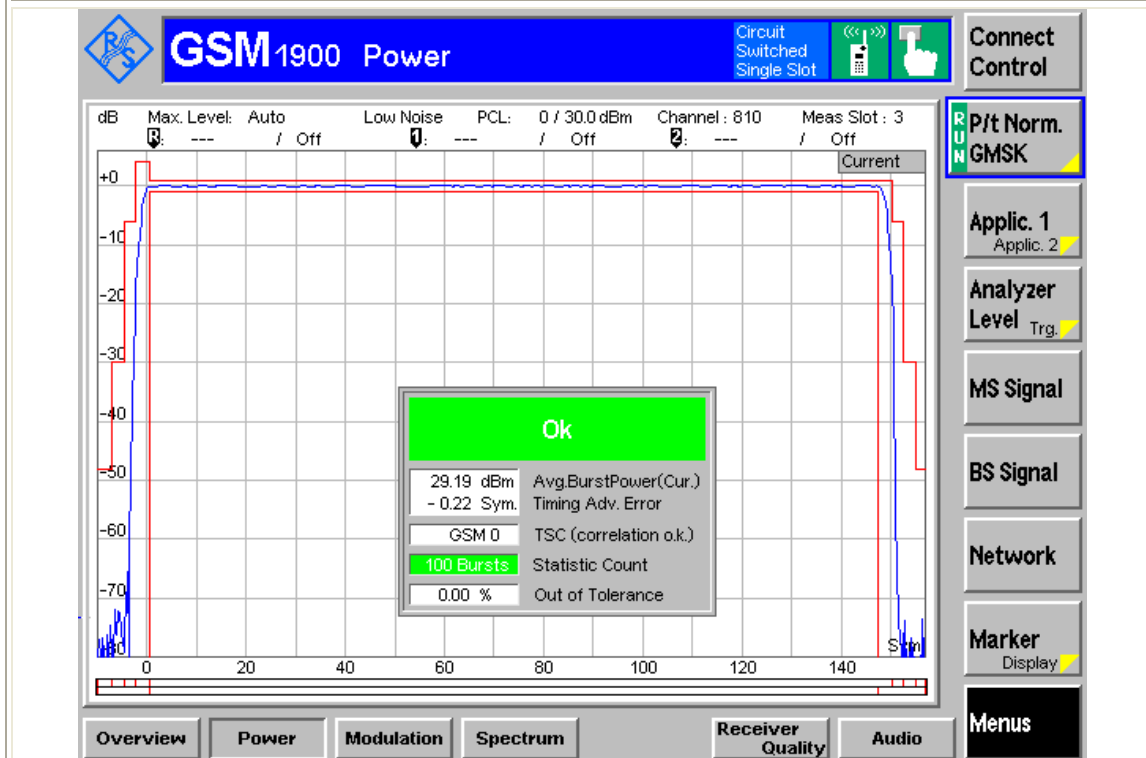


- GSM1900, Channel 810 -

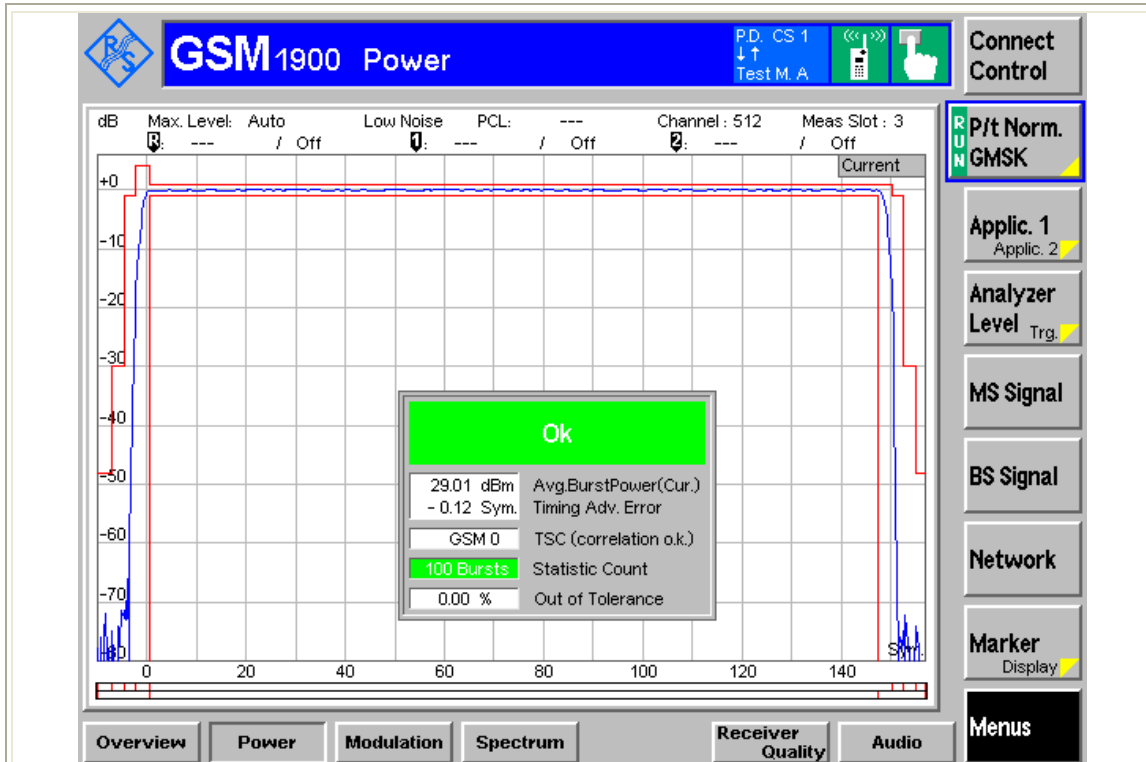


- GPRS1900, Channel 512 -

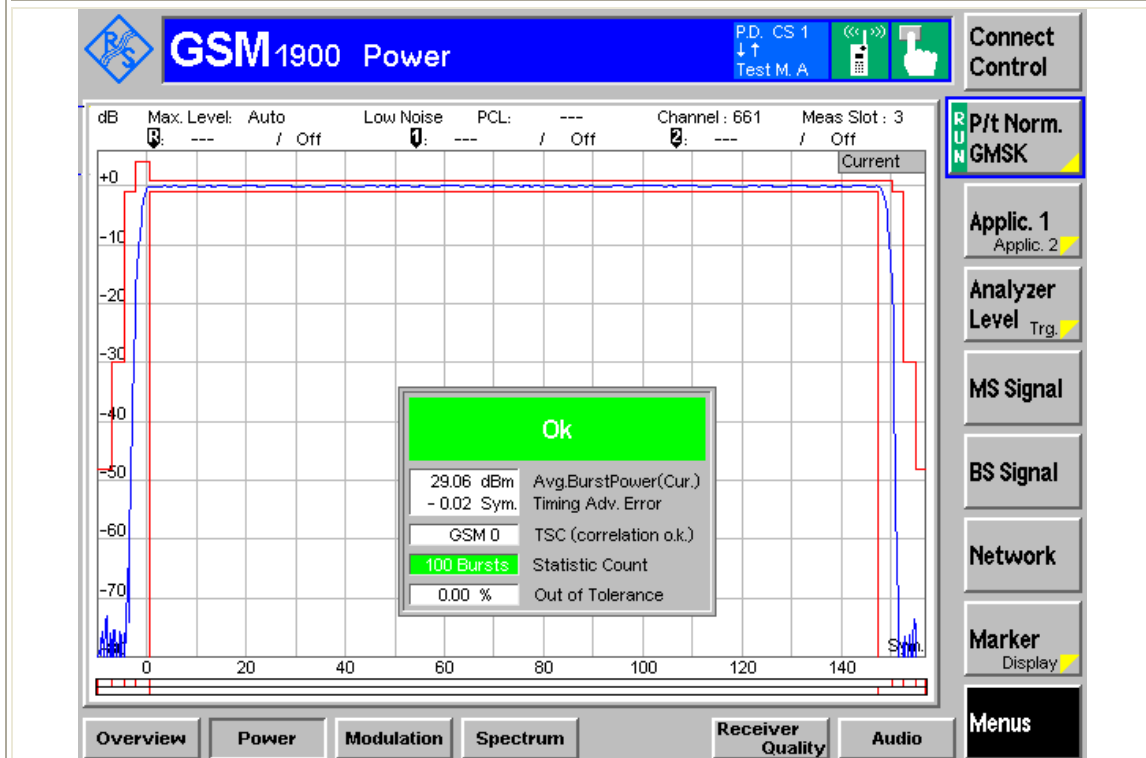


- GPRS1900, Channel 661 -

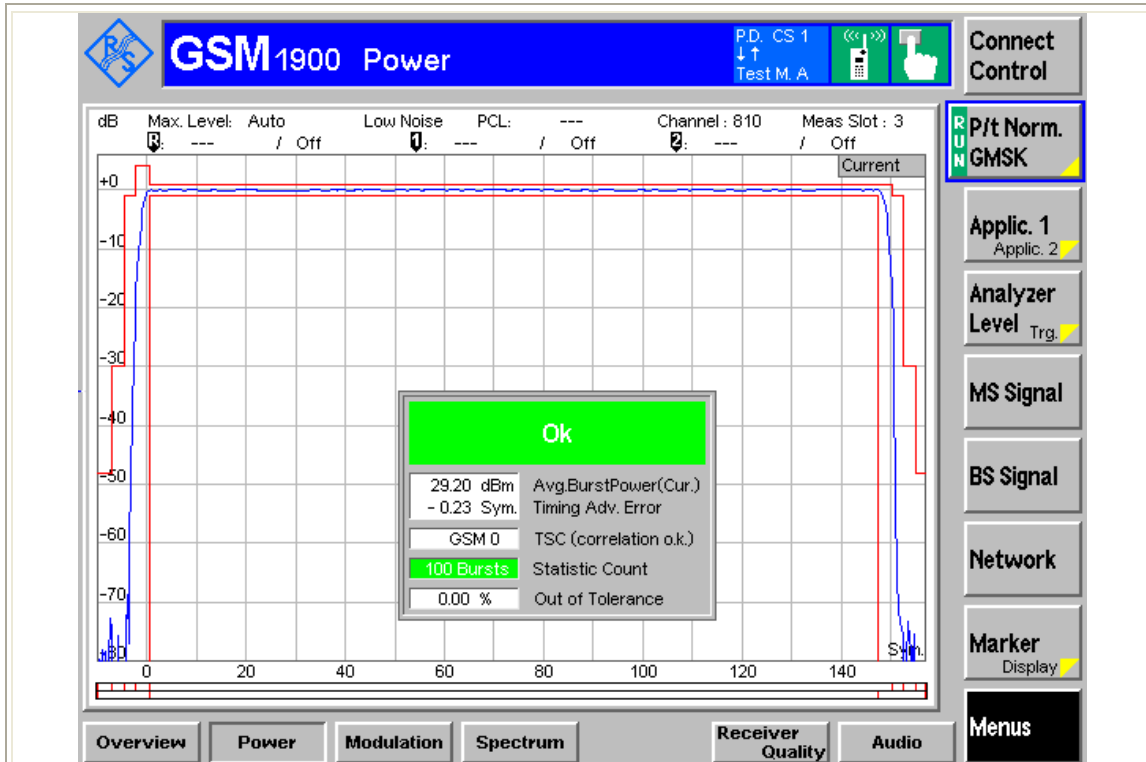


- GPRS1900, Channel 810 -

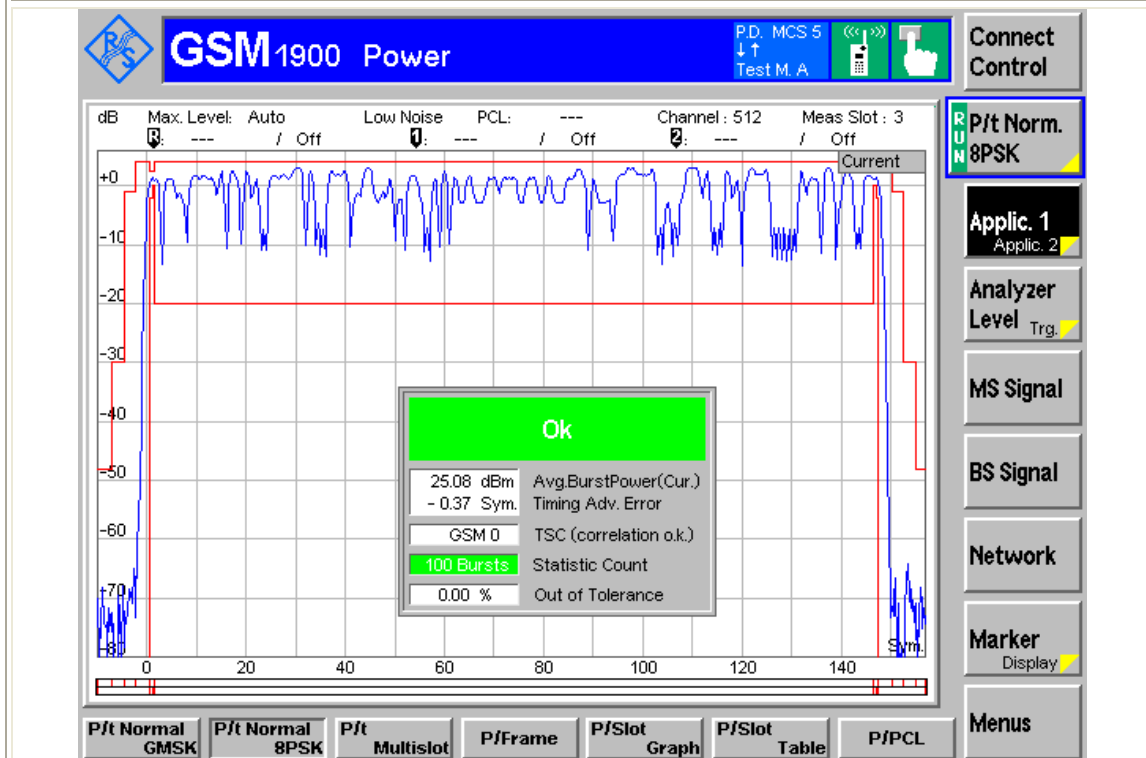

- EDGE1900, Channel 512 -

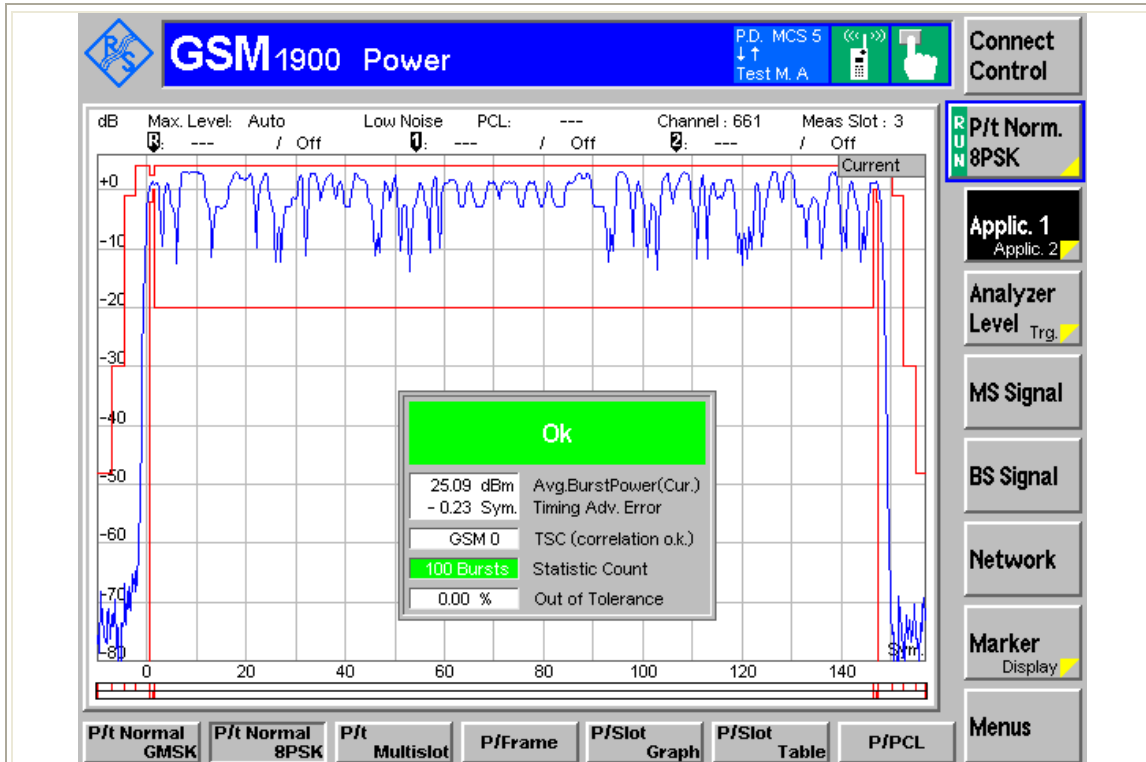

- EDGE1900, Channel 661 -

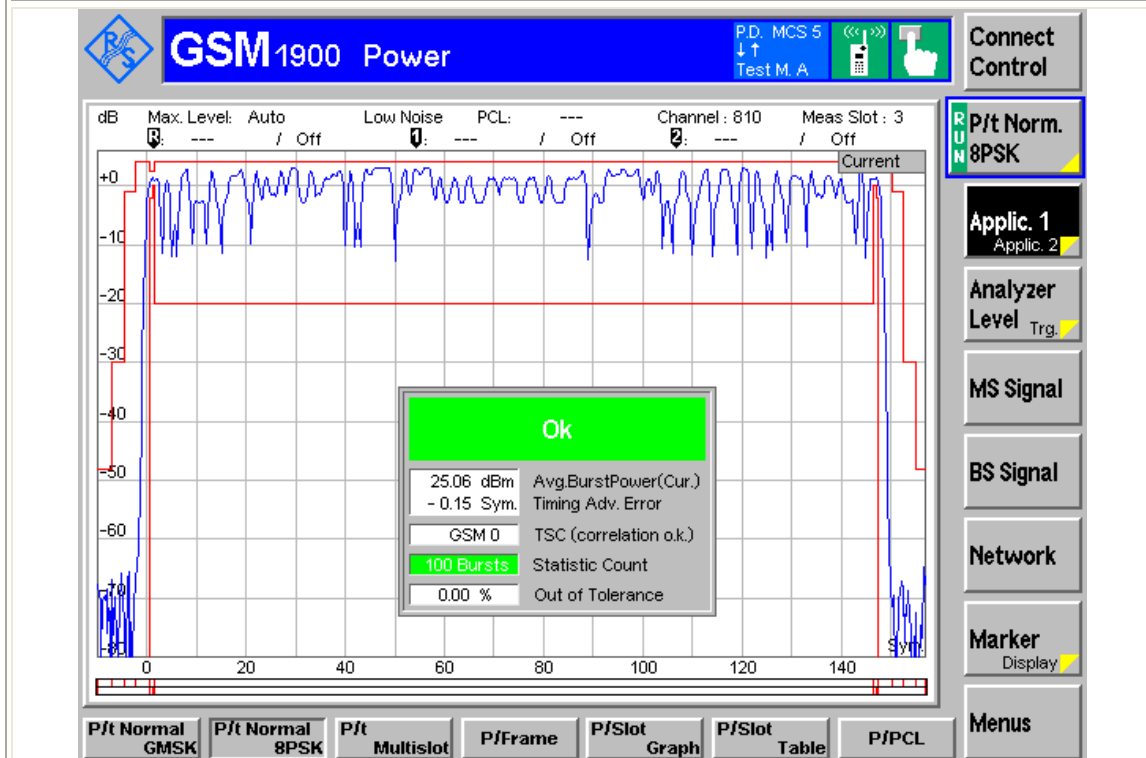

- EDGE1900, Channel 810 -


### 3.4. Occupied Bandwidth

#### 3.4.1. Test Procedure


The EUT's output RF connector was connected with a short cable to spectrum analyzer. The EUT was setup to maximum output power. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. RBW was set to about 1% of emission BW, VBW is set to 3 times.

#### 3.4.2. Limit

- On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB
- Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB Below the transmitter power.
- When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the license's frequency block edges, both upper and lower, as the design permits.
- The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

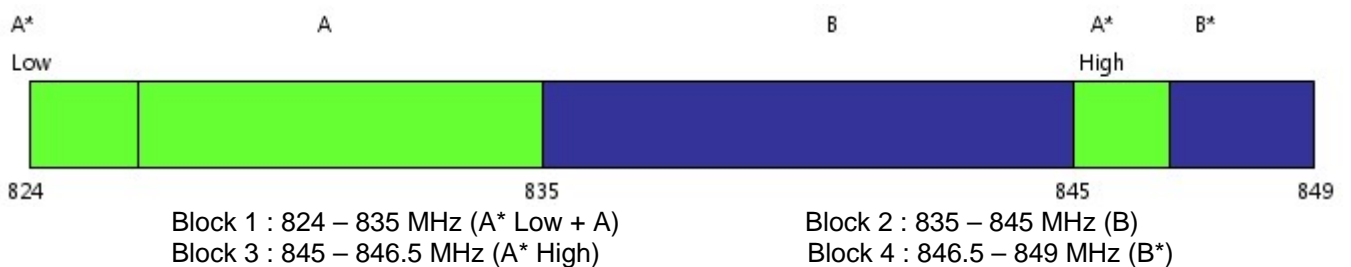


#### - Cellular Service Frequency Blocks -

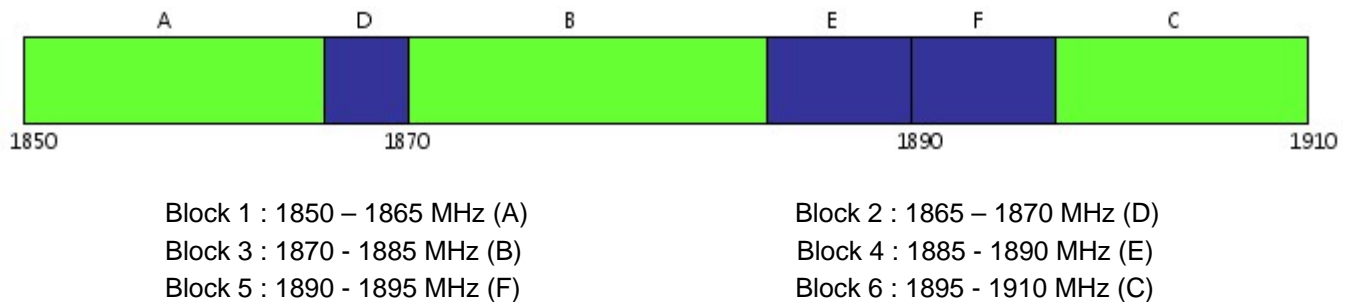


#### - Broadband PCS Service Frequency Blocks -


### 3.4.3. Test Results (GSM850)

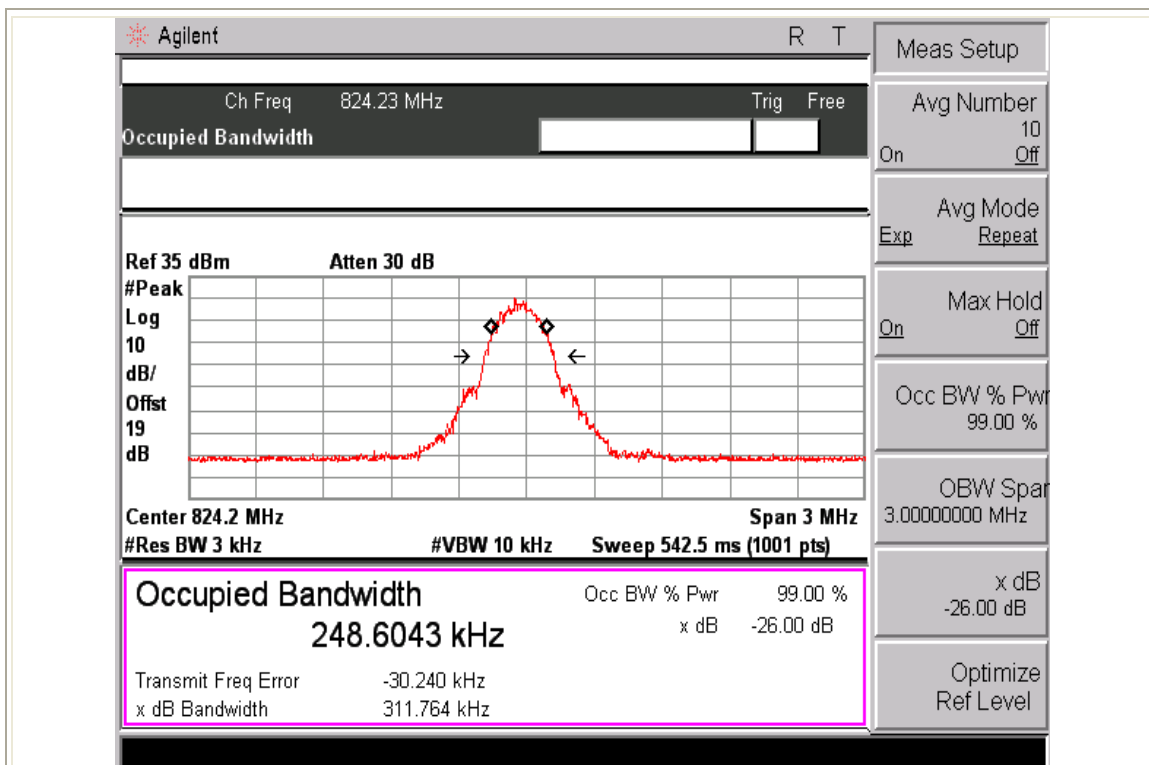


- GSM850, Channel 128 -

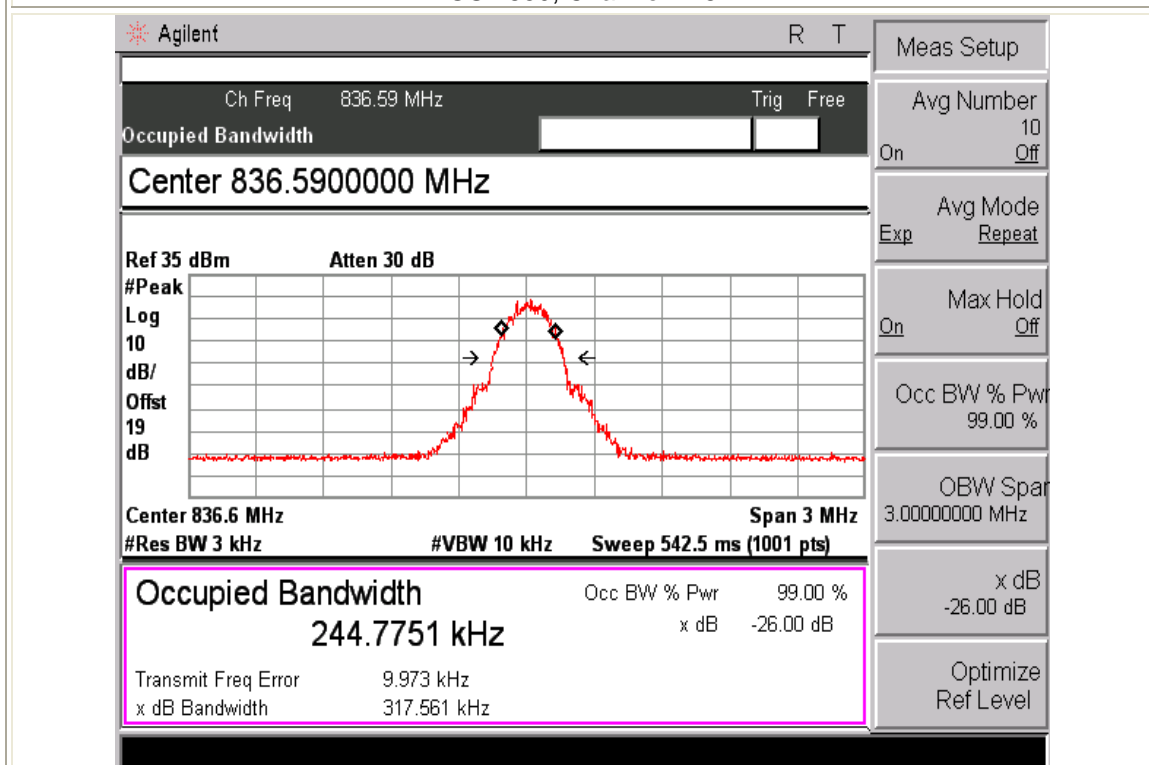

- GSM850, Channel 190 -

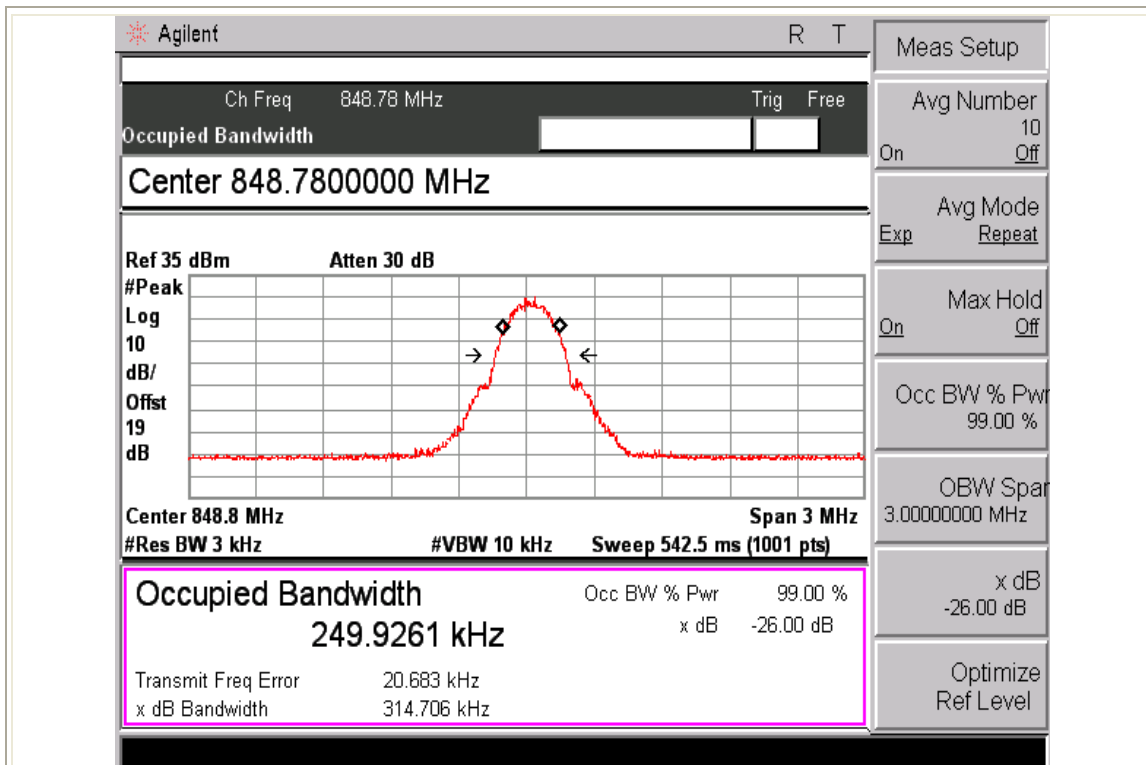


- GSM850, Channel 251 -

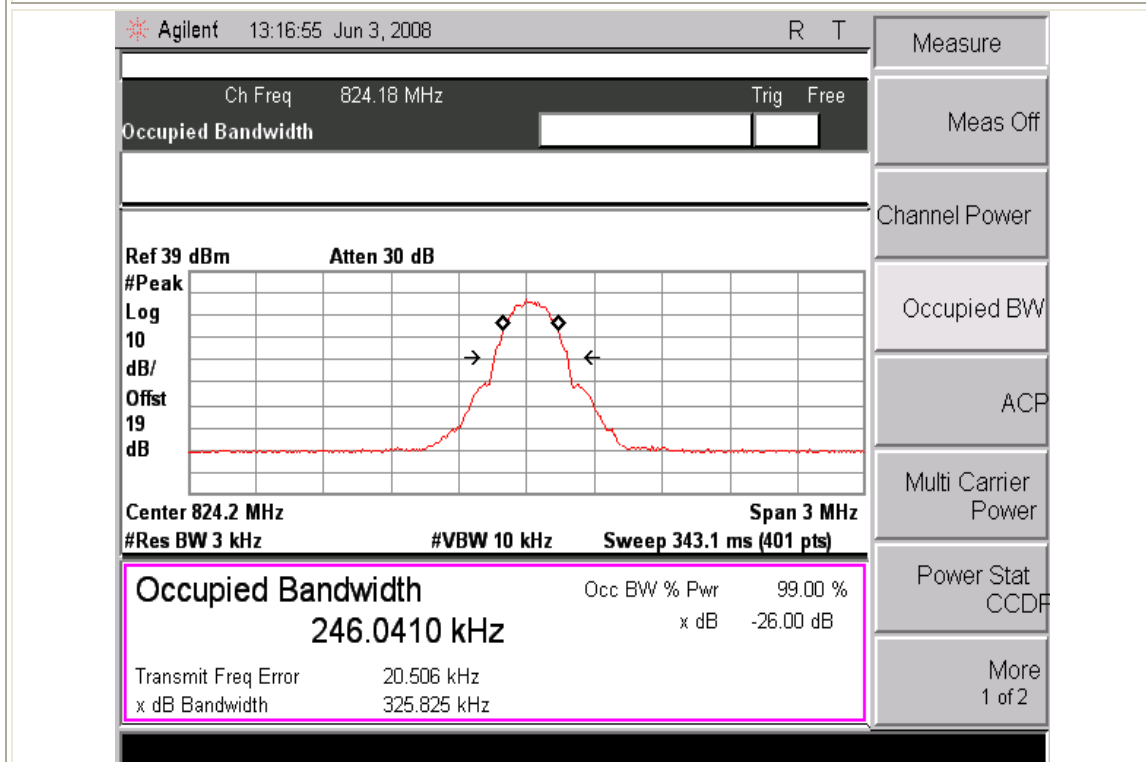


- GPRS850, Channel 128 -




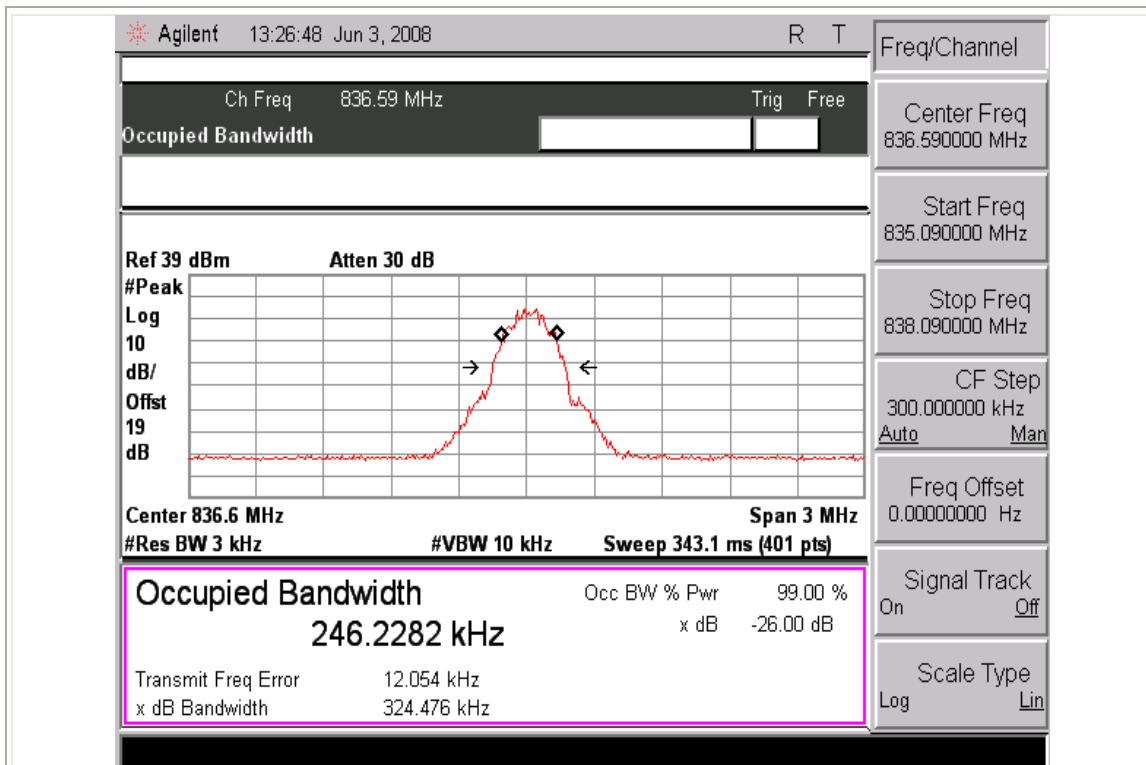


- GPRS850, Channel 190 -

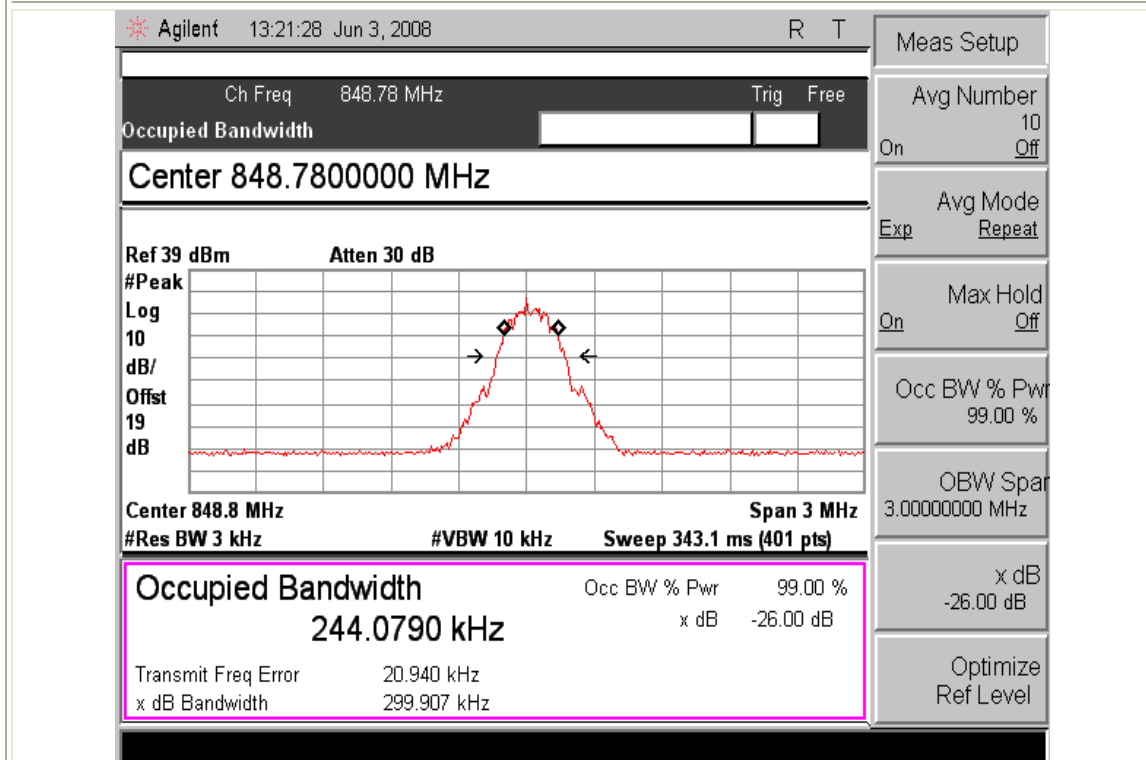


- GPRS850, Channel 251 -

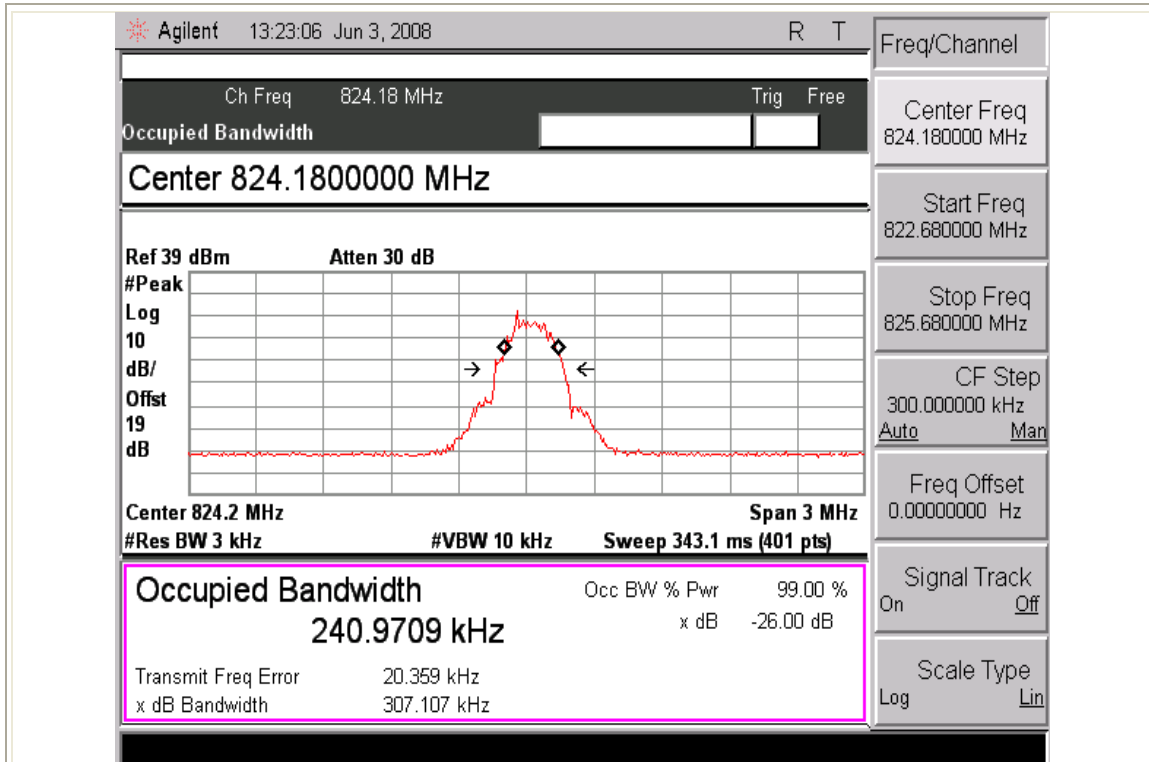


- EDGE850, Channel 128 -

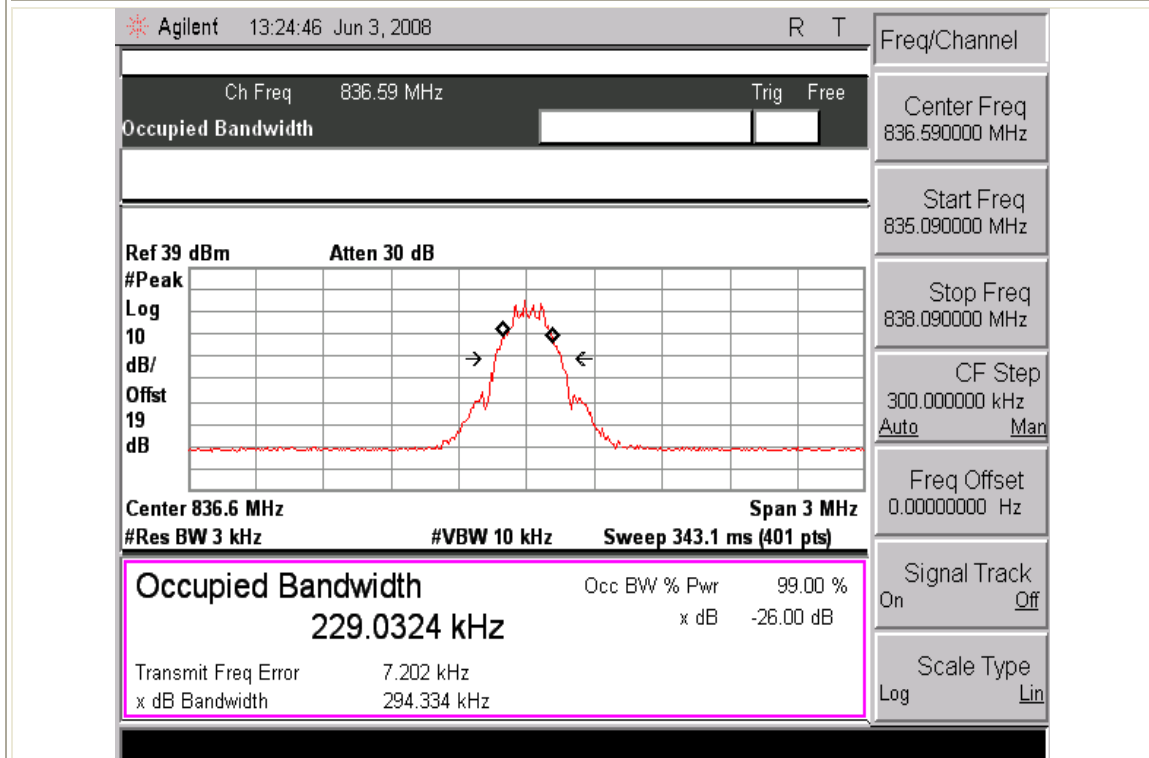


- EDGE850, Channel 190 -

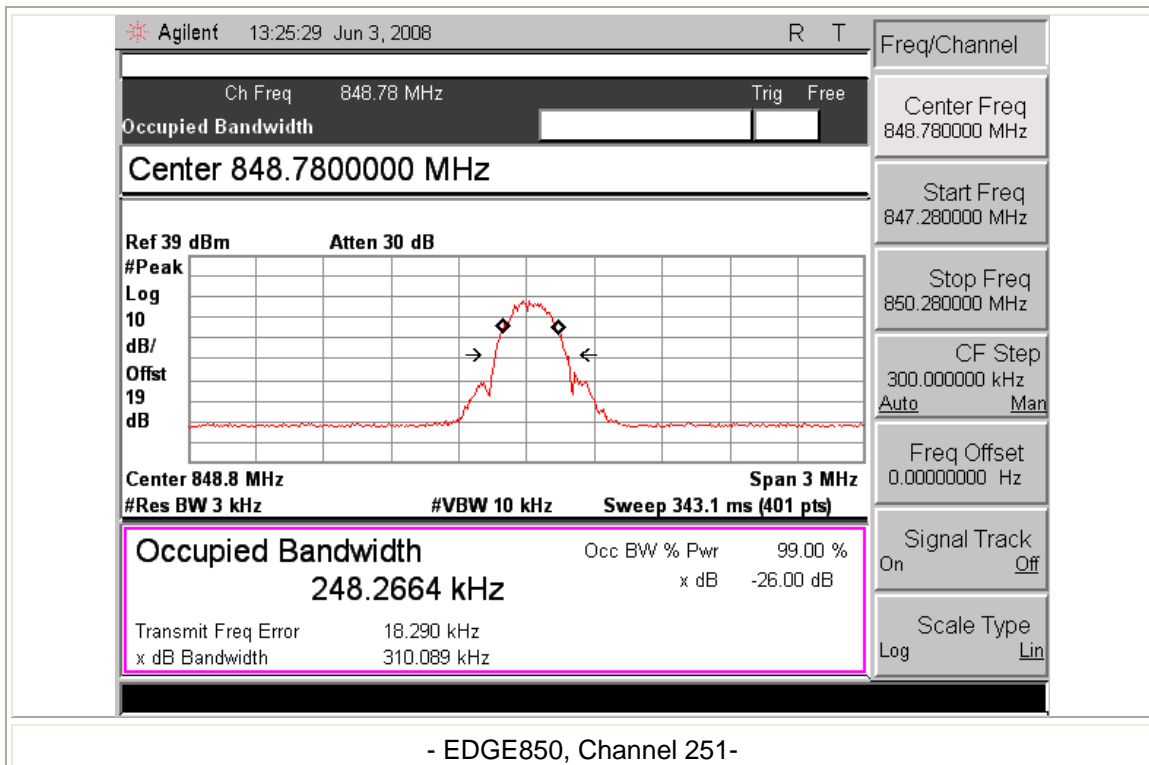


#### 3.4.4. Test Results (GSM1900)

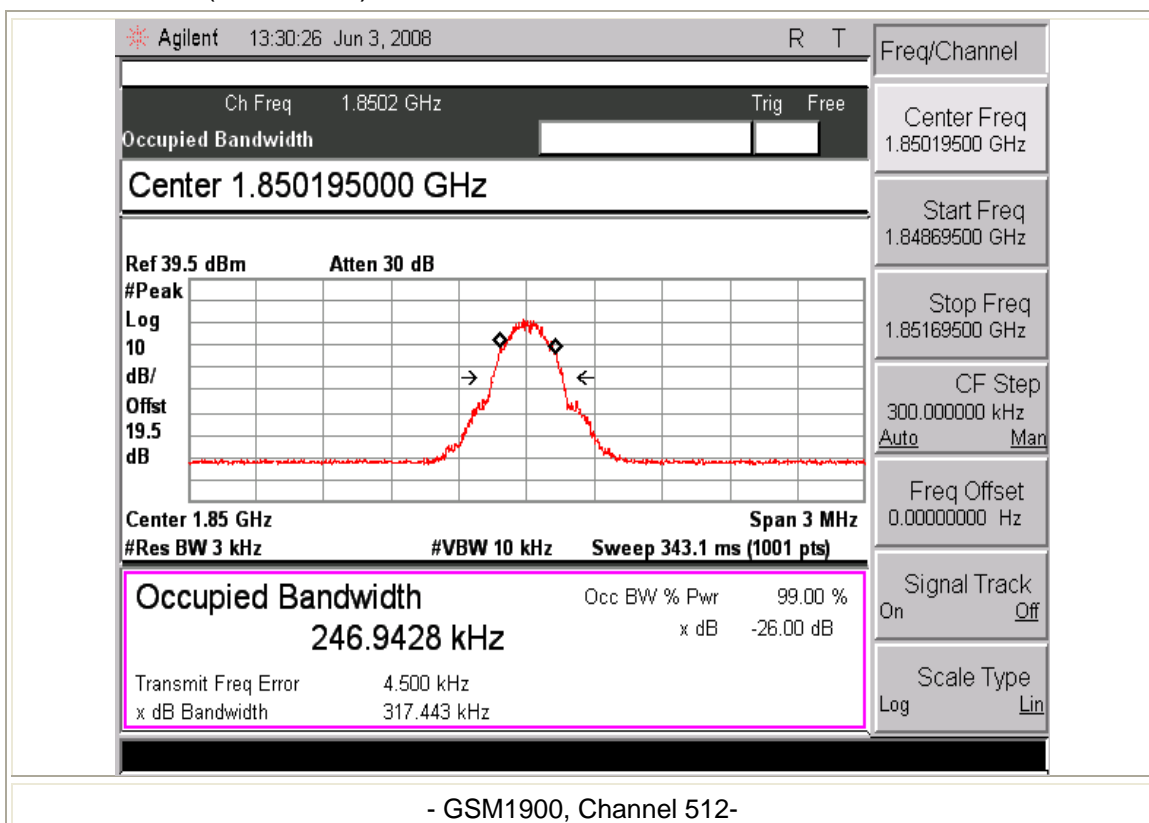


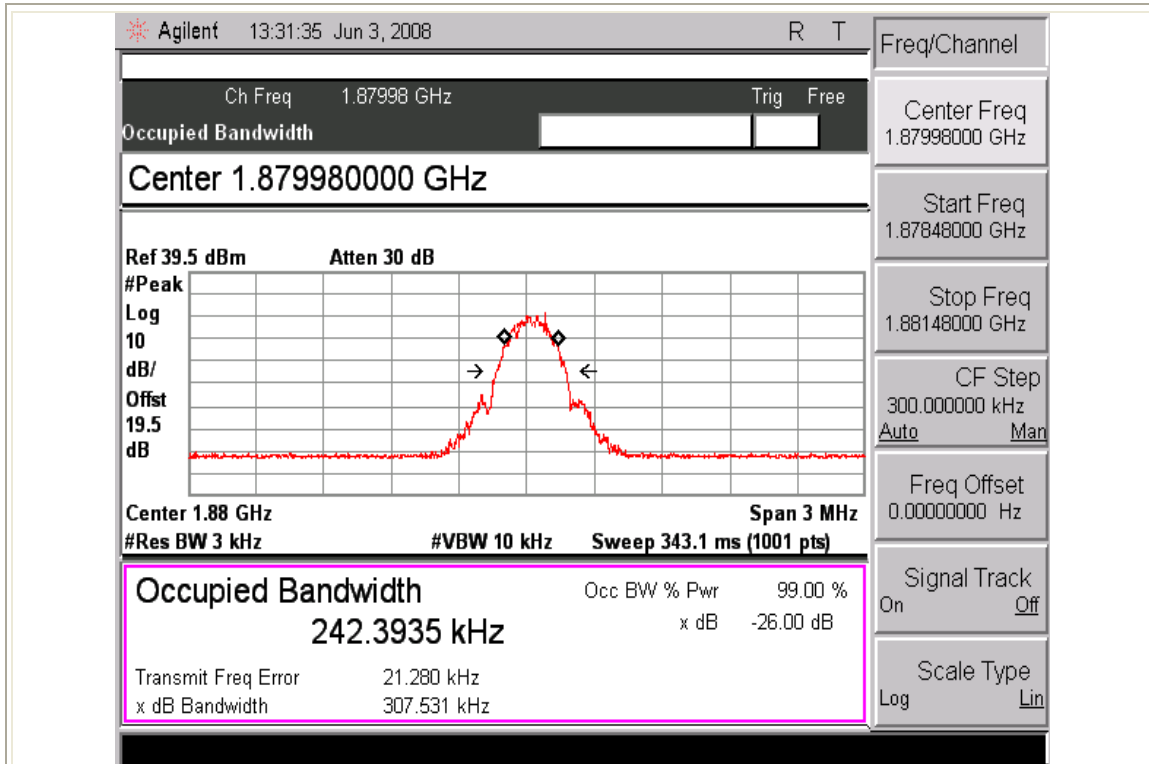


- GSM1900, Channel 661 -

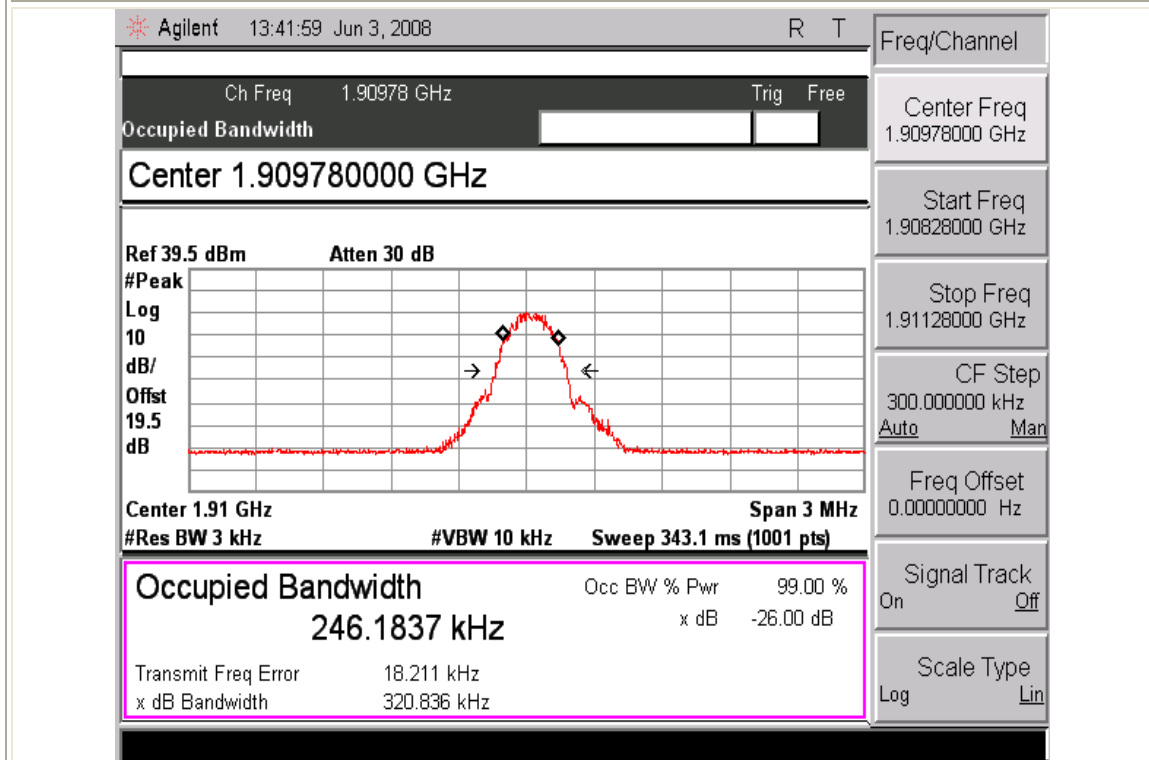


- GSM1900, Channel 810 -

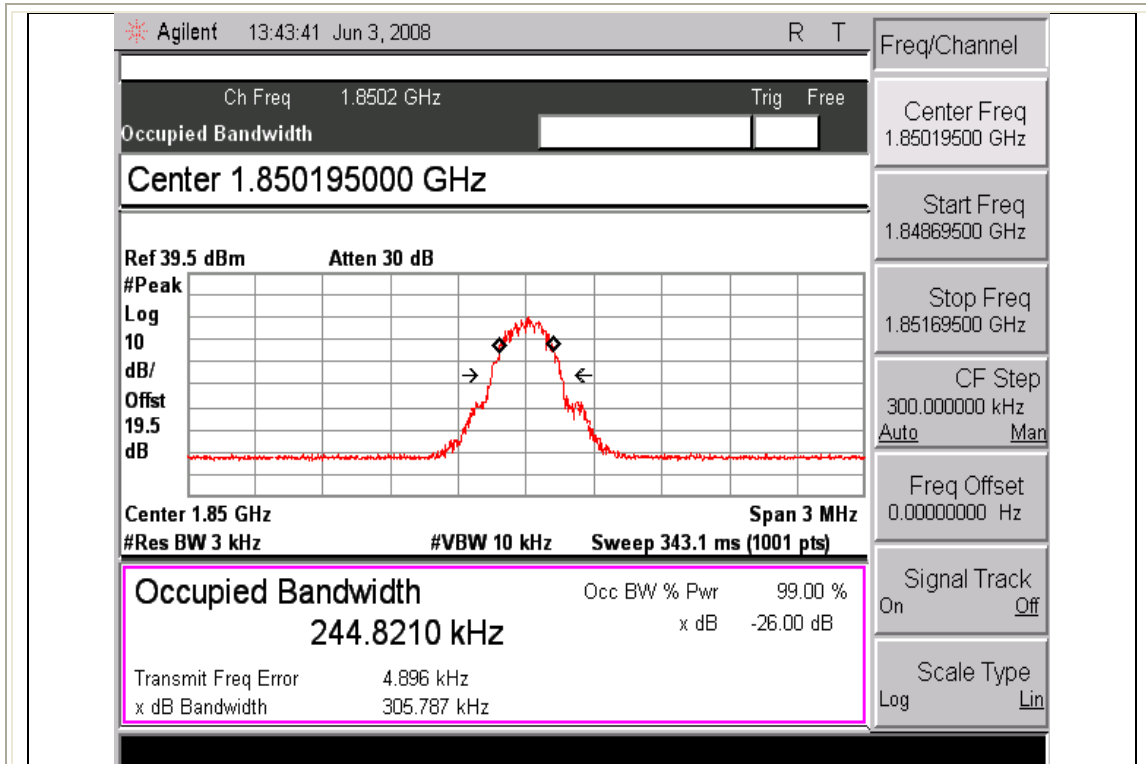


- GPRS1900, Channel 512 -

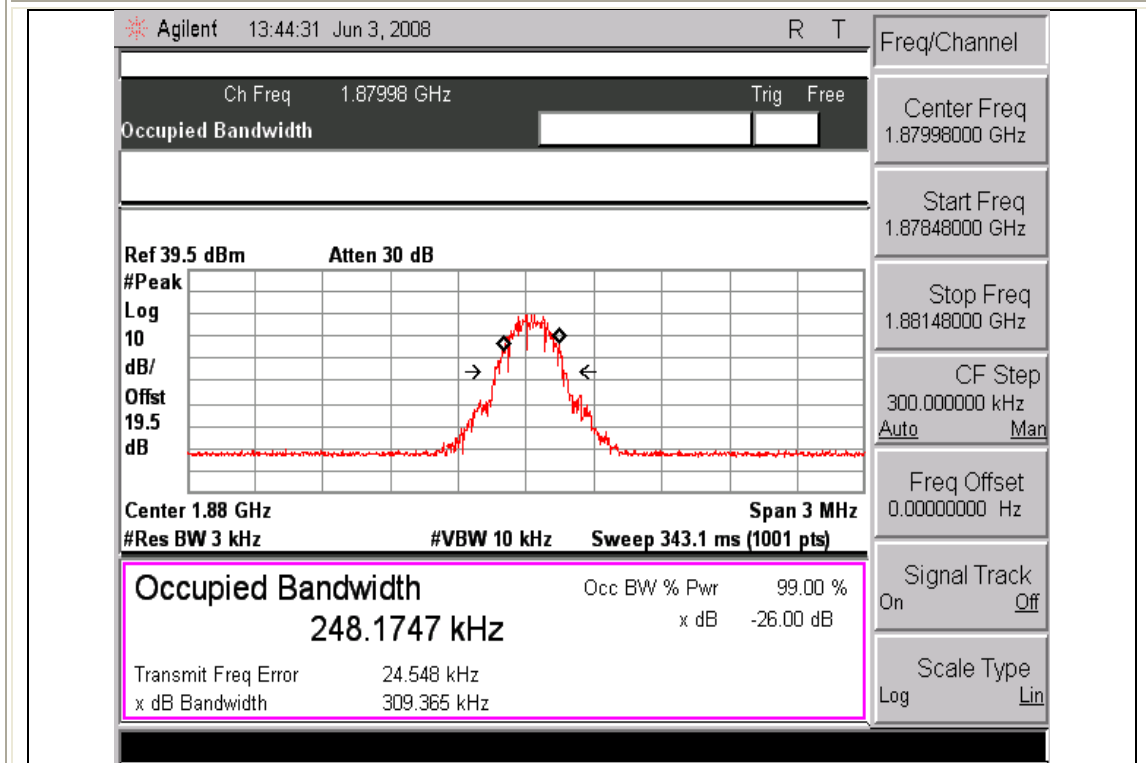


- GPRS1900, Channel 661 -

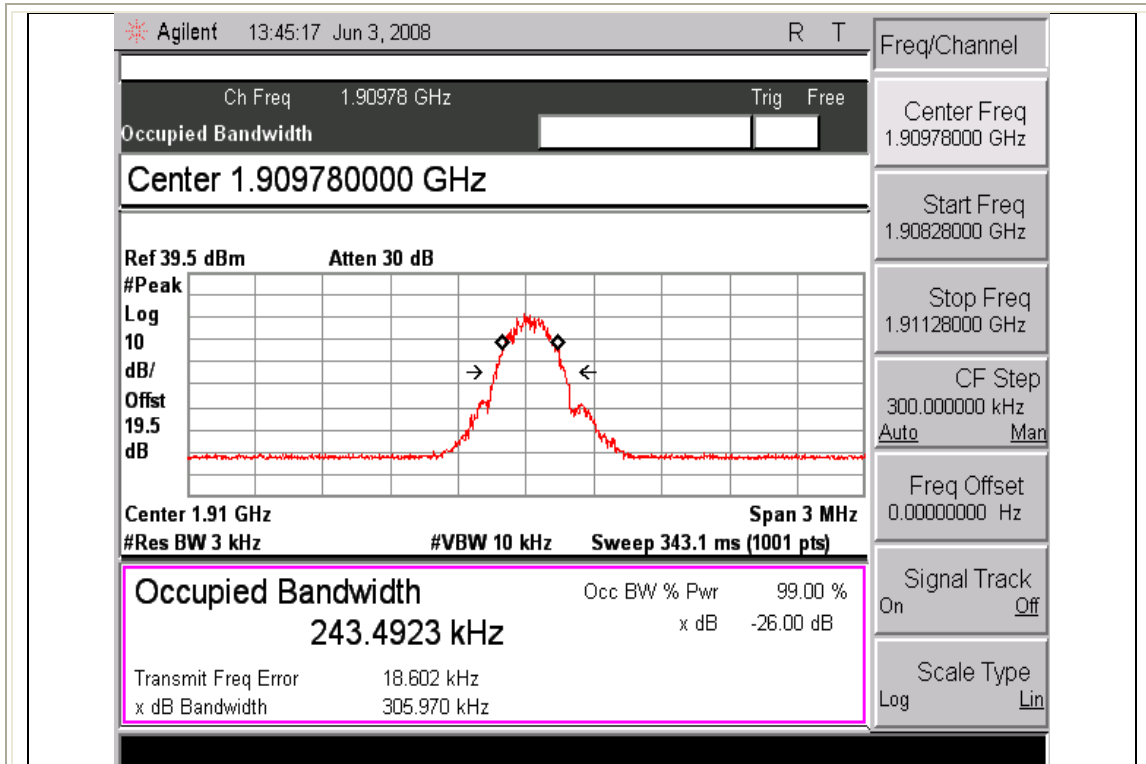


- GPRS1900, Channel 810 -

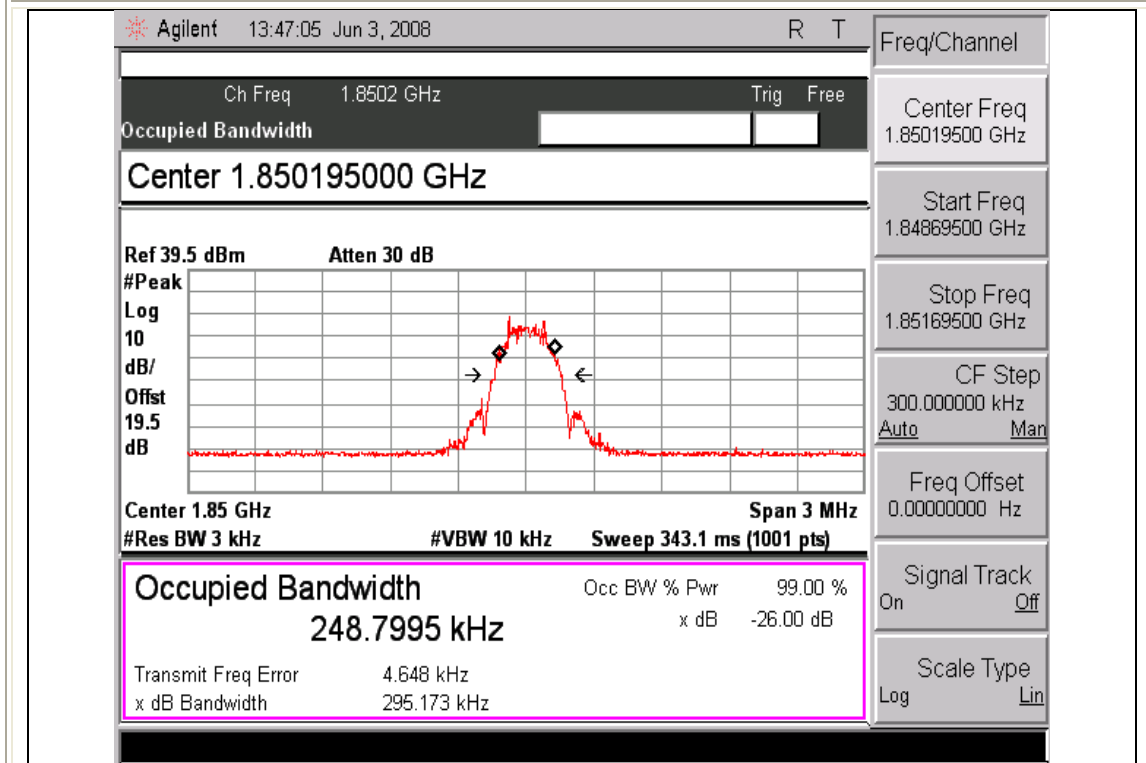

- EDGE1900, Channel 512 -

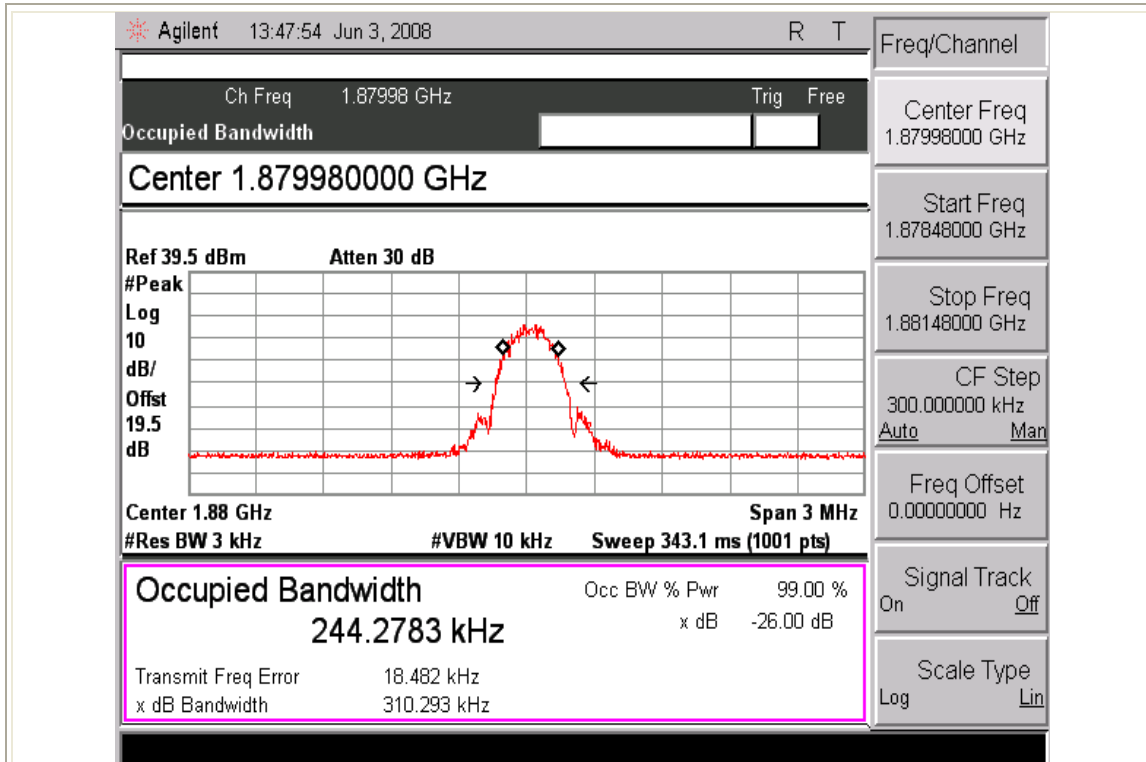

- EDGE1900, Channel 661 -

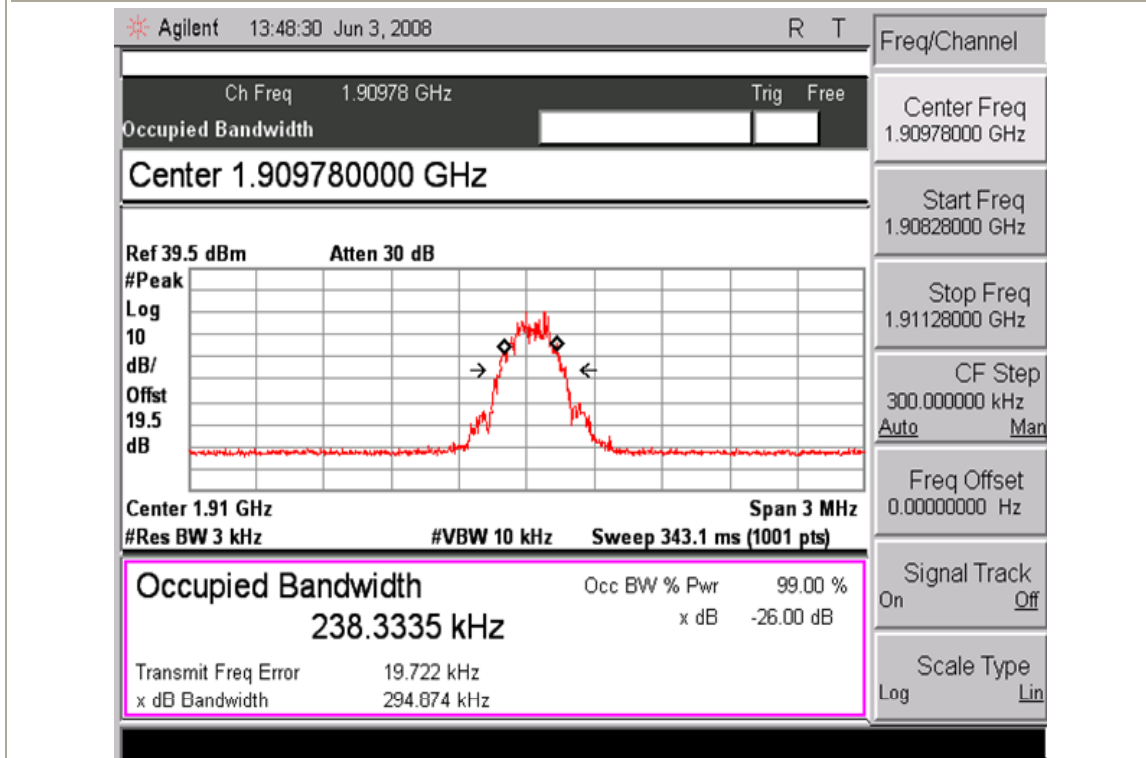

- EDGE1900, Channel 810 -

### 3.5. Conducted Spurious Emission


#### 3.5.1. Test Procedure

The EUT's output RF connector was connected with a short cable to spectrum analyzer. The EUT was setup to maximum output power. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1 MHz. However in the 1 MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed. A display line was placed at -13 dBm to show compliance.


#### 3.5.2. Limit

On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.


#### 3.5.3. Test Results (GSM850)

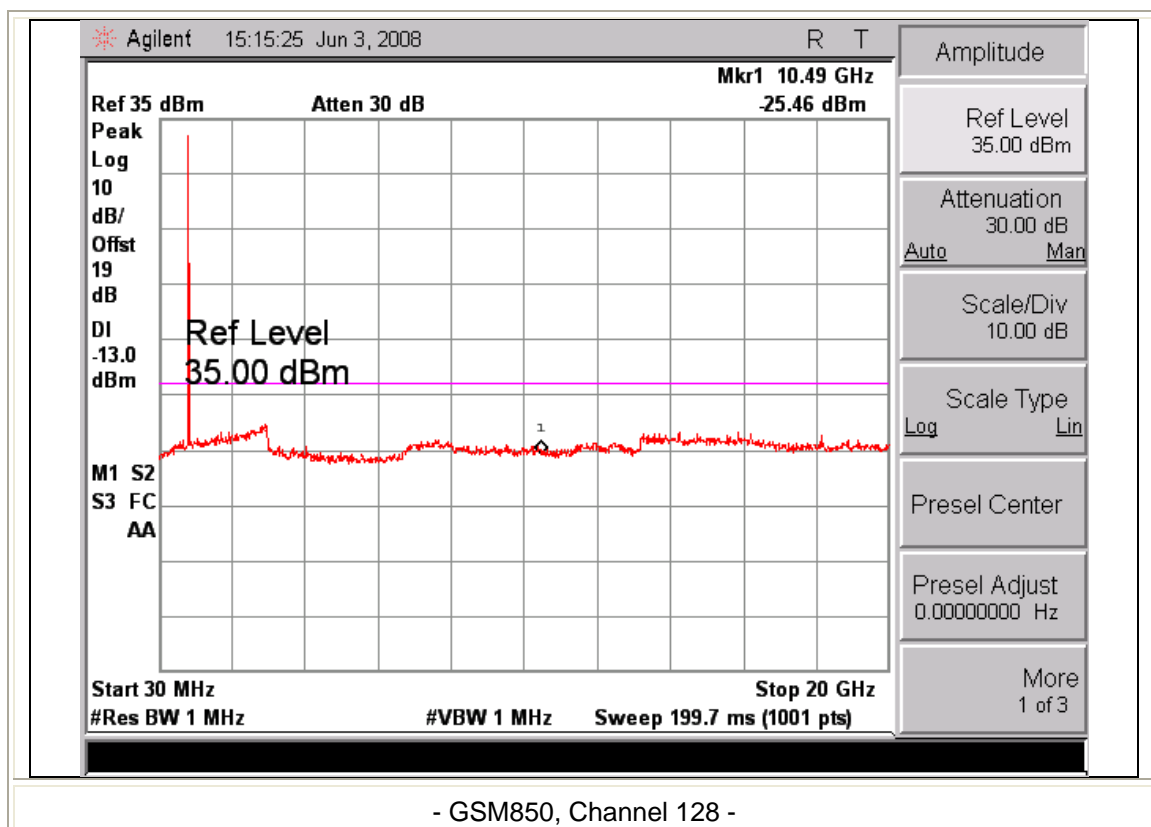




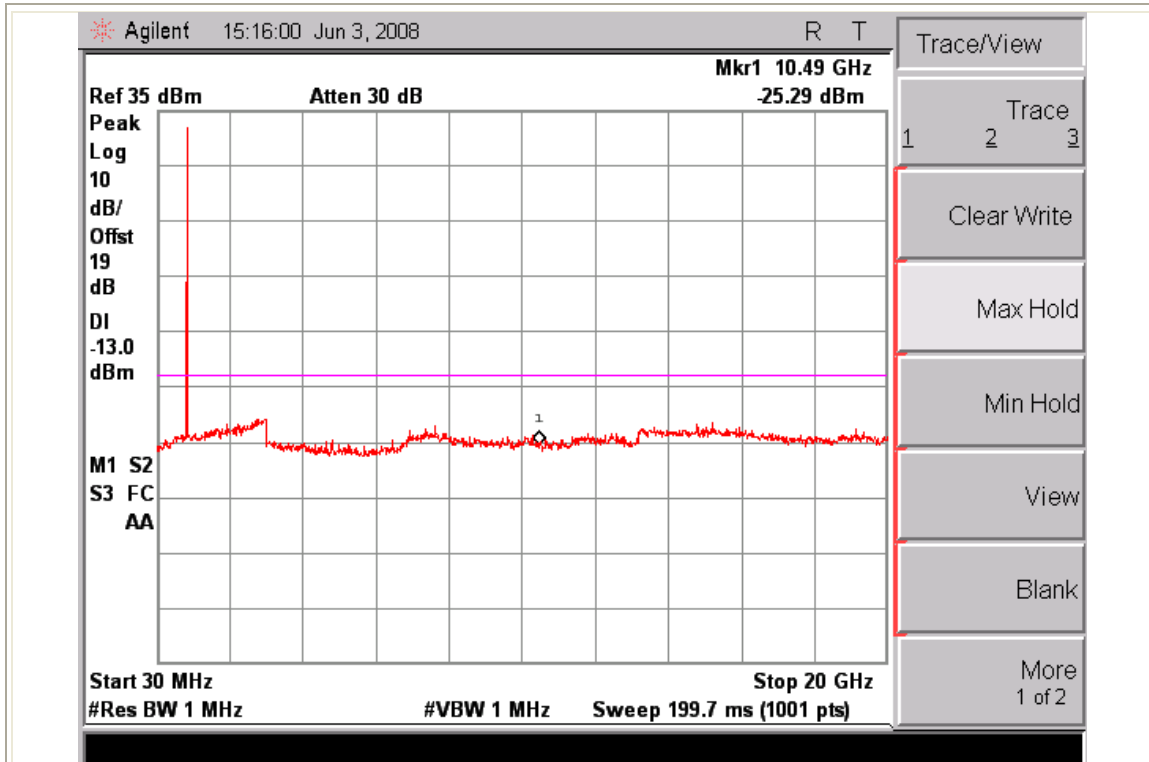


- GSM850, Channel 190 -

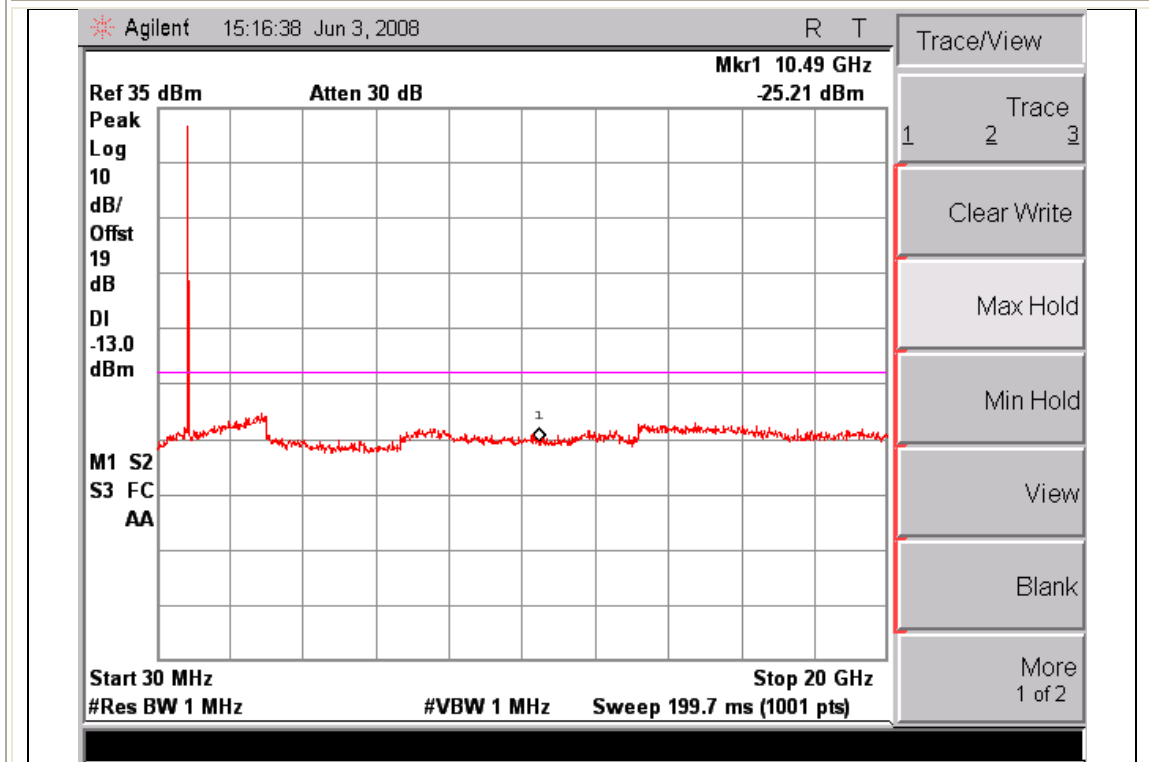


- GSM850, Channel 251 -

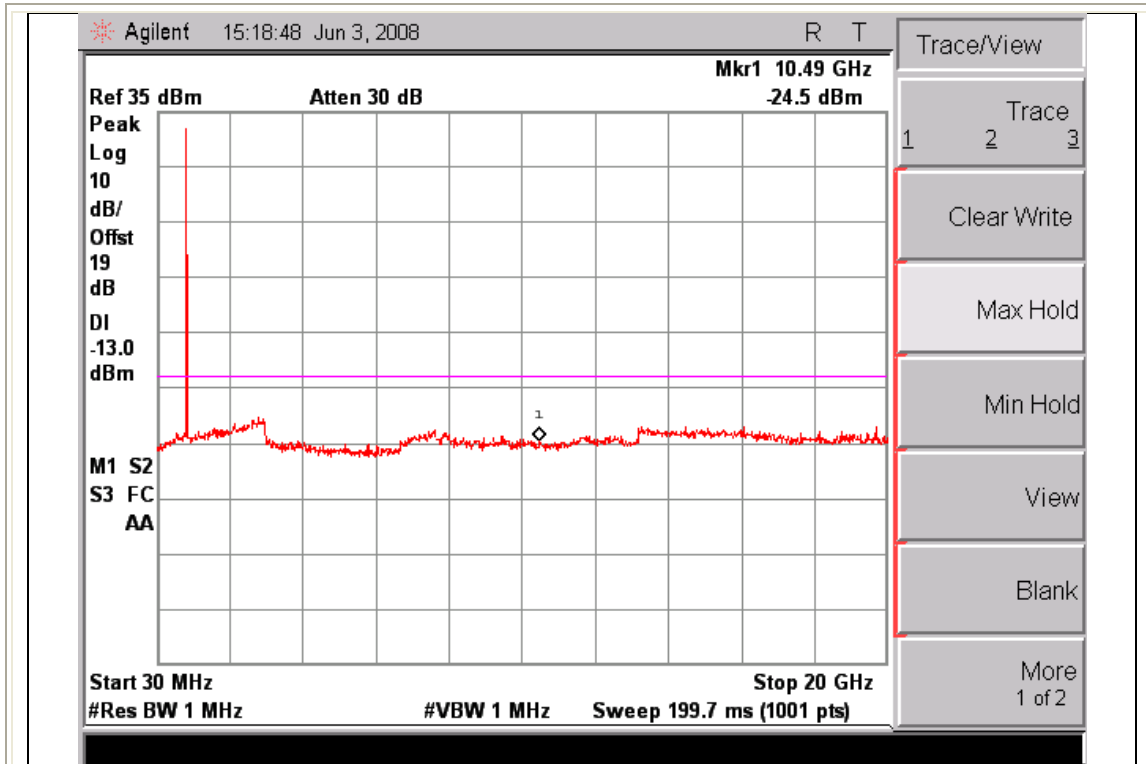


- GPRS850, Channel 128 -

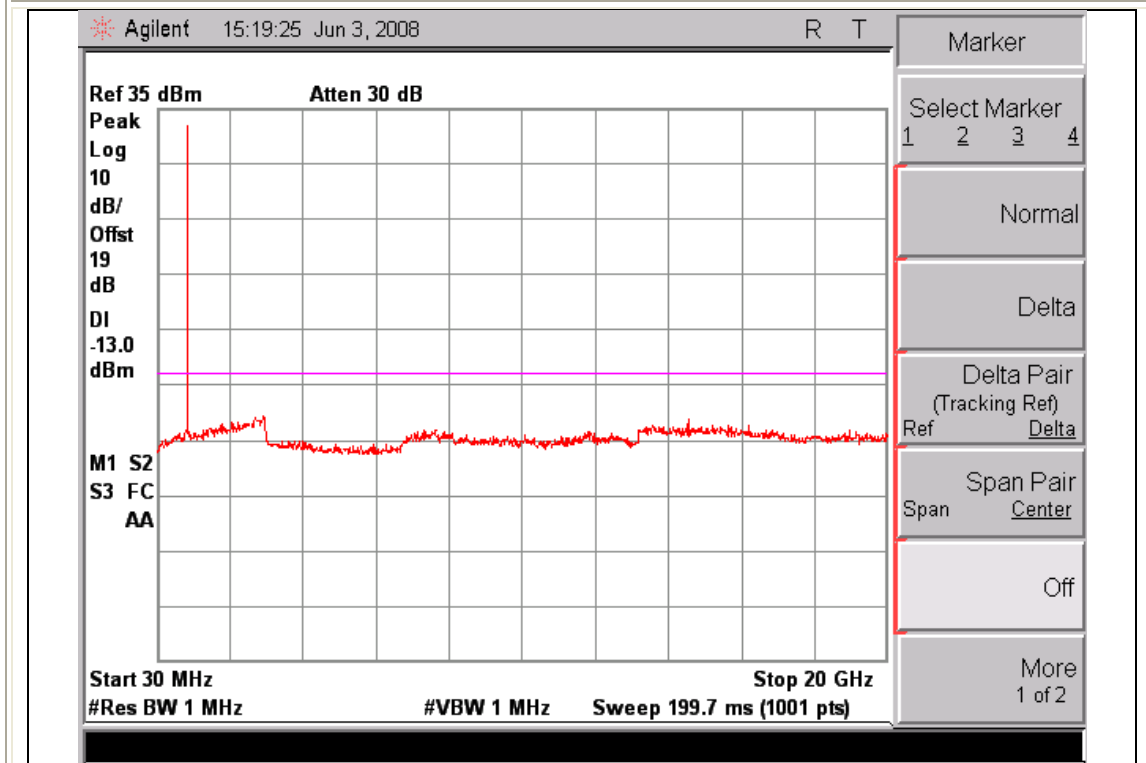


- GPRS850, Channel 190 -

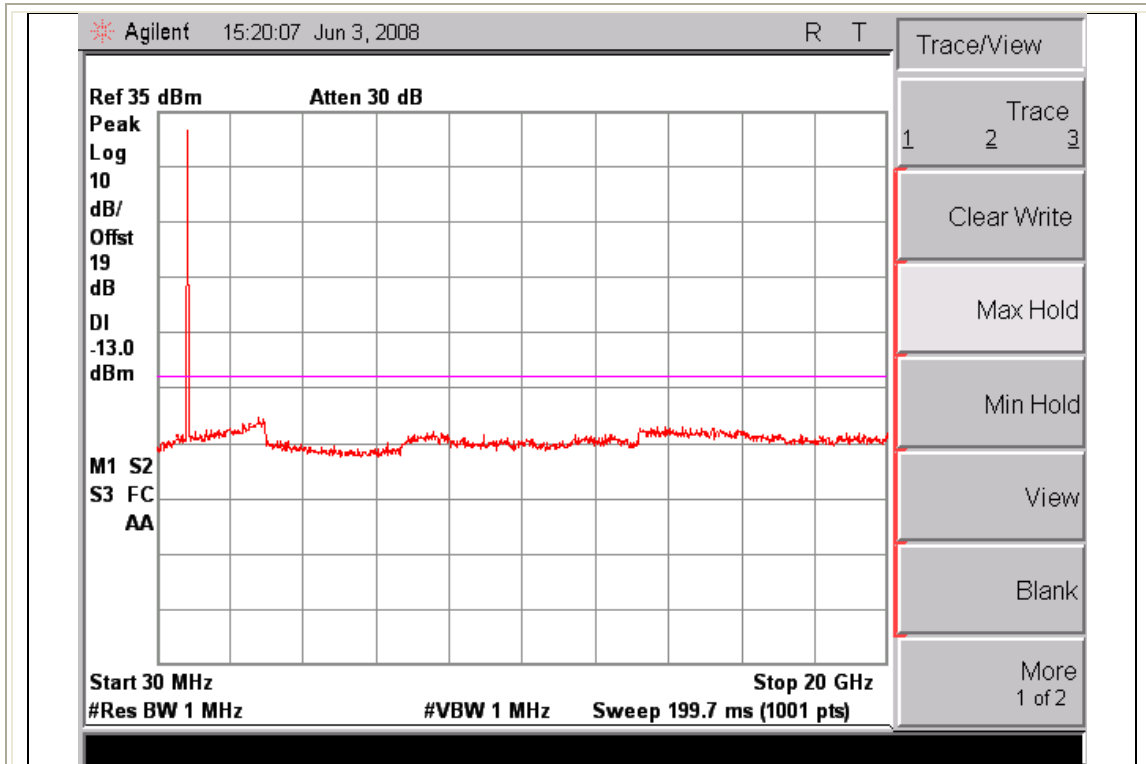


- GPRS850, Channel 251 -

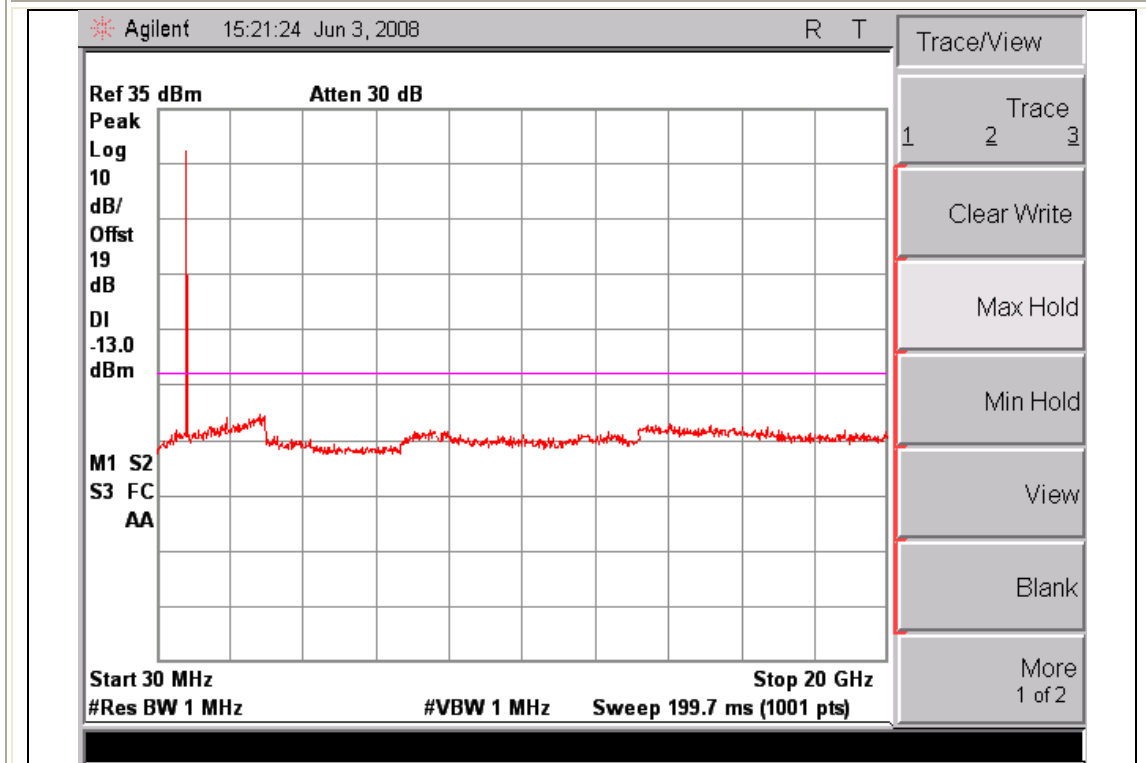


- EDGE850, Channel 128 -

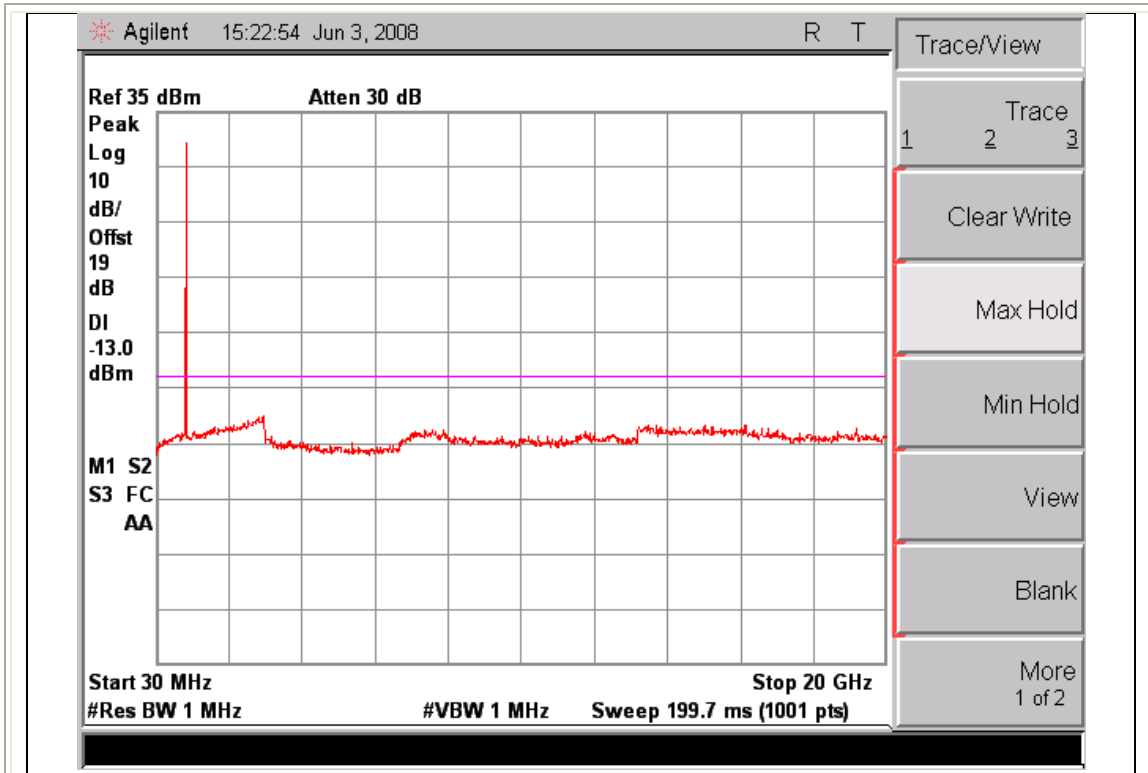


- EDGE850, Channel 190 -

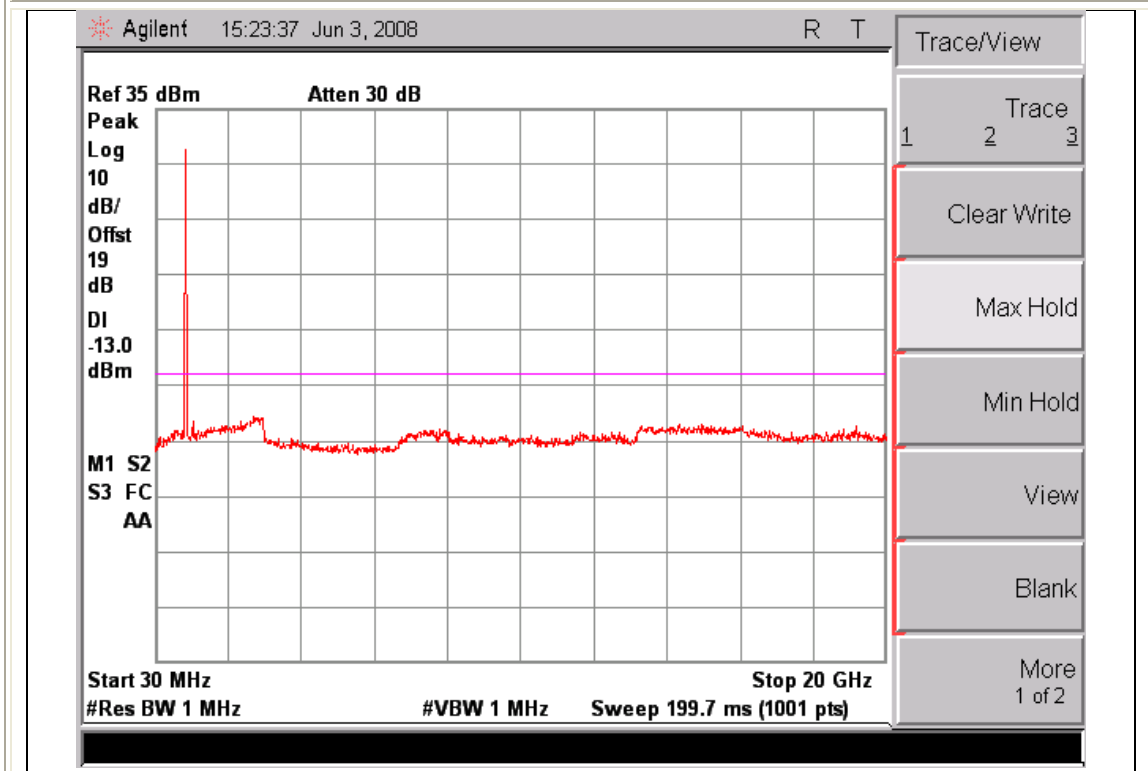


- EDGE850, Channel 251 -

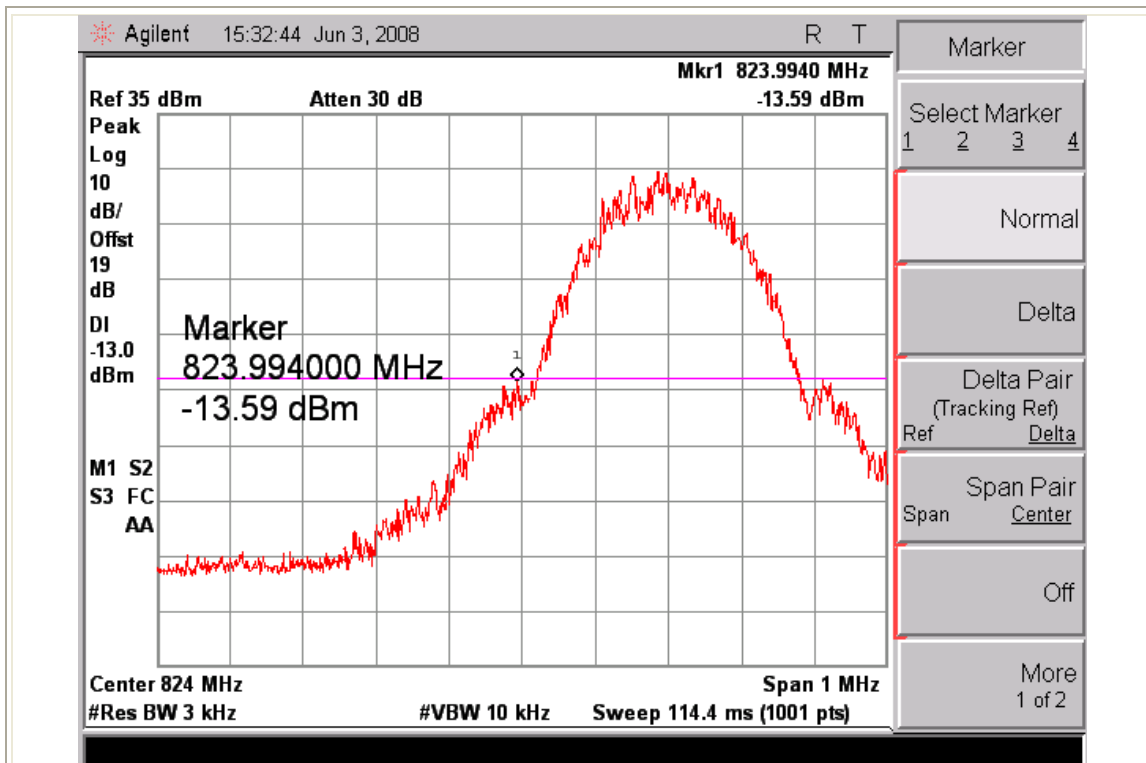


- Band Edge emissions, GSM850 -

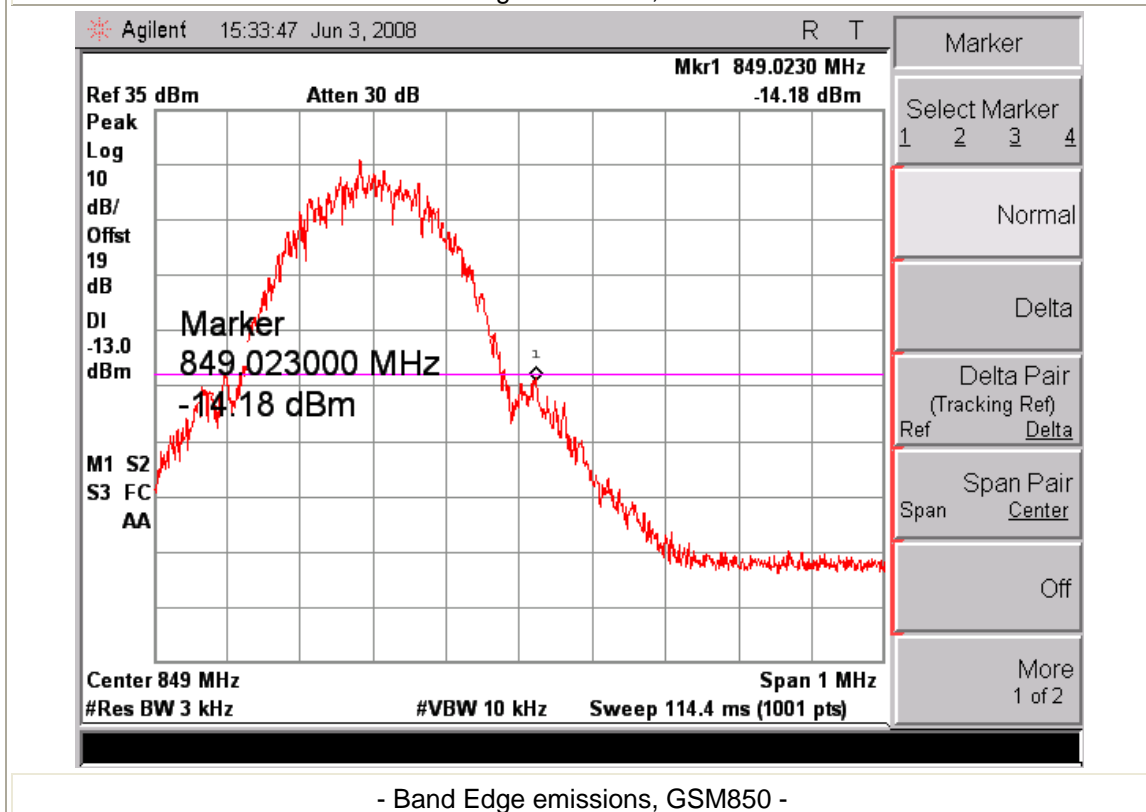


- Band Edge emissions, GSM850 -

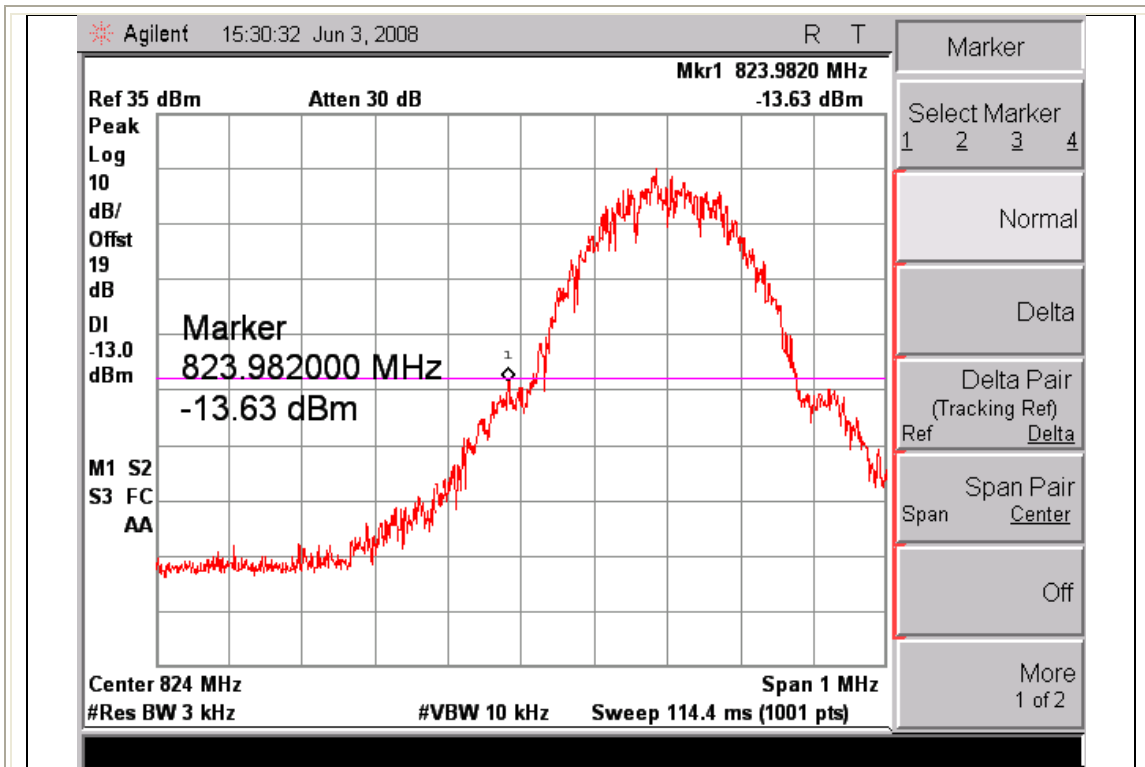


- Band Edge emissions, GPRS850 -

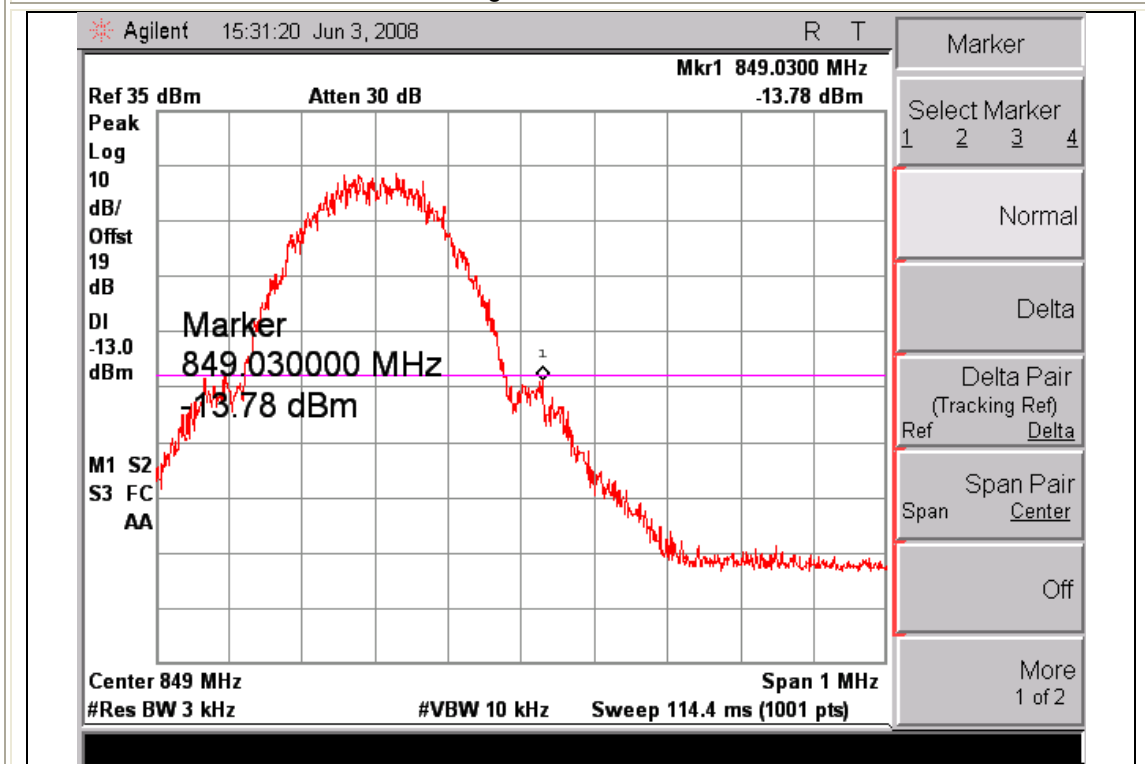

- Band Edge emissions, GPRS850 -

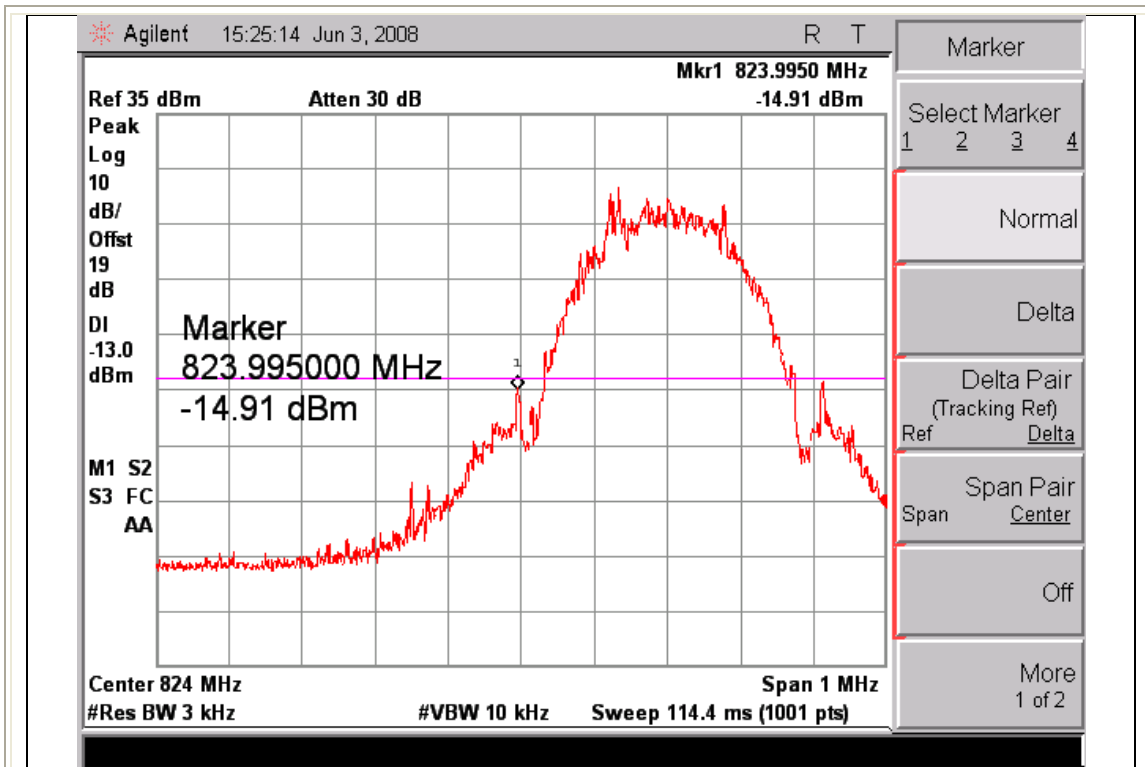


- Band Edge emissions, EDGE850 -

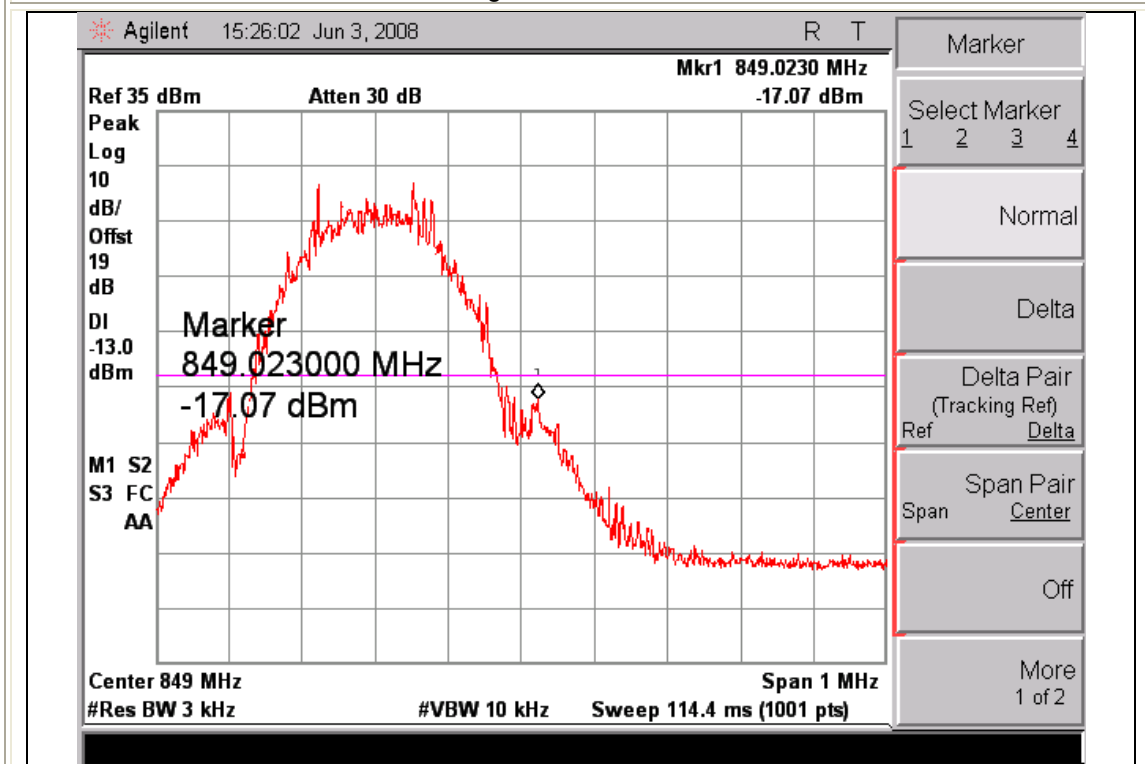


- Band Edge emissions, EDGE850 -

### 3.5.4. Test Results (GSM1900)

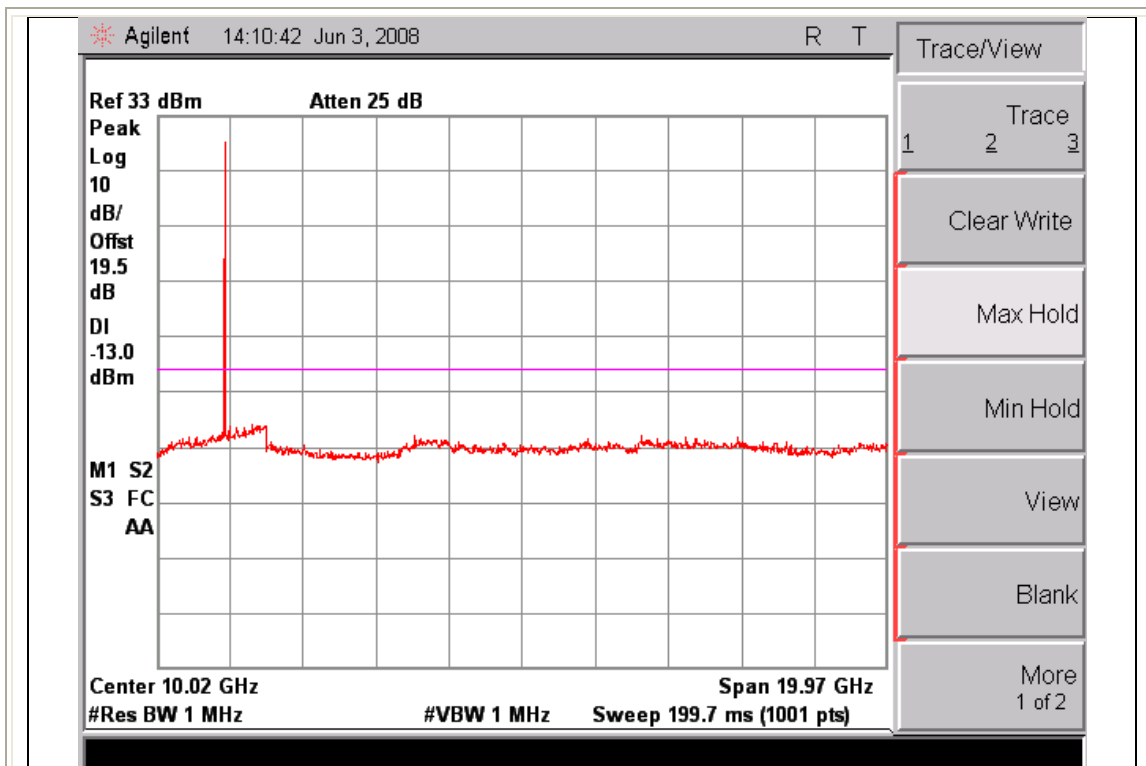


- GSM1900, Channel 512 -

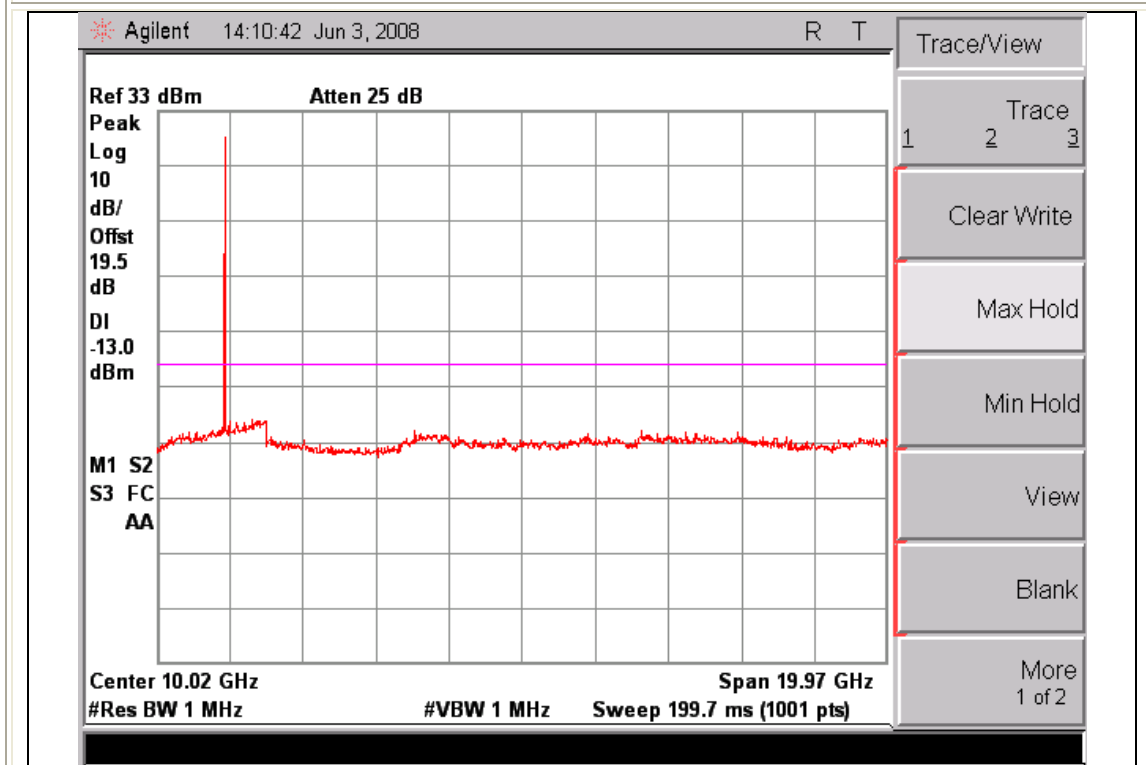


- GSM1900, Channel 661 -




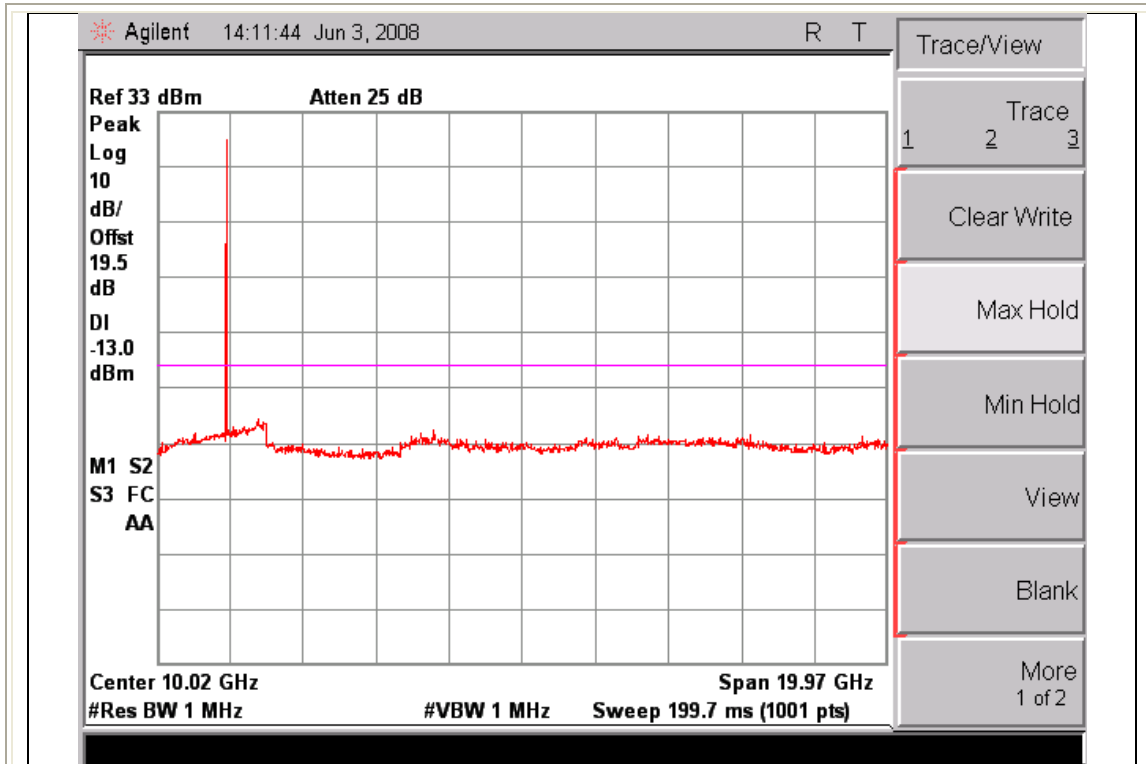


- GSM1900, Channel 810 -

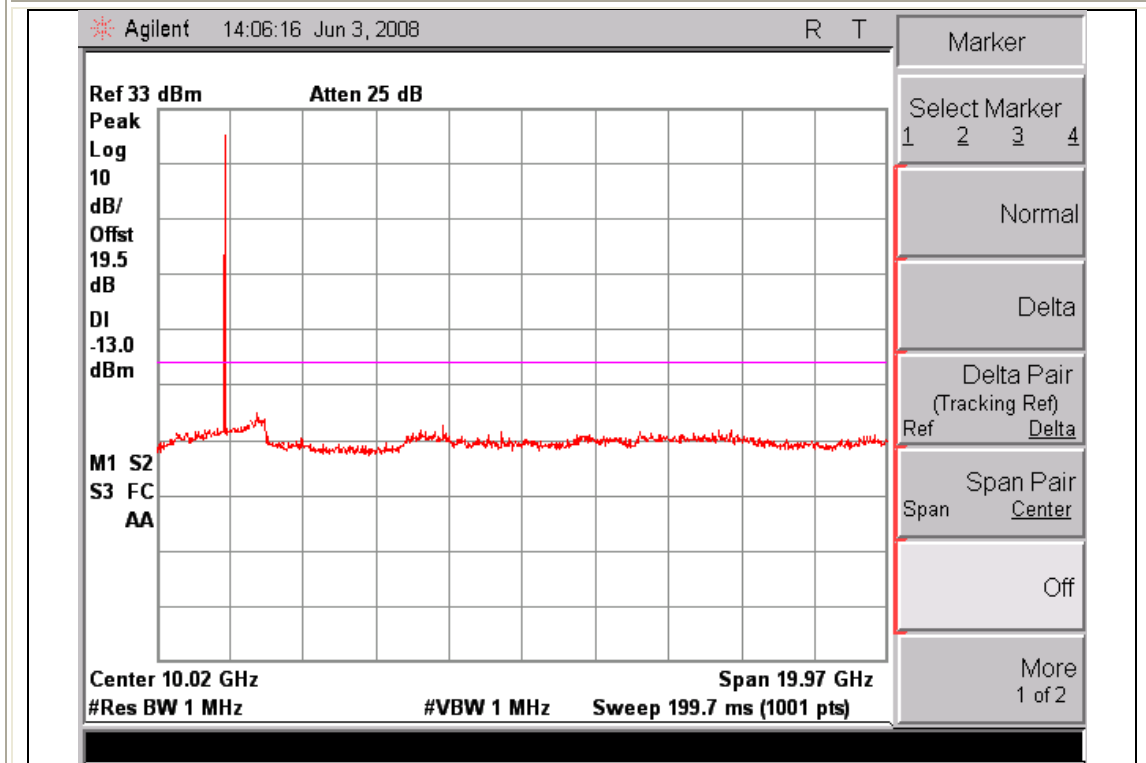


- GPRS1900, Channel 512 -

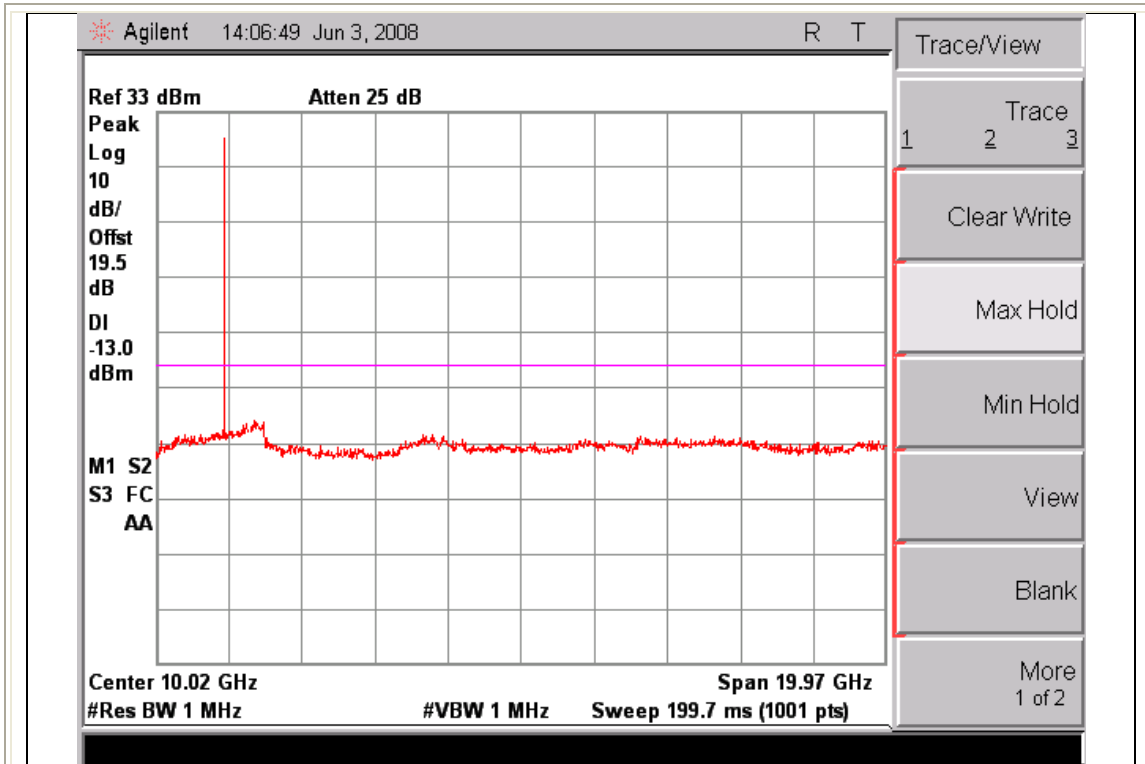


- GPRS1900, Channel 661 -

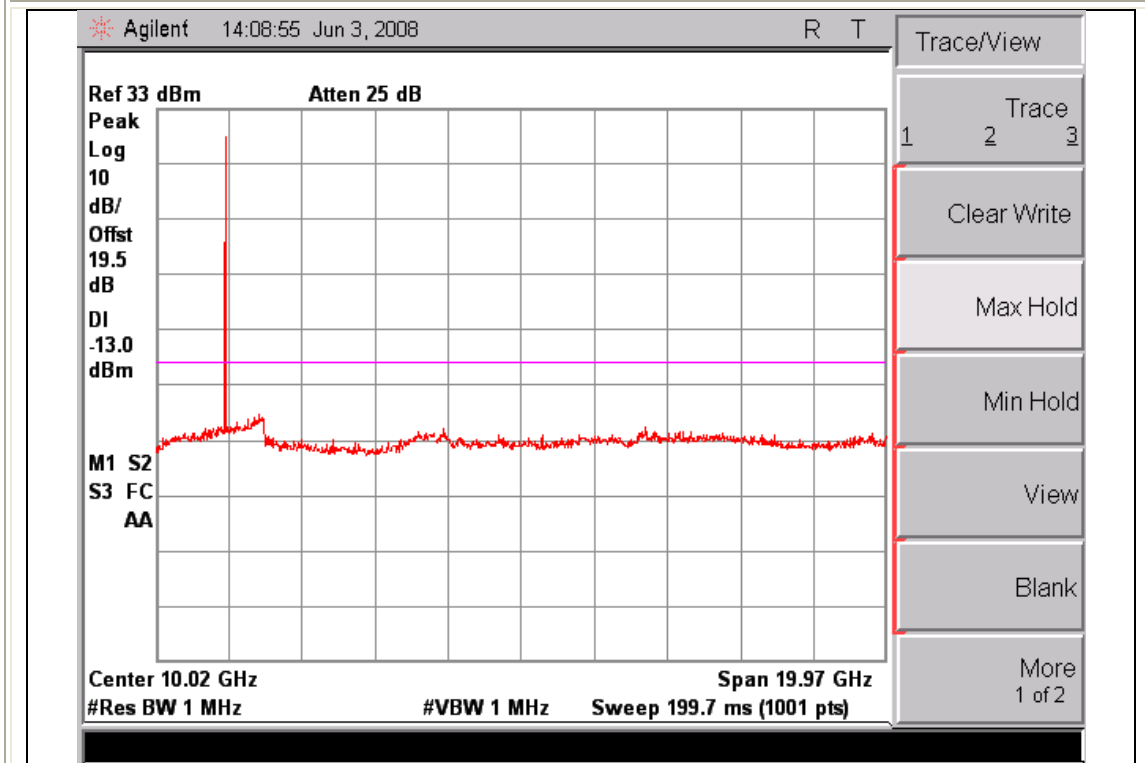


- GPRS1900, Channel 810 -

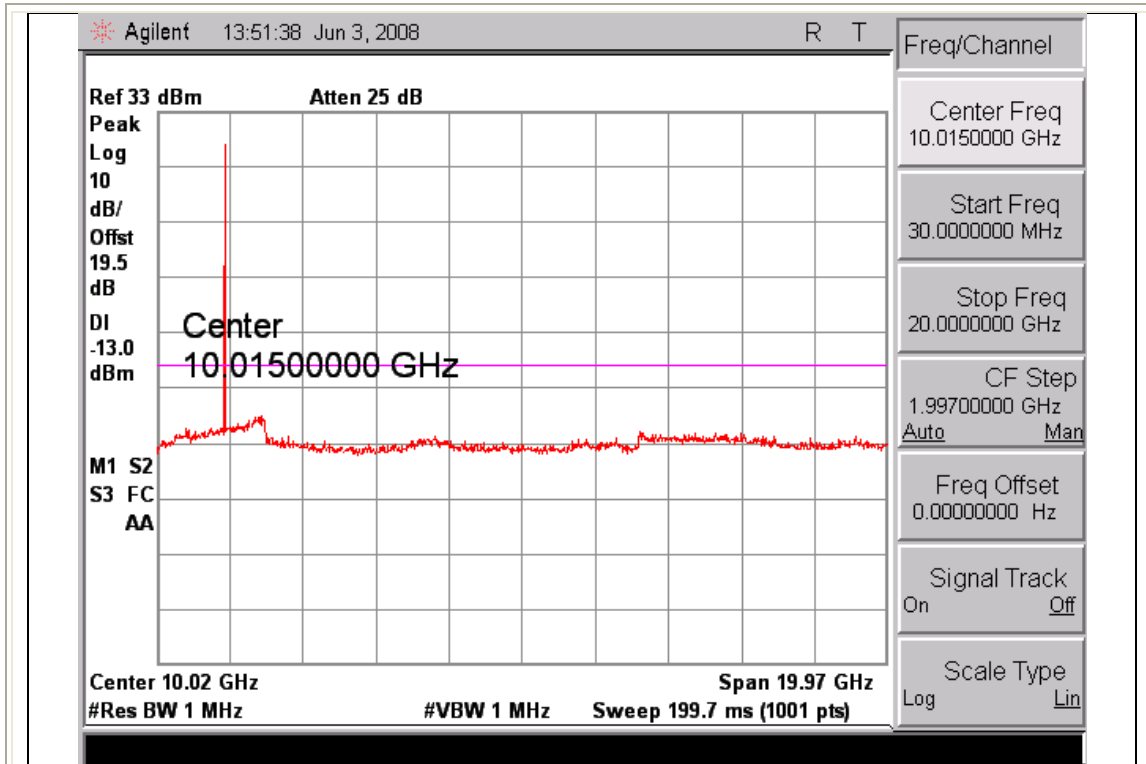


- EDGE1900, Channel 512 -

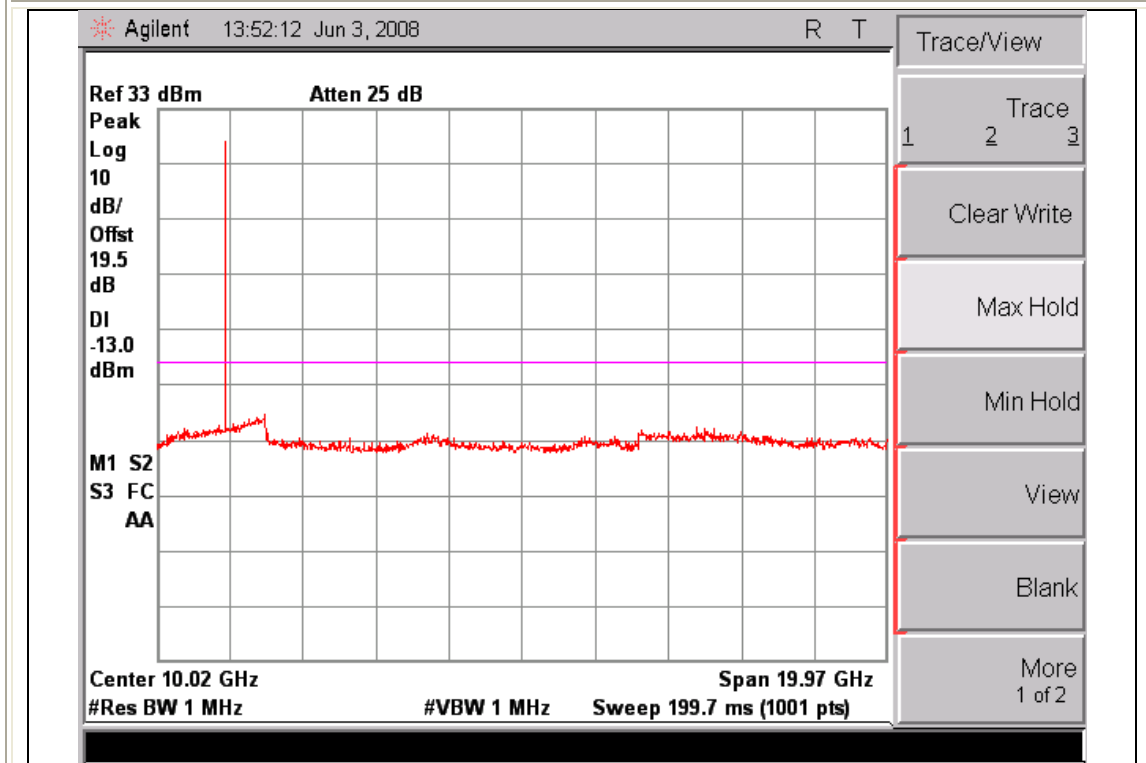


- EDGE1900, Channel 661 -

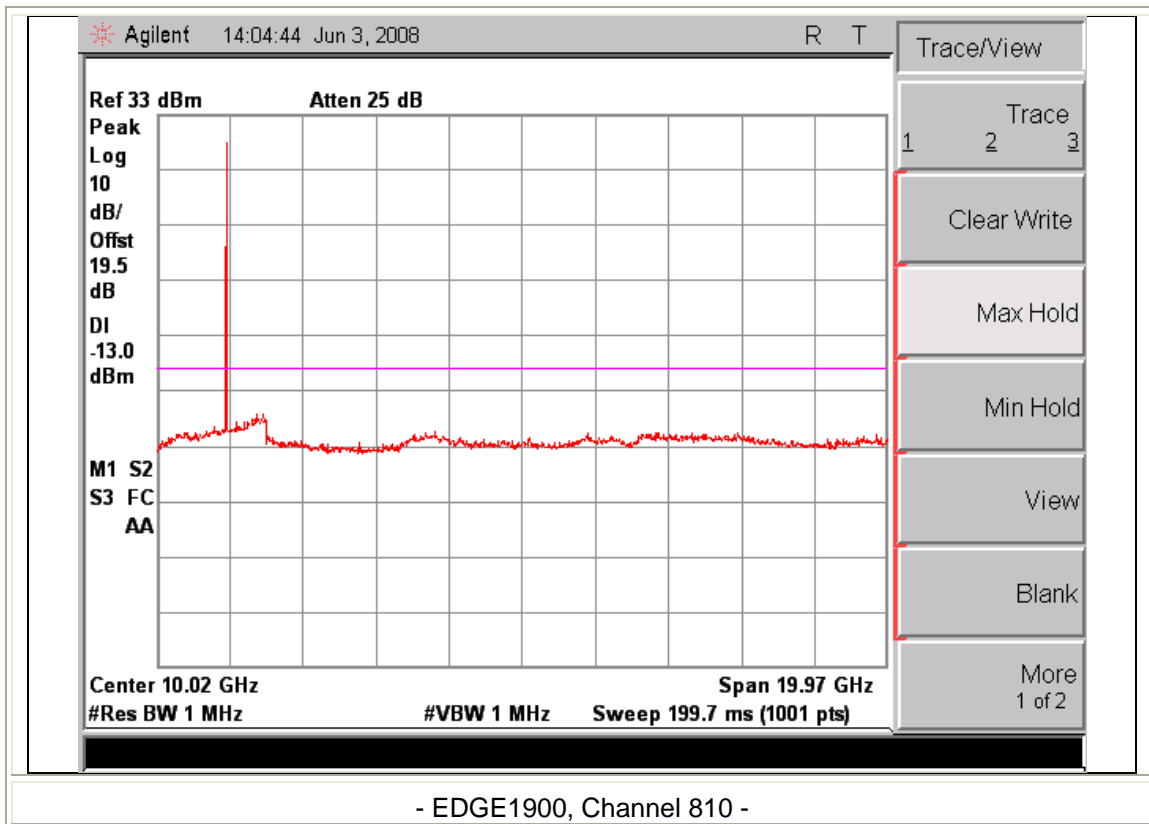


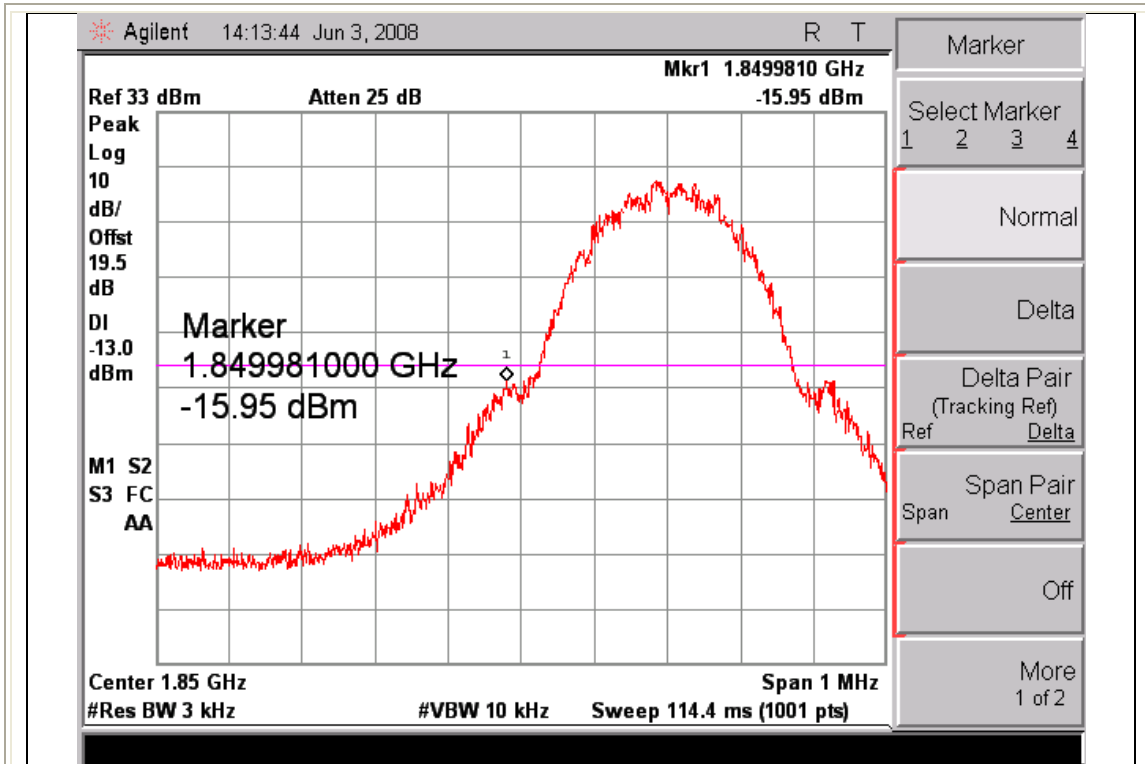


- Band Edge emissions, GSM1900 -

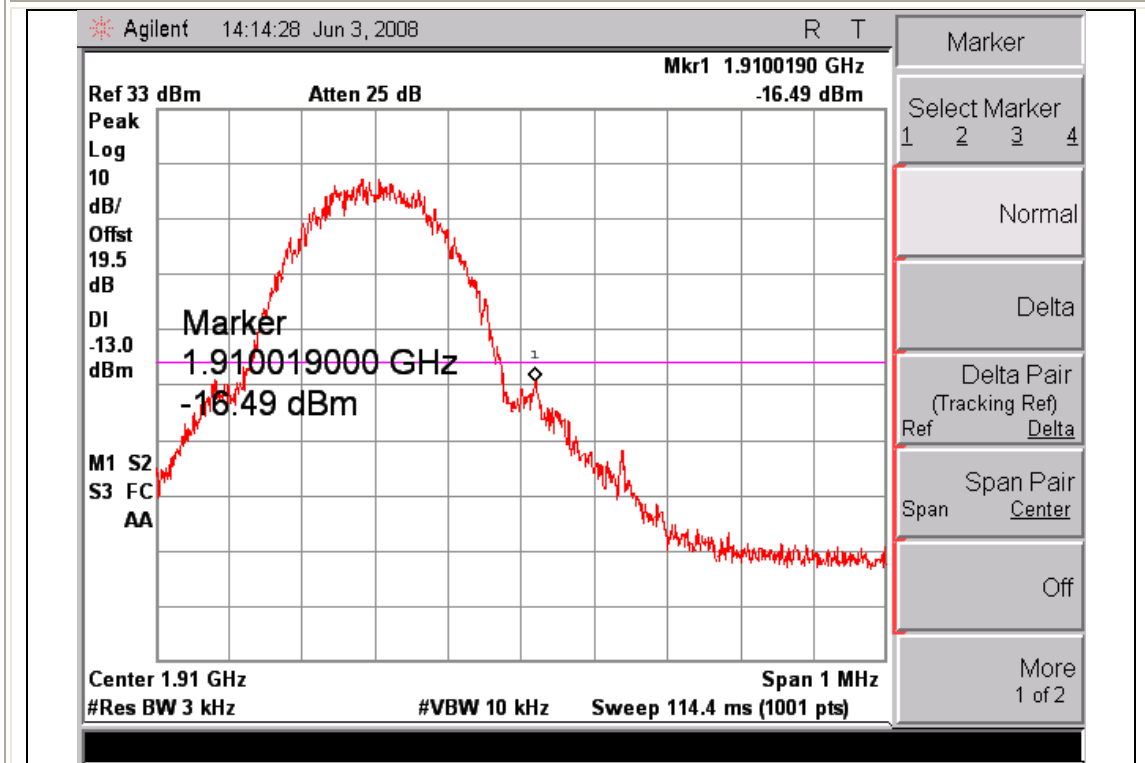


- Band Edge emissions, GSM1900 -

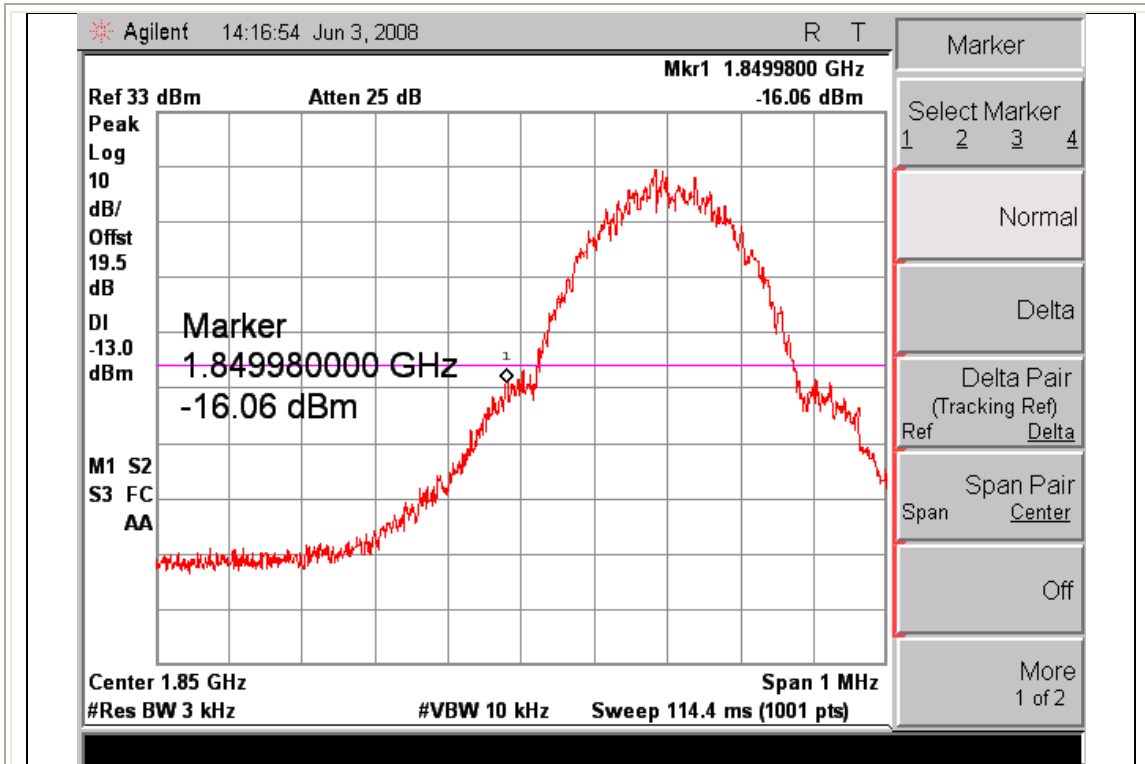


- Band Edge emissions, GPRS1900 -

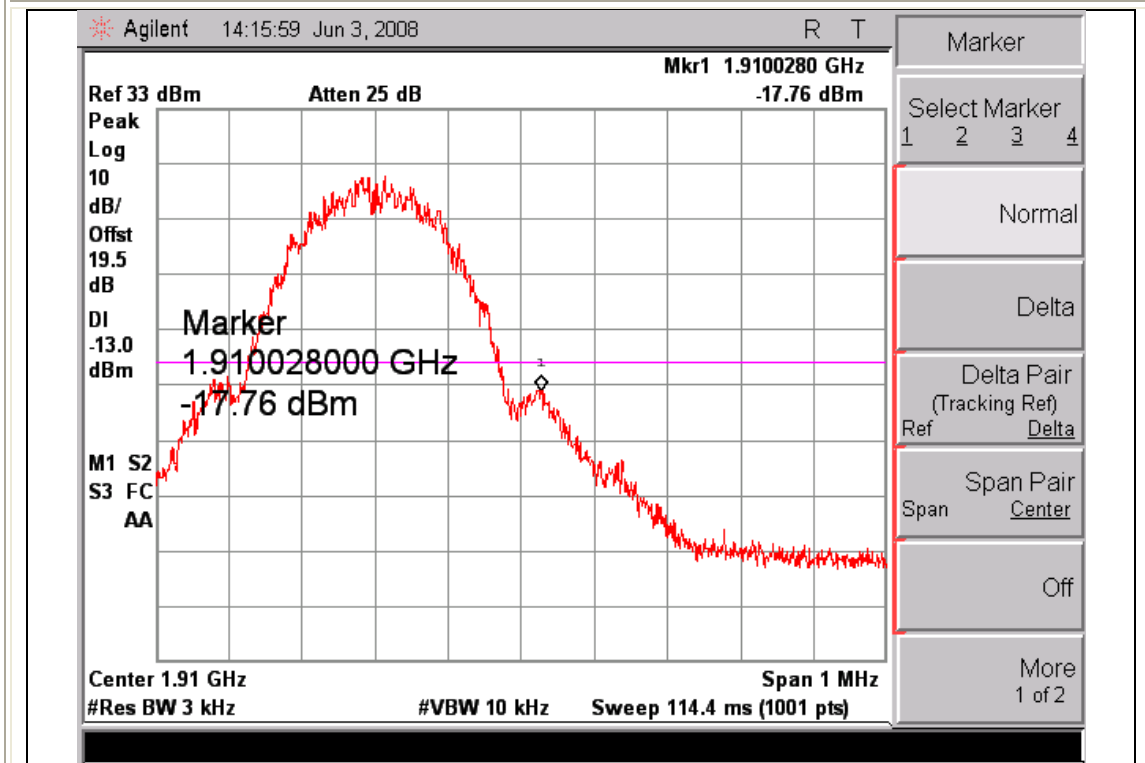

- Band Edge emissions, GPRS1900 -

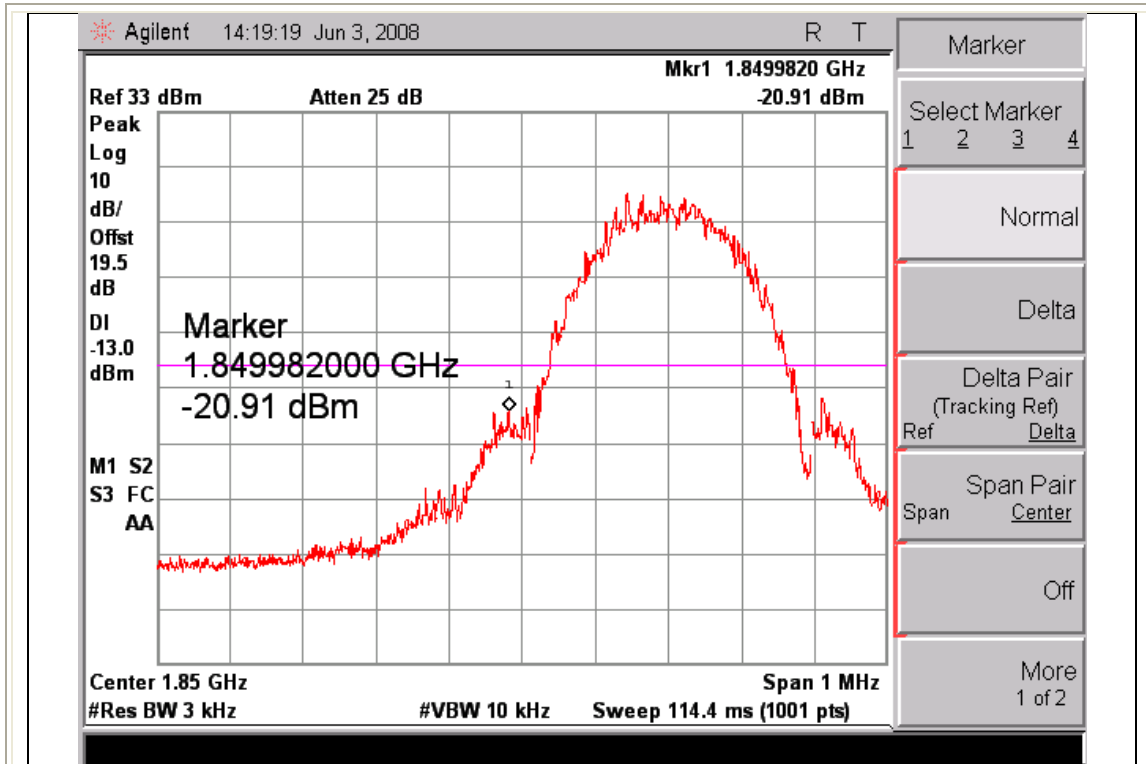

- Band Edge emissions, EDGE1900 -

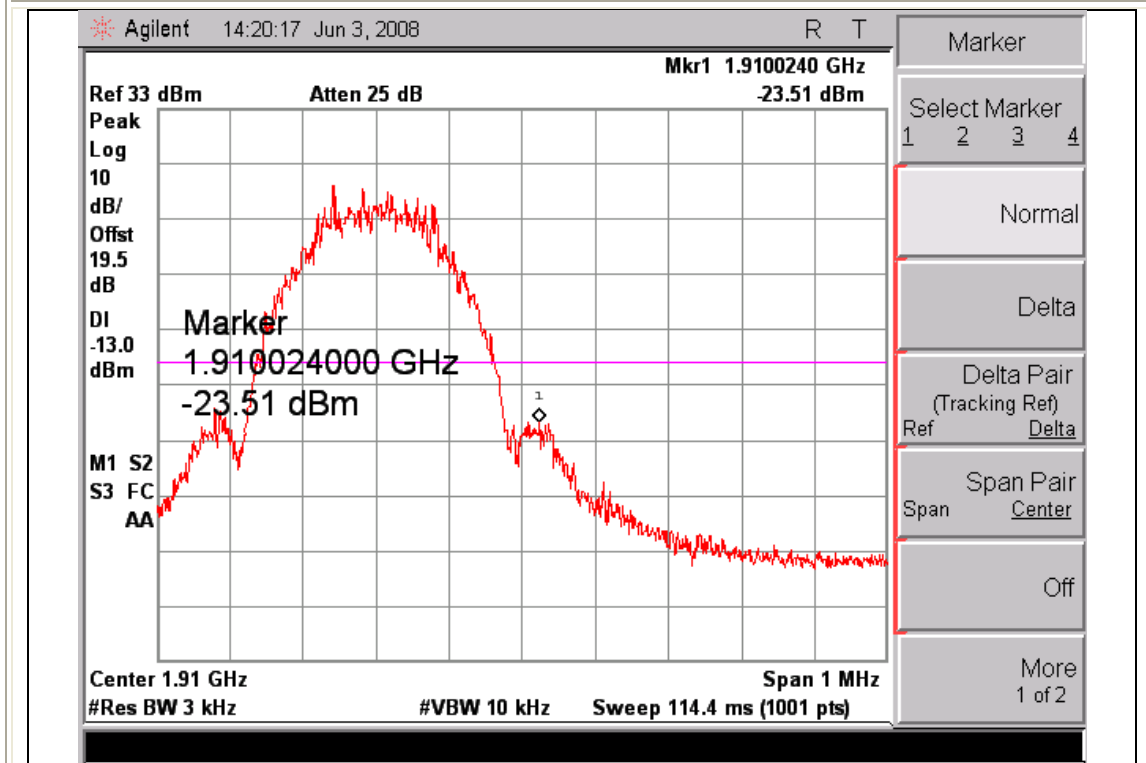

- Band Edge emissions, EDGE1900 -

---

## 3.6. Frequency Stability / Temperature Variation

### 3.6.1. Test Procedure

The equipment under test is placed in an environmental chamber. Frequency measurements are made at the extremes of the temperature range  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  and at intervals of  $10^{\circ}\text{C}$  with the primary supply voltage set to the nominal battery operating voltage. A period of time sufficient to stabilize all components of the equipment is allowed at each frequency measurement. The maximum variation of frequency is measured. The test was done at middle channel.

### 3.6.2. Limit


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.



### 3.6.3. Test Results (GSM850)

Voltage(%)	Power (VDC)	Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)
100 %	3.7	+ 20	-10	-0.011
100 %		-30	-16	-0.019
100 %		-20	-17	-0.020
100 %		-10	-17	-0.020
100 %		0	-15	-0.018
100 %		+10	-14	-0.017
100 %		+20	-13	-0.016
100 %		+30	-9	-0.011
100 %		+40	-7	-0.008
100 %		+50	-7	-0.008
115 %	4.26	+20	-3	-0.003
Battery end point	3.20	+20	-17	-0.020


Note. : The EUT is tested down to the battery end point.

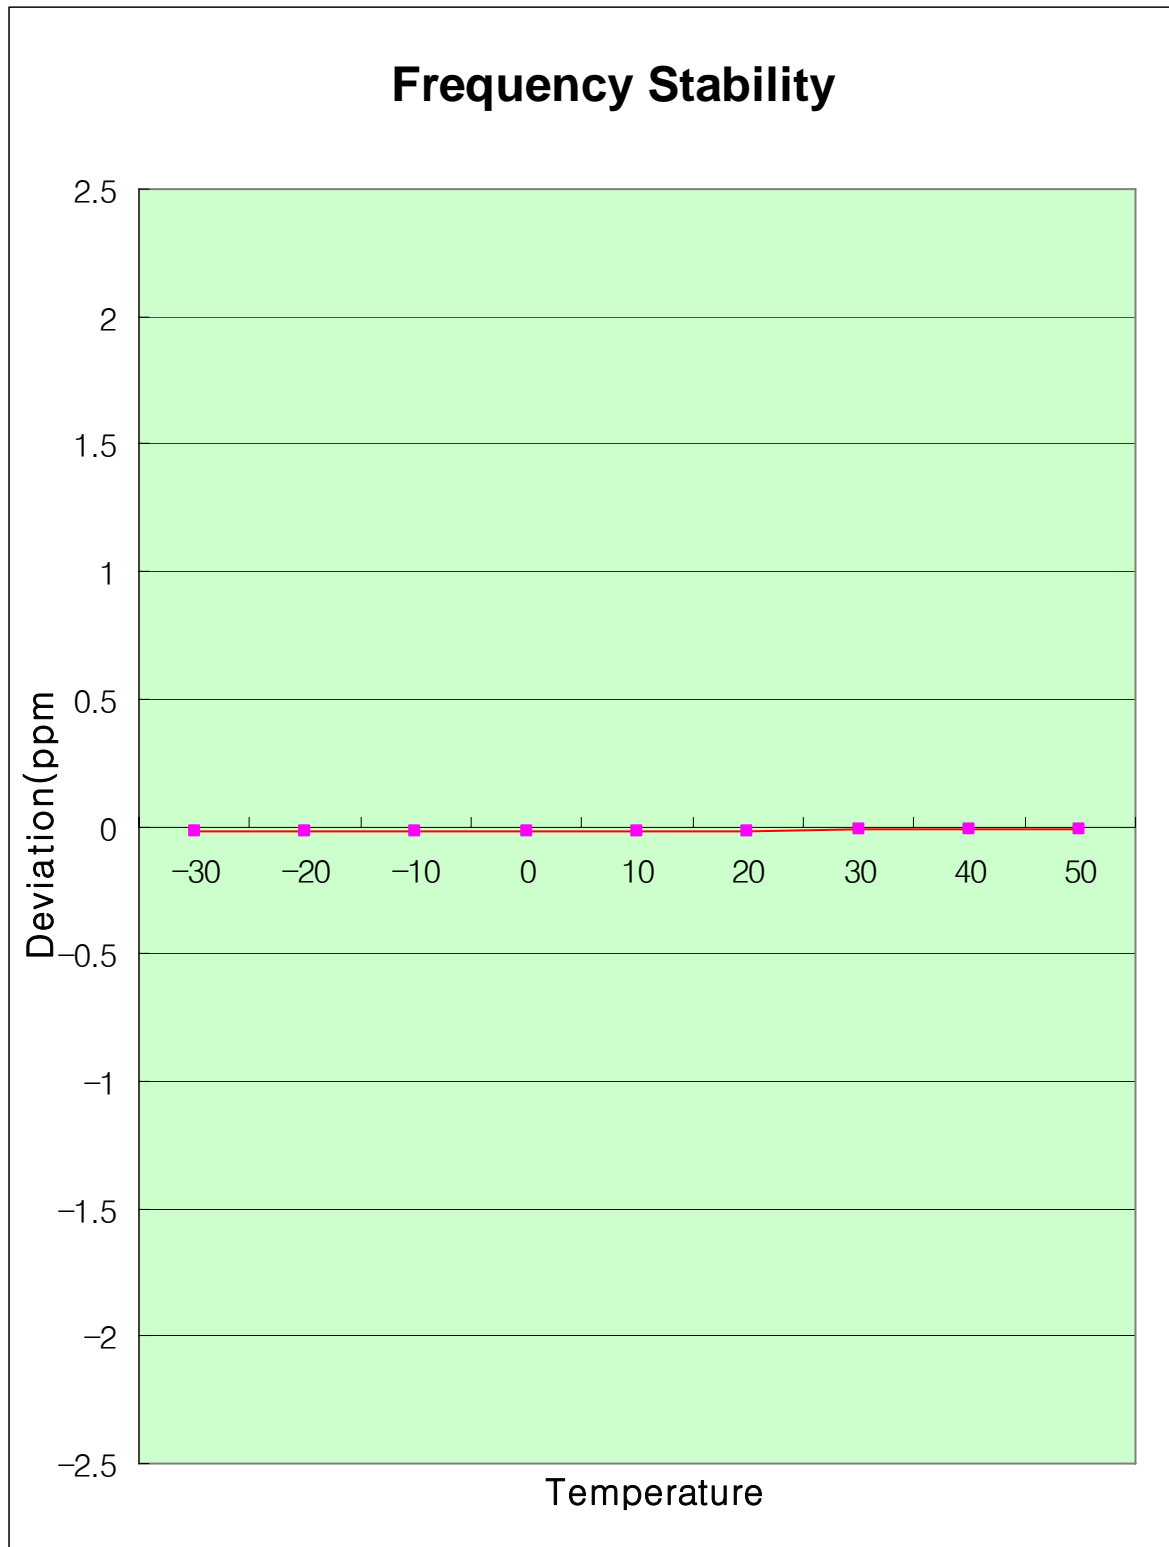

### 3.6.4. Test Results (GSM1900)

Voltage(%)	Power (VDC)	Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)
100 %	3.7	+ 20	-20	-0.011
100 %		-30	-25	-0.013
100 %		-20	-21	-0.011
100 %		-10	-20	-0.011
100 %		0	-18	-0.010
100 %		+10	-20	-0.011
100 %		+20	-12	-0.006
100 %		+30	-7	-0.004
100 %		+40	-15	-0.008
100 %		+50	-15	-0.008
115 %	4.26	+20	-5	-0.002
Battery end point	3.20	+20	-18	-0.009

Note. : The EUT is tested down to the battery end point.

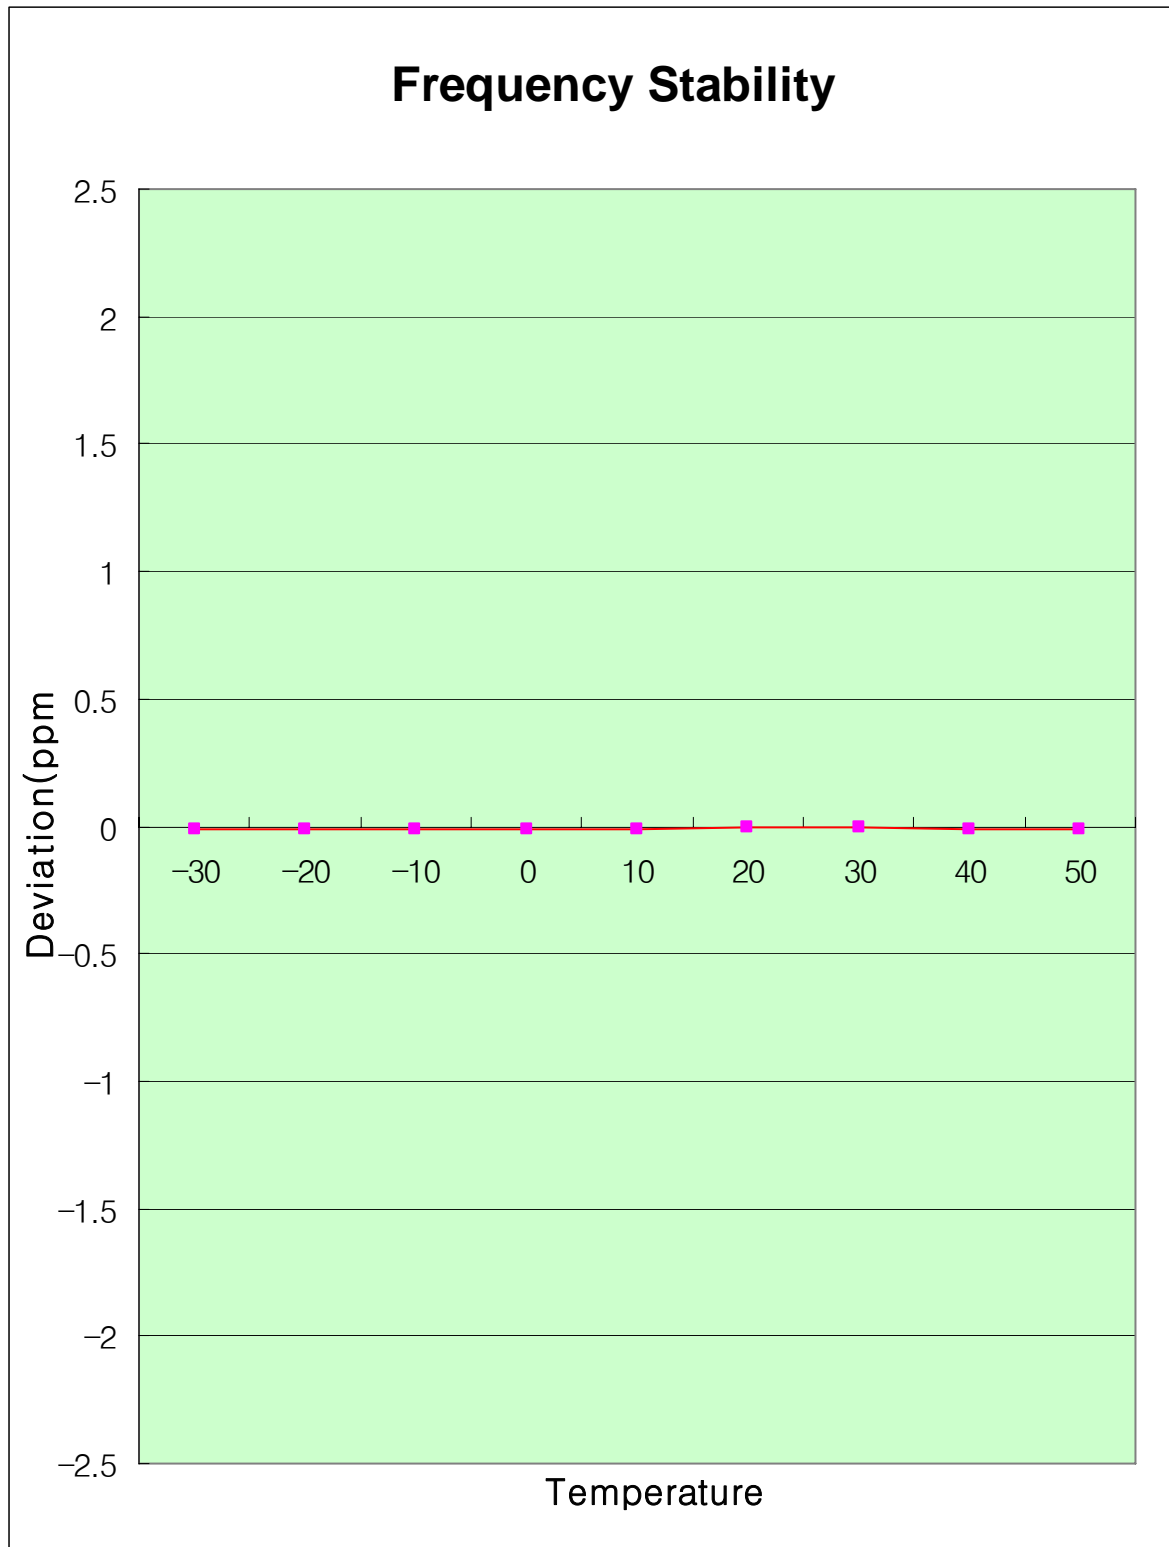

## 4. TEST EQUIPMENTS

No.	Equipment	Manufacturer	Model	S/N	Effective Cal.Duration
1	Spectrum Analyzer (100 Hz ~ 26.5 GHz)	Agilent	E4407B	US41443316	12/01/2007 ~ 12/01/2008
2	Spectrum Analyzer (3 Hz ~ 50 GHz)	Agilent	E4448A	MY43360322	08/30/2007 ~ 08/30/2008
3	Pre-Amplifier (10 MHz ~ 18 GHz)	R&S	SCU18	137144	11/15/2007 ~ 11/15/2008
4	Pre-Amplifier (0.5 GHz ~ 26.5 GHz)	Agilent	83017A	MY39500982	04/02/2008 ~ 04/02/2009
5	Biconi-Log Ant. (30 MHz ~ 1000 MHz)	Schwarzbeck	VULB9163	9163-317	10/10/2007 ~ 10/10/2008
6	Horn Ant. (1 GHz ~ 18 GHz)	Schwarzbeck	BRHA 9120D	9120D-653	10/10/2007 ~ 10/10/2008
7	Horn Ant. (18 GHz ~ 40 GHz)	EMCO	3116	2664	03/26/2007 ~ 03/26/2009
8	Tuned Dipole Antenna	Schwarzbeck	VHA 9103	--	09/09/2007 ~ 09/09/2008
9	Dipole Antenna	ETS-Lindgren	3126-880	00052703	06/20/2007 ~ 06/20/2008
10	DC Power Supply	Agilent	E4356A	MY41000296	10/01/2007 ~ 10/01/2008
11	Power Meter	Agilent	E4417A	GB4129075	09/17/2007 ~ 09/17/2008
12	Power sensor	Agilent	8482A	MY41092389	05/04/2008 ~ 05/04/2009
13	Universal Radio Communication tester	R&S	CMU200	317	08/09/2007 ~ 08/09/2008
14	Highpass Filter	Wainwright	WHK1.0/1.5G	6	08/09/2007 ~ 08/09/2008
15	Highpass Filter	Wainwright	WHK3.5/1.8G	8	08/09/2007 ~ 08/09/2008