

# TEST REPORT

## 1. Applicant

Name : Uriver Inc  
Address : 3rd., Fl., Bogwang Bldg, Gaepo-dong, 1238-7  
Gangnam-gu, Seoul, Korea

## 2. Products

Name : HSDPA USB MODEM  
Model/Type : UM100  
Manufacturer : Uriver Inc

3. Test Standard : Uriver FCC CFR 47 Part 2, Part 22(H), Part 24(E)

4. Test Method : ANSI/TIA/EIA-603-C, ANSI C63.4-2003

5. Test Result : Positive

6. Date of Application : July 18, 2008

7. Date of Issue : August 06, 2008

Tested by



Sung-kyu Cho

Telecommunication Team  
Engineer

Approved by



Seok-Jin Kim

Telecommunication Team  
Manager

*The test results contained apply only to the test sample(s) supplied by the applicant, and this test report shall not be reproduced in full or in part without approval of the KTL in advance.*

## Korea Testing Laboratory

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION</b>	<b>4</b>
1.1. Applicant (Client)	4
1.2. Equipment (EUT)	4
1.3. Testing Laboratory	5
1.4. Channel numbers and Frequencies	5
<b>2. SUMMARY OF TEST RESULTS</b>	<b>6</b>
<b>3. MEASUREMENT &amp; RESULTS</b>	<b>7</b>
3.1. Effective Radiated Power	7
3.1.1. Test Procedure	7
3.1.2. Limit	7
3.1.3. Test Results (WCDMA Band V)	7
3.1.4. Test Results (WCDMA Band II)	8
3.2. Field Strength of Spurious Radiation	9
3.2.1. Test Results (WCDMA Band V)	9
3.2.2. Test Results (WCDMA Band II)	10
3.3. Conducted Output Power	12
3.3.1. Test Procedure	12
3.3.2. Test Results (WCDMA&HSDPA Band V)	12
3.3.3. Test Results (WCDMA&HSDPA Band II)	12
3.4. Occupied Bandwidth	13
3.4.1. Test Procedure	13
3.4.2. Limit	13
3.4.3. Test Results (WCDMA&HSDPA Band V)	14
3.4.4. Test Results (WCDMA&HSDPA Band II)	17
3.5. Conducted Spurious Emission	20
3.5.1. Test Procedure	20
3.5.2. Limit	20

---

3.5.3.	Test Results (WCDMA&HSDPA Band V) .....	20
3.5.4.	Test Results (WCDMA&HSDPA Band II) .....	26
<b>3.6.</b>	<b>Frequency Stability / Temperature Variation .....</b>	<b>34</b>
3.6.1.	Test Procedure .....	34
3.6.2.	Limit .....	34
3.6.3.	Test Results (WCDMA Band V) .....	35
3.6.4.	Test Results (WCDMA Band II) .....	36
<b>4.</b>	<b>TEST EQUIPMENTS .....</b>	<b>37</b>

## 1. GENERAL INFORMATIONS

### 1.1. Applicant (Client)

Name	Uriver Inc
Address	3rd., Fl., Bogwang Bldg, Gaepo-dong, 1238-7 Gangnam-gu, Seoul, Korea
Contact Person	TSJEONG
Telephone No.	+82-2-3497-8432
Facsimile No.	+82-2-579-6624
E-mail address	tsjeong@uriver.co.kr
Manufacturer Name	Uriver Inc
Manufacturer Address	3rd., Fl., Bogwang Bldg, Gaepo-dong, 1238-7 Gangnam-gu, Seoul, Korea

### 1.2. Equipment (EUT)

Type of equipment	HSDPA USB MODEM
Model Name	UM100
FCC ID	UDTUM100
FCC Classification	Licensed Portabel Tx Held to Ear (PCE)
Tx frequency Band	826.4 ~ 846.6 MHz (Cellular WCDMA-HSDPA) 1852.4 ~ 1907.6 MHz (PCS WCDMA-HSDPA)
Rx frequency Band	871.4 ~ 891.8 MHz (Cellular WCDMA-HSDPA) 1932.4 ~ 1995.6 MHz (PCS WCDMA-HSDPA)
Max. Power Rating	0.073W(Cellular WCDMA), 0.065W(Cellular HSDPA) 0.376W(PCS WCDMA), 0.364W(PCS HSDPA)
Emission Designators	4M18F9W(Cellular WCDMA), 4M18F9W(Cellular HSDPA) 4M19F9W(PCS WCDMA), 4M19F9W(PCS HSDPA)
Frequency Tolerance	± 2.5 ppm
MODE	WCDMA / HSDPA
Antenna Type	PIFA
Power class	Class 3 for WCDMA
UE Category	12, 6 & 8

Hardware Version	UM100 REV02
Software Version	REV02.002

### 1.3. Testing Laboratory

Testing Place	Korea Testing Laboratory (KTL) 1271-12, Sa-Dong Sangnok-Gu, Ansan-si Gyunggi-Do , Korea
FCC registration number	408324
Industry Canada filing number	6298
Test Engineer	Sung-kyu Cho
Telephone number	+82 31 5000 132
Facsimile number	+82 31 5000 159
E-mail address	skcho@ktl.re.kr
Other Comments	-

### 1.4. Channel numbers and Frequencies

WCDMA		HSDPA	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
4132	826.4	9262	1852.4
4183	836.4	9400	1880.0
4233	846.6	9538	1907.6

## 2. SUMMARY OF TEST RESULTS

Testing performed for : Uriver Inc.

Equipment Under Test : HSDPA USB MODEM

Receipt of Test Sample : , 2008.07. 18

Test Start Date : , 2008. 07. 25

Test End Date : , 2008. 08. 05

The following table represents the list of measurements required under the FCC CFR47 Part 22H and 24E.

FCC Rules	Test Requirements	Result
22.913(a), 24.232(c)	ERP & EIRP	Pass
22.917, 24.238	Radiated Spurious Emission	Pass
22.913(a), 24.232(c)	Conducted RF power output	Pass
2.1049	Occupied bandwidth	Pass
22.917, 24.238	Conducted Spurious Emission	Pass
22.355, 24.235	Frequency Stability	Pass

**Note 1** : Test results reported in this document relate only to the items tested

**Note 2** : The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

**Note 3** : Test results apply only to the item(s) tested

### \* Modifications required for compliance

No modifications were implemented by KTL.

All results in this report pertain to the un-modified sample provided to KTL.

## 3. Measurement & Results

### 3.1. Effective Radiated Power

#### 3.1.1. Test Procedure

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004:

The EUT was placed on a nonconductive turntable 1.5 meter above the ground plane and set up for the max.output power.

The measurement was made in same test set up and configuration with 3 orthogonal planes which produced maximum emission level. Receiving antenna was installed at 3-meter distance from the EUT, and was connected to an spectrum analyzer.

The EUT was then replaced by an dipole antenna and polarized in accordance with the EUT's antenna polarization.The dipole antenna was connected to a RF signal generator with a coaxial cable. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration. The signal generator was adjusted to a level that produced the maximum radiated emission level. The signal generator level was recorded and corrected by the power loss in the cable between the signal generator and the antenna and further corrected for the gain of the substitution antenna. The signal generator corrected level is the ERP or EIRP level.

All modes of operation were investigated, and the worst-case results are reported.

#### 3.1.2.Limit

FCC 22.913(b) : The Effective Radiated Power (ERP) of mobile transmitters must not exceed 7 Watts.  
 FCC 24.232(b) : The equivalent Isotropic Radiated Power (EIRP) must not exceed 2 Watts.

#### 3.1.3.Test Results (WCDMA Band V)

Frequency(MHz)	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]
826.4	-16.05	19.64	-1.02	H	16.81
836.4	-15.14	19.80	-0.65	H	17.34
846.6	-15.19	21.19	-0.71	H	18.66

### Test Results (HSDPA Band V)

Frequency(MHz)	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]
846.6	-15.66	20.72	-0.71	H	18.19

### 3.1.4. Test Results (WCDMA Band II)

Frequency(MHz)	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	EIRP [dBm]
1852.4	-16.30	18.67	10.04	H	25.76
1880.0	-19.44	15.63	10.04	H	22.70
1907.6	-20.09	15.02	10.05	H	22.12

### Test Results (HSDPA Band II)

Frequency(MHz)	Measured Level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	EIRP [dBm]
1852.4	-16.44	18.53	10.05	H	25.62



## 3.2. Field Strength of Spurious Radiation

### 3.2.1. Test Results (WCDMA Band V)

Operating Frequency : 826.4 MHz

Measured Output Power : 16.81 dBm = 0.047 W

Limit :  $43 + 10 \log 10 (W) = 29.7 \text{ dBc}$

Frequency(MHz)	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Correct Generator Level [dBm]	Result [dBc]	Pol [H/V]
1652.8	-53.47	7.56	-63.16	75.13	H
2479.2	--	--	--	--	--
3305.6	--	--	--	--	--
4132.0	--	--	--	--	--

Operating Frequency : 836.40 MHz

Measured Output Power : 17.34 dBm = 0.054 W

Limit :  $43 + 10 \log 10 (W) = 30.3 \text{ dBc}$

Frequency(MHz)	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Correct Generator Level [dBm]	Result [dBc]	Pol [H/V]
1672.8	-52.99	7.65	-62.42	74.84	H
2509.2	--	--	--	--	--
3345.6	--	--	--	--	--
4182.0	--	--	--	--	--

Operating Frequency : 846.6 MHz  
Measured Output Power : 18.66 dBm = 0.073 W  
Limit :  $43 + 10 \log 10 (W) = 31.6 \text{ dBc}$

Frequency(MHz)	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Correct Generator Level [dBm]	Result [dBc]	Pol [H/V]
1693.2	-50.87	7.68	-59.86	73.78	H
2539.8	--	--	--	--	--
3386.4	--	--	--	--	--
4233.0	--	--	--	--	--

### 3.2.2. Test Results (WCDMA Band II)

Operating Frequency : 1852.4 MHz  
Measured Output Power : 25.76 dBm = 0.376 W  
Limit :  $43 + 10 \log 10 (W) = 38.7 \text{ dBc}$

Frequency(MHz)	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Correct Generator Level [dBm]	Result [dBc]	Pol [H/V]
3704.8	-39.89	12.32	-43.29	-60.80	H
5557.2	-43.71	13.02	-43.23	-61.27	H
7409.6	--	--	--	--	--
9262.0	--	--	--	--	--

Operating Frequency : 1880.0 MHz  
Measured Output Power : 22.70 dBm = 0.186 W  
Limit :  $43 + 10 \log 10 (W) = 35.6 \text{ dBc}$

Frequency(MHz)	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Correct Generator Level [dBm]	Result [dBc]	Pol [H/V]
3760.00	-34.60	7.00	-37.16	51.80	H
5640.00	-45.86	8.85	-45.07	60.11	H
7520.00	--	--	--	--	--
9400.00	--	--	--	--	--

Operating Frequency : 1907.6 MHz  
Measured Output Power : 22.12 dBm = 0.162 W  
Limit :  $43 + 10 \log 10 (W) = 35.0 \text{ dBc}$

Frequency(MHz)	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Correct Generator Level [dBm]	Result [dBc]	Pol [H/V]
3815.2	-33.59	7.00	-35.97	49.91	H
5722.8	-42.02	8.85	-40.94	55.46	H
7630.4	--	--	--	--	--
9538.0	--	--	--	--	--

### 3.3. Conducted Output Power

#### 3.3.1. Test Procedure

A base station simulator (CMU200) was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. The default test configuration test set using a 12.2 kbps RMC(reference measurement channel). TPC(Transmit Power Control) set to "All 1" and measure the mean power of the UE in a bandwidth of at least  $(1+\alpha)$  times the chip rate of the radio access mode. The mean power shall be averaged over at least one time slot. Maximum output power is verified according to 3GPP TS 34.121 Section 5.2.

#### 3.3.2. Test Results (WCDMA&HSDPA Band V)

Frequency(MHz)	WCDMA (12.2 kpps RMC)	HSDPA (12.2 kpps RMC)
826.4	23.27 dBm	22.92 dBm
836.4	23.27 dBm	23.03 dBm
846.6	23.18 dBm	22.87 dBm

#### 3.3.3. Test Results (WCDMA&HSDPA Band II)

Frequency(MHz)	WCDMA (12.2 kpps RMC)	HSDPA (12.2 kpps RMC)
1852.4	23.93 dBm	23.45 dBm
1880.0	23.61 dBm	23.31 dBm
1907.6	23.52 dBm	23.52 dBm


### 3.4. Occupied Bandwidth

#### 3.4.1. Test Procedure


The EUT's output RF connector was connected with a short cable to spectrum analyzer. The EUT was setup to maximum output power. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. RBW was set to about 1% of emission BW, VBW is set to 3 times.

#### 3.4.2. Limit

- On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB
- Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB Below the transmitter power.
- When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the license's frequency block edges, both upper and lower, as the design permits.
- The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

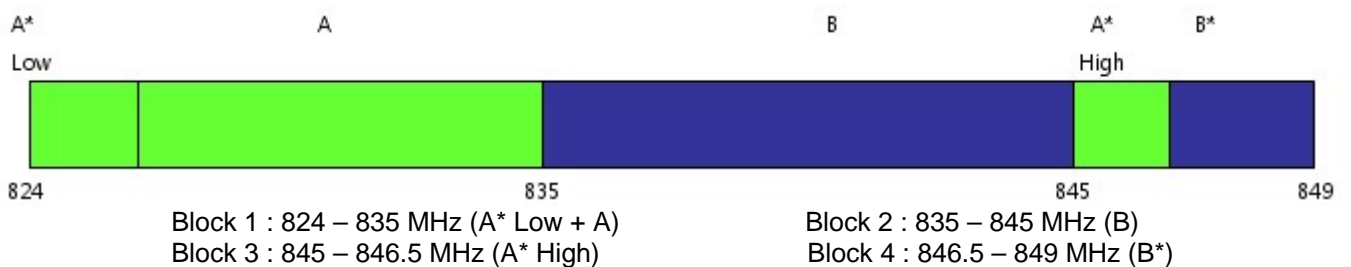


#### - Cellular Service Frequency Blocks -

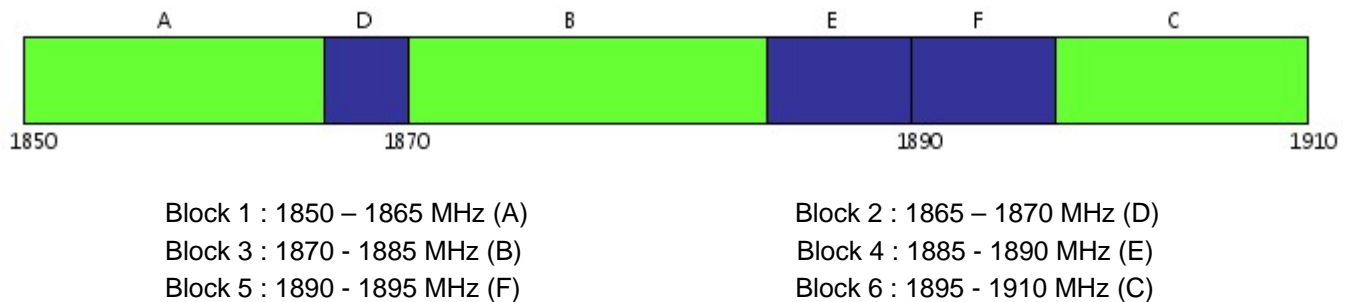


#### - Broadband PCS Service Frequency Blocks -


### 3.4.3. Test Results (WCDMA&HSDPA Band V)

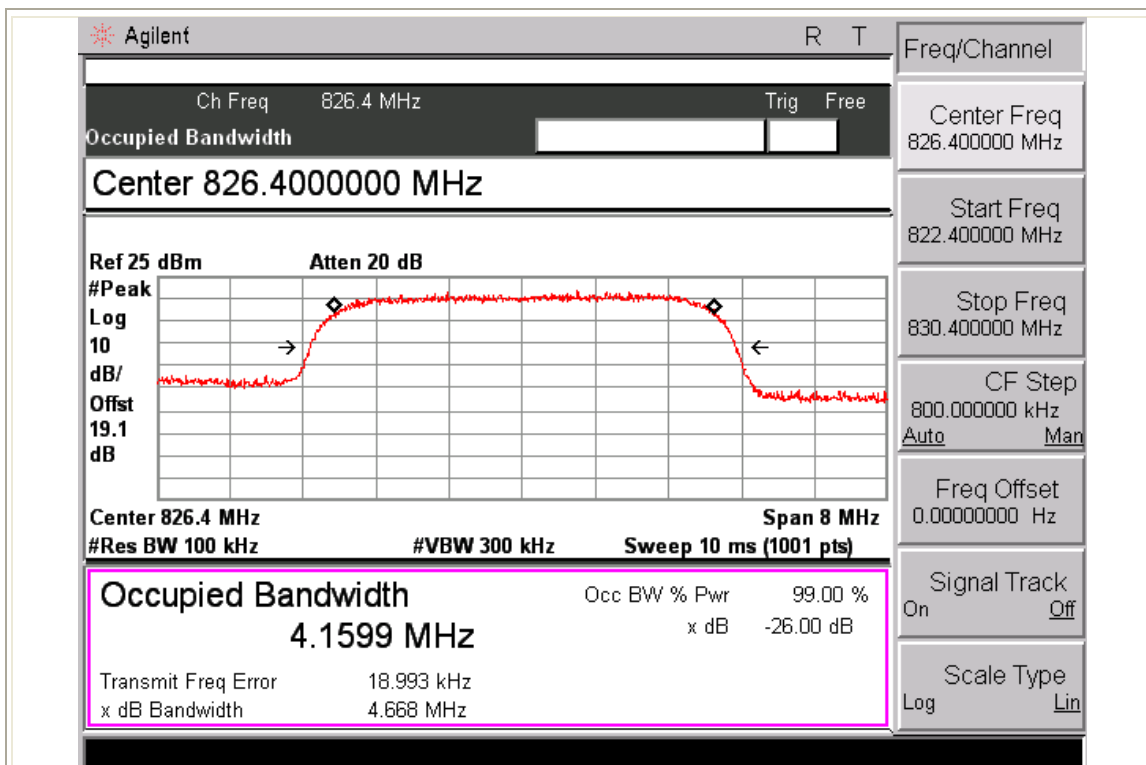


- WCDMA Band V, Channel 4132 -

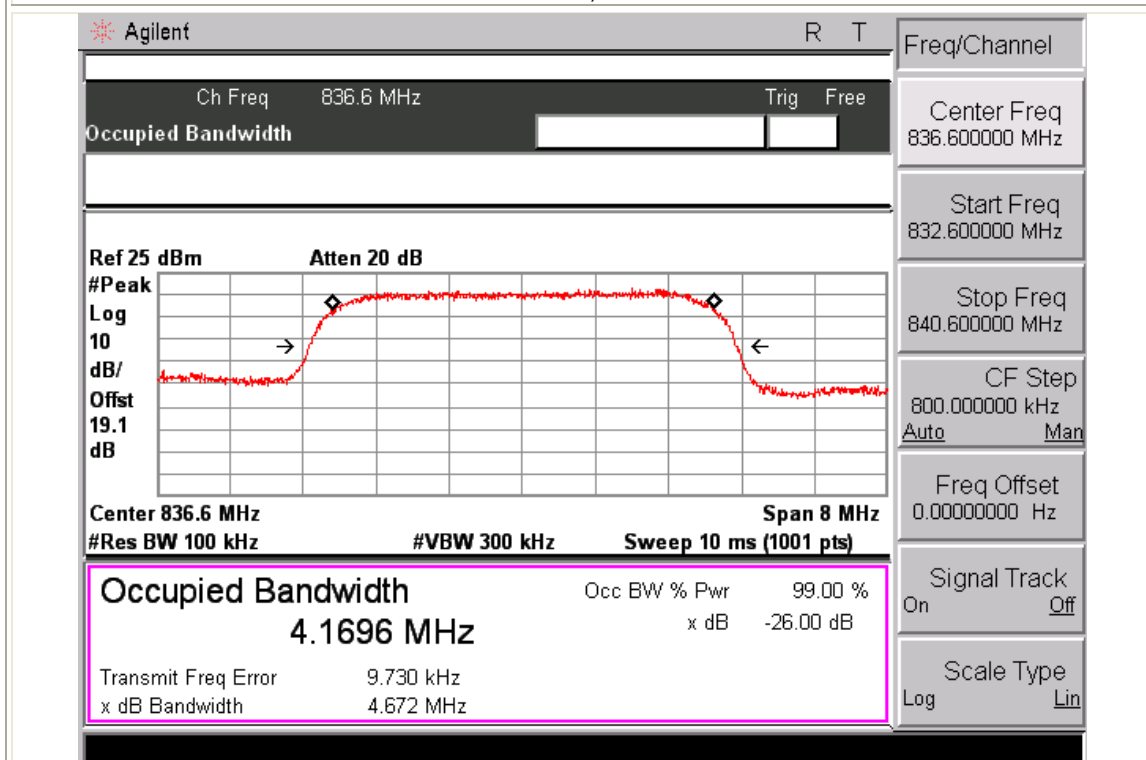


- WCDMA Band V, Channel 4183 -

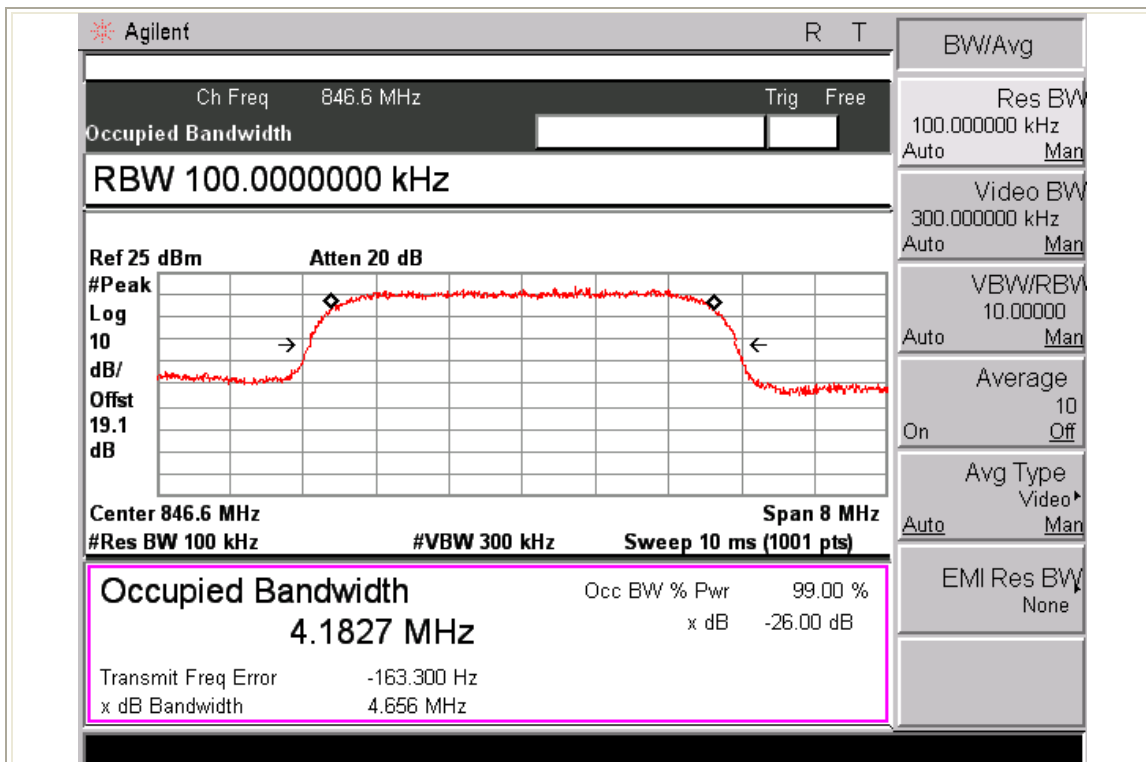


- WCDMA Band V, Channel 4233 -

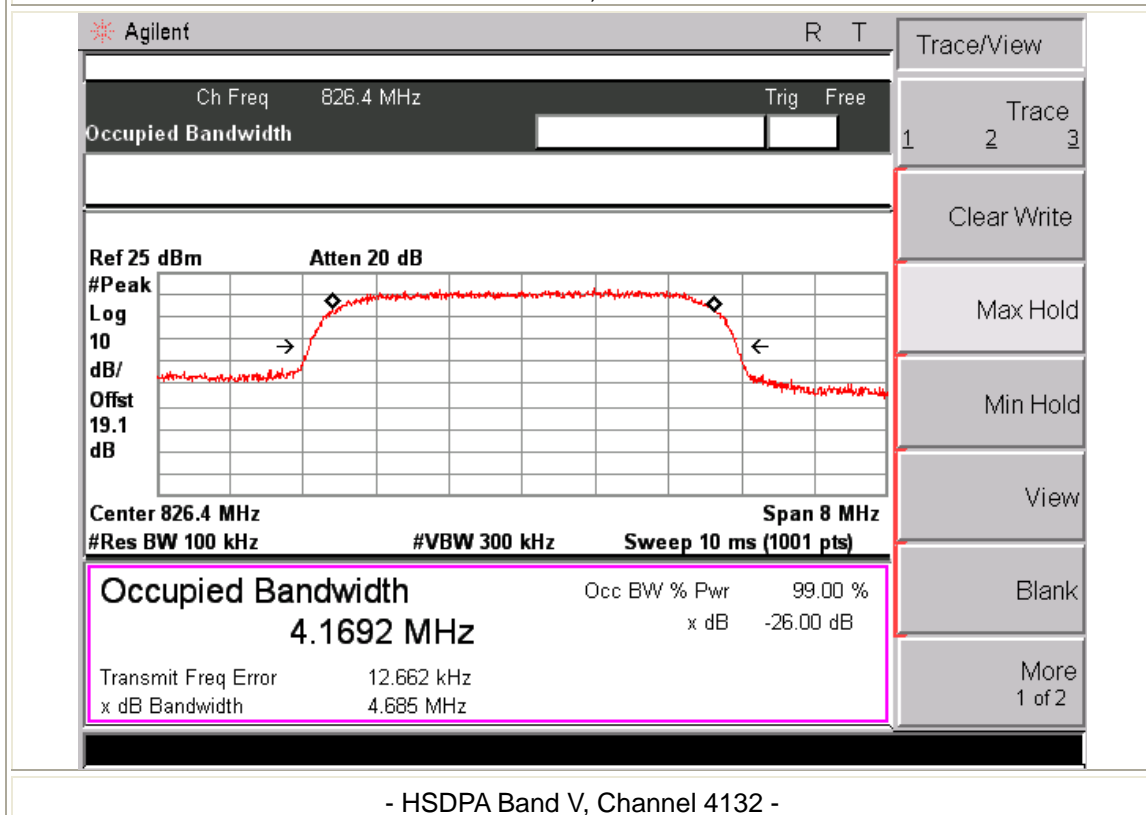

- HSDPA Band V, Channel 4132 -

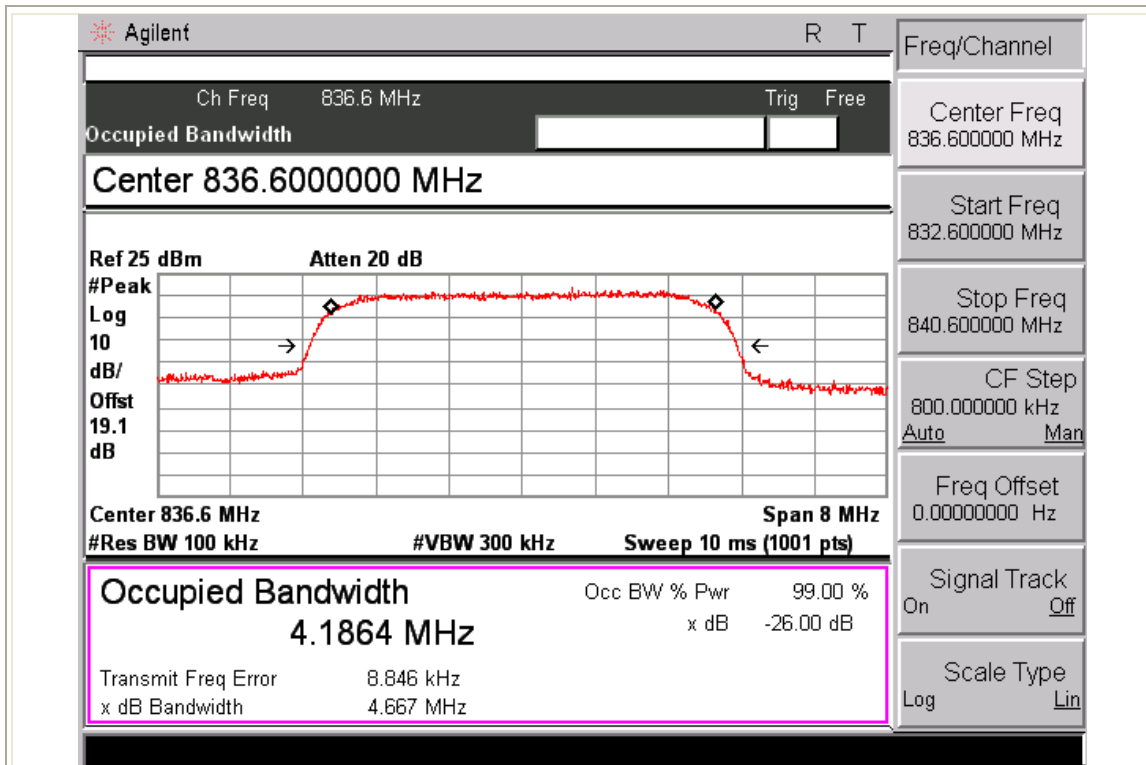


- HSDPA Band V, Channel 4183 -

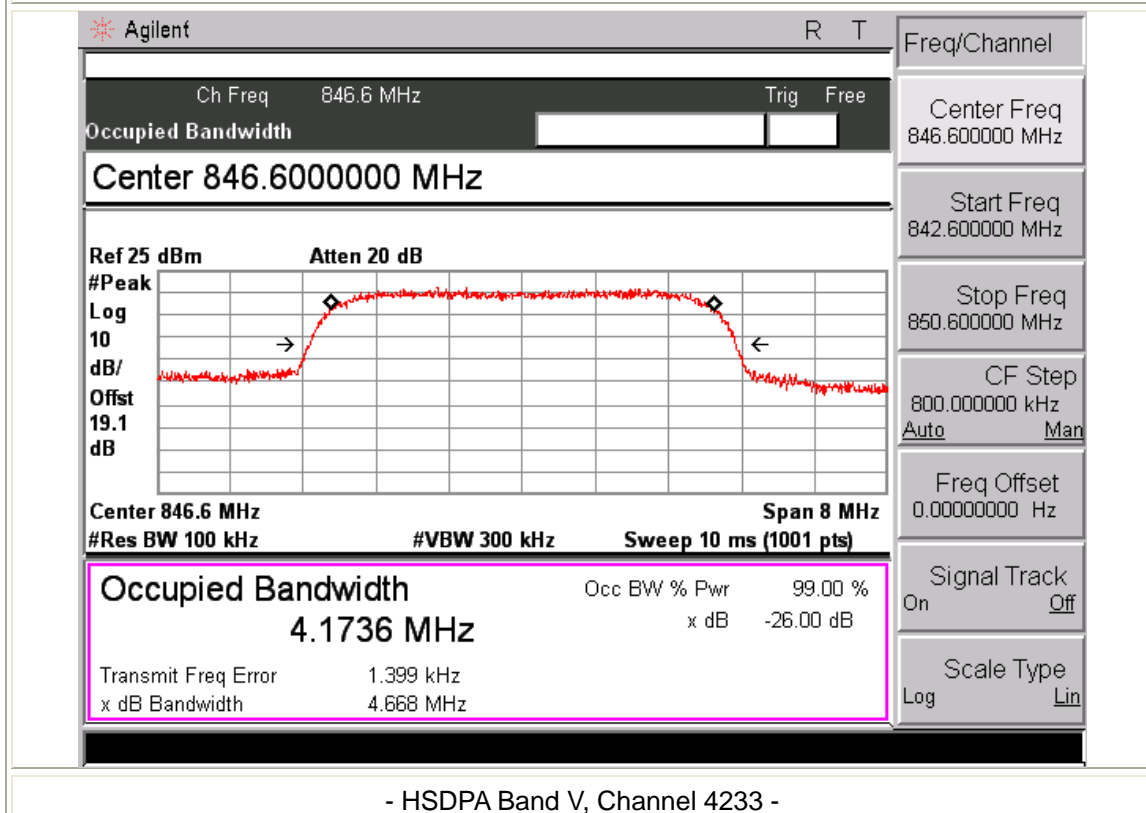


- HSDPA Band V, Channel 4233 -




### 3.4.4. Test Results (WCDMA&HSDPA Band II)

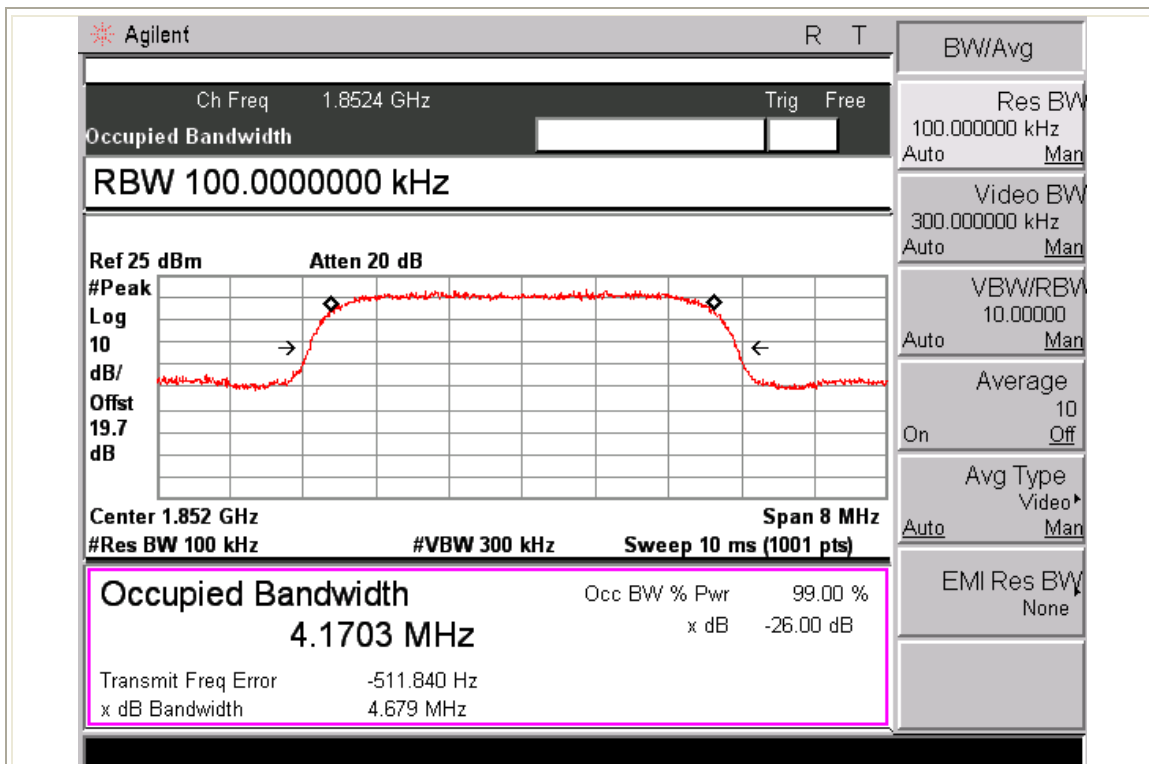


- WCDMA Band II, Channel 9262 -

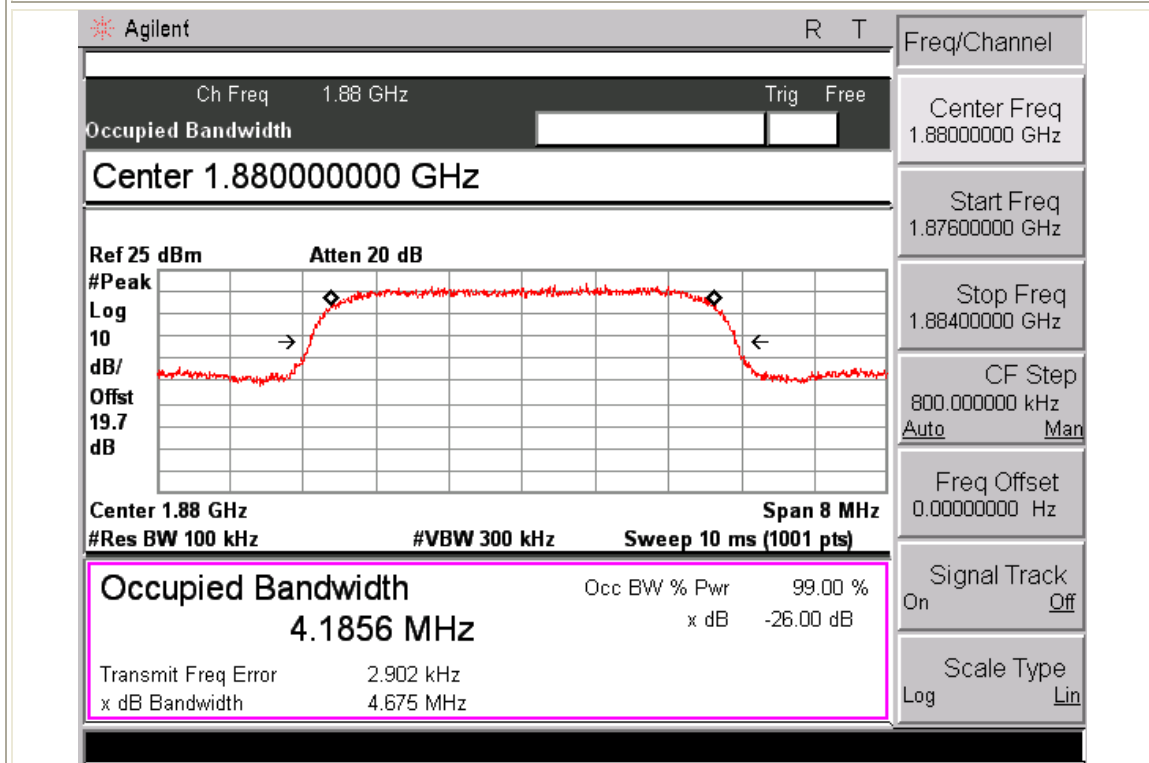


- WCDMA Band II, Channel 9400 -

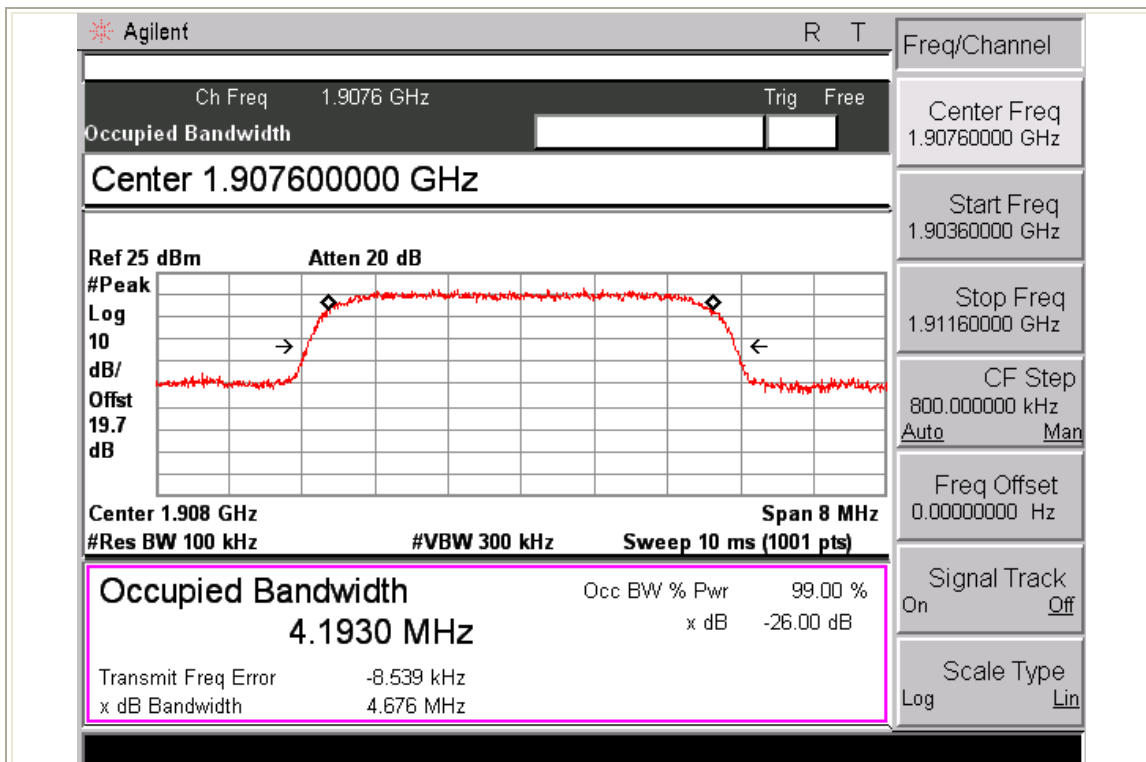


- WCDMA Band II, Channel 9538 -

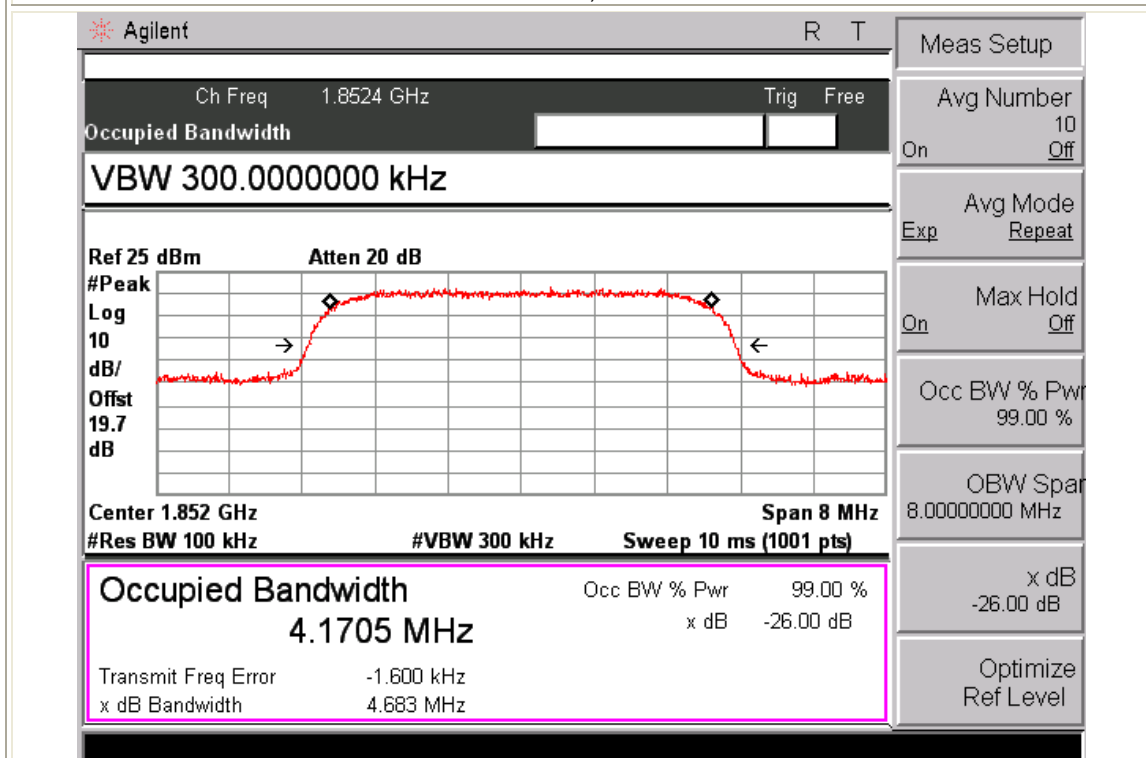

- HSDPA Band II, Channel 9262 -

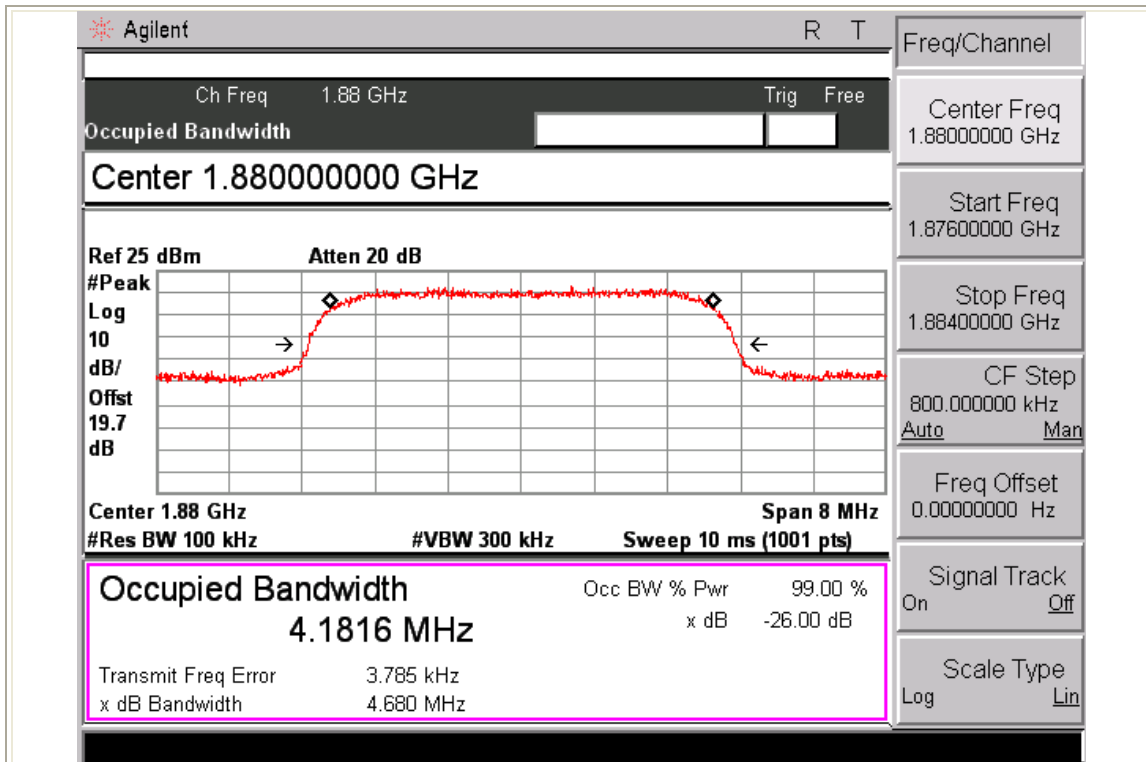

- HSDPA Band II, Channel 9400 -

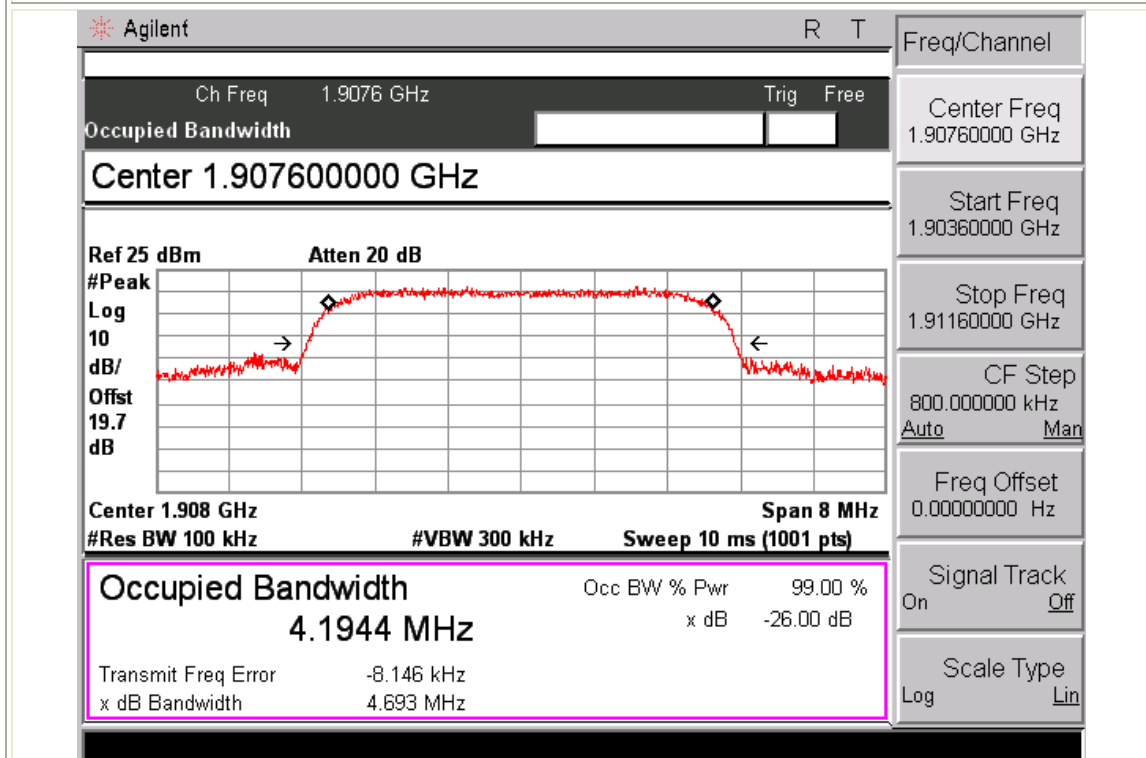

- HSDPA Band II, Channel 9538 -

### 3.5. Conducted Spurious Emission


#### 3.5.1. Test Procedure


The EUT's output RF connector was connected with a short cable to spectrum analyzer. The EUT was setup to maximum output power. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1 MHz. However in the 1 MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed. A display line was placed at -13 dBm to show compliance.

#### 3.5.2. Limit


On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

#### 3.5.3. Test Results (WCDMA&HSDPA Band V)

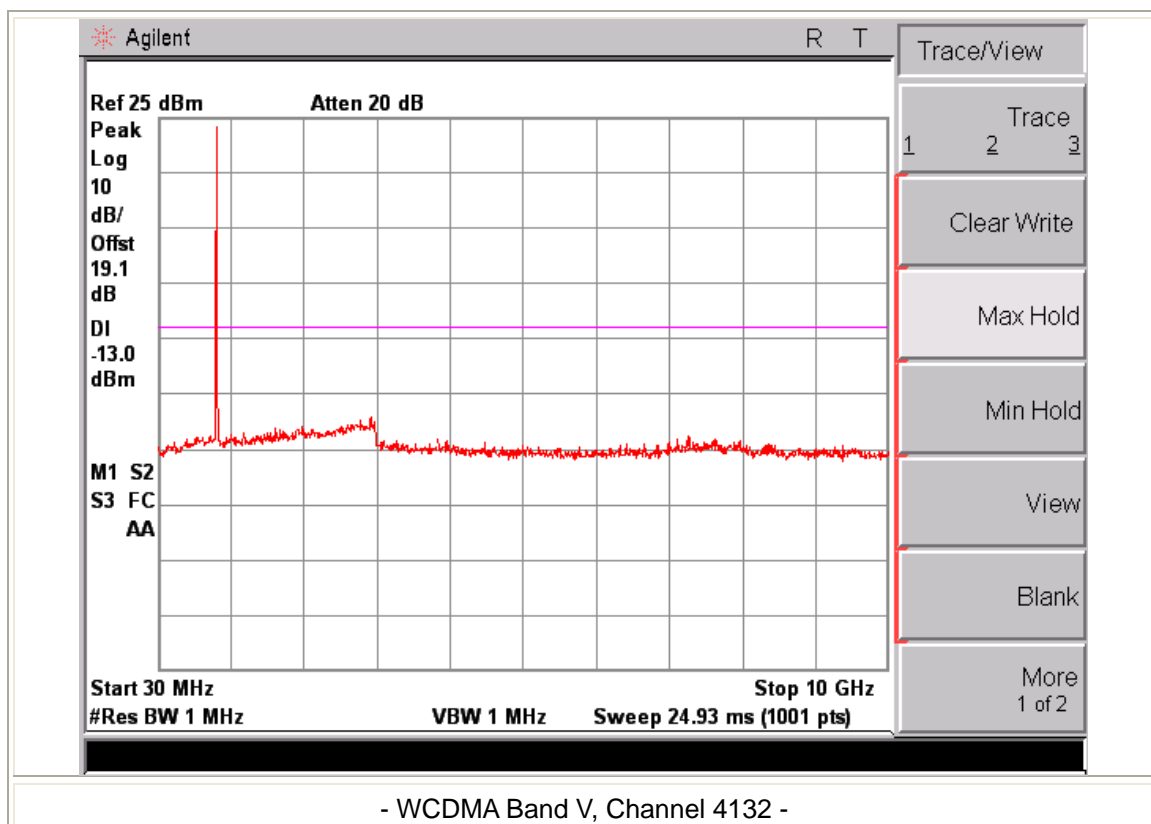


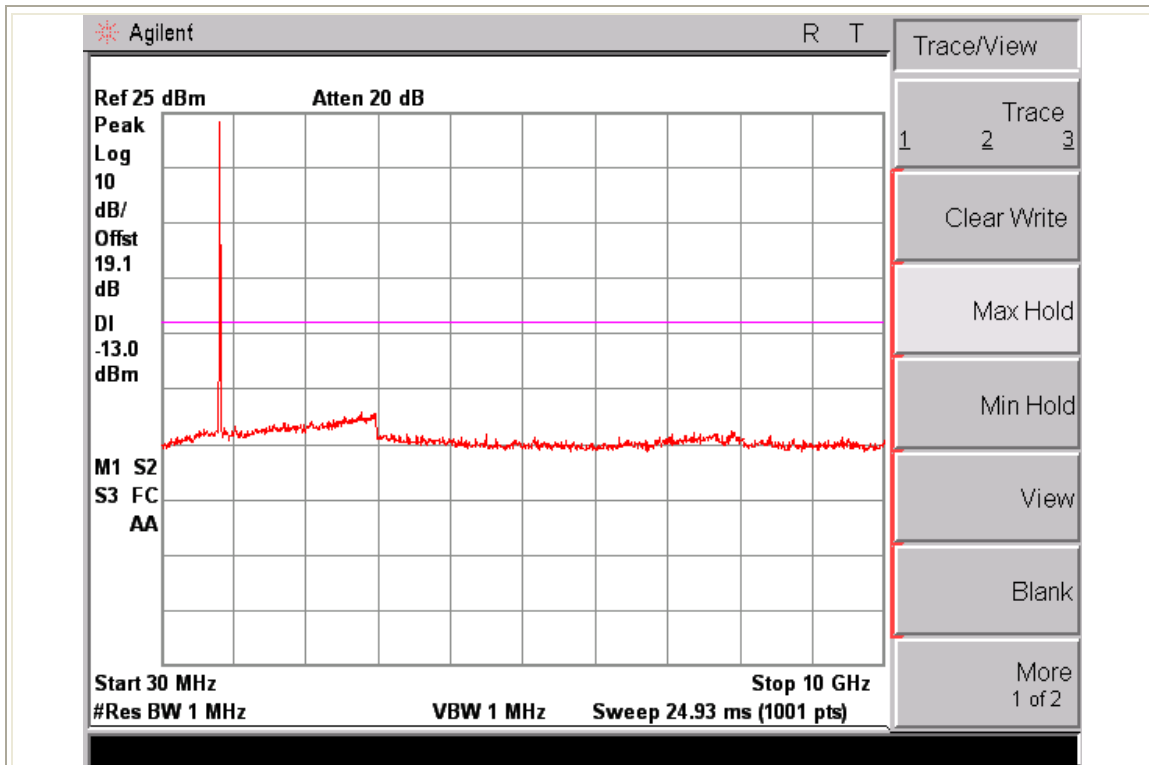


- WCDMA Band V, Channel 4183 -

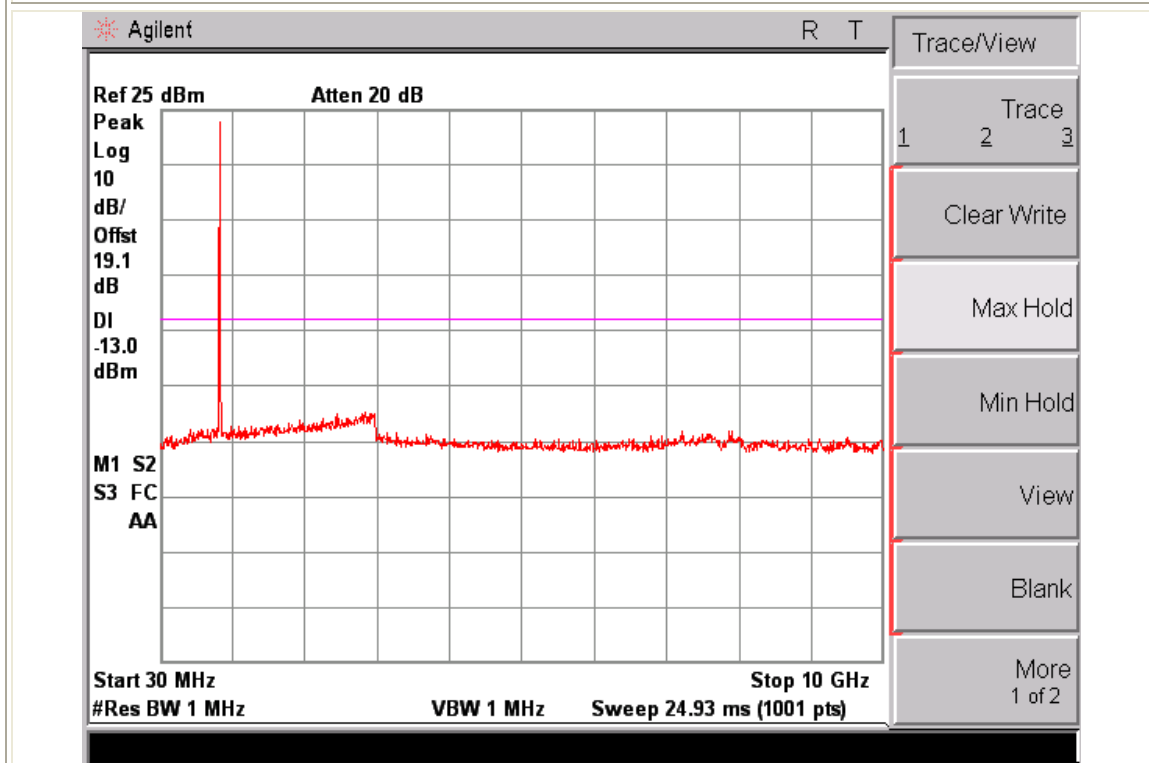


- WCDMA Band V, Channel 4233 -

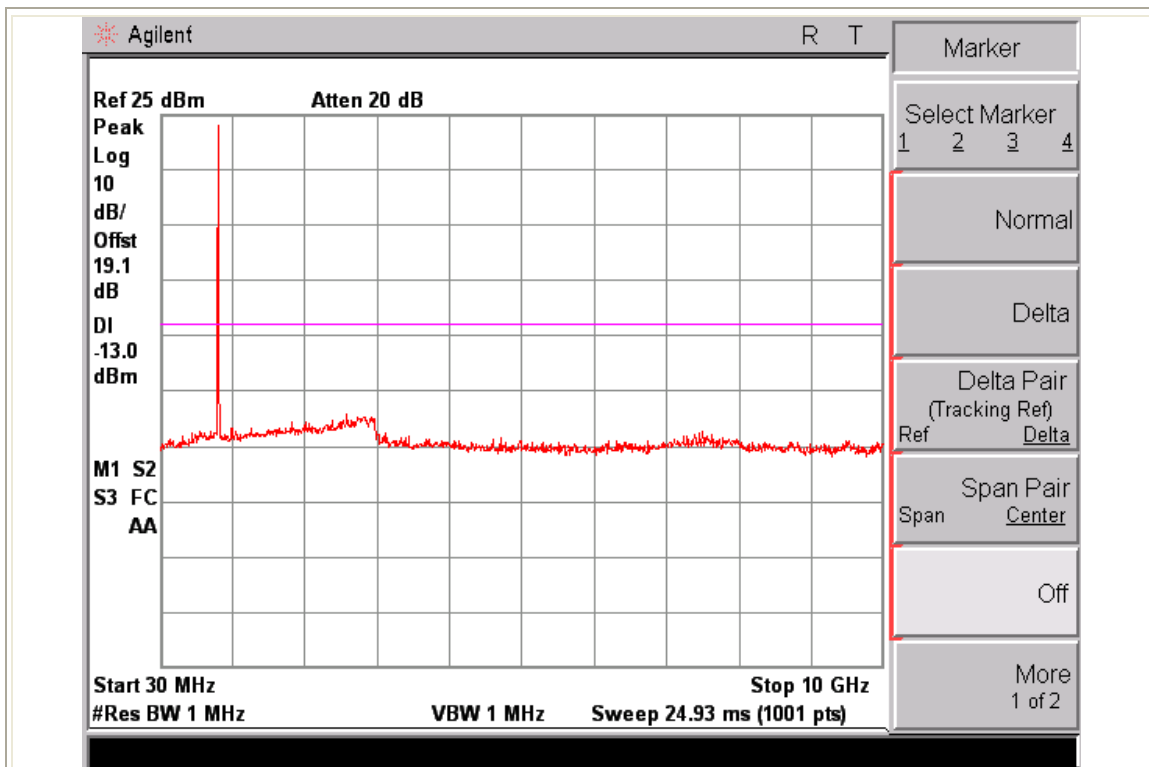


- HSDPA Band V, Channel 4132 -

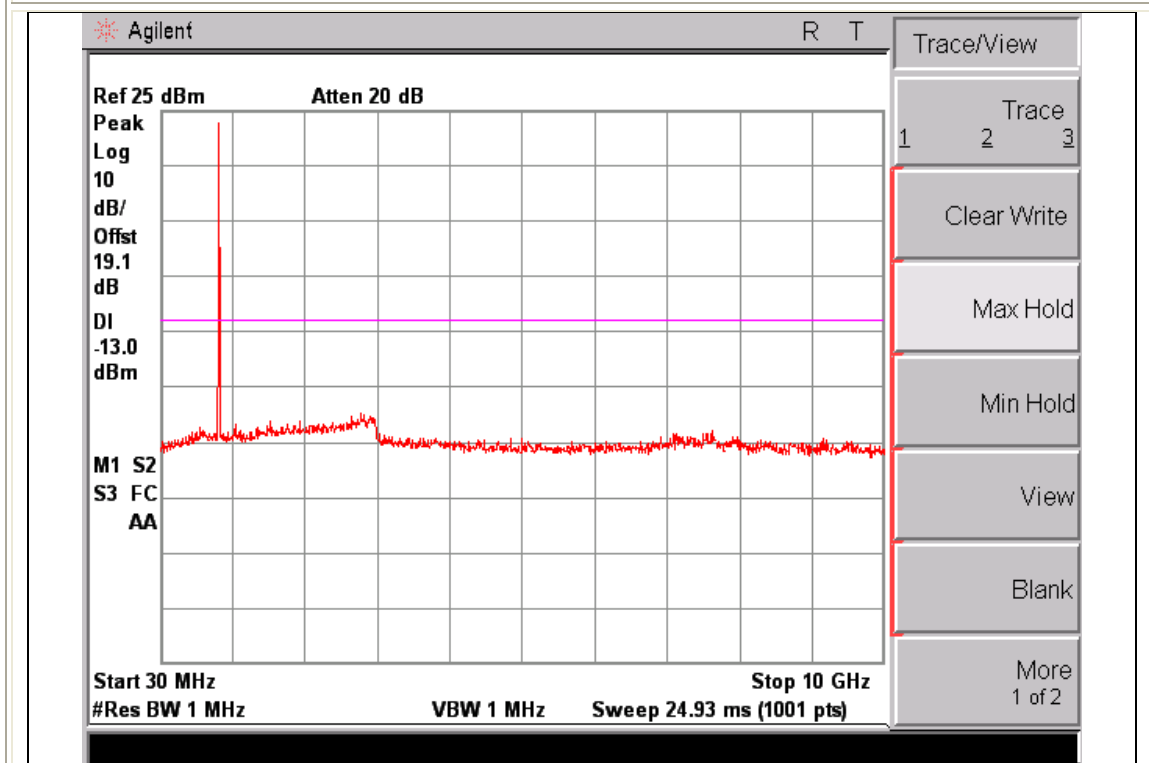


- HSDPA Band V, Channel 4183 -

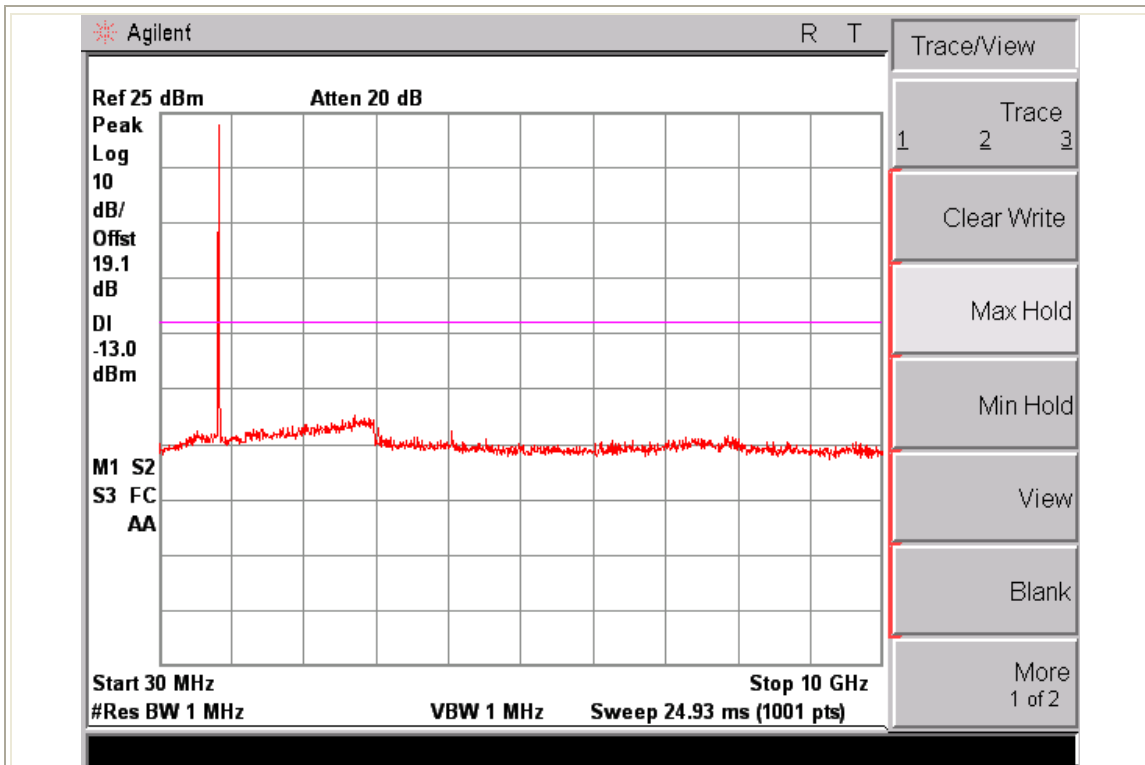


- HSDPA Band V, Channel 4233 -

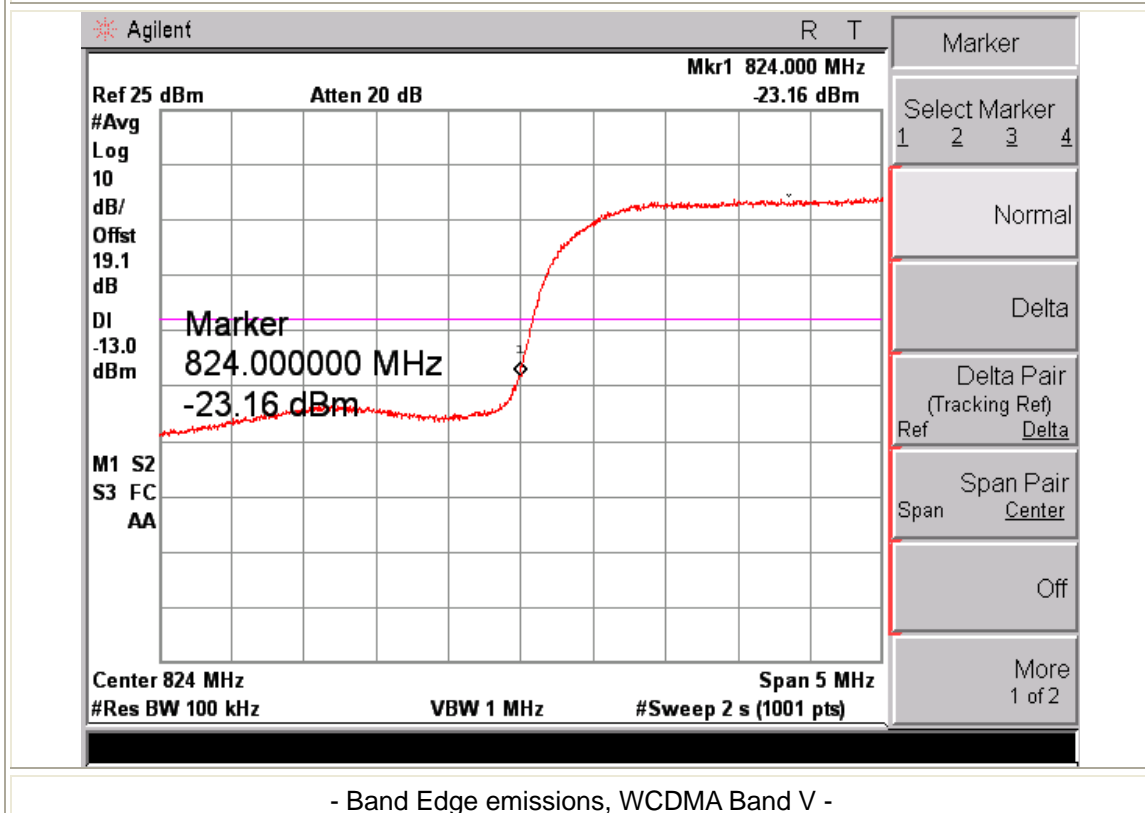

- Band Edge emissions, WCDMA Band V -

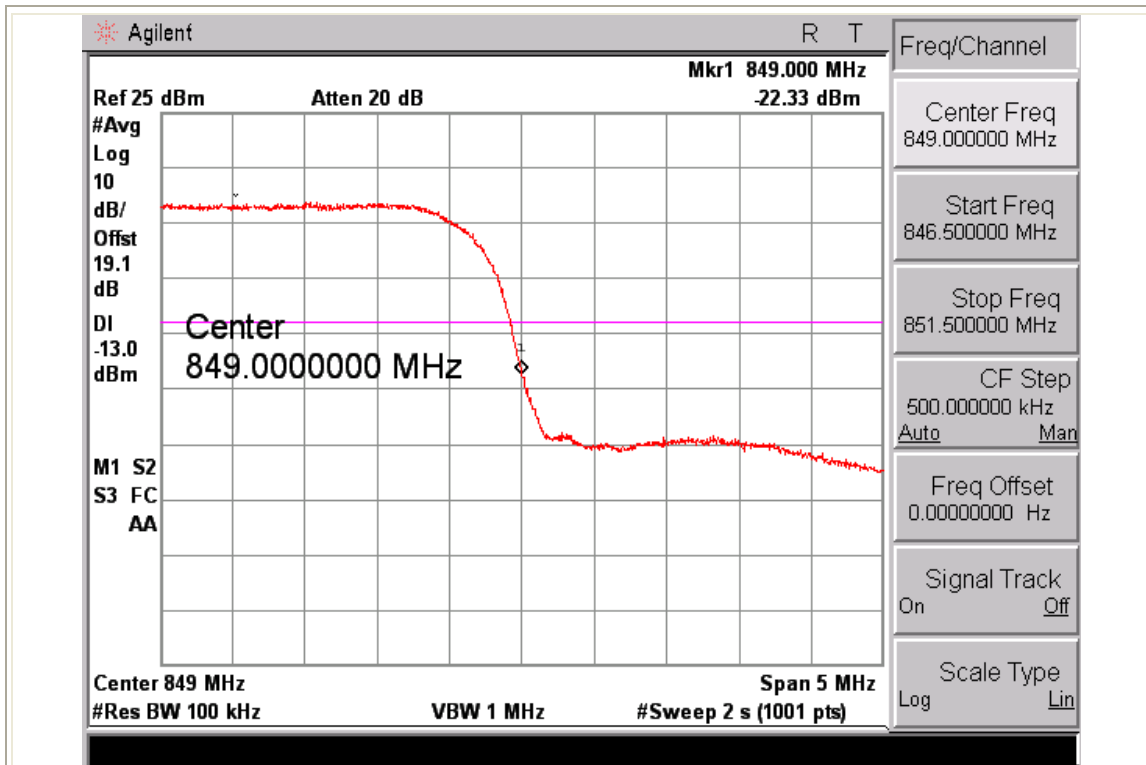


- Band Edge emissions, WCDMA Band V -

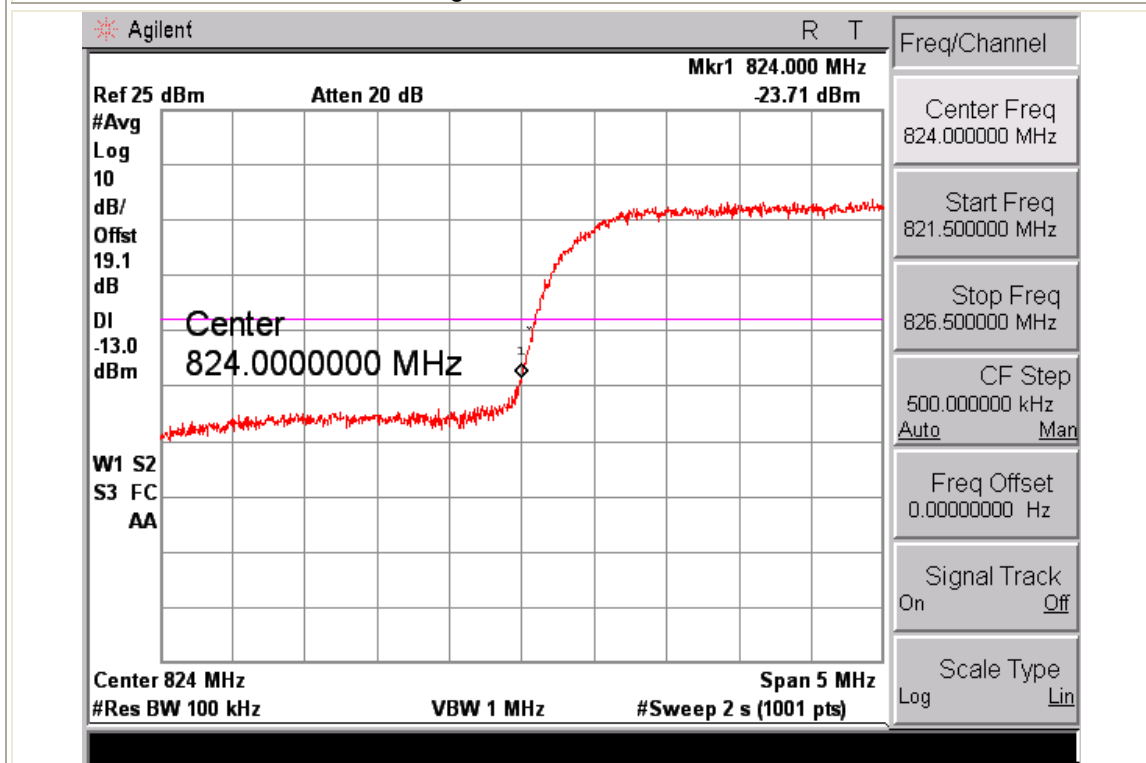


- Band Edge emissions, HSDPA Band V -




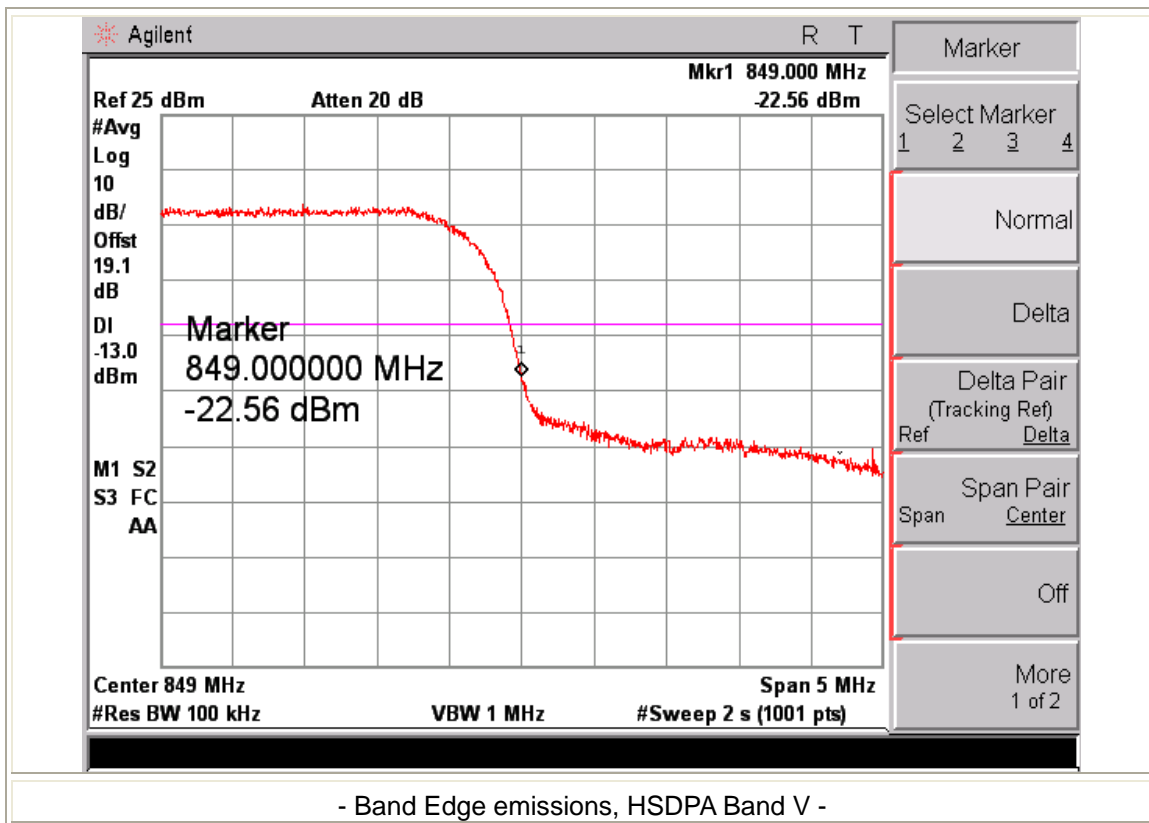


### 3.5.4. Test Results (WCDMA&HSDPA Band II)

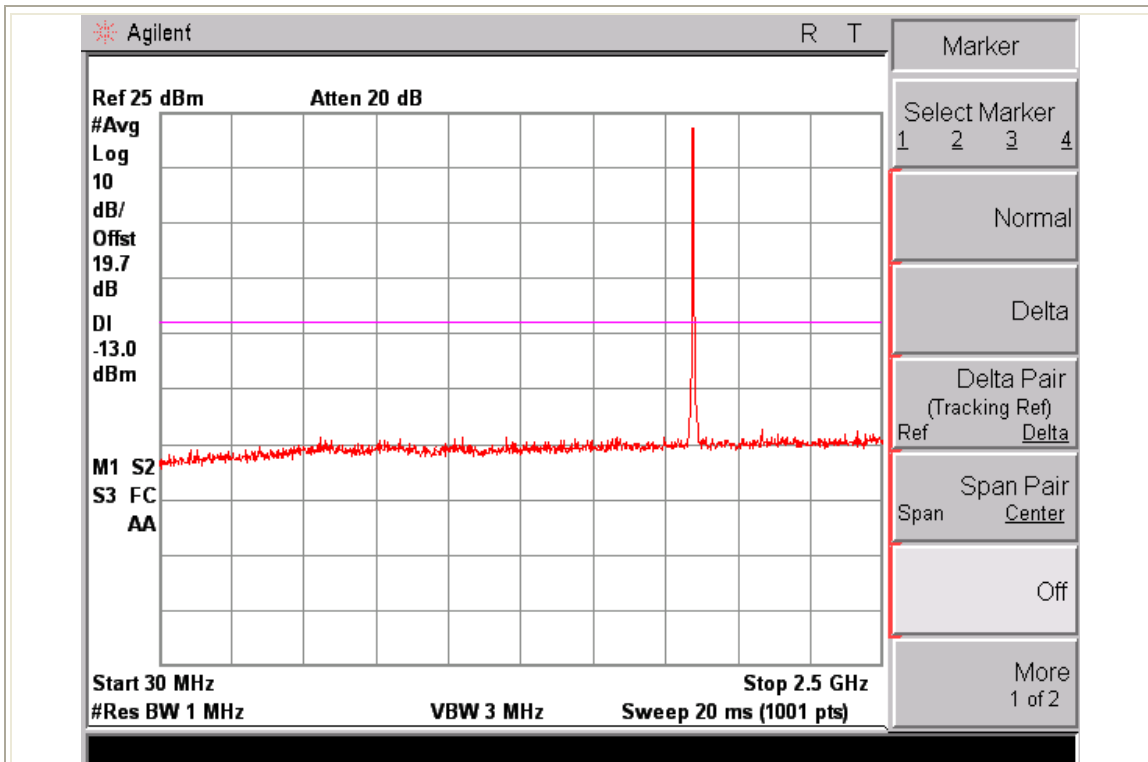


- WCDMA Band II, Channel 9262 -

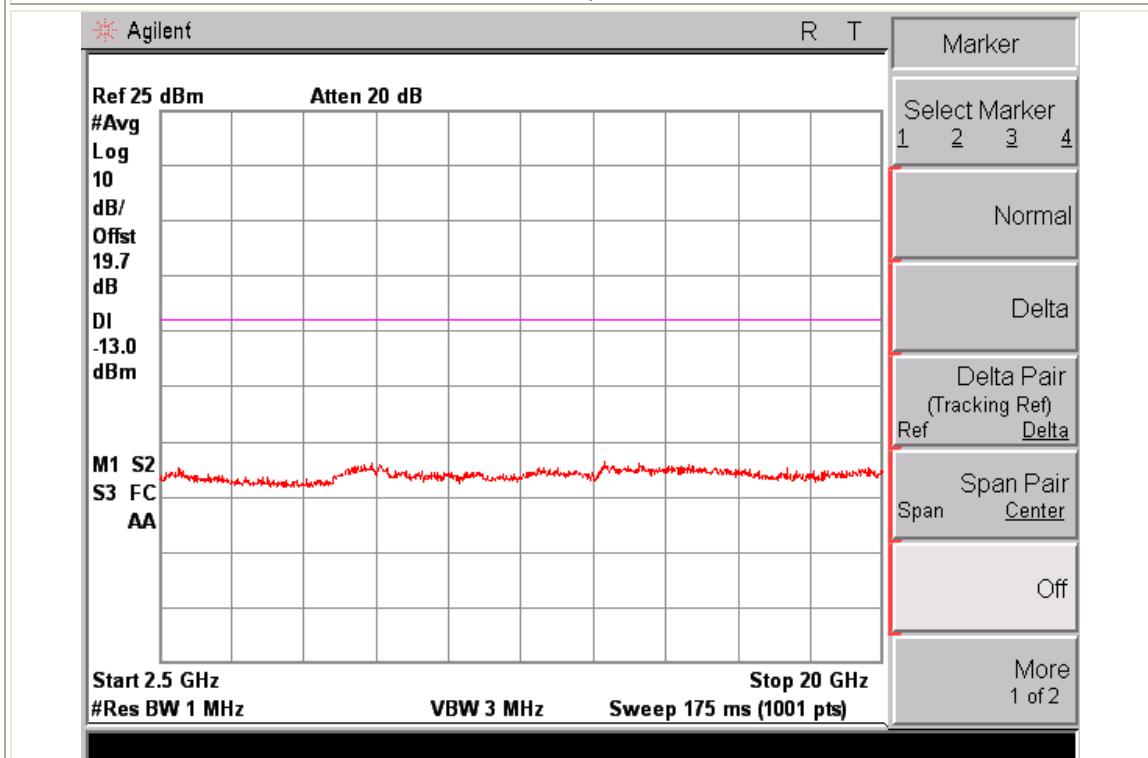


- WCDMA Band II, Channel 9262 -

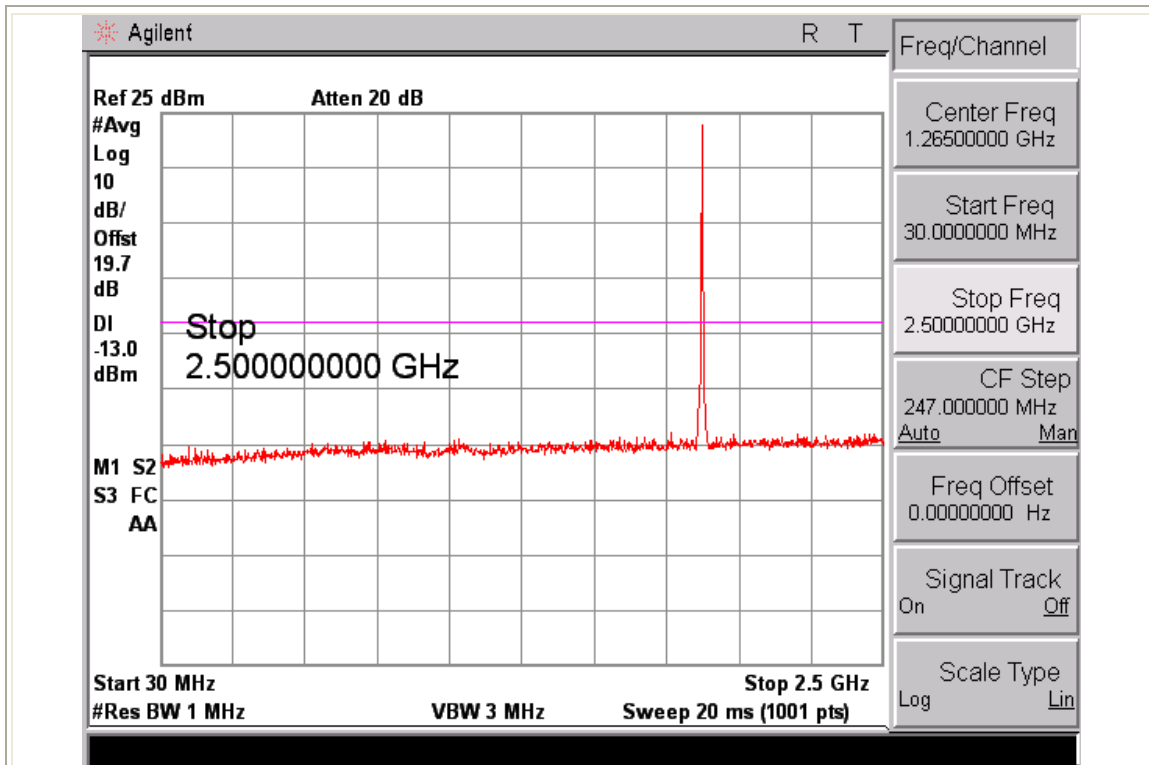


- WCDMA Band II, Channel 9400 -

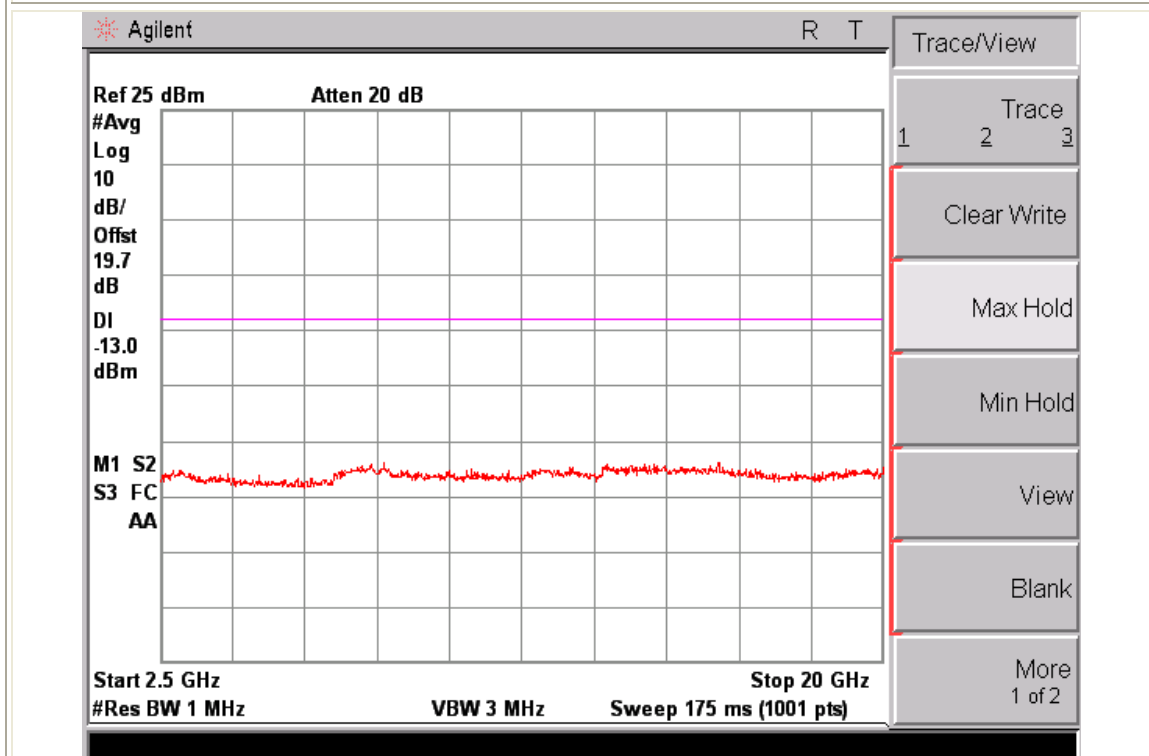


- WCDMA Band II, Channel 9400 -

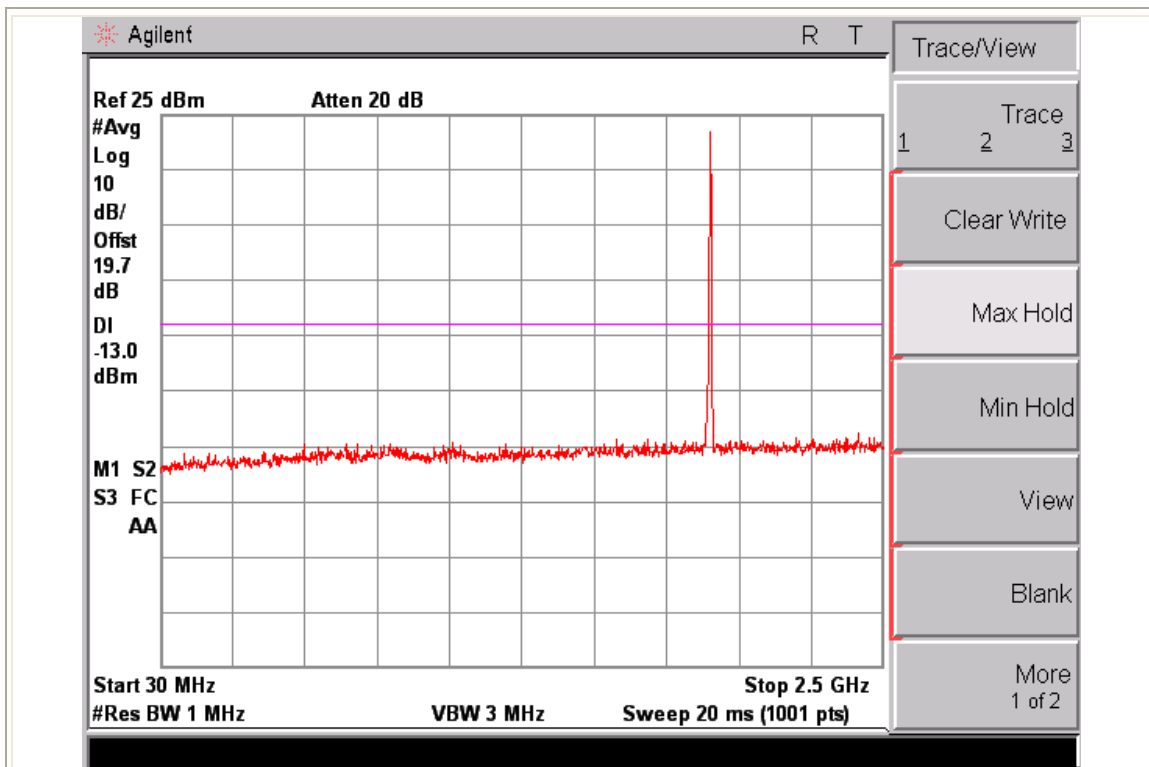


- WCDMA Band II, Channel 9538 -

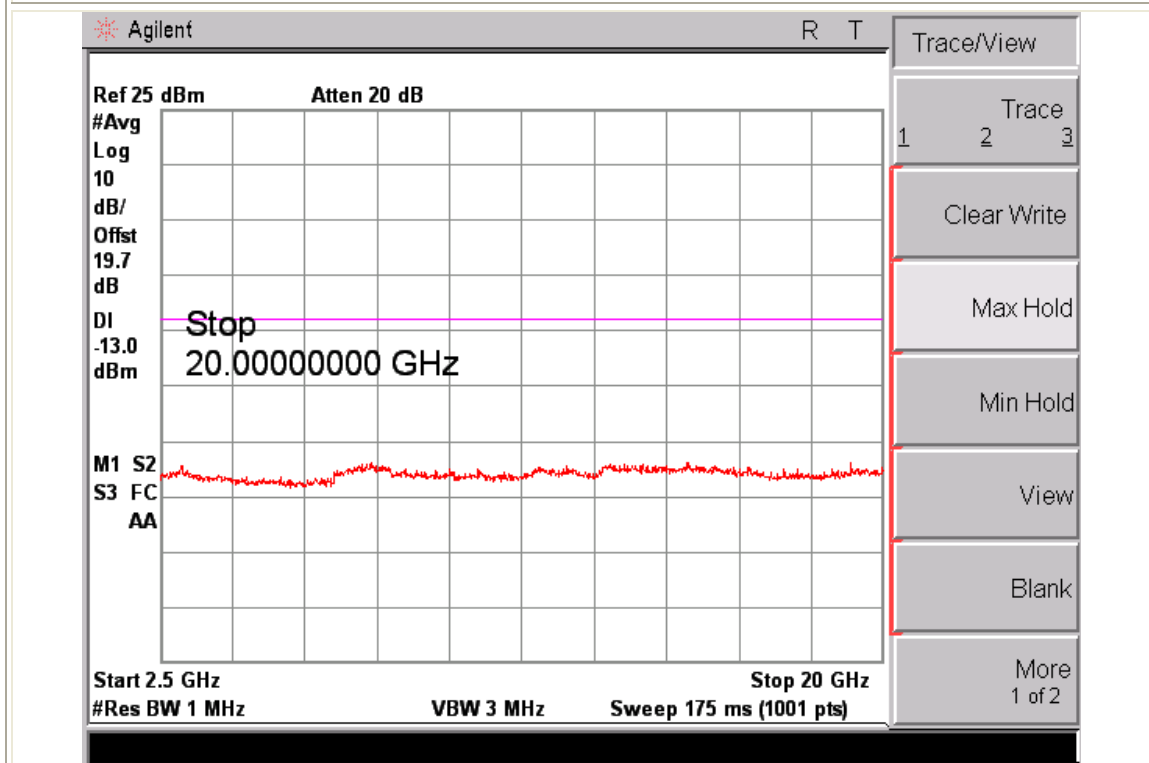


- WCDMA Band II, Channel 9538 -

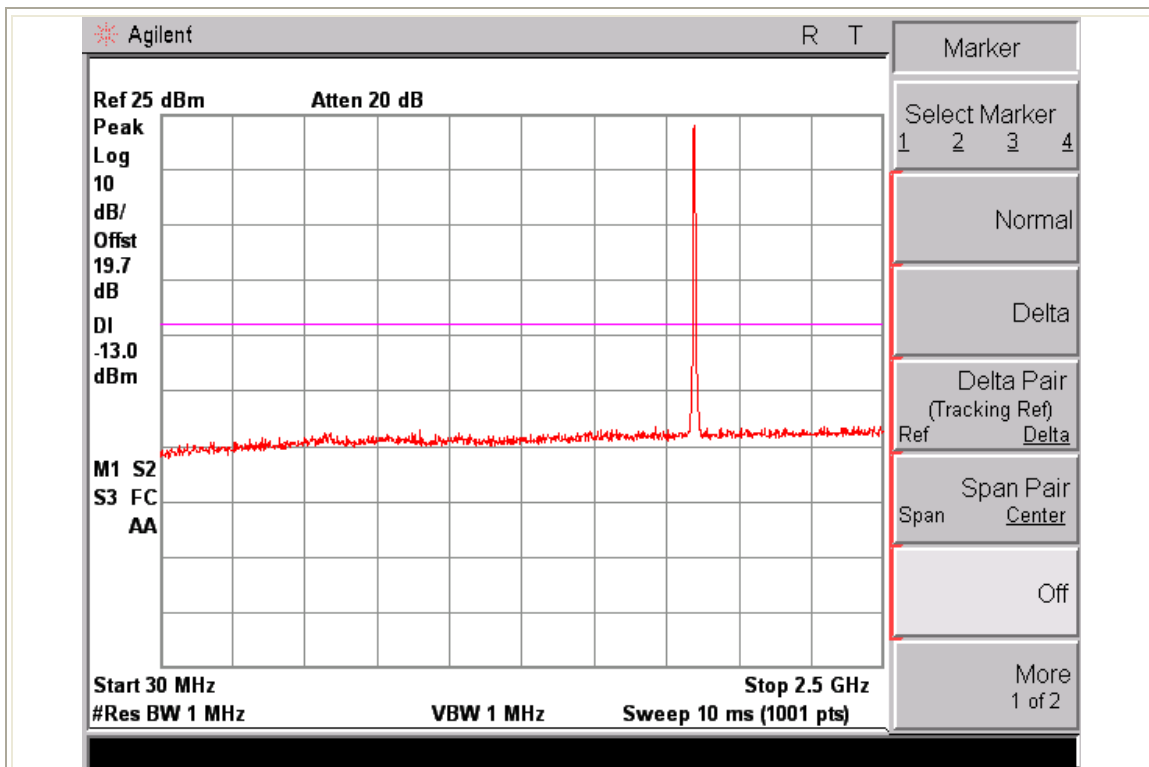


- HSDPA Band II, Channel 9262 -

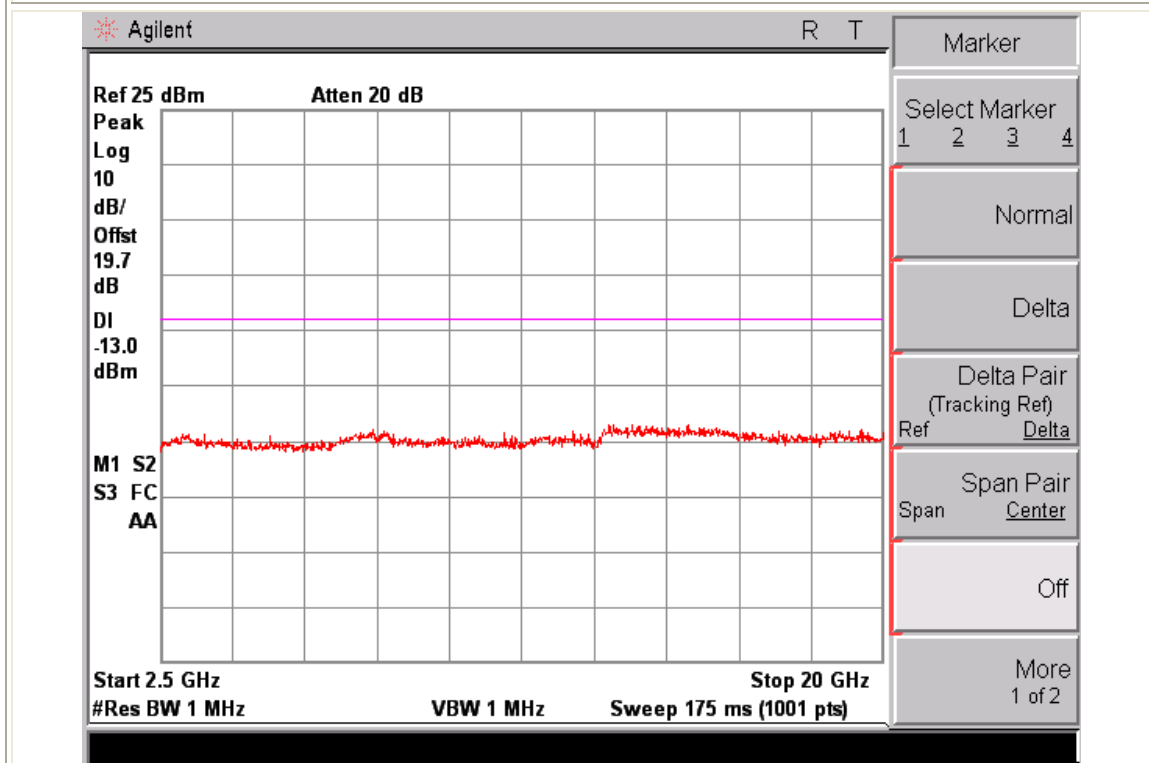


- HSDPA Band II, Channel 9262 -

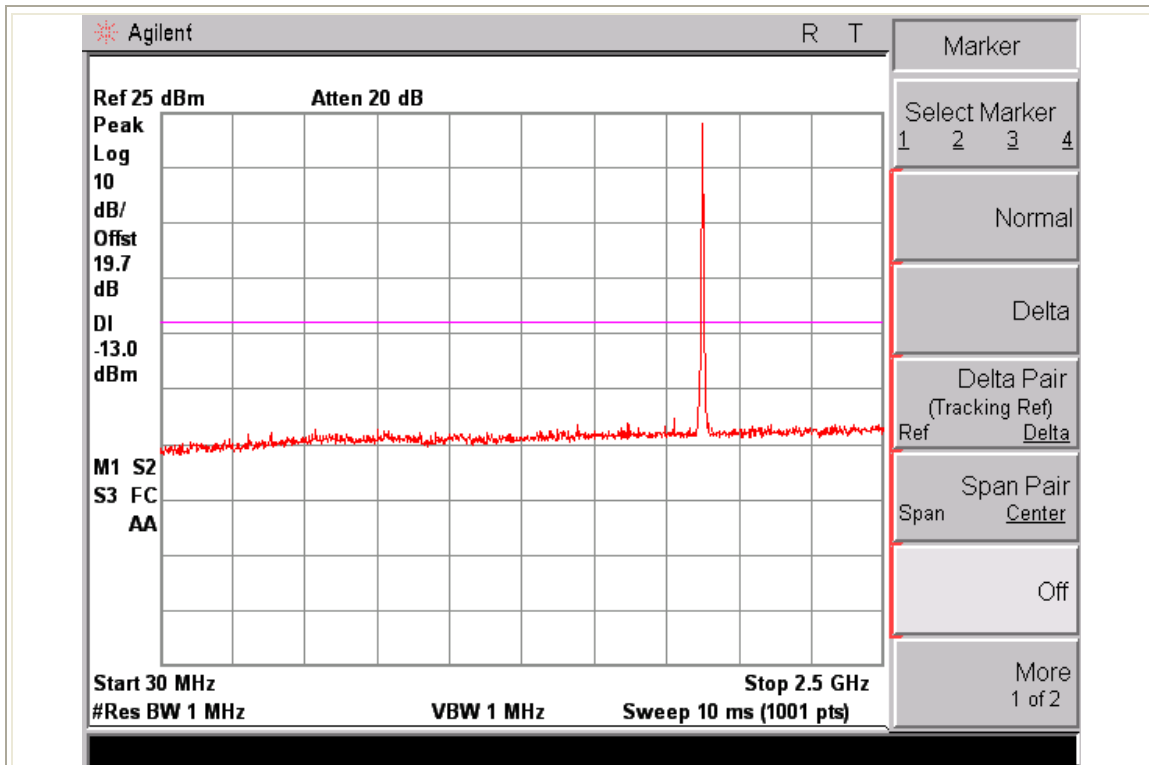


- HSDPA Band II, Channel 9400 -

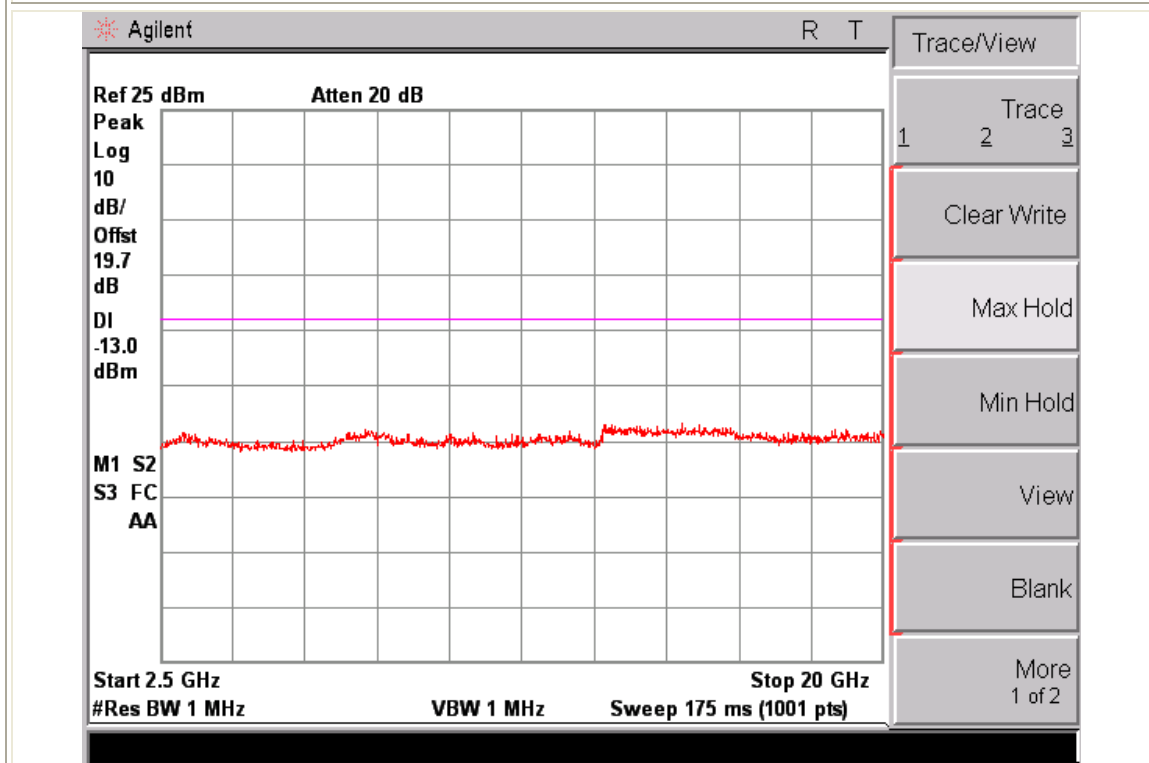


- HSDPA Band II, Channel 9400 -

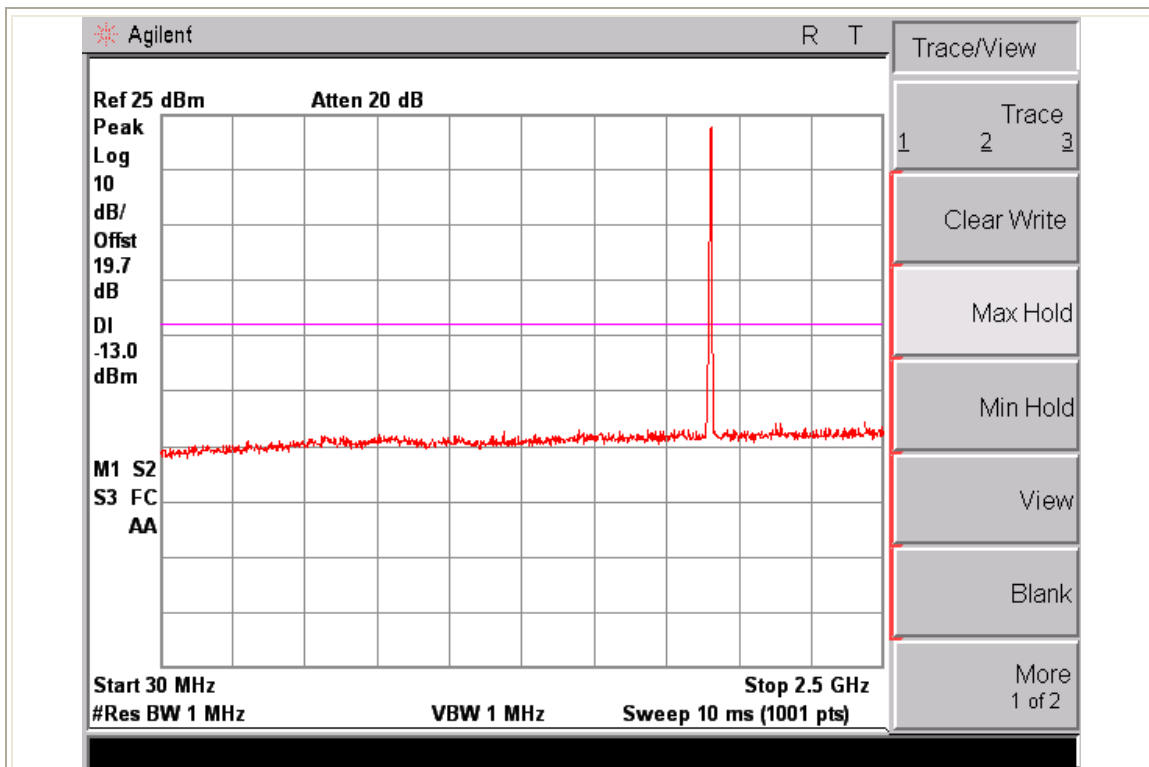


- HSDPA Band II, Channel 9538 -

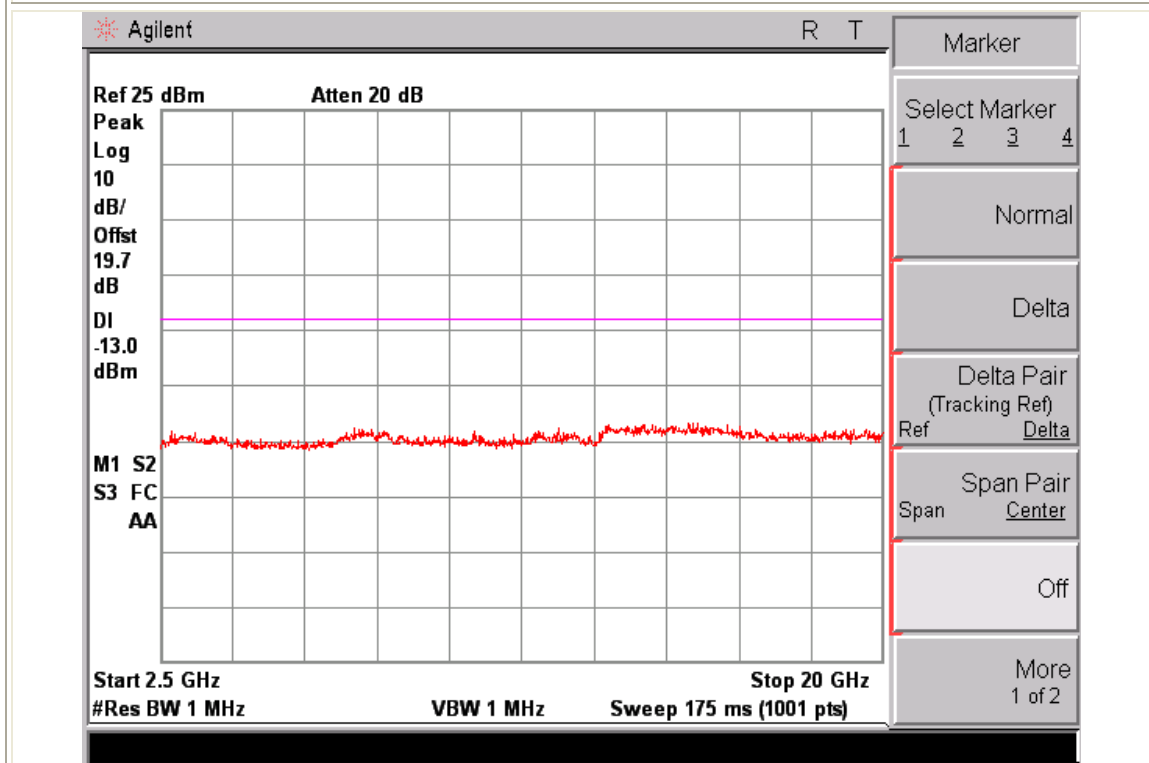

- HSDPA Band II, Channel 9538 -

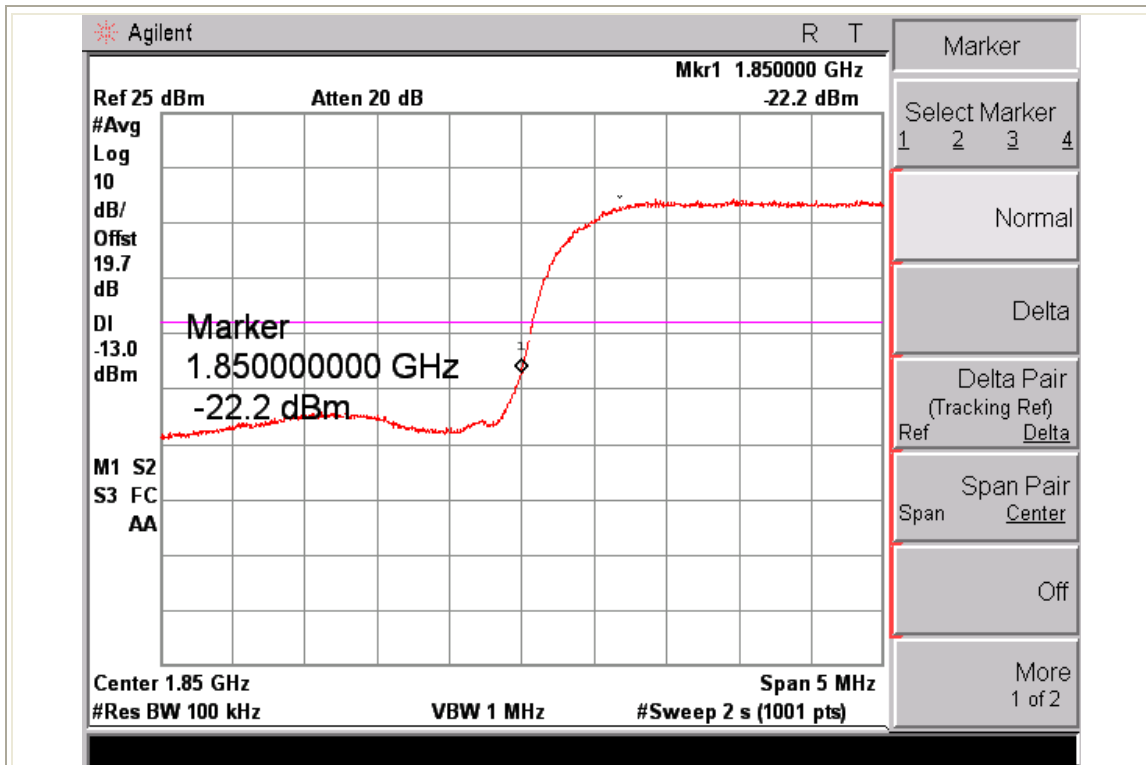


- Band Edge emissions, WCDMA Band II -

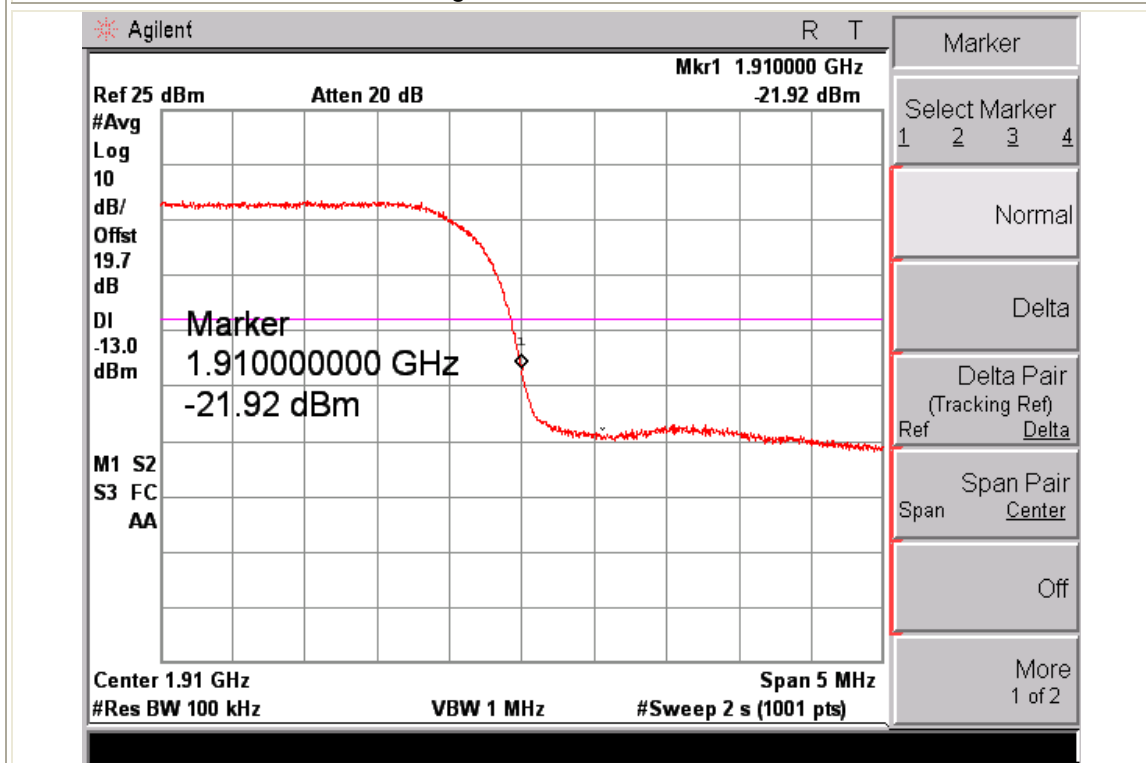


- Band Edge emissions, WCDMA Band II -



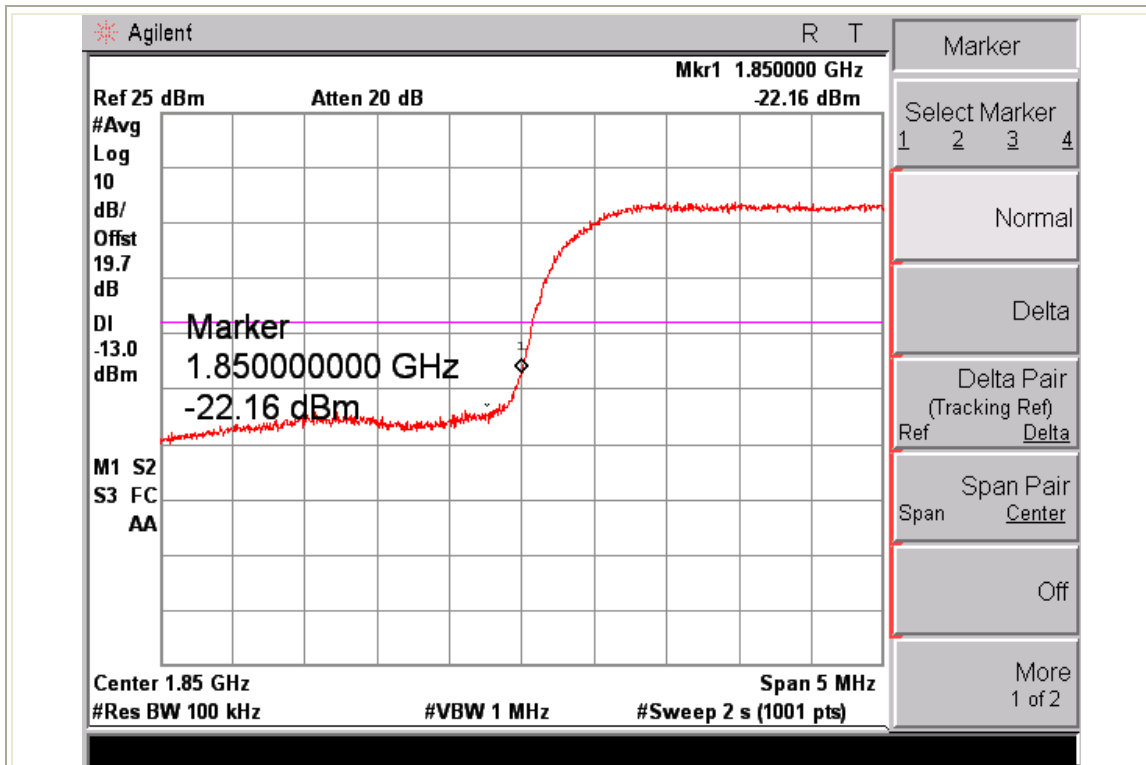

- Band Edge emissions, HSDPA Band II -

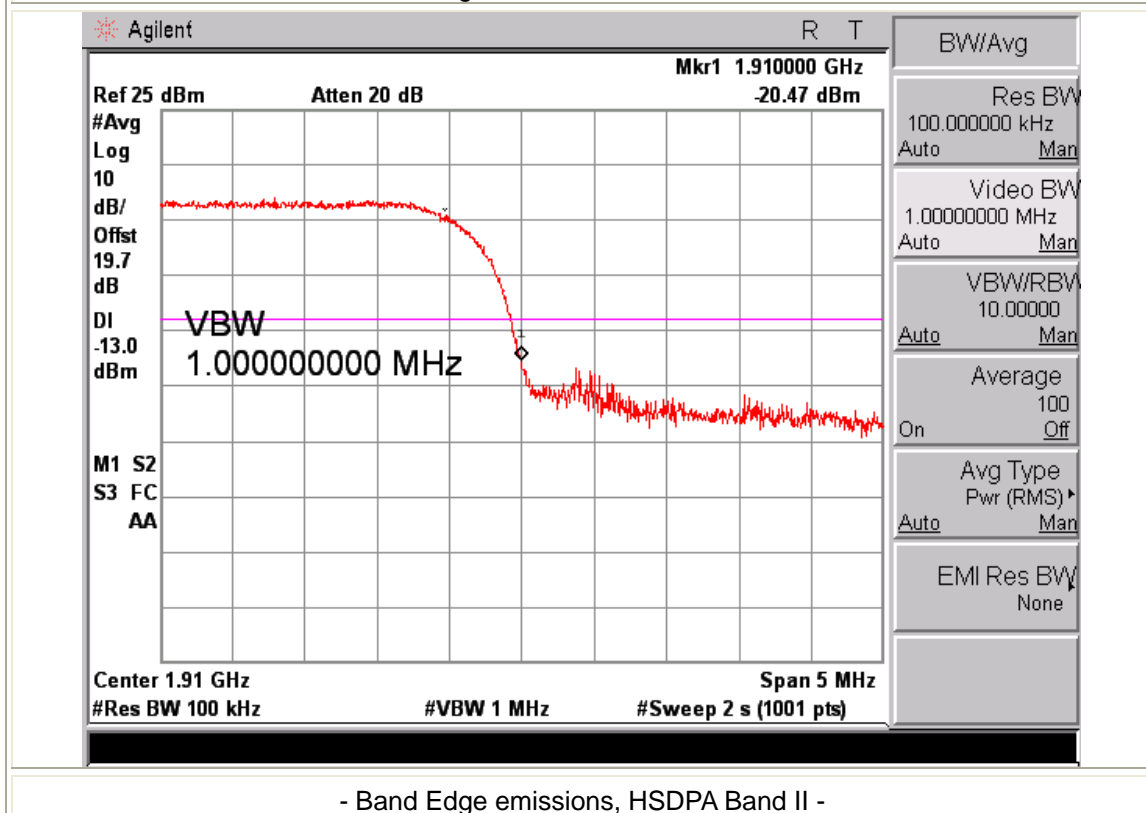

- Band Edge emissions, HSDPA Band II -

---

## 3.6. Frequency Stability / Temperature Variation

### 3.6.1. Test Procedure

The equipment under test is placed in an environmental chamber. Frequency measurements are made at the extremes of the temperature range -30° C to +50° C and at intervals of 10° C with the primary supply voltage set to the nominal battery operating voltage. A period of time sufficient to stabilize all components of the equipment is allowed at each frequency measurement. The maximum variation of frequency is measured. The test was done at middle channel.


### 3.6.2. Limit

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.6.3. Test Results (WCDMA Band V)

Voltage(%)	Power (VDC)	Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)
100 %	5.0	+ 20	+18	+0.020
100 %		-30	+20	+0.023
100 %		-20	-15	-0.017
100 %		-10	-15	-0.017
100 %		0	-16	-0.019
100 %		+10	-7	-0.008
100 %		+20	+15	+0.017
100 %		+30	-16	-0.019
100 %		+40	+7	+0.008
100 %		+50	+9	+0.010
115 %	5.75	+20	+7	+0.008
85 %	4.25	+20	-15	-0.017


**Frequency Stability**

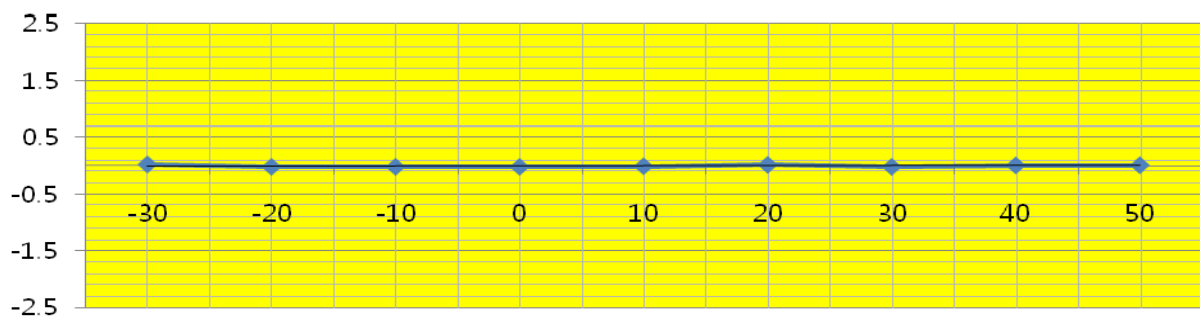

### 3.6.4. Test Results (WCDMA Band II)

Voltage(%)	Power (VDC)	Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)
100 %	5.0	+ 20	-11	-0.005
100 %		-30	-19	-0.010
100 %		-20	-27	-0.014
100 %		-10	-35	-0.018
100 %		0	-28	-0.014
100 %		+10	-25	-0.013
100 %		+20	-19	-0.010
100 %		+30	-22	-0.011
100 %		+40	+29	+0.015
100 %		+50	+25	+0.013
Battery end point	5.75	+20	+9	+0.004
85 %115 %	4.25	+20	+11	+0.005

**Frequency Stability**

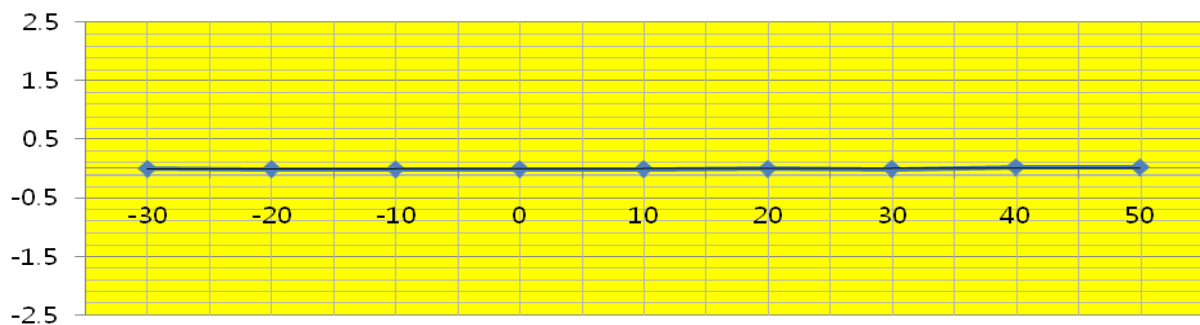

## 4. TEST EQUIPMENTS

No.	Equipment	Manufacturer	Model	S/N	Effective Cal.Duration
1	Spectrum Analyzer (100 Hz ~ 26.5 GHz)	Agilent	E4407B	US41443316	12/01/2007 ~ 12/01/2008
2	Spectrum Analyzer (3 Hz ~ 50 GHz)	Agilent	E4448A	MY43360322	08/30/2007 ~ 08/30/2008
3	Pre-Amplifier ( 100 kHz ~ 1 GHz)	SONOMA.	310N	186270	08/25/2007 ~ 08/25/2008
4	Pre-Amplifier (0.5 GHz ~ 26.5 GHz)	Agilent	83017A	MY39500982	04/02/2008 ~ 04/02/2009
5	Biconi-Log Ant. (30 MHz ~ 1000 MHz)	Schwarzbeck	VULB9168	9168-180	08/24/2007 ~ 08/24/2008
6	Horn Ant. (1 GHz ~ 18 GHz)	EMCO	3115	9012-3595	03/26/2007 ~ 03/26/2009
7	Tuned Dipole Antenna	Schwarzbeck	VHA 9103	--	09/09/2007 ~ 09/09/2008
8	Horn Ant. (18 GHz ~ 40 GHz)	EMCO	3116	2664	03/26/2007 ~ 03/26/2009
9	DC Power Supply	Agilent	E4356A	MY41000296	10/01/2007 ~ 10/01/2008
10	Power Meter	Agilent	E4417A	GB4129075	09/17/2007 ~ 09/17/2008
11	Power Sensor	Agilent	8482A	MY41092389	05/04/2008 ~ 05/04/2009
12	Universal Radio Communication tester	R&S	CMU200	317	08/09/2007 ~ 08/09/2008
13	Highpass Filter	Wainwright	WHK1.0/15G	6	08/09/2007 ~ 08/09/2008
14	Highpass Filter	Wainwright	WHK3.5/18G	8	08/09/2007 ~ 08/09/2008