

Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page: 1 of 61

## ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 22 SUBPART H and PART 24 SUBPART E **FULL MODULAR APPROVAL**

OF

**Product Name:** 850/900/1800/1900 GSM/GPRS+GPS module

**Brand Name: SIMCOM** 

**Model Name:** SIM548C

FCC ID: UDV-0805152008527

**Report No.:** EH/2008/50038

**Issue Date:** Jun. 10, 2008

**FCC Rule Part:** 2,22H & 24E

**Prepared for: Shanghai Simcom Ltd.** 

SIM Technology Building, 700 Yishan Rd.,

Shanghai 200233

Prepared by: SGS Taiwan Ltd.

**Electronics & Communication Laboratory** 

No. 134, Wu Kung Rd., Wuku Industrial

Zone, Taipei County, Taiwan.

**Note:** This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 2 of 61

## VERIFICATION OF COMPLIANCE

**Applicant:** Shanghai Simcom Ltd.

SIM Technology Building, 700 Yishan Rd., Shanghai 200233

**Equipment Under Test:** 850/900/1800/1900 GSM/GPRS+GPS module

**FCC ID Number:** UDV-0805152008527

**Brand Name: SIMCOM** 

Model No.: SIM548C

**Model Difference:** N/A

File Number: EH/2008/50038

Date of test: May. 30, 2007 ~ Jun. 09, 2008

May. 29, 2008 **Date of EUT Received:** 

## We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA-603-B-2002 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rule FCC PART 22 subpart H and FCC PART 24 subpart E.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Bondi Jin	Date	Jun. 10, 2008
	Bondi Liu / Engineer		
Prepared By:	Gigi yeh	Date	Jun. 10, 2008
	Gigi Yeh / Clerk		
Approved By	Timent Su	Date	Jun. 10, 2008
	Vincent Su/Manager		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms\_and\_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.

| No. 134, Wu Kung Road., Wuku Industrial Zone, Taipei Country, Taiwan. / 台牌紅股工業區五工路134號 t (886-2) 2299-3939 f (886-2) 2299-3279 www.sgs.com.tw



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 3 of 61

## Version

Version No.	Date
00	Jun. 10, 2008

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No. 134, Wu Kung Road., Wuku Industrial Zone, Taipei Country, Taiwan. / 台牌石股工業品石工路134號 t (886-2) 2299-3939 f (886-2) 2299-3279 www.sgs.com.tw

SGS Taiwan Ltd.



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 4 of 61

## **Table of Contents**

1.	GEN	NERAL INFORMATION	6
	1.1	Product Description	6
	1.2	Related Submittal(s) / Grant (s)	8
	1.3	Test Methodology	8
	1.4	Test Facility	8
	1.5	Special Accessories	8
	1.6	Equipment Modifications	8
2.	SYS	TEM TEST CONFIGURATION	9
	2.1	EUT Configuration	9
	2.2	EUT Exercise	9
	2.3	Test Procedure	9
	2.4	Configuration of Tested System	10
3.	SUM	MMARY OF TEST RESULTS	11
4.	DES	SCRIPTION OF TEST MODES	11
5.	RF I	POWER OUTPUT MEASUREMENT	12
	5.1	Standard Applicable	12
	5.2	Test Set-up:	12
	5.3	Measurement Procedure	12
	5.4	Measurement Equipment Used:	13
	5.5	Measurement Result	14
6.	ERF	P, EIRP MEASUREMENT	15
	6.1	Standard Applicable	15
	6.2	Test SET-UP (Block Diagram of Configuration)	15
	6.3	Measurement Procedure	17
	6.4	Measurement Equipment Used:	18
	6.5	Measurement Result	19
	6.6	Measurement Result	20
7	99%	OCCUPIED BANDWIDTH MEASUREMENT	21
	7.5	Standard Applicable	21
	7.6	Test Set-up:	21
	7.7	Measurement Procedure	21
	7.8	Measurement Equipment Used:	22
	7.9	Measurement Result:	23
8	OUT	Γ OF BAND EMISSION AT ANTENNA TERMINALS	28

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2008/50038 **Issue Date: Jun. 10, 2008** 

Page 5 of 61

	8.5	Standard Applicable	28
	8.6	Test SET-UP	28
	8.7	Measurement Procedure	28
	8.8	Measurement Equipment Used:	29
	8.9	Measurement Result	30
9	FIEI	LD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	38
	9.5	Standard Applicable	38
	9.6	EUT Setup (Block Diagram of Configuration)	38
	9.7	Measurement Procedure	40
	9.8	Measurement Equipment Used:	41
	9.9	Measurement Result	41
10	FRE	QUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	54
	10.5	Standard Applicable	54
	10.6	Test Set-up:	54
	10.7	Measurement Procedure	54
	10.8	Measurement Equipment Used:	55
	10.9	Measurement Result	56
11	FRE	QUENCY STABILITY V.S. VOLTAGE MEASUREMENT	57
	11.5	Standard Applicable	57
	11.6	Test Set-up:	57
	11.7	Measurement Procedure	57
	11.8	Measurement Equipment Used:	58
	11.9	Measurement Result	59
12	AC I	POWER LINE CONDUCTED EMISSION TEST	60
	12.5	Standard Applicable	60
	12.6	EUT Setup	
	12.7	Measurement Procedure	60
	12.8	Measurement Equipment Used:	61
	12.9	Measurement Result	61
PH	ото	GRPHS OF SET UP	62
PH	ото	GRPHS OF EUT	64

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 6 of 61

### 1. GENERAL INFORMATION

## 1.1 Product Description

#### General:

Product Name:	850/900/1800/1900 GSM/GPRS+GPS module
Brand Name:	SIMCOM
Model Name:	SIM548C
Model Difference:	N/A
Data Cable (USB):	One provide, Model: N/A
Power Supply	4.0 Vdc

#### GSM:

	GSM/GPRS 850	824 MHz– 849MHz	33 dBm		
Cellular Phone Standards Fre-	E-GSM/GPRS 900	880MHz – 915MHz	32.5 dBm		
quency Range and Power	GSM/GPRS 1800	1710MHz-1785MHz	29.5 dBm		
	GSM/GPRS 1900	1850MHz – 1910MHz	29.5 dBm		
Type of Emission	GSM: 300KGXW				
IMEI	3521340047694465				
Hardware Version	V1.02				
Software Version	ADI 16.0				
Antenna Designation	Dipole, Gain: 1.5dBi.				

This test report applies for GSM /GPRS 850/1900.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 7 of 61

### GPS:

Receiver Frequency	L1 Band, 1575.42MHz
Frequency Conversion oscillator	12MHz and 32.768kHz
Antenna Designation	mono pole 1.5dBi.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 8 of 61

## 1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID:** <u>UDV-0805152008527</u> filing to comply with Section Part 22 subpart H and Part 24 subpart E of the FCC CFR 47 Rules.

## 1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on chapter 13 of ANSI C63.4 (2003) and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057.

## 1.4 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-1

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 & 10 meters) and FCC Registration Number: 94644.

## 1.5 Special Accessories

Not available for this EUT intended for grant.

#### 1.6 Equipment Modifications

Not available for this EUT intended for grant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 9 of 61

#### 2. SYSTEM TEST CONFIGURATION

## 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.

#### 2.3 Test Procedure

#### 2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

#### 2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 and Subclause 8.3.1.2 of ANSI C63.4-2003.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。




Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 10 of 61

## 2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System (Fixed Channel)



#### **Remote Side**

CMU200

**Table 2-1 Equipment Used in Tested System** 

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1	DC Power Supply	Topward	3303D	981327	N/A	Un-shielded
2.	Universal Radio Communication Tester	R&S	CMU200	102189	shielded	Un-shielded
3.	Develop Kit	N/A	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No. 134, Wu Kung Road., Wuku Industrial Zone, Taipei Country, Taiwan. / 台塘石股工業區工路134號 t (886-2) 2299-3939 f (886-2) 2299-3279 www.sgs.com.tw



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 11 of 61

### SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§2.1046(a)		
§22.913(a)	RF Power Output	Compliant
§24.232(a)		
§2.1046(a)		
§22.913(a)	ERP/ EIRP measurement	Compliant
§24.232(a)		
§2.1049(h)	99% Occupied Bandwidth	Compliant
§2.1051	Out of Band Emissions at Antenna	
§22.917(a)	Terminals and	Compliant
§24.238(a)	Band Edge	
§2.1053		
§22.917(a)	Field Strength of Spurious Radiation	Compliant
§24.238(a)		
§2.1055(a)(1)(b)	Frequency Stability vs. Temperature	Compliant
§2.1055(d)(1)(2)	Frequency Stability vs. Voltage	Compliant
§15.107;§15.207	AC Power Line Conducted Emission	N/A

### **DESCRIPTION OF TEST MODES**

台灣檢驗科技股份有限公司

The EUT has been tested under operating condition.

EUT staying in continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing.

The field strength of spurious radiation emission was measured as EUT lie down position (H) for both GSM 850 and 1900 MHz bands were reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms\_and\_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.

Member of SGS Group



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 12 of 61

#### RF POWER OUTPUT MEASUREMENT


## 5.1 Standard Applicable

According to FCC §2.1046.

FCC 22.913(a) Mobile station are limited to 7W.

FCC 24.232(b) Mobile station are limited to 2W.

## 5.2 Test Set-up:

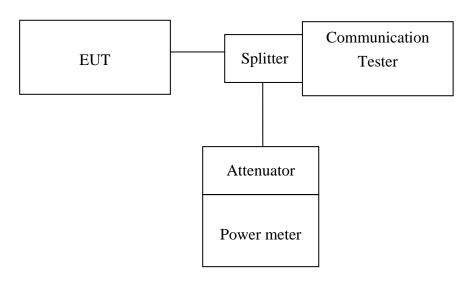

Note: Measurement setup for testing on Antenna connector

#### **5.3** Measurement Procedure

The transmitter output was connected to a calibrated attenuator, the other end of which was connected to a power meter. Transmitter output was read off the power meter in dBm. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the power meter reading.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms\_and\_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.

| No. 134, Wu Kung Road., Wuku Industrial Zone, Taipei Country, Taiwan. / 台間紀形工業區五工路134號 t (886-2) 2299-3939 f (886-2) 2299-3279 www.sgs.com.tw



Report No.: EH/2008/50038 **Issue Date: Jun. 10, 2008** 

Page 13 of 61

## 5.4 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2008	03/28/2009		
Spectrum Analyzer	Agilent	E7405A	US41160416	06/28/2007	06/29/2008		
Communication Test	R&S	SMU200	N/A	N/A	N/A		
Power Sensor	Anritsu	MA2490A	31431	06/28/2007	06/29/2008		
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2007	06/29/2008		
Temperature Chamber	TERCHY	MHG-120LF	911009	10/14/2007	10/13/2008		
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A		
Attenuator	Mini-Circult	BW-S10W5	N/A	09/23/2007	09/22/2008		
Attenuator	Mini-Circult	BW-S6W5	N/A	09/23/2007	09/22/2008		
Splitter	Agilent	11636B	51728	09/23/2007	09/22/2008		
DC Power Supply	TOPWARD	3303A	N/A	N/A	N/A		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2008/50038 **Issue Date: Jun. 10, 2008** 

Page 14 of 61

## 5.5 Measurement Result

台灣檢驗科技股份有限公司

EUT Mode	Frequency (MHz)	СН	Power meter Reading (dBm)	Path Loss (dB)	Peak Power (dBm)
GSM 850	824.20	128	14.9	16.00	30.90
	836.60	190	15.2	16.00	31.20
	848.80	251	15.4	16.00	31.40

EUT Mode	Frequency (MHz)	СН	Power Meter Reading (dBm)	Path Loss (dB)	Peak Power (dBm)
	1850.20	512	12.8	16.50	29.30
PCS 1900	1880.00	661	13.0	16.50	29.50
	1909.80	810	13.1	16.50	29.60

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.

Member of SGS Group



Report No.: EH/2008/50038 **Issue Date: Jun. 10, 2008** 

Page 15 of 61

## ERP, EIRP MEASUREMENT

## 6.1 Standard Applicable

台灣檢驗科技股份有限公司


According to FCC §2.1046

FCC 22.913(a) Mobile station are limited to 7W ERP.

FCC 24.232(b) Mobile station are limited to 2W EIRP.

## **6.2** Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

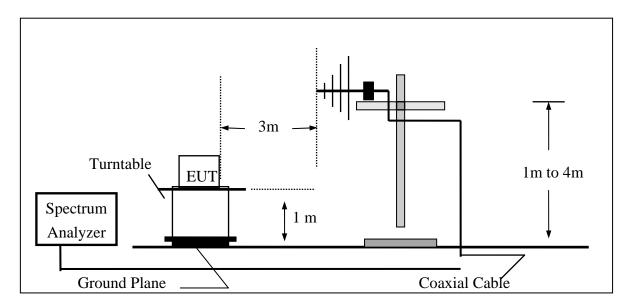

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms\_and\_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.


Member of SGS Group




Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 16 of 61

### (B) Radiated Emission Test Set-UP Frequency Over 1 GHz

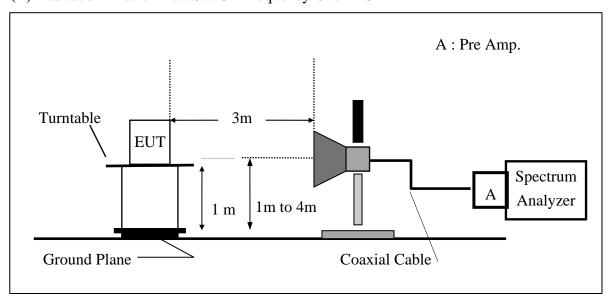

#### (C) Substituted Method Test Set-UP

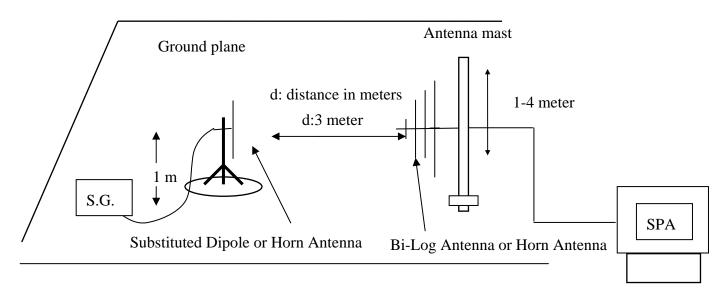

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 17 of 61

### **6.3** Measurement Procedure

The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824.2 –848.80MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows:

EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:

ERP = S.G. output (dBm) + Antenna Gain (dBd) - Cable Loss (dB)

EIRP = S.G. output (dBm) + Antenna Gain (dBi) – Cable Loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。



台灣檢驗科技股份有限公司

FCC ID: UDV-0805152008527

Report No.: EH/2008/50038 **Issue Date: Jun. 10, 2008** 

Page 18 of 61

## 6.4 Measurement Equipment Used:

EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
TYPE		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2008	03/28/2009
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2007	06/29/2008
Communication Test	R&S	SMU200	N/A	N/A	N/A
Bilog Antenna	SCHWAZBECK	VULB9163	152	06/03/2007	06/02/2008
Horn antenna	Schwarzbeck	BBHA 9120D	309/320	08/16/2007	08/15/2008
Pre-Amplifier	HP	8447D	2944A09469	07/19/2007	07/18/2008
Pre-Amplifier	HP	8494B	3008A00578	02/26/2008	02/25/2009
Signal Generator	R&S	SMR40	100210	02/09/2008	02/10/2009
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	10/09/2007	10/08/2008
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	10/09/2007	10/08/2008
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-0.5M	0.5m	10/09/2007	10/08/2008
Site NSA	SGS	966 chamber	N/A	11/17/2007	11/16/2008
Attenuator	Mini-Circult	BW-S10W5	N/A	09/23/2007	09/22/2008
Dipole Antenna	Schwarzbeck	VHAP	908/909	06/10/2007	06/11/2008
Dipole Antenna	Schwarzbeck	UHAP	891/892	06/10/2007	06/11/2008
Horn antenna	Schwarzbeck	BBHA 9120D	N/A	08/16/2007	08/15/2008

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.

Member of SGS Group



Report No.: EH/2008/50038 **Issue Date: Jun. 10, 2008** 

Page 19 of 61

#### 6.5 Measurement Result

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
GSM 850 836.60 848.80		128	н	V	123.63	36.31	-7.87	3.64	24.79	38.45
	824.20			Н	126.19	38.53	-7.87	3.64	27.02	38.45
	026.60	100		V	124.94	37.91	-7.88	3.70	26.34	38.45
	830.00	190	Н	Н	128.55	41.21	-7.88	3.70	29.64	38.45
	848.80	251	Н	V	124.20	37.46	-7.88	3.75	25.83	38.45
				Н	128.13	41.11	-7.88	3.75	29.48	38.45

#### Remark:

(1) The RBW, VBW of SPA for frequency

Below 1GHz was RBW=250 KHz, VBW=300KHz,

Above 1GHz was RBW= 1MHz, VBW= 3MHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2008/50038 **Issue Date: Jun. 10, 2008** 

Page 20 of 61

#### 6.6 Measurement Result

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
PCS 1900 188				V	127.61	20.65	9.90	5.41	25.14	33.00
	1850.20	512	Н	Н	119.06	12.17	9.90	5.41	16.66	33.00
	1880.00	661	Н	V	127.70	20.75	9.99	5.46	25.28	33.00
				Н	119.30	12.43	9.99	5.46	16.96	33.00
	1909.80	810 H	Н	V	126.85	19.91	10.08	5.51	24.48	33.00
				Н	119.63	12.78	10.08	5.51	17.34	33.00

#### Remark:

(1) The RBW, VBW of SPA for frequency

Below 1GHz was RBW=250 KHz, VBW=300KHz,

Above 1GHz was RBW= 1MHz, VBW= 3MHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008


Page 21 of 61

#### 7 99% OCCUPIED BANDWIDTH MEASUREMENT

## 7.5 Standard Applicable

According to §FCC 2.1049.

### 7.6 Test Set-up:

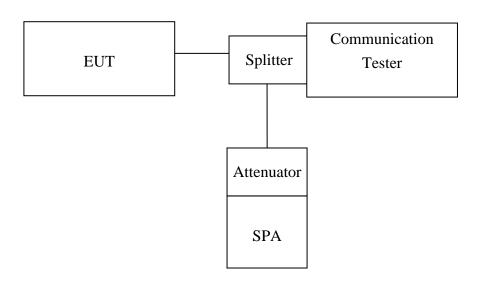

**Note:** Measurement setup for testing on Antenna connector

#### 7.7 Measurement Procedure

The EUT's output RF connector was connected with a short cable to the spectrum analyzer, RBW (10/30KHz) was set to about 1% of emission BW, VBW= 3 times RBW(30/100KHz), -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms\_and\_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.

| No. 134, Wu Kung Road., Wuku Industrial Zone, Taipei Country, Taiwan. / 台間紀形工業區五工路134號 t (886-2) 2299-3939 f (886-2) 2299-3279 www.sgs.com.tw



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 22 of 61

## 7.8 Measurement Equipment Used:

Conducted Emission Test Site							
<b>EQUIPMENT</b>	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2008	03/28/2009		
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2007	06/29/2008		
Power Sensor	Anritsu	MA2490A	31431	06/28/2007	06/29/2008		
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2007	06/29/2008		
Temperature Chamber	TERCHY	MHG-120LF	911009	11/11/2007	11/12/2008		
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A		
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2007	10/06/2008		
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2007	10/06/2008		
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2007	10/06/2008		
Signal Generator	R&S	SMR40	100210	11/09/2007	11/10/2008		
DC Power Supply	Agilent	6038A	2929A-07548	01/06/2008	01/05/2009		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 23 of 61

### 7.9 Measurement Result:.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
GSM 850	824.20	128	0.2458
	836.60	190	0.2473
	848.80	251	0.2499

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
PCS 1900	1850.20	512	0.2447
	1880.00	661	0.2446
	1909.80	810	0.2436

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of SGS Group



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 24 of 61

Figure 7-1: GSM Channel Low


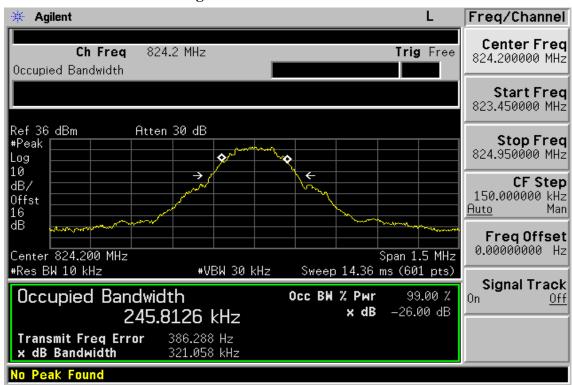


Figure 7-2 GSM Channel Mid



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。


No. 134, Wu Kung Road., Wuku Industrial Zone, Taipei Country, Taiwan. / 台 縣石股工業品工路134號 t (886-2) 2299-3939 f (886-2) 2299-3279 www.sgs.com.tw

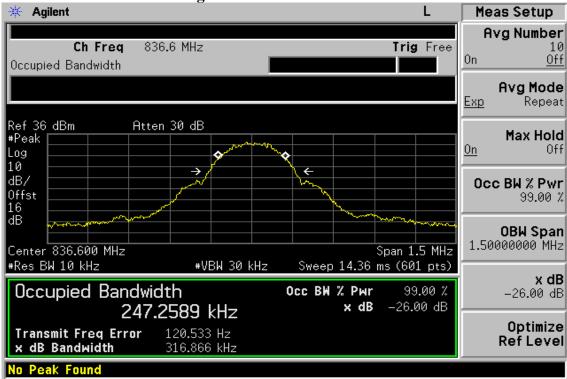

Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 25 of 61

Figure 7-3: GSM Channel High

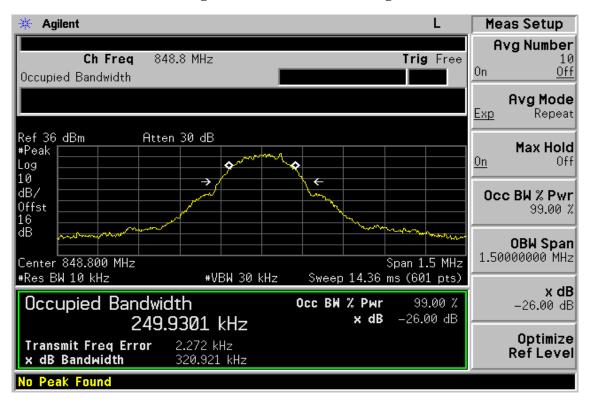

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sqs.com/terms\_and\_conditions.htm">http://www.sqs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of SGS Group

SGS Taiwan Ltd.



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 26 of 61

Figure 7-4: PCS Channel Low

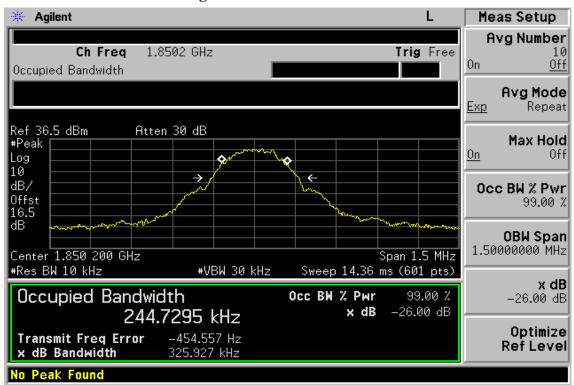


Figure 7-5 PCS Channel Mid



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


No. 134, Wu Kung Road., Wuku Industrial Zone, Taipei Country, Taiwan. / 台場拓股工業區工路134號 t (886-2) 2299-3939 f (886-2) 2299-3279 www.sgs.com.tw



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 27 of 61

Figure 7-6: PCS Channel High

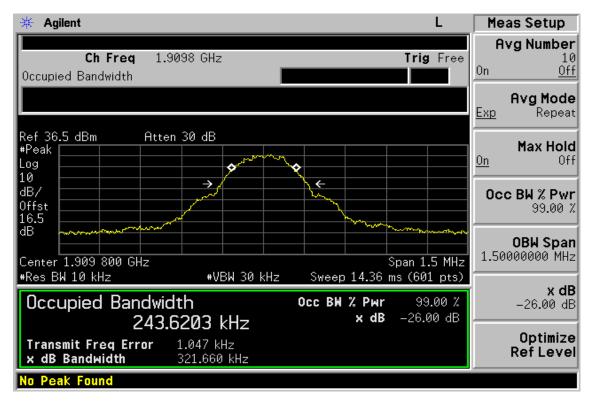

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sqs.com/terms\_and\_conditions.htm">http://www.sqs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 28 of 61


### 8 OUT OF BAND EMISSION AT ANTENNA TERMINALS

## 8.5 Standard Applicable

According to FCC §2.1051.

FCC §22.917(a),§24.238(a), the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than 43 + 10 log (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

### 8.6 Test SET-UP

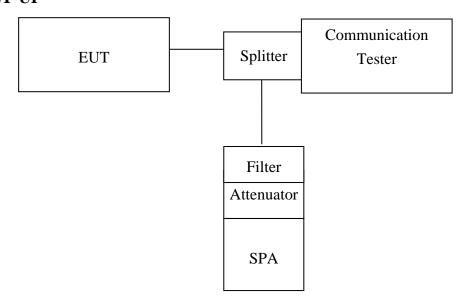

**Note:** Measurement setup for testing on Antenna connector

#### **8.7 Measurement Procedure**

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10 th harmonic. Limit = -13dBm

Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 29 of 61

## 8.8 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2008	03/28/2009		
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2007	06/29/2008		
Power Sensor	Anritsu	MA2490A	31431	06/28/2007	06/29/2008		
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2007	06/29/2008		
Temperature Chamber	TERCHY	MHG-120LF	911009	11/11/2007	11/12/2008		
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A		
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2007	10/06/2008		
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2007	10/06/2008		
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2007	10/06/2008		
Signal Generator	R&S	SMR40	100210	11/09/2007	11/10/2008		
DC Power Supply	Agilent	6038A	2929A-07548	01/06/2008	01/05/2009		
Band reject filter	Wicro-tronics	BRM13462	001	06/28/2007	06/29/2008		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。





Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 30 of 61

#### 8.9 Measurement Result

Figure 8-1: Out of Band emission at antenna terminals- GSM Channel Lowest

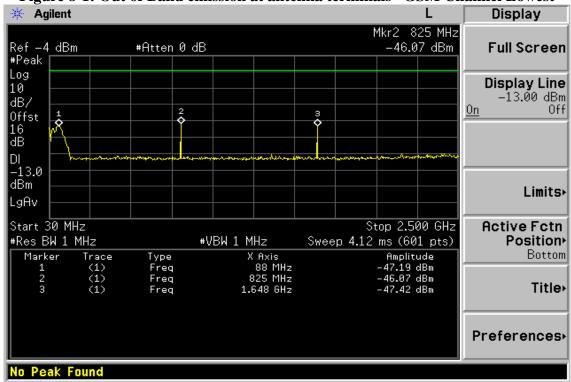

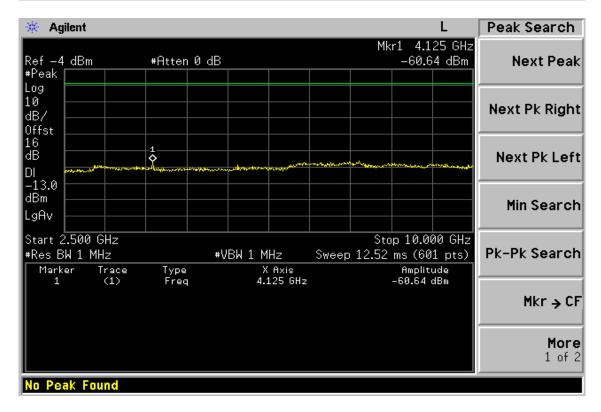

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。


This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sqs.com/terms\_and\_conditions.htm">http://www.sqs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


No. 134, Wu Kung Road., Wuku Industrial Zone, Taipei Country, Taiwan. / 台 螺石股工業品工路134號 t (886-2) 2299-3939 f (886-2) 2299-3279 www.sgs.com.tw

Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 31 of 61

Figure 8-2: Out of Band emission at antenna terminals -GSM Channel Mid

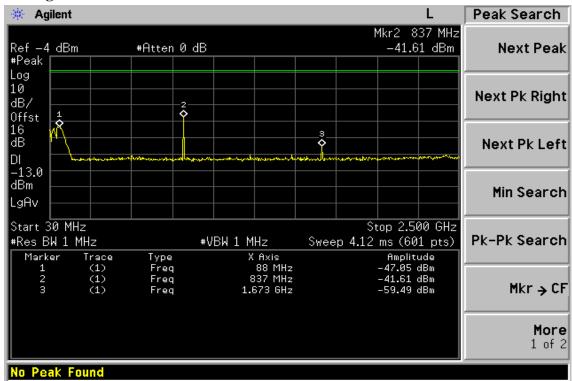

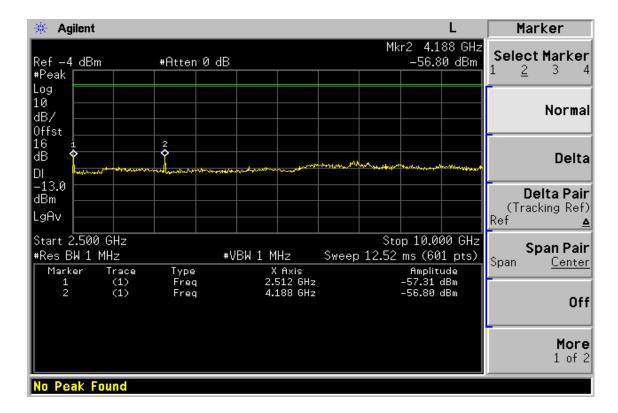

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sqs.com/terms\_and\_conditions.htm">http://www.sqs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


No. 134, Wu Kung Road., Wuku Industrial Zone, Taipei Country, Taiwan. / 台標拓股工業區工路134號 t (886-2) 2299-3939 f (886-2) 2299-3279 www.sgs.com.tw




Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 32 of 61

Figure 8-3: Out of Band emission at antenna terminals-GSM Channel Highest

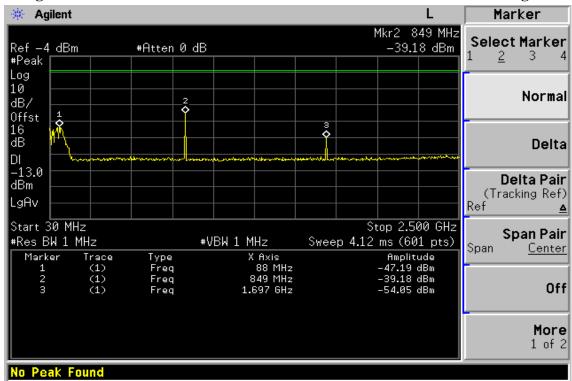

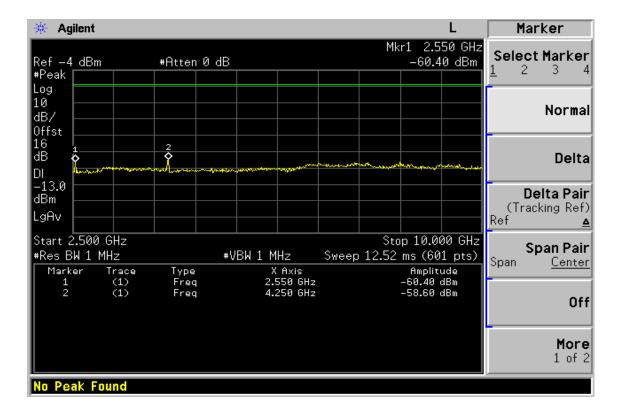

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sqs.com/terms\_and\_conditions.htm">http://www.sqs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No. 134, Wu Kung Road., Wuku Industrial Zone, Taipei Country, Taiwan. / 台標拓股工業區五工路134號 t (886-2) 2299-3939 f (886-2) 2299-3279 www.sgs.com.tw

Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 33 of 61

Figure 8-4: Bad edge emission at antenna terminals – GSM Channel Lowest


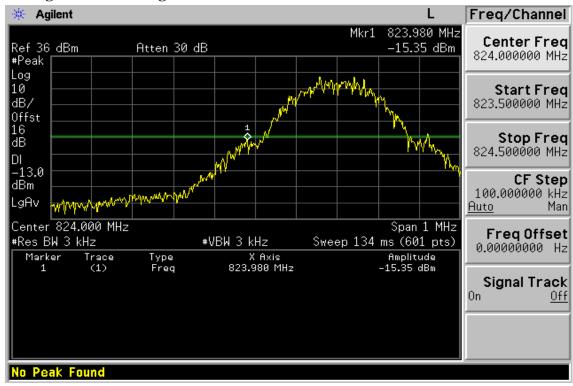


Figure 8-5: Band edge emission at antenna terminals – GSM Channel Highest

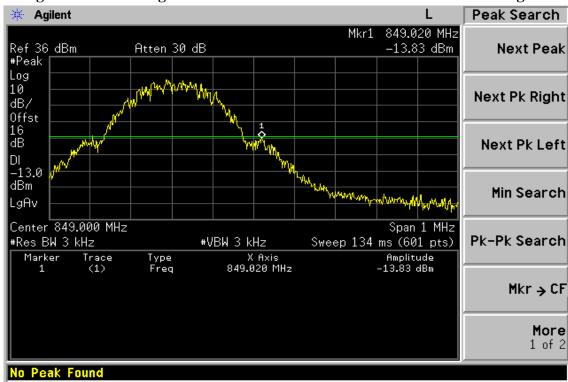

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. 

SGS Taiwan Ltd. No. 134, Wu Kung Road., Wuku Industrial Zone, Taipei Country, Taiwan. I 台灣原刊學了製品有一路134號


No. 134, Wu Kung Road., Wuku Industrial Zone, Taipei Country, Taiwan. / 台 螺石股工業品工路134號 t (886-2) 2299-3939 f (886-2) 2299-3279 www.sgs.com.tw




Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 34 of 61

Figure 8-6: Out of Band emission at antenna terminals- PCS Channel Lowest

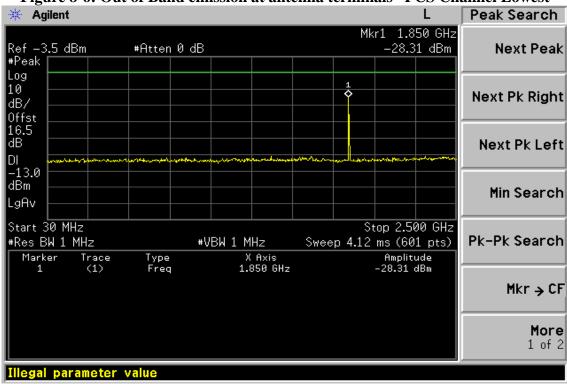

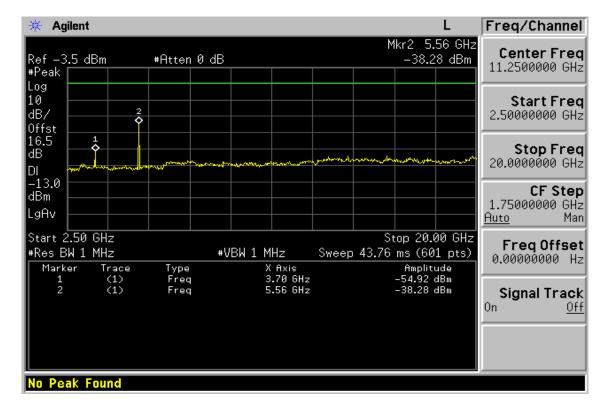


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 35 of 61

Figure 8-7: Out of Band emission at antenna terminals -PCS Channel Mid

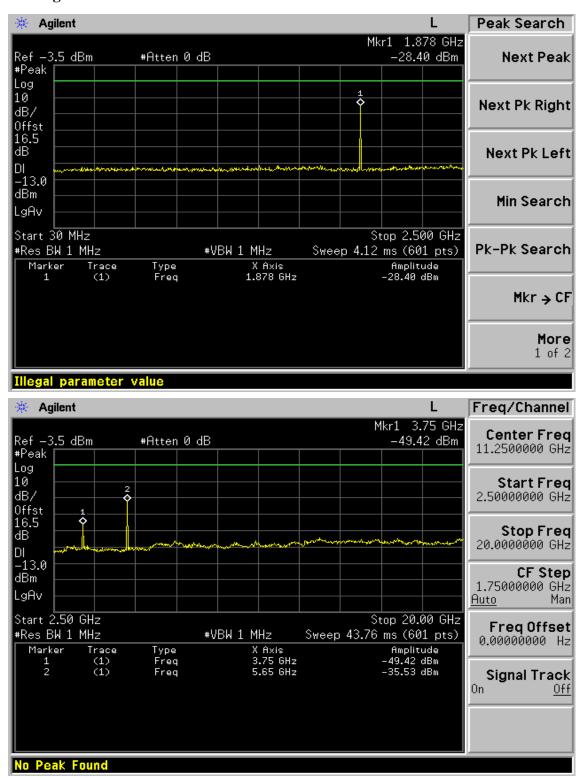


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 36 of 61

Figure 8-8: Out of Band emission at antenna terminals-PCS Channel Highest

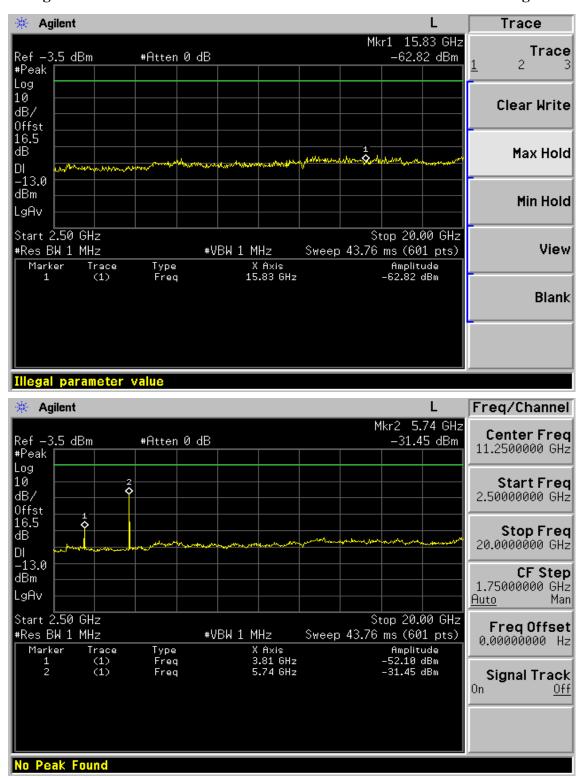

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 37 of 61

Figure 8-9: Bad edge emission at antenna terminals – PCS Channel Lowest


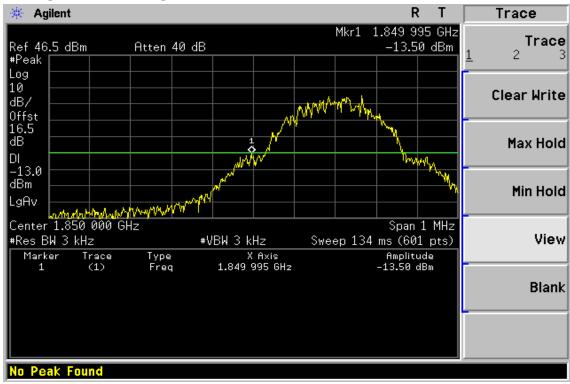


Figure 8-10: Band edge emission at antenna terminals – PCS Channel Highest

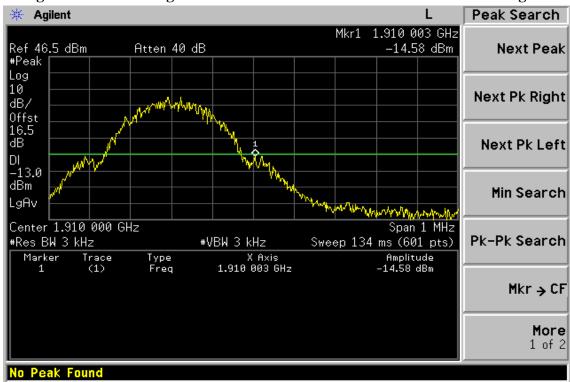

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. 

SGS Taiwan Ltd. | No. 134, Wu Kung Road., Wuku Industrial Zone, Taipei Country, Taiwan. | 台灣原刊學工業品子工業134號

No. 134, Wu Kung Road., Wuku Industrial Zone, Taipei Country, Taiwan. / 台 螺石股工業品工路134號 t (886-2) 2299-3939 f (886-2) 2299-3279 www.sgs.com.tw



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 38 of 61

#### 9 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT


### 9.5 Standard Applicable

According to FCC §2.1053,

FCC §22.917(a),§24.238(a), the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than 43 + 10 log (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

### **9.6 EUT Setup (Block Diagram of Configuration)**

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

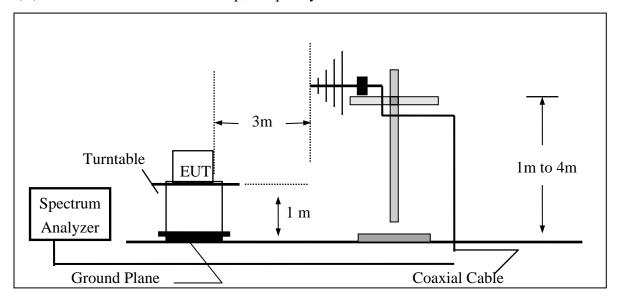

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sqs.com/terms\_and\_conditions.htm">http://www.sqs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


No. 134, Wu Kung Road., Wuku Industrial Zone, Taipei Country, Taiwan. / 台場拓股工業區工路134號 t (886-2) 2299-3939 f (886-2) 2299-3279 www.sgs.com.tw




Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 39 of 61

## (B) Radiated Emission Test Set-UP Frequency Over 1 GHz

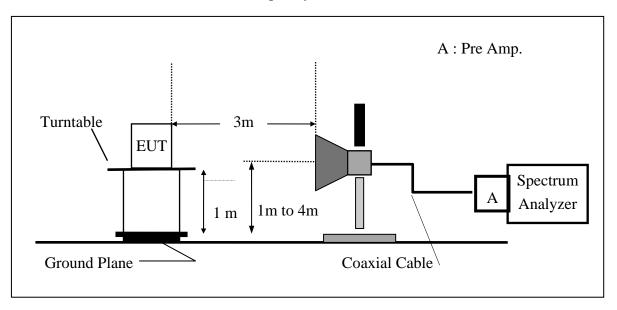

#### (C) Substituted Method Test Set-UP

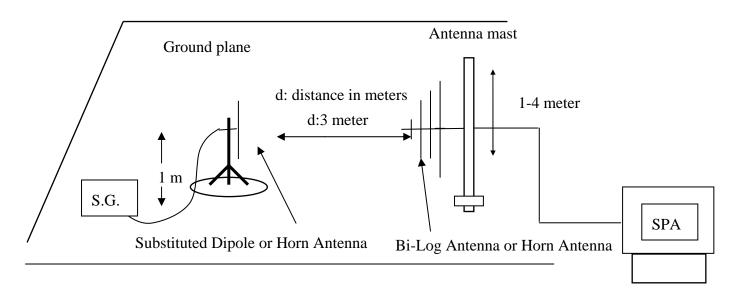

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sqs.com/terms\_and\_conditions.htm">http://www.sqs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 40 of 61

#### 9.7 Measurement Procedure

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

The EUT was placed on a non-conductive, The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission were identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

ERP = S.G. output (dBm) + Antenna Gain (dBd) - Cable Loss (dB)

EIRP = S.G. output (dBm) + Antenna Gain(dBi) - Cable Loss <math>(dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/50038 **Issue Date: Jun. 10, 2008** 

Page 41 of 61

# 9.8 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2008	03/28/2009
Spectrum Analyzer	Agilent	E7405A	US41160416	08/27/2007	08/26/2008
Bilog Antenna	SCHWAZBECK	VULB9163	152	06/03/2007	06/02/2008
Horn antenna	Schwarzbeck	BBHA 9120D	309/320	08/16/2007	08/15/2008
Pre-Amplifier	HP	8447D	2944A09469	07/19/2007	07/18/2008
Pre-Amplifier	HP	8494B	3008A00578	02/26/2008	02/25/2009
Signal Generator	R&S	SMR40	100210	02/09/2008	02/10/2008
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	10/09/2007	10/08/2008
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	10/09/2007	10/08/2008
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-0.5M	0.5m	10/09/2007	10/08/2008
Site NSA	SGS	966 chamber	N/A	11/17/2007	11/16/2008
Site NSA	SGS	10m Open-Site	N/A	10/02/2007	10/01/2008
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2007	10/06/2008
Temperature Chamber	TERCHY	MHG-120LF	911009	10/14/2007	10/13/2008
Dipole Antenna	Schwarzbeck	VHAP	908/909	06/10/2007	06/11/2008
Dipole Antenna	Schwarzbeck	UHAP	891/892	06/10/2007	06/11/2008
Horn antenna	Schwarzbeck	BBHA 9120D	N/A	08/16/2007	08/15/2008

#### 9.9 Measurement Result

Refer to attach tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 42 of 61

### Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH Low Mode Test Date: Jun. 05, 2008

Fundamental Frequency : 824.20 MHz Bondi Test By: Temperature Pol: Ver : 25

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
106.63	41.08	V	-61.81	-7.77	1.25	-70.83	-13.00	-57.83
138.64	36.15	V	-62.84	-7.79	1.41	-72.04	-13.00	-59.04
276.38	33.48	V	-66.63	-7.91	1.99	-76.52	-13.00	-63.52
426.73	32.38	V	-62.91	-7.68	2.49	-73.08	-13.00	-60.08
654.68	33.05	V	-57.34	-7.81	3.03	-68.18	-13.00	-55.18
824.00	80.64	V	-6.69	-7.87	3.64	-18.21	-13.00	-5.21
1648.40	53.98	V	-53.06	9.29	5.06	-48.83	-13.00	-35.83
2472.60	62.90	V	-41.16	10.08	6.30	-37.39	-13.00	-24.39
3296.80		V		12.17	7.26		-13.00	
4113.50	40.49	V	-59.32	12.61	8.32	-55.02	-13.00	-42.02
4121.00		V		12.61	8.33		-13.00	
4945.20		V		12.65	9.19		-13.00	
5769.40		V		13.55	9.80		-13.00	
6593.60		V		12.05	10.61		-13.00	
7417.80		V		11.49	11.28		-13.00	
8242.00		V		11.48	12.26		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

#### Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms\_and\_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| No. 134, Wu Kung Road., Wuku Industrial Zone, Taipei Country, Taiwan. / 台牌拓股工第區五工路134號 t (886-2) 2299-3939 f (886-2) 2299-3279



Report No.: EH/2008/50038 **Issue Date: Jun. 10, 2008** 

Page 43 of 61

#### Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH Low Mode Test Date: Jun. 05, 2008

Fundamental Frequency : 824.20 MHz Bondi Test By: Temperature Pol: Hor : 25

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
106.63	38.41	Н	-64.18	-7.77	1.25	-73.19	-13.00	-60.19
159.98	37.32	Н	-61.90	-7.81	1.49	-71.20	-13.00	-58.20
276.38	33.35	Н	-66.87	-7.91	1.99	-76.76	-13.00	-63.76
426.73	33.31	Н	-62.53	-7.68	2.49	-72.70	-13.00	-59.70
706.09	33.17	Н	-56.39	-7.86	3.34	-67.59	-13.00	-54.59
824.00	81.23	Н	-6.43	-7.87	3.64	-17.95	-13.00	-4.95
1648.40	47.38	Н	-59.63	9.29	5.06	-55.40	-13.00	-42.40
2472.60	51.41	Н	-52.65	10.08	6.30	-48.87	-13.00	-35.87
3296.80		Н		12.17	7.26		-13.00	
4121.00		Н		12.61	8.33		-13.00	
4945.20		Н		12.65	9.19		-13.00	
5769.40		Н		13.55	9.80		-13.00	
6593.60		Н		12.05	10.61		-13.00	
7417.80		Н		11.49	11.28		-13.00	
8242.00		Н		11.48	12.26		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

### Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms\_and\_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. | No. 134, Wu Kung Road., Wuku Industrial Zone, Taipei Country, Taiwan. / 台牌拓股工第區五工路134號

t (886-2) 2299-3939

f (886-2) 2299-3279 www.sgs.com.tw



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 44 of 61

#### Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH Mid Mode Test Date: Jun. 05, 2008

Fundamental Frequency: 836.60 MHz
Temperature: 25
Test By: Bondi
Pol: Ver

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
106.63	39.78	V	-63.11	-7.77	1.25	-72.13	-13.00	-59.13
153.19	35.94	V	-61.96	-7.80	1.47	-71.23	-13.00	-58.23
276.38	33.31	V	-66.80	-7.91	1.99	-76.69	-13.00	-63.69
426.73	32.06	V	-63.23	-7.68	2.49	-73.40	-13.00	-60.40
628.49	32.46	V	-58.00	-7.80	2.97	-68.77	-13.00	-55.77
1673.20	42.14	V	-64.89	9.36	5.10	-60.63	-13.00	-47.63
2509.80	58.70	V	-45.18	10.09	6.35	-41.44	-13.00	-28.44
3346.40		V		12.28	7.29		-13.00	
4183.00		V		12.62	8.40		-13.00	
5019.60		V		12.67	9.26		-13.00	
5856.20		V		13.68	9.85		-13.00	
6692.80		V		11.95	10.74		-13.00	
7529.40		V		11.45	11.35		-13.00	
8366.00		V		11.59	12.43		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

### Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 45 of 61

### Radiated Spurious Emission Measurement Result: GSM 850 Mode

: TX CH Mid Mode Operation Mode Test Date: Jun. 05, 2008

Fundamental Frequency: 836.60 MHz Test By: Bondi Temperature Pol: Hor : 25

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
104.69	38.33	Н	-64.44	-7.76	1.24	-73.44	-13.00	-60.44
164.83	38.65	Н	-60.89	-7.81	1.50	-70.19	-13.00	-57.19
276.38	33.16	Н	-67.06	-7.91	1.99	-76.95	-13.00	-63.95
424.79	36.30	Н	-59.57	-7.68	2.49	-69.74	-13.00	-56.74
599.39	32.30	Н	-59.35	-7.79	2.94	-70.08	-13.00	-57.08
1673.20	37.36	Н	-69.64	9.36	5.10	-65.37	-13.00	-52.37
2509.80	53.93	Н	-49.94	10.09	6.35	-46.20	-13.00	-33.20
3346.40		Н		12.28	7.29		-13.00	
4183.00		Н		12.62	8.40		-13.00	
5019.60		Н		12.67	9.26		-13.00	
5856.20		Н		13.68	9.85		-13.00	
6692.80		Н		11.95	10.74		-13.00	
7529.40		Н		11.45	11.35		-13.00	
8366.00		Н		11.59	12.43		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

### Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms\_and\_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 46 of 61

### Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH High Mode Test Date: Jun. 05, 2008

Fundamental Frequency: 848.80 MHz
Temperature: 25
Test By: Bondi
Pol: Ver

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
106.63	39.73	V	-63.16	-7.77	1.25	-72.18	-13.00	-59.18
143.49	37.63	V	-60.77	-7.79	1.43	-70.00	-13.00	-57.00
284.14	33.38	V	-66.56	-7.91	1.99	-76.45	-13.00	-63.45
426.73	33.39	V	-61.90	-7.68	2.49	-72.07	-13.00	-59.07
706.09	33.90	V	-55.89	-7.86	3.34	-67.08	-13.00	-54.08
850.00	79.61	V	-7.10	-7.88	3.75	-18.73	-13.00	-5.73
1697.60	48.33	V	-58.69	9.44	5.14	-54.40	-13.00	-41.40
2546.40	58.71	V	-45.08	10.20	6.40	-41.28	-13.00	-28.28
3395.20		V		12.38	7.33		-13.00	
4244.00		V		12.63	8.46		-13.00	
5092.80		V		12.74	9.32		-13.00	
5941.60		V		13.81	9.89		-13.00	
6790.40		V		11.86	10.87		-13.00	
7639.20		V		11.40	11.48		-13.00	
8488.00		V		11.70	12.59		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

#### Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 47 of 61

## Radiated Spurious Emission Measurement Result: GSM 850 Mode

Operation Mode : TX CH High Mode Test Date: Jun. 05, 2008

Fundamental Frequency: 848.80 MHz
Temperature: 25
Test By: Bondi
Pol: Hor

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
106.63	38.11	Н	-64.48	-7.77	1.25	-73.49	-13.00	-60.49
164.83	39.06	Н	-60.48	-7.81	1.50	-69.78	-13.00	-56.78
276.38	33.50	Н	-66.72	-7.91	1.99	-76.61	-13.00	-63.61
426.73	32.31	Н	-63.53	-7.68	2.49	-73.70	-13.00	-60.70
706.09	33.12	Н	-56.44	-7.86	3.34	-67.64	-13.00	-54.64
850.00	80.17	Н	-6.82	-7.88	3.75	-18.45	-13.00	-5.45
1697.60	40.40	Н	-66.58	9.44	5.14	-62.29	-13.00	-49.29
2546.40	54.72	Н	-49.06	10.20	6.40	-45.26	-13.00	-32.26
3395.20		Н		12.38	7.33		-13.00	
4244.00		Н		12.63	8.46		-13.00	
5092.80		Н		12.74	9.32		-13.00	
5941.60		Н		13.81	9.89		-13.00	
6790.40		Н		11.86	10.87		-13.00	
7639.20		Н		11.40	11.48		-13.00	
8488.00		Н		11.70	12.59		-13.00	

	30MHz - 80MHz: 5.04dB					
Measurement uncertainty	80MHz -1000MHz: 3.76dB					
	1GHz - 13GHz: 4.45dB					

#### Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 48 of 61

## Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Low Mode Test Date: Jun. 05, 2008

Fundamental Frequency: 1850.20MHz
Temperature: 25
Test By: Bondi
Pol: Ver

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
140.58	40.92	V	-57.84	-7.79	1.42	-67.05	-13.00	-54.05
177.44	36.24	V	-63.83	-7.82	1.52	-73.18	-13.00	-60.18
276.38	34.74	V	-65.37	-7.91	1.99	-75.26	-13.00	-62.26
449.04	32.18	V	-62.47	-7.70	2.56	-72.73	-13.00	-59.73
706.09	33.04	V	-56.75	-7.86	3.34	-67.94	-13.00	-54.94
1850.00	80.16	V	-26.80	9.90	5.41	-22.31	-13.00	-9.31
3700.40	47.81	V	-53.77	12.61	7.73	-48.89	-13.00	-35.89
5550.60	41.40	V	-53.81	13.23	9.68	-50.27	-13.00	-37.27
7400.80		V		11.50	11.28		-13.00	
9251.00		V		11.92	13.10		-13.00	
11101.20		V		11.66	14.33		-13.00	
12951.40		V		13.63	15.98		-13.00	
14801.60		V		12.76	17.27		-13.00	
16651.80		V		15.92	19.04		-13.00	
18502.00		V		18.75	21.21		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

#### Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- $4 \text{ ERP/EIRP } (dBm) = SG \text{ Setting}(dBm) + Antenna Gain } (dB/dBi) Cable loss } (dB)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 49 of 61

### Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Low Mode Test Date: Jun. 05, 2008

Fundamental Frequency: 1850.20MHz
Temperature: 25
Test By: Bondi
Pol: Hor

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
140.58	36.92	Н	-62.53	-7.79	1.42	-71.74	-13.00	-58.74
177.44	36.78	Н	-63.57	-7.82	1.52	-72.91	-13.00	-59.91
276.38	34.10	Н	-66.12	-7.91	1.99	-76.01	-13.00	-63.01
426.73	33.37	Н	-62.47	-7.68	2.49	-72.64	-13.00	-59.64
604.24	33.10	Н	-58.43	-7.79	2.95	-69.17	-13.00	-56.17
1850.00	72.42	Н	-34.47	9.90	5.41	-29.98	-13.00	-16.98
3700.40	38.99	Н	-62.37	12.61	7.73	-57.49	-13.00	-44.49
5550.60	36.06	Н	-59.07	13.23	9.68	-55.52	-13.00	-42.52
7400.80		Н		11.50	11.28		-13.00	
9251.00		Н		11.92	13.10		-13.00	
11101.20		Н		11.66	14.33		-13.00	
12951.40		Н		13.63	15.98		-13.00	
14801.60		Н		12.76	17.27		-13.00	
16651.80		Н		15.92	19.04		-13.00	
18502.00		Н		18.75	21.21		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

#### Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 t



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 50 of 61

### Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Mid Mode Test Date: Jun. 05, 2008

Fundamental Frequency: 1880MHz
Temperature: 25
Test By: Bondi
Pol: Ver

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
106.63	39.97	V	-62.92	-7.77	1.25	-71.94	-13.00	-58.94
140.58	39.13	V	-59.63	-7.79	1.42	-68.84	-13.00	-55.84
177.44	36.23	V	-63.84	-7.82	1.52	-73.19	-13.00	-60.19
276.38	34.35	V	-65.76	-7.91	1.99	-75.65	-13.00	-62.65
426.73	32.30	V	-62.99	-7.68	2.49	-73.16	-13.00	-60.16
3760.00	38.99	V	-62.31	12.60	7.82	-57.53	-13.00	-44.53
5640.00	36.06	V	-58.90	13.36	9.73	-55.27	-13.00	-42.27
7520.00		V		11.45	11.33		-13.00	
9400.00		V		11.93	13.15		-13.00	
11280.00		V		11.92	14.56		-13.00	
13160.00		V		13.33	16.11		-13.00	
15040.00		V		13.76	17.57		-13.00	
16920.00		V		15.27	19.66		-13.00	
18800.00		V		18.68	21.34		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

#### Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- $4 \text{ ERP/EIRP } (dBm) = SG \text{ Setting}(dBm) + Antenna Gain } (dB/dBi) Cable loss } (dB)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">https://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 51 of 61

### Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH Mid Mode Test Date: Jun. 05, 2008

Fundamental Frequency: 1880MHz
Temperature: 25
Test By: Bondi
Pol: Hor

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
106.63	38.59	Н	-64.00	-7.77	1.25	-73.01	-13.00	-60.01
140.58	40.55	Н	-58.90	-7.79	1.42	-68.11	-13.00	-55.11
201.69	35.45	Н	-66.32	-7.84	1.58	-75.74	-13.00	-62.74
276.38	34.52	Н	-65.70	-7.91	1.99	-75.59	-13.00	-62.59
426.73	32.36	Н	-63.48	-7.68	2.49	-73.65	-13.00	-60.65
3760.00	45.44	Н	-55.67	12.60	7.82	-50.88	-13.00	-37.88
5640.00		Н		13.36	9.73		-13.00	
7520.00		Н		11.45	11.33		-13.00	
9400.00		Н		11.93	13.15		-13.00	
11280.00		Н		11.92	14.56		-13.00	
13160.00		Н		13.33	16.11		-13.00	
15040.00		Н		13.76	17.57		-13.00	
16920.00		Н		15.27	19.66		-13.00	
18800.00		Н		18.68	21.34		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

#### Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- $4 \text{ ERP/EIRP } (dBm) = SG \text{ Setting}(dBm) + Antenna Gain } (dB/dBi) Cable loss } (dB)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">https://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 52 of 61

### Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH High Mode Test Date: Jun. 05, 2008

Fundamental Frequency: 1909.8 MHz
Temperature: 25
Test By: Bondi
Pol: Ver

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
177.44	36.68	V	-63.39	-7.82	1.52	-72.74	-13.00	-59.74
276.38	34.21	V	-65.90	-7.91	1.99	-75.79	-13.00	-62.79
426.73	32.52	V	-62.77	-7.68	2.49	-72.94	-13.00	-59.94
596.48	32.45	V	-58.22	-7.79	2.93	-68.94	-13.00	-55.94
1910.00	77.47	V	-29.47	10.08	5.51	-24.90	-13.00	-11.90
3821.00	40.51	V	-60.51	12.60	7.92	-55.83	-13.00	-42.83
3981.60		V		12.60	8.17		-13.00	
5725.50	40.67	V	-54.04	13.49	9.78	-50.33	-13.00	-37.33
5972.40		V		13.86	9.91		-13.00	
7963.20		V		11.27	11.88		-13.00	
9954.00		V		12.08	13.43		-13.00	
11944.80		V		13.08	15.21		-13.00	
13935.60		V		11.82	16.86		-13.00	
15926.40		V		17.08	18.33		-13.00	
17917.20		V		9.63	20.12		-13.00	
19908.00		V		18.88	20.85		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

### Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 53 of 61

#### Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH High Mode Test Date: Jun. 05, 2008

Fundamental Frequency: 1909.8 MHz Test By: Bondi Temperature Pol: Hor : 25

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
140.58	40.12	Н	-59.33	-7.79	1.42	-68.54	-13.00	-55.54
201.69	36.21	Н	-65.56	-7.84	1.58	-74.98	-13.00	-61.98
276.38	33.56	Н	-66.66	-7.91	1.99	-76.55	-13.00	-63.55
507.24	32.62	Н	-61.03	-7.73	2.73	-71.49	-13.00	-58.49
1910.00	70.27	Н	-36.58	10.08	5.51	-32.02	-13.00	-19.02
3821.00	36.44	Н	-64.41	12.60	7.92	-59.73	-13.00	-46.73
3981.60		Н		12.60	8.17		-13.00	
5725.50	38.99	Н	-55.67	13.49	9.78	-51.96	-13.00	-38.96
5972.40		Н		13.86	9.91		-13.00	
7963.20		Н		11.27	11.88		-13.00	
9954.00		Н		12.08	13.43		-13.00	
11944.80		Н		13.08	15.21		-13.00	
13935.60		Н		11.82	16.86		-13.00	
15926.40		Н		17.08	18.33		-13.00	
17917.20		Н		9.63	20.12		-13.00	
19908.00		Н		18.88	20.85		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

### Remark:

- 1 The emission behaviour belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms\_and\_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

t (886-2) 2299-3939

f (886-2) 2299-3279



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 54 of 61

# 10 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT

# 10.5 Standard Applicable


According to FCC §2.1055(a)(1)(b).

Frequency Tolerance: +/-0.1ppm for 850MHz band

+/-0.04ppm for 1900MHz band

## 10.6 Test Set-up:

### Temperature Chamber

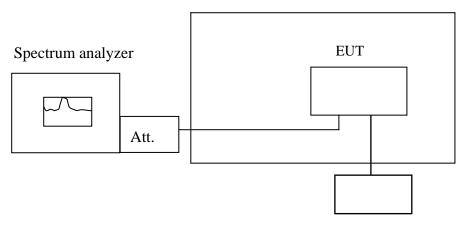

Variable Power Supply

**Note:** Measurement setup for testing on Antenna connector

#### 10.7 Measurement Procedure

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT  $25^{\circ}$ C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to  $-30^{\circ}$ C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with  $10^{\circ}$ C increased per stage until the highest temperature of  $+50^{\circ}$ C reached.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 FCC ID: UDV-0805152008527

Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 55 of 61

# 10.8 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2008	03/28/2009	
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2007	06/29/2008	
Power Sensor	Anritsu	MA2490A	31431	06/28/2007	06/29/2008	
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2007	06/29/2008	
Temperature Chamber	TERCHY	MHG-120LF	911009	11/11/2007	11/12/2008	
Low Loss Cable	HUBER+SUHNE R	SUCOFLEX 104PEA	N/A	N/A	N/A	
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2007	10/06/2008	
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2007	10/06/2008	
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2007	10/06/2008	
Signal Generator	R&S	SMR40	100210	11/09/2007	11/10/2008	
DC Power Supply	Agilent	6038A	2929A-07548	01/06/2008	01/05/2009	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 56 of 61

### 10.9 Measurement Result

Re	Reference Frequency: GSM Mid Channel 836.6 MHz @ 25°C					
	Limit	: +/- 0.1 ppm = 83	.6 Hz			
Power Supply	Environment	Frequency	Dalta (II-)	Limit (Hz)		
Vdc	Temperature ( $^{\circ}$ C)	(MHz)	Delta (Hz)	Limit (Hz)		
4	-30	836.599999	-4.00	83.6		
4	-20	836.599996	-1.00	83.6		
4	-10	836.599992	3.00	83.6		
4	0	836.6	-5.00	83.6		
4	10	836.600006	-11.00	83.6		
4	20	836.599995	0.00	83.6		
4	30	836.599998	-3.00	83.6		
4	40	836.59999	5.00	83.6		
4	50	836.599985	10.00	83.6		

Reference Frequency: PCS Mid Channel 1880 MHz @ 25°C						
	Limit: +/- 0.04 ppm = 75.2 Hz					
Power Supply	Environment	Frequency	Dolto (Hg)	Limit (Uz)		
Vdc	Temperature (°C)	(MHz)	Delta (Hz)	Limit (Hz)		
4	-30	1880.000017	-27.00	75.2		
4	-20	1880.000026	-36.00	75.2		
4	-10	1880.000007	-17.00	75.2		
4	0	1880.000003	-13.00	75.2		
4	10	1879.999995	-5.00	75.2		
4	20	1879.999990	0.00	75.2		
4	30	1879.999992	-2.00	75.2		
4	40	1879.999986	4.00	75.2		
4	50	1879.999975	15.00	75.2		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sqs.com/terms\_and\_conditions.htm">http://www.sqs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No. 134, Wu Kung Road., Wuku Industrial Zone, Taipei Country, Taiwan. / 台場石股工業區石工路134號 t (886-2) 2299-3939 f (886-2) 2299-3279 www.sgs.com.tw



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 57 of 61

# 11 FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT


# 11.5 Standard Applicable

According to FCC  $\S2.1055(d)(1)(2)$ 

Frequency Tolerance: +/-0.1ppm for 850MHz band

+/-0.04ppm for 1900MHz band

## 11.6 Test Set-up:

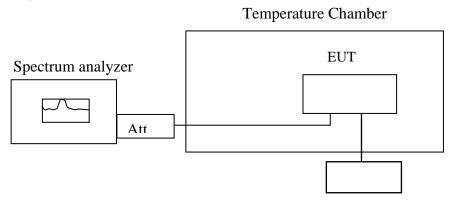

Variable DC Power Supply

*Note:* Measurement setup for testing on Antenna connector

#### 11.7 Measurement Procedure

Set chamber temperature to  $25^{\circ}$ C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



台灣檢驗科技股份有限公司

FCC ID: UDV-0805152008527

Report No.: EH/2008/50038 **Issue Date: Jun. 10, 2008** 

Page 58 of 61

# 11.8 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2008	03/28/2009	
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2007	06/29/2008	
Power Sensor	Anritsu	MA2490A	31431	06/28/2007	06/29/2008	
Power Meter	Anritsu	ML2487A	6K00002070	06/28/2007	06/29/2008	
Temperature Chamber	TERCHY	MHG-120LF	911009	11/11/2007	11/12/2008	
Low Loss Cable	HUBER+SUHNE R	SUCOFLEX 104PEA	N/A	N/A	N/A	
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2007	10/06/2008	
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2007	10/06/2008	
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2007	10/06/2008	
Signal Generator	R&S	SMR40	100210	11/09/2007	11/10/2008	
DC Power Supply	Agilent	6038A	2929A-07548	01/06/2008	01/05/2009	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 59 of 61

### 11.9 Measurement Result

Reference Frequency: GSM Mid Channel 836.6 MHz @ 25°C									
	Limi	t: +/- 0.1  ppm = 83	.6 Hz						
Power Supply	Environment	Frequency	Dolto (Uz)	Limit (Uz)					
Vdc	Temperature (°C)	(MHz)	Delta (Hz)	Limit (Hz)					
4.40	25.00	836.599988	0.00	83.60					
4.00	25.00	836.599995	-7.00	83.60					
3.60	25.00	836.599998	-10.00	83.60					
2.9		27.00						0.000001	02.50
(End Point)	25.00	836.600001	13.00	83.60					

R	Reference Frequency: PCS Mid Channel 1880 MHz @ 25°C					
	Limit	: +/- 0.04 ppm = 75	5.2 Hz			
Power Supply	Environment	Frequency	Dolto (Uz)	Limit (Uz)		
Vdc	Temperature ( $^{\circ}$ C)	(MHz)	Delta (Hz)	Limit (Hz)		
4.4	25 1879.999991 0.00 75.2					
4.0	25	1879.99999	1.00	75.2		
3.6	25	1880.000003	-12.00	75.2		
2.9	25	1070 00000	0.00	75.0		
(Endpoint)	25	1879.99998	8.00	75.2		

Note: The battery is rated 4.0V dc.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2008/50038 Issue Date: Jun. 10, 2008

Page 60 of 61

### 12 AC POWER LINE CONDUCTED EMISSION TEST

### 12.5 Standard Applicable

According to §15.207. The emission value for frequency within 150KHz to 30MHz shall not exceed criteria of below chart.

Frequency range	Limits dB(uV)		
MHz	Quasi-peak	Average	
0.15 to 0.50	66 to 56	56 to 46	
0.50 to 5	56	46	
5 to 30	60	50	

#### Note

# 12.6 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2001.
- 2. The EUT was plug-in DC power adaptort and was placed on the center of the back edge on the test table. The peripherals like earphone was placed on the side of the EUT. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The Power adaptor was connected with 110Vac/60Hz power source.

#### 12.7 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

<sup>1.</sup> The lower limit shall apply at the transition frequencies

<sup>2.</sup> The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.



Report No.: EH/2008/50038 **Issue Date: Jun. 10, 2008** 

Page 61 of 61

# 12.8 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
EMC Analyzer	НР	8594EM	3624A00203	09/02/2007	09/03/2008	
EMI Test Receiver	R&S	ESCS30	828985/004	06/09/2007	06/10/2008	
Transient Limiter	HP	11947A	3107A02062	09/02/2007	09/03/2008	
LISN	Rolf-Heine	NNB-2/16Z	99012	12/31/2007	12/30/2008	
LISN	Rolf-Heine	NNB-2/16Z	99013	12/24/2007	12/23/2008	
Coaxial Cables	N/A	No. 3, 4	N/A	12/24/2007	12/23/2008	

#### 12.9 Measurement Result

N/A

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at <a href="http://www.sgs.com/terms\_and\_conditions.htm">http://www.sgs.com/terms\_and\_conditions.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.